

We are IntechOpen, the world's leading publisher of Open Access books Built by scientists, for scientists

4,800

Open access books available

122,000

International authors and editors

135M

Downloads

Our authors are among the

154

Countries delivered to

TOP 1%

most cited scientists

12.2%

Contributors from top 500 universities



WEB OF SCIENCE™

Selection of our books indexed in the Book Citation Index
in Web of Science™ Core Collection (BKCI)

Interested in publishing with us?
Contact book.department@intechopen.com

Numbers displayed above are based on latest data collected.

For more information visit www.intechopen.com



A Levy Type Solution for Free Vibration Analysis of a Nano-Plate Considering the Small Scale Effect

E. Jomehzadeh^{1,2} and A. R. Saidi¹

¹Department of Mechanical Engineering,

Young Researchers Club, Kerman Branch, Islamic Azad University, Kerman

²Shahid Bahonar University of Kerman, Young Researchers Society, Kerman, Iran

1. Introduction

Experimental results show that as length scales of a material are reduced, the influences of long-range interatomic and intermolecular cohesive forces on the mechanical properties become prominent and cannot be neglected. It is well known that surfaces and interfaces in nano structures behave differently from their bulk counterparts. For nanostructures with size less than 100nm, the surface to volume ratio is significant and the effective properties are altered by surface and nonlocal effects. Therefore, at nanolength scales, size effects often become prominent, the causes of which need to be explicitly addressed especially with an increasing interest in the general area of nanotechnology (Sharma et al., 2003).

Due to the vast computational expenses of nano-structures analyses when using atomic lattice dynamics and molecular dynamic simulations, there is a great interest in applying continuum mechanics for analysis of nano-structures. Classical continuum elasticity, which is a scale free theory, cannot predict the size effects. Nonlocal continuum mechanics allows one to account for the small length scale effect that becomes significant when dealing with microstructures or nanostructures. It has been showed that it is possible to represent the integral constitutive relations of nano-structures in an equivalent differential form (Eringen, 1983). Eringen presented a nonlocal elasticity theory to account for the small scale effect by specifying the stress at a reference point is a functional of the strain field at every point in the body. Since then, many studies have been carried out nonlocal theory of elasticity for bending, buckling and vibration analyses of nano-structures.

Small scale effect on static deformation of micro- and nano-rods or tubes is revealed through nonlocal Euler-Bernoulli and Timoshenko beam theories by Wang and Liew (2007). Li and Wang (2009) investigated a theoretical treatment of Timoshenko beams, in which the influences of shear deformation, rotary inertia, and scale coefficient are taken into account.

Murmu and Pradhan (2009a) studied vibration response of nano cantilever considering non-uniformity in the cross sections using nonlocal elasticity theory.

Although graphite sheet has many superior properties, such as low electrical and thermal conductivities normal to the sheet but high electrical and thermal conductivities in the plane of the sheet, relatively little research have been reported in the literature for mechanical analyses of graphene sheets.

Kitipornchai et al. (2005) used the continuum plate model for mechanical analysis of graphene sheets. He et al. (2005) investigated vibration analysis of multi-layered graphene sheets in which the van der Waals interaction between layers is described by an explicit formula. Behfar and Naghdabadi (2005) studied nano scale vibrational analysis of a multi-layered graphene sheet embedded in an elastic medium based on the classical plate theory. Lu et al. (2007) derived the basic equations of nonlocal Kirchhoff and Mindlin plate theories for simply supported nano-plates. Axisymmetric bending of micro/nanoscale circular plates was studied using a nonlocal plate theory by Duan and Wang (2007). Pradhan and Phadikar (2009a) presented classical and first order shear deformation plate theories for vibration of nano-plate. Their approach is based on the Navier solution and for a nano-plate with all edges simply supported. Pradhan and Phadikar (2009b) carried out vibration analysis of multilayered graphene sheets embedded in polymer matrix employing nonlocal continuum mechanics.

In-plane vibration of nano-plates was investigated by Murmu and Pradhan (2009b) employing nonlocal continuum mechanics and considering small scale effect.

Aghababaei and Reddy (2009) developed a higher order plate theory for buckling and vibration analyses of a simply supported plate accounting the small scale effect. A nonlocal plate model was developed to study the vibrational characteristics of multi-layered graphene sheets with different boundary conditions embedded in an elastic medium using finite element method (Ansari et al., 2010). Pradhan and Kumar (2010) investigated the small scale effect on the vibration analysis of orthotropic single layered graphene sheets embedded in an elastic medium. Jomehzadeh and Saidi (2011a) investigated the nonlocal three dimensional elastodynamics theory to study the vibration of nano-plates. Recently, they (2011b & 2011c) studied the nonlinear vibration of graphene sheets using classical plate theory.

In this chapter, the vibration analysis of a nano-plate is presented by considering the small scale effect. The three coupled governing equations of motion are obtained based on the nonlocal continuum theory and are decoupled into two new equations. Solving these two decoupled partial differential equations, the natural frequencies of the nano-plate with arbitrary boundary conditions are determined. Finally, a detailed study is carried out to understand the effects of boundary condition, nonlocal parameter, thickness to length and aspect ratios on the vibration characteristics of nano-plates.

Results for natural frequencies of nano-plates with arbitrary boundary conditions are given for the first time and these can serve as reference values for other numerical analysis.

2. Constitutive relations

According to nonlocal elasticity theory, the stress at a reference point X is considered to be a function of the strain field at every point X' in the body. The nonlocal stress tensor σ^{nl} at point X can be expressed as (Eringen, 1983)

$$\sigma^{nl} = \int K(|X' - X|, \tau) \sigma^l(X') dX' \quad (1)$$

where σ^l is the classical stress tensor and $K(|X' - X|)$ is the Kernel function represents the nonlocal modulus. While the constitutive equations of classical elasticity is an algebraic relation between stress and strain tensors, that of nonlocal elasticity involves spatial

integrals which represent weighted averages of contributions of the strain of all points in the body to the stress at the given point. Eringen showed that it is possible to represent the integral constitutive relation in an equivalent differential form as

$$(1 - \mu \nabla^2) \sigma^{nl} = \sigma^l \quad (2)$$

where $\mu = (e_0 a)^2$ is nonlocal parameter, a an internal characteristic length and e_0 a constant. Also, ∇^2 is the Laplacian operator.

3. Governing equations of motion

The first order shear deformation plate theory assumes that the plane sections originally perpendicular to the longitudinal plane of the plate remain plane, but not necessarily perpendicular to the longitudinal plane. This theory accounts for shear strains in the thickness direction of the plate and is based on the displacement field

$$\begin{aligned} u &= u_0(x, y) + z\psi_x(x, y, t) \\ v &= v_0(x, y) + z\psi_y(x, y, t) \\ w &= w(x, y) \end{aligned} \quad (3)$$

where u_0 and v_0 are displacement components of the midplane, w is transverse displacement, t is time, ψ_x and ψ_y are the rotation functions of the midplane normal to x and y directions, respectively. Using the Hamilton's principle, the nonlocal bending governing equations of motion for a single layered nano-plate are obtained as follows (Pradhan and Phadikar, 2009a)

$$D(\psi_{x,xx} + \psi_{y,xy}) + \frac{D(1-\nu)}{2}(\psi_{x,yy} - \psi_{y,xy}) - \kappa^2 Gh(\psi_x + w_{,x}) = I_2(\ddot{\psi}_x - \mu \nabla^2 \ddot{\psi}_x) \quad (4a)$$

$$D(\psi_{y,yy} + \psi_{x,xy}) + \frac{D(1-\nu)}{2}(\psi_{y,xx} - \psi_{x,xy}) - \kappa^2 Gh(\psi_y + w_{,y}) = I_2(\ddot{\psi}_y - \mu \nabla^2 \ddot{\psi}_y) \quad (4b)$$

$$\kappa^2 Gh(\psi_{x,x} + \psi_{y,y} + w_{,xx} + w_{,yy}) + q(x, y, t) = I_1(\ddot{w} - \mu \nabla^2 \ddot{w}) \quad (4c)$$

In above equations, dot above each parameter denotes derivative with respect to time, G is the shear modulus, $D = Eh^3 / 12(1-\nu^2)$ denotes the bending rigidity of the plate, E and ν Young modulus and Poisson's ratio, respectively and κ^2 the shear correction factor. Also, q is the transverse loading in z direction. Mass moments of inertia, I_1 and I_2 , are defined as

$$(I_1, I_2) = \int_{-h/2}^{h/2} \rho(1, z) dz \quad (5)$$

in which ρ is the density of the plate. It can be seen that the governing equations (4) are generally a system of six-order coupled partial differential equations in terms of the transverse displacement and rotation functions.

4. Solution

In order to solve the governing equations of motion (4) for various boundary conditions, it is reasonable to find a method to decouple these equations. Let us introduce two new functions ζ and φ as

$$\zeta = \psi_{x,x} + \psi_{y,y} \quad (6a)$$

$$\varphi = \psi_{x,y} - \psi_{y,x} \quad (6b)$$

Using relations (6), the governing equations (4) can be rewritten as

$$D\zeta_{,x} + \frac{D(1-\nu)}{2}\varphi_{,y} - \kappa^2 Gh(\psi_x + w_{,x}) = I_2(\ddot{\psi}_x - \mu\nabla^2\ddot{\psi}_x) \quad (7a)$$

$$D\zeta_{,y} - \frac{D(1-\nu)}{2}\varphi_{,x} - \kappa^2 Gh(\psi_y + w_{,y}) = I_2(\ddot{\psi}_y - \mu\nabla^2\ddot{\psi}_y) \quad (7b)$$

$$\kappa^2 Gh(\zeta + \nabla^2 w) + q = I_1(\ddot{w} - \mu\nabla^2\ddot{w}) \quad (7c)$$

Doing some algebraic operations on Eqs. (7), the three coupled partial differential equations (4) can be replaced by the following two uncoupled equations

$$C\nabla^2\varphi - \kappa^2 Gh\varphi = I_2(1 - \mu\nabla^2)\ddot{\varphi} \quad (8a)$$

$$D\nabla^2\nabla^2 w = (1 - \mu\nabla^2)\left\{q - \frac{D}{\kappa^2 Gh}\nabla^2 q - I_1\ddot{w} + \left(\frac{I_1 D}{\kappa^2 Gh} + I_2\right)\nabla^2\ddot{w} + I_2\right\} + \frac{(1 - \mu\nabla^2)^2}{\kappa^2 Gh}\{I_2\ddot{q} - I_1 I_2\ddot{\ddot{w}}\} \quad (8b)$$

where C denotes $D(1-\nu)/2$. It can be seen that the above equations are converted to the classical equations of the Mindlin plate theory when $\mu=0$. Like the classical elasticity (Reissner, 1985), Eqs. (8a) and (8b) are called edge-zone (boundary layer) and interior equations, respectively. Also, the rotation functions ψ_x and ψ_y can be defined in terms of w and φ as

$$\kappa^2 Gh\psi_x + I_2\ddot{\psi}_x = \frac{\partial}{\partial x}\left[-\frac{D(1-\mu\nabla^2)}{\kappa^2 Gh}q + \frac{I_1 D(1-\mu\nabla^2)}{\kappa^2 Gh}\ddot{w} - D\nabla^2 w - \kappa^2 Gh w + I_2\mu\left(-\frac{(1-\mu\nabla^2)}{\kappa^2 Gh}\ddot{q} - \nabla^2\ddot{w} + \frac{I_1(1-\mu\nabla^2)}{\kappa^2 Gh}\ddot{\ddot{w}}\right)\right] + \frac{\partial}{\partial y}[C\varphi + I_2\mu\ddot{\varphi}] \quad (9a)$$

$$\kappa^2 Gh\psi_y + I_2\ddot{\psi}_y = \frac{\partial}{\partial y}\left[-\frac{D(1-\mu\nabla^2)}{\kappa^2 Gh}q + \frac{I_1 D(1-\mu\nabla^2)}{\kappa^2 Gh}\ddot{w} - D\nabla^2 w - \kappa^2 Gh w + I_2\mu\left(-\frac{(1-\mu\nabla^2)}{\kappa^2 Gh}\ddot{q} - \nabla^2\ddot{w} + \frac{I_1(1-\mu\nabla^2)}{\kappa^2 Gh}\ddot{\ddot{w}}\right)\right] - \frac{\partial}{\partial x}[C\varphi + I_2\mu\ddot{\varphi}] \quad (9a)$$

By obtaining transverse displacement and rotation functions (w , ψ_x and ψ_y), the stress components of the nano-plate can be computed by using the nonlocal constitutive relations in the following forms

$$\begin{aligned} \sigma_{xx}^{nl} - \mu \nabla^2 \sigma_{xx}^{nl} &= \frac{E}{1-\nu^2} (\psi_{x,x} + \nu \psi_{y,y}) z & \sigma_{xy}^{nl} - \mu \nabla^2 \sigma_{xy}^{nl} &= \frac{E}{2(1+\nu)} (\psi_{x,y} + \psi_{y,x}) z \\ \sigma_{yy}^{nl} - \mu \nabla^2 \sigma_{yy}^{nl} &= \frac{E}{1-\nu^2} (\psi_{y,y} + \nu \psi_{x,x}) z & \sigma_{xz}^{nl} - \mu \nabla^2 \sigma_{xz}^{nl} &= G(\psi_x + w_{,x}) \\ \sigma_{yz}^{nl} - \mu \nabla^2 \sigma_{yz}^{nl} &= G(\psi_y + w_{,y}) \end{aligned} \quad (10)$$

Here, a rectangular plate ($a \times b$) with two opposite simply supported edges at $x=0$ and $x=a$ and arbitrary boundary conditions at two other edges is considered. For free harmonic vibration of the plate, the transverse loading q is put equal to zero and the transverse deflection w and boundary layer function φ are assumed as

$$w = \sum_{n=1}^{\infty} w_n(y) \sin(\beta_n x) e^{i\omega_n t} \quad (11a)$$

$$\varphi = \sum_{n=1}^{\infty} \varphi_n(y) \cos(\beta_n x) e^{i\omega_n t} \quad (11b)$$

which exactly satisfy the simply supported boundary conditions at $x=0$ and $x=a$. In these relations, ω_n is the natural frequency of the nano-plate and β_n denotes $n\pi/a$. Substituting the proposed series solutions (11) into decoupled Eqs. (8), yields

$$\lambda_1 \frac{\partial^4 w_n(y)}{\partial y^4} + \lambda_2 \frac{\partial^2 w_n(y)}{\partial y^2} + \lambda_3 w_n(y) = 0 \quad (12a)$$

$$\lambda_4 \frac{\partial^2 \varphi_n(y)}{\partial y^2} + \lambda_5 \varphi_n(y) = 0 \quad (12b)$$

where the constant coefficients λ_i ($i=1, \dots, 5$) are material constants. The above equations are two ordinary differential equations with total order of six. The solutions of Eqs. (12) can be expressed as

$$w_n(y) = C_1 \sin(\eta_1 y) + C_2 \cos(\eta_1 y) + C_3 \sinh(\eta_2 y) + C_4 \cosh(\eta_2 y) \quad (13a)$$

$$\varphi_n(y) = C_5 \sinh(\eta_3 y) + C_6 \cosh(\eta_3 y) \quad (13b)$$

where C_i ($i=1, \dots, 6$) are constants of integration and parameters η_1 , η_2 and η_3 are defined as

$$\eta_1 = \sqrt{\frac{\lambda_2 + \sqrt{\lambda_2^2 - 4\lambda_1\lambda_3}}{2\lambda_1}} \quad (14a)$$

$$\eta_2 = \sqrt{\frac{-\lambda_2 + \sqrt{\lambda_2^2 - 4\lambda_1\lambda_3}}{2\lambda_1}} \quad (14b)$$

$$\eta_3 = \frac{\sqrt{\lambda_4\lambda_5}}{\lambda_4} \quad (14c)$$

Six independent linear equations must be written among the integration constants to solve the free vibration problem. Applying arbitrary boundary conditions along the edges of the plate at $y=0$ and $y=b$, leads to six algebraic equations. Here, three types of boundary conditions along the edges of the nano-plate in y direction are considered as

$$\text{Simply supported (S)} \quad w = M_{yy} = \psi_x = 0 \quad (14a)$$

$$\text{Clamped (C)} \quad w = \psi_x = \psi_y = 0 \quad (14b)$$

$$\text{Free (F)} \quad M_{yy} = M_{xy} = Q_y = 0 \quad (14c)$$

where the resultant moments M_{yy} and M_{xy} and resultant force Q_y are expressed as

$$M_{yy} = \int_{-h/2}^{h/2} \sigma_{yy}^{nl} z dz \quad M_{xy} = \int_{-h/2}^{h/2} \sigma_{xy}^{nl} z dz \quad Q_y = \int_{-h/2}^{h/2} \sigma_{yz}^{nl} dz \quad (15)$$

In order to find the natural frequencies of the nano-plate, the various boundary conditions at $y=0$ and $y=b$ should be imposed. Applying these conditions and setting the determinant of the six order coefficient matrix equal to zero, the natural frequencies of the nano-plate are evaluated.

5. Numerical results and discussion

For numerical results, the following material properties are used throughout the investigation

$$E = 1.2TPa, \nu = 0.3, \kappa^2 = 5/6 \quad (16)$$

In order to verify the accuracy of the present formulations, a comparison has been carried out with the results given by Pradhan and Phadikar (2009a) for an all edges simply supported nano-plate. To this end, a four edges simply supported nano-plate is considered. The non-dimensional natural frequency parameter $\Omega = \omega a^2 \pi^4 \sqrt{I_1 / D}$ is listed in Table 1 for some nonlocal parameters. From this table, it can be found that the present results are in good agreement with the results in literature when the rotary inertia terms have been neglected. It can be also seen that the rotary inertia terms have considerable effects especially in second mode of vibration and cause the natural frequency decreases. Hereafter, the rotary inertia terms are considered in numerical results.

To study the effects of boundary condition, the nonlocal parameter (μ) and thickness to length ratio (h/a) on the vibrational behavior of the nano-plate, the first two non-dimensional frequencies are obtained for a single layered nano-plate. The results are tabulated in Tables 2-6 for five possible boundary conditions at $y = 0$ and $y = b$ as clamped- clamped (C-C), clamped-simply (C-S), clamped-free (C-F), simply-free (S-F) and free-free (F-F).

μ	h/b		Mode 1	Mode 2
1nm	0.1	Present	0.1322 0.1332 ^a	0.1994 0.2026 ^a
		Pradhan (2009a)	0.1332	0.2026
	0.2	Present	0.1210 0.1236 ^a	0.1673 0.1730 ^a
		Pradhan (2009a)	0.1236	0.1730
2nm	0.1	Present	0.0935 0.0942 ^a	0.1410 0.1432 ^a
		Pradhan (2009a)	0.0942	0.1432
	0.2	Present	0.0855 0.0874 ^a	0.1183 0.1224 ^a
		Pradhan (2009a)	0.0874	0.1224
3nm	0.1	Present	0.0763 0.0769 ^a	0.1151 0.1170 ^a
		Pradhan (2009a)	0.0769	0.1170
	0.2	Present	0.0698 0.0714 ^a	0.0966 0.0999 ^a
		Pradhan (2009a)	0.0714	0.0999
4nm	0.1	Present	0.0661 0.0666 ^a	0.0997 0.1013 ^a
		Pradhan (2009a)	0.0666	0.1013
	0.2	Present	0.0605 0.0618 ^a	0.0836 0.0865 ^a
		Pradhan (2009a)	0.0618	0.0865

Table 1. Comparison of non-dimensional frequency parameter $\Omega = \omega a^2 \pi^4 \sqrt{I_1 / D}$ of a nano-plate with all edges simply supported (^a Neglecting the rotary inertia terms)

Based on the results in these tables, it can be concluded that for constant h/a , the frequency parameter decreases for all modes as the nonlocal parameter μ increases. The reason is that with increasing the nonlocal parameter, the stiffness of the nano-plate decreases. i.e. small scale effect makes the nano-plate more flexible as the nonlocal model may be viewed as atoms linked by elastic springs while the local continuum model assumes the spring constant to take on an infinite value. In sum, the nonlocal plate theory should be used if one needs accurate predictions of natural frequencies of nano-plates.

μ	h/b	Mode 1	Mode 2
1nm	0.1	0.1757	0.2124
	0.2	0.1494	0.1735
2nm	0.1	0.1242	0.1502
	0.2	0.1057	0.1227
3nm	0.1	0.1014	0.1226
	0.2	0.0863	0.1002
4nm	0.1	0.0878	0.1062
	0.2	0.0747	0.0868

Table 2. First two non-dimensional frequency parameters $\Omega = \omega a^2 \pi^4 \sqrt{I_1 / D}$ of a C-C nanoplate

μ	h/b	Mode 1	Mode 2
1nm	0.1	0.1501	0.2049
	0.2	0.1333	0.1700
2nm	0.1	0.1062	0.1449
	0.2	0.0942	0.1202
3nm	0.1	0.0867	0.1183
	0.2	0.0769	0.0982
4nm	0.1	0.0751	0.1024
	0.2	0.0666	0.0850

Table 3. First two non-dimensional frequency parameters $\Omega = \omega a^2 \pi^4 \sqrt{I_1 / D}$ of a C-S nanoplate

μ	h/b	Mode 1	Mode 2
1nm	0.1	0.1273	0.1921
	0.2	0.1172	0.1615
2nm	0.1	0.0900	0.1358
	0.2	0.0829	0.1142
3nm	0.1	0.0735	0.1109
	0.2	0.0677	0.0933
4nm	0.1	0.0636	0.0960
	0.2	0.0586	0.0808

Table 4. First two non-dimensional frequency parameters $\Omega = \omega a^2 \pi^4 \sqrt{I_1 / D}$ of a C-F nanoplate

The influence of thickness-length ratio on the frequency parameter can also be examined by keeping the nonlocal parameter constant while varying the thickness to length ratio. It can be easily observed that as h/a increases, the frequency parameter decreases. The decrease in the frequency parameter is due to effects of the shear deformation, rotary inertia and use of term a^2/h in the definition of the non-dimensional frequency Ω . These effects are more considerable in the second mode than in the first modes.

μ	h/b	Mode 1	Mode 2
1nm	0.1	0.1136	0.1753
	0.2	0.1070	0.1531
2nm	0.1	0.0804	0.1239
	0.2	0.0756	0.1083
3nm	0.1	0.0656	0.1012
	0.2	0.0618	0.0884
4nm	0.1	0.0568	0.0876
	0.2	0.0535	0.0766

Table 5. First two non-dimensional frequency parameters $\Omega = \omega a^2 \pi^4 \sqrt{I_1 / D}$ of a **S-F** nano-plate

μ	h/b	Mode 1	Mode 2
1nm	0.1	0.1012	0.1542
	0.2	0.0964	0.1401
2nm	0.1	0.0715	0.1090
	0.2	0.0682	0.0991
3nm	0.1	0.0582	0.0890
	0.2	0.0557	0.0809
4nm	0.1	0.0506	0.0771
	0.2	0.0481	0.0701

Table 6. First two non-dimensional frequency parameters $\Omega = \omega a^2 \pi^4 \sqrt{I_1 / D}$ of a **F-F** nano-plate

To study the effect of the boundary conditions on the vibration characteristic of the nano-plate, the frequency parameters listed in a specific row of tables 1-6 may be selected from each table. It can be seen that the lowest and highest values of frequency parameters correspond to **F-F** and **C-C** edges, respectively. Thus like the classical plate, more constrains at the edges increases the stiffness of the nano-plate which results in increasing the frequency.

The effect of variation of aspect ratio (b/a) on the natural frequency of a **C-S** nano-plate is shown in Fig. 1 for various nonlocal parameters. It can be seen with increasing the aspect ratio, the natural frequency of the nano-plate decreases because of decreasing of stiffness.

In Fig. 2, the relation between natural frequency and nonlocal parameter of a square **C-C** nano-plate is depicted for different thickness to length ratios. It can be seen that nonlocal theories predict smaller values of natural frequencies than local theories especially for higher thickness to length ratios. Thus the local theories, in which the small length scale effect between the individual carbon atoms is neglected, overestimate the natural frequencies. The effect of boundary conditions on the natural frequency of a nano-plate is shown in Fig. 3. It can be concluded that the boundary condition has significant effect on the vibrational characteristic of the nano-plates.

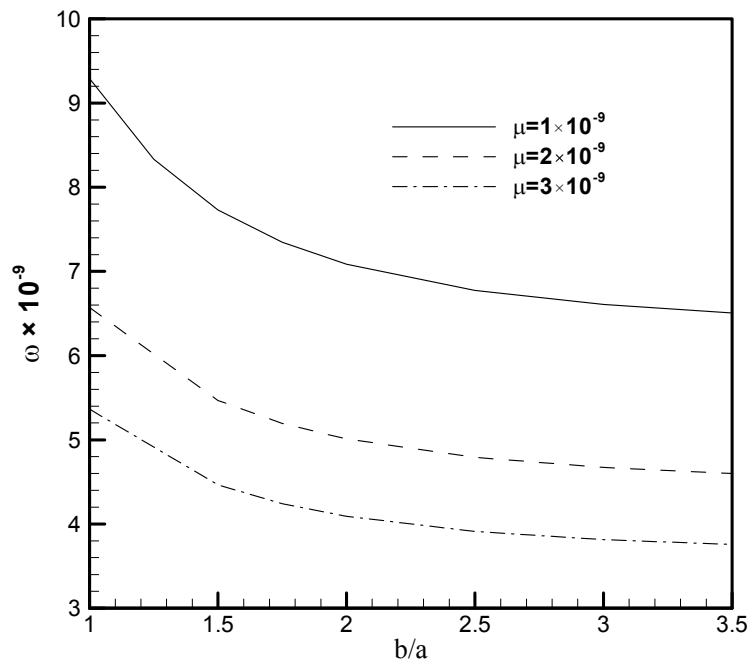


Fig. 1. Variation of natural frequency with respect to aspect ratio for a C-S nano-plate

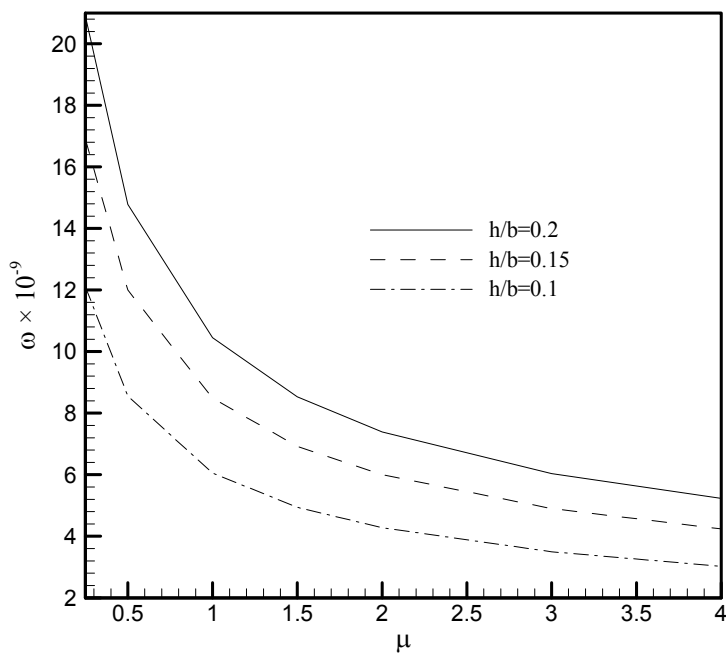


Fig. 2. Variation of natural frequency with nonlocal parameter for a C-C nano-plate

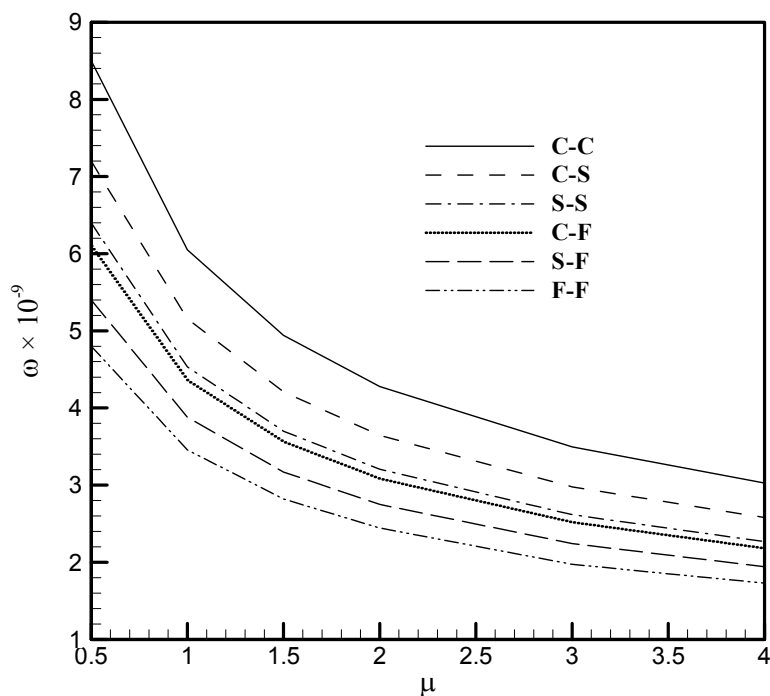


Fig. 3. Variation of natural frequency with nonlocal parameter for nano-plates with different boundary conditions at two edges

6. Conclusion

Presented herein is a variational derivation of the governing equations and boundary conditions for the free vibration of nano-plates based on Eringen's nonlocal elasticity and first order shear deformation plate theory. This nonlocal plate theory accounts for small scale effect, transverse shear deformation and rotary inertia which become significant when dealing with nano-plates. Coupled partial differential equations have been reformulated and the generalized Levy type solution has been presented for free vibration analysis of a nano-plate considering the small scale effect. The accurate natural frequencies of nano-plates have been tabulated for various nonlocal parameters, some thickness to length ratios and different boundary conditions. The effects of boundary conditions, variation of nonlocal parameter, thickness to length and aspect ratios on the frequency values of a nano-plate have been examined and discussed.


7. Acknowledgements

The authors wish to thank Iran Nanotechnology Initiative Council for its financial support.

8. References

- Aghababaei R. & Reddy J.N. (2009). Nonlocal third-order shear deformation plate theory with application to bending and vibration of plates. *Journal of Sound and Vibration*, Vol. 326, pp. 277-289.

- Ansari R.; Rajabiehfard R. & Arash B. (2010) Nonlocal finite element model for vibrations of embedded multi-layered graphene sheets. *Computational Materials Science*, Vol. 49, pp. 831–838.
- Behfar K. & Naghdabadi R. (2005). Nanoscale vibrational analysis of a multi-layered grapheme sheet embedded in an elastic medium. *Composites Science and Technology*, Vol. 65, pp. 1159–1164.
- Duan W.H. & Wang C.M. (2007). Exact solutions for axisymmetric bending of micro/nanoscale circular plates based on nonlocal plate theory. *Nanotechnology*, Vol. 18, 385704.
- Eringen C. (1983). On differential equations of nonlocal elasticity and solutions of screw dislocation and surface waves. *Journal of Applied Physics*, Vol. 54, pp. 4703–4710
- He X.Q.; Kitipornchai S. & Liew K.M. (2005). Resonance analysis of multi-layered grapheme sheets used as nano scale resonators. *Nanotechnology*, Vol. 16, pp. 2086–2091.
- Jomehzadeh E. & Saidi A. R. (2011a) Decoupling the Nonlocal Elasticity Equations for Three Dimensional Vibration Analysis of Nanoplates. *Composite Structures*, Vol. 93, pp. 1015–1020.
- Jomehzadeh E. & Saidi A. R. (2011b) A study on large amplitude vibration of multilayered graphene sheets. *Computational Materials Science*, Vol. 50, pp. 1043–1051.
- Jomehzadeh E. & Saidi A. R. (2011c) Study of small scale effect on nonlinear vibration of nano-plates. *Journal of Computational and Theoretical Nanoscience*, Accepted.
- Kitipornchai S.; He X.Q.; & Liew K.M. (2005). Continuum model for the vibration of multilayered graphene sheets. *Physical Review B*, Vol. 72, 075443 6 pages.
- Li X.F. & Wang B.L. (2009). Vibrational modes of Timoshenko beams at small scales. *Applied Physics Letters*, Vol. 94, 1.3094130.
- Lu P.; Zhang P.Q.; Lee H.P.; Wang C.M. & Reddy J.N. (2007). Non-local elastic plate theories. *Mathematical Physical and Engineering Sciences*, Vol. 463 pp. 3225–3240.
- Murmu T. & Pradhan S.C. (2009a). Small-scale effect on the vibration of nonuniform nano cantilever based on nonlocal elasticity theory. *Physica E*, Vol. 41, Vol. 1451–1456.
- Murmu T. & Pradhan S.C. (2009b). Small-scale effect on the free in-plane vibration of nanoplates by nonlocal continuum model. *Physica E*, Vol. 41, pp. 1628–1633.
- Pradhan S.C. & Phadikar J.K. (2009a). Nonlocal elasticity theory for vibration of nanoplates. *Journal of Sound and Vibration*, Vol. 325, pp. 206–223.
- Pradhan S.C. & Phadikar J.K. (2009b). Small scale effect on vibration of embedded multilayered graphene sheets based on nonlocal continuum models. *Physics Letters A*, Vol. 373, pp. 1062–1069.
- Pradhan S.C. & Kumar A. (2010) Vibration analysis of orthotropic graphene sheets embedded in Pasternak elastic medium using nonlocal elasticity theory and differential quadrature method. *Computational Materials Science*, Vol. 50, pp. 239–245.
- Reissner E. (1985). Reflections on the theory of elastic plates. *Applied Mechanics Review*, Vol. 38, pp. 1453–1464.
- Sharma P.; Ganti S. & Bhate N. (2003). Effect of surfaces on the size-dependent elastic state of nano-inhomogeneities. *Applied Physics Letters*, Vol. 82, pp. 535–537
- Wang Q. & Liew K.M. (2007). Application of nonlocal continuum mechanics to static analysis of micro- and nano-structures. *Physics Letters A*, Vol. 363, pp. 236–242.

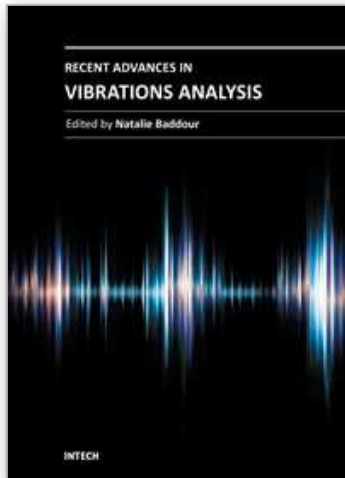

Recent Advances in Vibrations Analysis

Edited by Dr. Natalie Baddour

ISBN 978-953-307-696-6

Hard cover, 236 pages

Publisher InTech

Published online 09, September, 2011

Published in print edition September, 2011

This book covers recent advances in modern vibrations analysis, from analytical methods to applications of vibrations analysis to condition monitoring. Covered topics include stochastic finite element approaches, wave theories for distributed parameter systems, second order shear deformation theory and applications of phase space to the identifications of nonlinearities and transients. Chapters on novel condition monitoring approaches for reducers, transformers and low earth orbit satellites are included. Additionally, the book includes chapters on modelling and analysis of various complex mechanical systems such as eccentric building systems and the structural modelling of large container ships.

How to reference

In order to correctly reference this scholarly work, feel free to copy and paste the following:

E. Jomehzadeh and A. R. Saidi (2011). A Levy Type Solution for Free Vibration Analysis of a Nano-Plate Considering the Small Scale Effect, *Recent Advances in Vibrations Analysis*, Dr. Natalie Baddour (Ed.), ISBN: 978-953-307-696-6, InTech, Available from: <http://www.intechopen.com/books/recent-advances-in-vibrations-analysis/a-levy-type-solution-for-free-vibration-analysis-of-a-nano-plate-considering-the-small-scale-effect>

INTECH
open science | open minds

InTech Europe

University Campus STeP Ri
Slavka Krautzeka 83/A
51000 Rijeka, Croatia
Phone: +385 (51) 770 447
Fax: +385 (51) 686 166
www.intechopen.com

InTech China

Unit 405, Office Block, Hotel Equatorial Shanghai
No.65, Yan An Road (West), Shanghai, 200040, China
中国上海市延安西路65号上海国际贵都大饭店办公楼405单元
Phone: +86-21-62489820
Fax: +86-21-62489821

© 2011 The Author(s). Licensee IntechOpen. This chapter is distributed under the terms of the [Creative Commons Attribution-NonCommercial-ShareAlike-3.0 License](#), which permits use, distribution and reproduction for non-commercial purposes, provided the original is properly cited and derivative works building on this content are distributed under the same license.

IntechOpen

IntechOpen