

We are IntechOpen, the world's leading publisher of Open Access books Built by scientists, for scientists

4,800

Open access books available

122,000

International authors and editors

135M

Downloads

Our authors are among the

154

Countries delivered to

TOP 1%

most cited scientists

12.2%

Contributors from top 500 universities



WEB OF SCIENCE™

Selection of our books indexed in the Book Citation Index
in Web of Science™ Core Collection (BKCI)

Interested in publishing with us?
Contact book.department@intechopen.com

Numbers displayed above are based on latest data collected.

For more information visit www.intechopen.com



Pilot Plant Experiences Using Activated Sludge Treatment Steps for the Biodegradation of Textile Wastewater

Lamia Ayed and Amina Bakhrouf

*Laboratoire d'Analyse, Traitement et Valorisation des Polluants
de l'Environnement et des Produits, Faculté de Pharmacie, Monastir
Tunisie*

1. Introduction

Considering both the volume and the effluent composition, the textile industry wastewater is rated as the most polluting among all industrial sectors. Important pollutants are present in textile effluents; they are mainly recalcitrant organics, colour, toxicants and inhibitory compounds (Khelifi et al., 2008).

Textile industries however, have caused serious environmental problems because of the wastewater produced. Most textile industries produce wastewater with relatively high BOD, COD, suspended solids and color. The wastewater may also contain heavy metals depending on the type of coloring substances used. In general, the objective of textile industry wastewater treatment to reduce the level of organic pollutants, heavy metal, suspended solids and color before discharge into the river. Coloring substances are used for dyeing and printing processes. The wastewater from these two processes is the most polluted liquid waste in a textile industry. Biological, chemical, physical or the combination of the three treatment technologies can be used to treat textile industry liquid waste (Suwardiyno and Wenten, 2005). It has been proven that some of these dyes and/or products are carcinogens and mutagens (Manu and Chaudhari 2003). A part from the aesthetic deterioration of the natural water bodies, dyes also cause harm to the flora and fauna in the natural environment (Kornaros and Lyberatos 2006). So, textile wastewater containing dyes must be treated before their discharge into the environment (Forgas et al., 2004). Numerous processes have been proposed for the treatment of coloured waste water e.g., precipitation, flocculation, coagulation, adsorption and wet oxidation (Hongman et al., 2004; Thomas et al., 2006). All these methods have different colour removal capabilities, capital costs and operating speed. Among these methods coagulation and adsorption are the commonly used; however, they create huge amounts of sludge which become a pollutant on its own creating disposal problems (Nyanhongo et al., 2002). Among low cost, viable alternatives, available for effluent treatment and decolourization, the biological systems are recognised, by their capacity to reduce biochemical oxygen demand (BOD) and chemical oxygen demand (COD) by conventional aerobic biodegradation (Forgas et al., 2004; Kornaros and Lyberatos 2006; Balan and

Monteiro, 2001). Work on the use of combined bacterial process to treat textile wastewater has been carried out over the years by many research groups. Recent study has used the combination of anaerobic and aerobic steps in an attempt to achieve not only decolourization but also mineralization of dyes (Forgas et al., 2004; Ong et al., 2005). Aerobic processes have been recently used for the treatment of textile wastewater as standalone processes (Khelifi et al., 2008) and it is confirmed that they are efficient, cost-effective for smaller molecules and that the aerobic reactor is an effective technique to treat industrial wastewater (Coughlin et al., 2002; Coughlin et al., 2003; Buitron et al., 2004; Ge et al., 2004; Sandhaya et al., 2005; Steffan et al., 2005; Sudarjanto et al., 2006). The aerobic reactor has the advantage of being a closed and comparatively homogeneous and stable ecosystem. Since little is known about this ecosystem, a molecular inventory is the first step to describe this dynamic bacterial community without cultivation (Godon et al., 1997). In order to better understand the functions of the bacterial community, a full description of the bacterial ecosystem is required (Bouallagui et al., 2004). Acquisition of DNA sequences is now a fundamental component of most phylogenetic, phylogeographic and molecular ecological studies. Single-strand conformation polymorphism (SSCP) offer a simple, inexpensive and sensitive method for detecting whether or not DNA fragments are identical in sequence, and so can greatly reduce the amount of sequencing necessary (Sunnucks et al., 2000). SSCP can be applied without any a priori information on the species and then can give a more objective view of the bacterial community. SSCP has been applied to study microbial communities from several habits including water, compost and anaerobic digesters (Duthoit et al., 2003; Bouallagui et al., 2004).

In this research, we used the mixture design in the experimental design (Minitab 14.0) to optimize the formulation of the predominant strains isolated from textile waste water plant. After biodegradation, the Chemical Oxygen Demand (COD) and percentage of decolorization were measured. The relationships between the different combinations and products were analyzed by Minitab to select the optimal bacterial combination and to investigate the aerobic degradability of a textile industry wastewater in Tunisia by an aerobic Stirred Bed Reactor (SBR).

2. Materials and methods

2.1 Materials

The microbial strains were microcapsules of *Sphingomonas paucimobilis* (14×10^7 cfu), *Bacillus sp.* (4.2×10^8 cfu) and *Staphylococcus epidermidis* (7×10^9 cfu), which were isolated from textile Waste Water plant in KsarHellal, Tunisia. *Sphingomonas paucimobilis*, *Staphylococcus epidermidis* and *Bacillus sp.* were isolated in previous works of Ayed et al.2009a,b and Ayed et al 2010a,b,c with the ability of degrading azo and triphenylmethane dyes (Congo Red, Methyl Red, Methyl Orange, Malachite Green, Phenol Red, Fushin, Methyl Green and Crystal Violet). All chemicals used were of the highest purity available and of analytical grade.

2.2 Nutrient agar preparation

Nutrient agar was used as the growth medium for microbial isolation. For this purpose, 28 g of nutrient agar was dissolved in 1 l of distilled water, and was then autoclaved at 121 °C for 20 min. After autoclaving, the agar was left to cool at room temperature for 15 min, and it was then poured out into Sterilin © disposable Petri dishes.

2.3 Microbial strain

The culture was cultivated and maintained by weekly transfers on to nutrient agar slants. For production experiments, the culture was revived in nutrient broth (pH 7.0) and freshly prepared 3 h old culture ($\lambda_{600 \text{ nm}} = 1$) prepared in Mineral Salt Medium (MSM) at 37 °C, 150 rpm (New Brunswick Scientific Shaker, Edison, NJ) was used as the inoculum. The used medium was composed in 1000 ml of distilled water: glucose (1250 mg/l), yeast extract (3000 mg/l), MgSO_4 (100 mg/l); $(\text{NH}_4)_2\text{SO}_4$ (600 mg/l); NaCl (500 mg/l); K_2HPO_4 (1360 mg/l); CaCl_2 (20 mg/l); MnSO_4 (1.1 mg/l); ZnSO_4 (0.2 mg/l); CuSO_4 (0.2 mg/l); FeSO_4 (0.14 mg/l) and it was maintained at a constant pH of 7 by the addition of phosphate buffer (Ayed et al., 2010a,b,c).

2.4 Acclimatization

The acclimatization was performed by gradually exposing *Sphingomonas paucimobilis*, *Bacillus sp.* and *Staphylococcus epidermidis* to the higher concentrations of effluent (Kalme et al., 2006). This bacteria were grown for 24 h at 30 °C in 250 ml Erlenmeyer flasks containing in g/l yeast extract (3.0) and glucose (1.25) (pH 7.0). During the investigation, nutrient broth concentration was decreased from 90% (w/v) to 0% (w/v) and finally the organism was provided with effluent as sole source of nutrient. Acclimatization experiments were carried out at optimum temperature (Kalme et al., 2006).

2.5 Operational conditions of laboratory bioreactors

A laboratory scale aerobic bioprocess was used in this study. The aerobic system used was SBR bioreactor. The system was operated continuously at a constant temperature of 30 °C using an external water bath. A continuous stirred tank reactor with a 500 ml working volume was used. Mixing was assured by the continuous rotation of the magnetic stirrer. The system was first inoculated with a microbial consortia (*Sphingomonas paucimobilis*, *Bacillus sp.* and *Staphylococcus epidermidis*) obtained from a textile wastewater treatment plant. These inocula were selected because of the large variety of microorganisms that could be found in the biomass degrading dyes in textile wastewater, and because mixed cultures offer considerable advantages over the use of pure culture. In fact, individual strains may attack the dye molecules at different position or may use decomposition products produced by another strains for further decomposition. In fact, it is mentioned that adaptation is important for successful decolorization, and as acclimation occurred, the decolorization time becomes constant (Buitron and Quezada Moreno, 2004). The system was fed by a peristaltic pump with the textile effluent obtained from textile wastewater plant in Ksar Hellal (Tunisia), and its pH was maintained at approximately 7. Air was provided from the bottom of the aeration of the combined bacterial process using diffusers and an air pump. Bioreactors operating conditions were (COD: 1700 (mg O_2 /l); BOD_5 : 400 (mg O_2 /l); Color : 3600 (U.C); pH: 7; MES: 810 (mg/l)).

2.6 Analytical methods

The effluent from each bioreactor was collected daily, centrifuged at 6000 rpm for 10 min and analysed for color, COD, pH, volatile suspended solids (VSS) and colonies forming units (cfu). COD and color measurements were carried out on the clear supernatant. Color was measured by an UV-vis spectrophotometer (Spectro UV-Vis Double Beam PC Scanning spectrophotomètre UVD-2960) at a wavelength of 275 nm in which maximum absorbance spectra was obtained. The decolorization and COD removal were calculated according to the following formulation (Eq 1 and Eq 2) (Ayed et al., 2009a,b).

In this study, *Sphingomonas paucimobilis*, *Bacillus sp.* and Filamentous bacteria were used as mixture starters, with different proportions ranging from 0 to 100%, as shown in Table 1. Decolorization experiments were taken according to the ratio given by the experimental design, and 10% of mixed culture were inoculated into the effluent (3.0 g/l yeast extract and 1.25 g/l glucose) at 37°C for 10 h in shaking conditions (150 rpm) (Ayed et al., 2010a,b,c).

$$\% \text{ Decolorization} = \frac{(I - F)}{I} \times 100 \quad (1)$$

Where I was the initial absorbance and F the absorbance at incubation time t

$$\text{COD removal (\%)} = \frac{\text{initial COD}(0 \text{ h}) - \text{observed COD}(t)}{\text{initial COD}(0 \text{ h})} \times 100 \quad (2)$$

The pH was measured using a digital calibrated pH-meter (Inolab, D-82362 Weilheim Germany). All assays were carried in triplicate.

Assay	<i>Sphingomonas paucimobilis</i>	<i>Bacillus sp.</i>	<i>Staphylococcus epidermidis</i>	Total	COD Removal (%)	Decolorization (%)
1	0.66667	0.16667	0.16667	1.00000	60	70
2	0.50000	0.50000	0.00000	1.00000	76	77
3	0.50000	0.00000	0.50000	1.00000	77	88
4	0.33333	0.33333	0.33333	1.00000	75	80
5	0.00000	1.00000	0.00000	1.00000	70	77
6	1.00000	0.00000	0.00000	1.00000	81	89
7	0.16667	0.16667	0.66667	1.00000	53	63
8	0.00000	0.00000	1.00000	1.00000	49	55
9	0.00000	0.50000	0.50000	1.00000	45	44
10	0.16667	0.66667	0.16667	1.00000	60	64

Table 1. Mixture design matrix with the experimental analysis

2.7 Pilot plant design

As described earlier, the pilot plant comprised several treatment steps.

3. Results and discussion

3.1 Model establishment

Through linear regression fitting, the regression models of two responses (COD % and decolorization %) were established. The regression model equations are as follows:

$$Y_{\text{decolorization}\%} = 85.34 S1 + 67.70 S2 + 55.43 S3 + (-21.77) S1*S2 + (67.69) S1*S3 + (-73.59) S2*S3$$

$$R^2 = 84.82\%; P = 0.09$$

$$Y_{\text{COD}\%} = 77.11 S1 + 70.11 S2 + 49.02 S3 + (-1.55) (S1*S2) + (44.27) (S1*S3) + (-57.73) (S2*S3)$$

$$R^2 = 75.27\%; P = 0.2$$

Where S1: *Sphingomonas paucimobilis*; S2: *Bacillus sp.* and S3: *Staphylococcus epidermidis*

3.2 Effect of formulation on the percentage of decolorization and COD removal of effluent

The mixture design is now used widely in the formulation experiment of food, chemicals, fertilizer, pesticides, and other products. It can estimate the relationship between formulation and performance through regression analysis in fewer experiment times (Zhang et al., 2006).

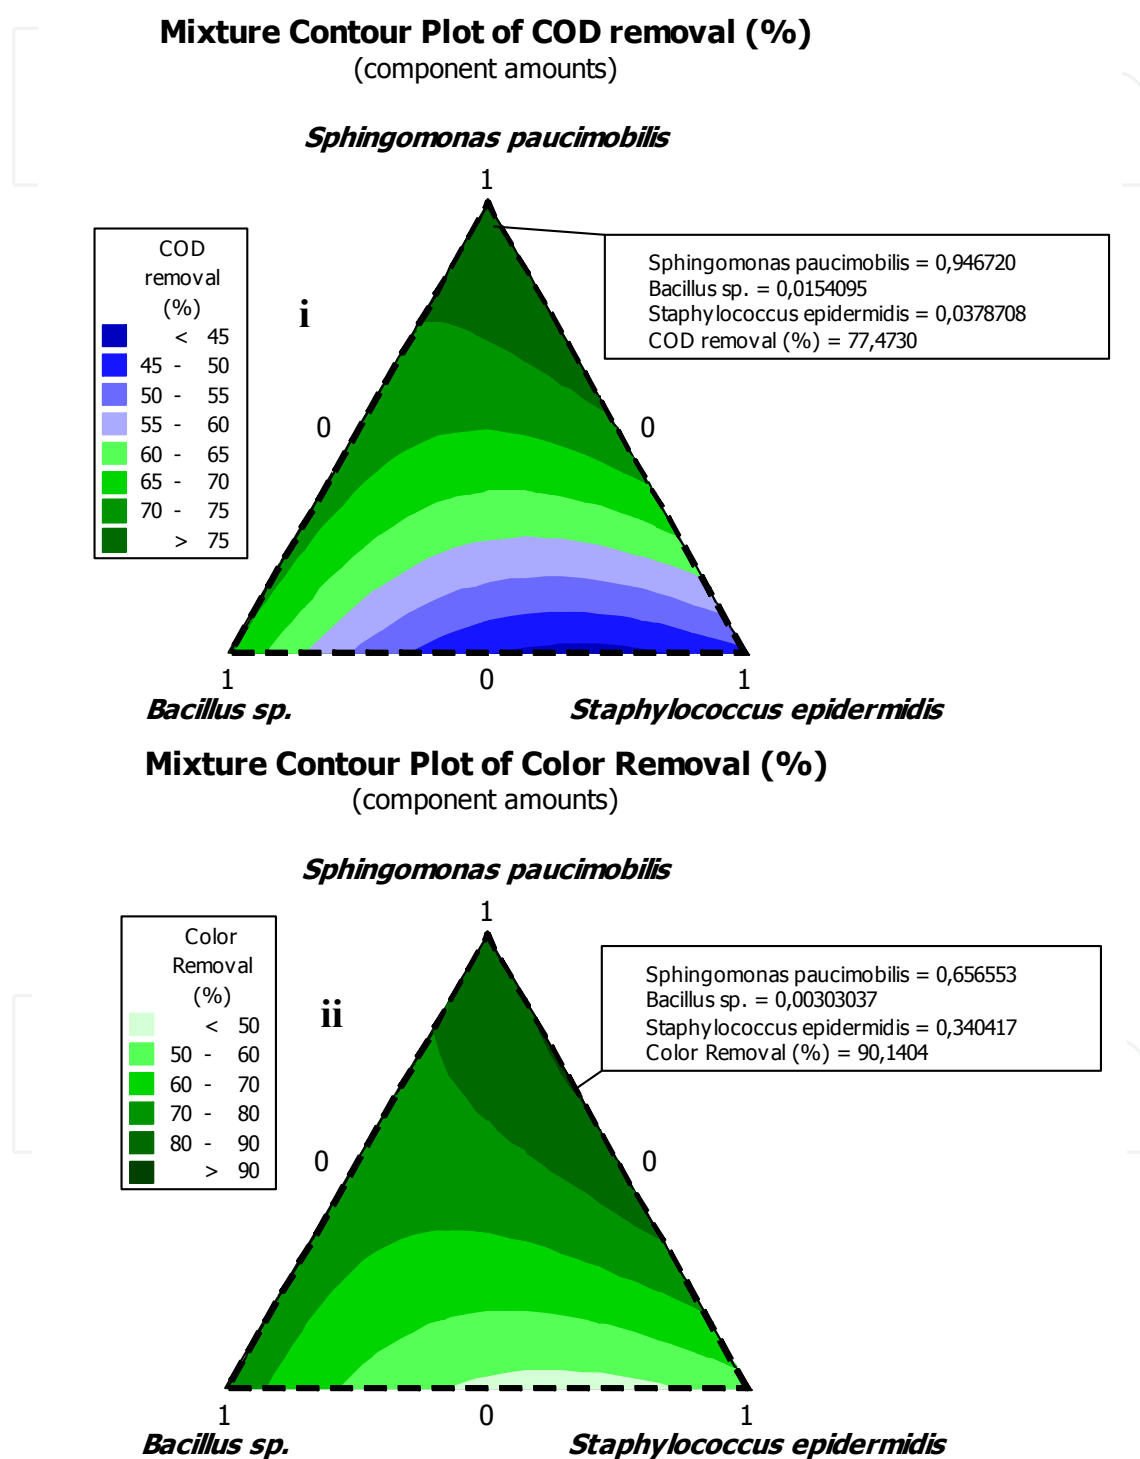


Fig. 1. Mixture contour plots between the variables (*Sphingomonas paucimobilis*, *Bacillus sp* and *Staphylococcus epidermidis*.) for i COD removal (%), ii Color removal (%).

Zhang et al. (2006) studied the formulation of plant protein beverage using the mixture design, obtaining the optimized combination of walnut milk, peanut milk, and soy milk. In the mixture design, the effect of the change of variables on the responses can be observed on the ternary contour map. Figure 1 shows the effect of the interaction of *Sphingomonas paucimobilis*, *Bacillus sp.* and *Staphylococcus epidermidis* on the decolorization of effluent; Figure 1 shows the effect of the interaction of *Sphingomonas paucimobilis*, *Bacillus sp.* and *Staphylococcus epidermidis* on the variation of COD. The statistical significance of the ratio of mean square variation due to regression and mean square residual error was tested using analysis of variance. ANOVA is a statistical technique which subdivides the total variation in a set of data into component parts associated with specific sources of variation for the purpose of testing hypotheses on the parameters of the model.

Only results obtained for decolorization and COD removal were presented herein for clarity of purpose. According to the ANOVA (Table 2 and 3), the regression adjusted average squares were (305.8) and (231), the linear regression adjusted average squares were (1529.3) and (1115.02) allowed the calculation of the Fisher ratios (*F*-value) for assessing the statistical significance. The model *F*-value (4.33) and (2.43) implies that most of the variation in the response can be explained by the regression equation.

Source	Degrees of freedom	Sum of square	Sum of adjusted squares	adjusted average squares	<i>F</i> -ratio	<i>P</i> -value (significance)
Regression	5	1529,3	1529,303	305,861	4,33	0,090
Linear regression	2	996,33	521,279	260,639	3,69	0,123
Quadratic regression	3	532,97	532,970	177,657	2,52	0,197
Residual error	4	282,30	282,297	70,574		
Total	9	1811,60				

Table 2. Analysis of variance of % decolorization (ANOVA) for the selected linear and interactions model for effluent textile wastewater

The *P*-value for the regression obtained $R^2 = 84.82\%$; $P = 0.09$ for decolorization was less than 0.1 and means consequently that at least one of the term in the regression equation has significant correlation with the response variable.

The associated *P*-value is used to judge whether *F*-ratio is large enough to indicate statistical significance. A *P*-value is more than 0.1 (i.e. $\alpha = 0.05$ or 95% confidence) indicates

that the model is not to be considered statistically significant. The non-significant value of lack of fit (>0.05) revealed that the quadratic model is statistically significant for the response and therefore it can be used for further analysis (Zhou et al., 2007). The ANOVA test also shows a term for residual error, which measures the amount of variation in the response data left unexplained by the model (Xudong and Rong, 2008). The collected data were analyzed by using Minitab® 14 Statistical Software for the evaluation of the effect of each parameter on the optimization criteria. In order to determine the effective parameters and their confidence levels on the color removal process, an analysis of variance was performed. A statistical analysis of variance (ANOVA) was performed to see which process parameters were statistically significant. *F*-test is a tool to see which process parameters have a significant effect on the dye removal value. The *F*-value for each process parameter is simply a ratio of the mean of the squared deviations to the mean of the squared error. The color removal from the real textile wastewater was investigated in different experimental conditions.

Source	Degrees of freedom	Sum of square	Sum of adjusted squares	adjusted average squares	<i>F</i> -ratio	<i>P</i> -value (significance)
Regression	5	1155,02	1155,023	231,005	2,43	0,205
Linear regression	2	885,44	470,406	235,203	2,48	0,199
Quadratic regression	3	269,58	269,578	89,859	0,95	0,498
Residual error	4	379,48	379,477	94,869		
Total	9	1534,50				

Table 3. Analysis of variance of COD% (ANOVA) for the selected linear and interactions model for effluent textile wastewater

The mixture surface plots (Figure 2), which are a three-dimensional graph, was represented using COD and color removal were represented based on the simultaneous variation of *Sphingomonas paucimobilis*, *Bacillus sp.* and *Staphylococcus epidermidis* in the consortium composition ranging from 0 to 100 % for each strain. The mixture surface plot also describing individual and cumulative effect of these three variables and their subsequent effect on the response (Liu et al., 2009; Ayed et al., 2010b,c).

The mixture contour plots between the variables such as *Sphingomonas paucimobilis*, *Bacillus sp.* and *Staphylococcus epidermidis* are given in Figure 2. The lines of contour plots predict the values of each response at different proportion of *Sphingomonas paucimobilis*, *Bacillus sp.* and *Staphylococcus epidermidis*. These values are more or less same to the experimental values.

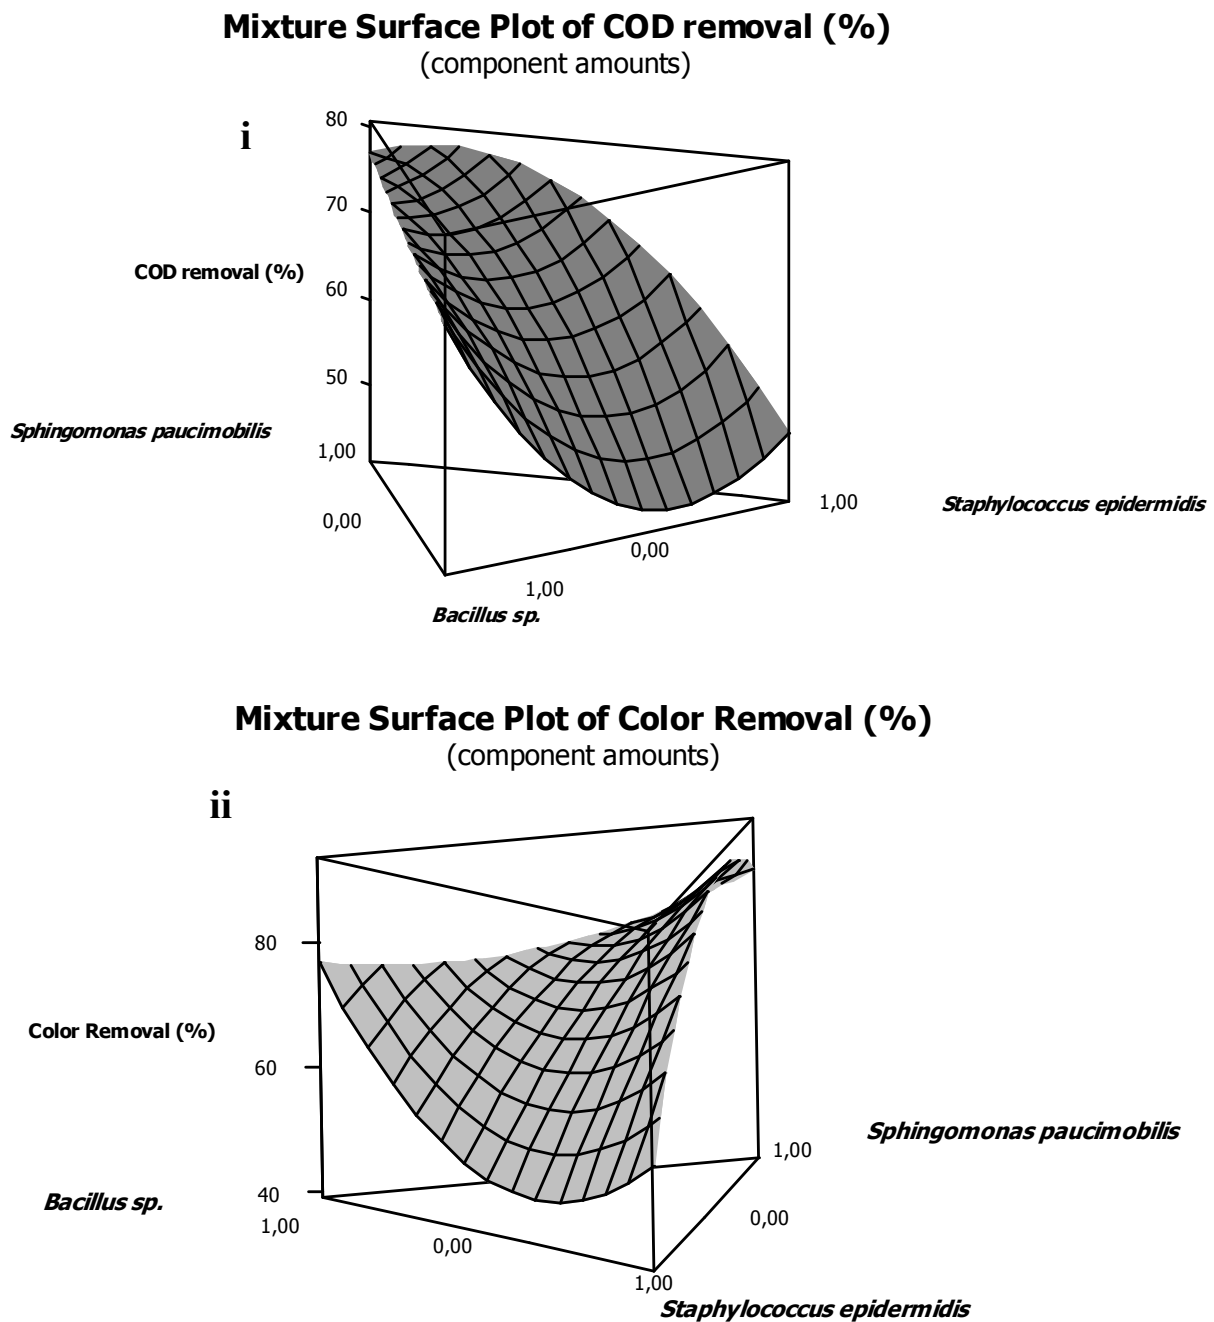


Fig. 2. Mixture surface plots between the variables (*Sphingomonas paucimobilis*, *Bacillus sp* and *Staphylococcus epidermidis*.) for i COD removal (%), ii Color removal (%).

4. Conclusions


The developed consortium showed a better decolorization yields as compared to pure cultures, which proved a complementary interaction among various isolated bacteria. The consortium achieved significantly a higher reduction in color (90.14%) and COD removal (77.47%) in less time (96h). The biodegradation of the effluent textile wastewater was achieved by the developed consortium using *Sphingomonas paucimobilis*, *Bacillus sp.* and *Staphylococcus epidermidis*.

5. References

- Bouallagui, H., Torrijos, M., Godon, J.-J., Moletta, R., Ben-Cheik, R., Touhami, Y., Delegenes, J.-P., Hamdi, M., 2004. Microbial monitoring by molecular tools of a two-phase anaerobic bioreactor treating fruit and vegetable wastes. *Biotechnol. Lett.* 26, 857–862.
- Buitron, G., Quezada, M., Moreno, G., 2004. Aerobic degradation of the azo dye acid red 151 in a sequencing batch biofilter. *Bioresour. Technol.* 92, 143–149.
- Duthoit, F., Godon, J.-J., Montel, M.-C., 2003. Bacterial community dynamics during production of registered designation of origin salers cheese as evaluated by 16S rRNA gene single-strand conformation polymorphism analysis. *Appl. Environ. Microbiol.* 69, 3840–3848.
- Khelifi, E., Gannoun, H., Touhami, Y., Bouallagui, H., Hamdi, M., 2008. Aerobic decolourization of the indigo dye-containing textile wastewater using continuous combined bioreactors. *J. Hazard. Mater.* 152, 683–689.
- Kornaros, M., Lyberatos, G., 2006. Biological treatment of wastewaters from a dye manufacturing company using a trickling filter. *J. Hazard. Mater.* 136, 95–102.
- Manu, B., Chaudhari, S., 2003. Decolourization of indigo and azo dyes in semi continuous reactors with long hydraulic retention time. *Process Biochem.* 38, 1213–1221.
- Forgas, E., Cserhati, T., Oros, G., 2004. Removal of synthetic dyes wastewaters: a review. *Environ. Int.* 30, 953–971.
- Godon, J.-J., Zumstein, E., Darbert, P., Habouzit, F., Moletta, R., 1997. Molecular bacterial diversity of an anaerobic digester as determined by small-subunit rDNA sequence analysis. *Appl. Environ. Microbiol.* 63, 2802–2813.
- Hongman, H., Jiti, Z., Jing, W., Cuihong, D., Bin, Y., 2004. Enhancement of laccase production by *P. ostreatus* and its use for the decolourization of anthraquinone dye. *Process Biochem.* 39, 1415–1419.
- Nyanhongo, G.S., Gomes, J., Gubitza, G.M., Zvauya, R., Read, J., Steiner, W., 2002. Decolorization of textile dyes by laccases from a newly isolated strain of *Trametes modesta*. *Water Res.* 36, 1449–1456.
- Khelifi, E., Gannoun, H., Touhami, Y., Bouallagui, H., Hamdi, M., 2008. Aerobic decolourization of the indigo dye-containing textile wastewater using continuous combined bioreactors. *J. Hazard. Mater.* 152, 683–689.
- Ge, Y., Yan, L., Qinge, K., 2004. Effect of environment factors on dye decolourization by *P. sordida* ATCC90872 in an aerated reactor. *Process Biochem.* 39, 1401–1405.
- Coughlin, M.F., Kinkle, B.K., Bishop, P.L., 2002. Degradation of acid orange 7 in an aerobic biofilm. *Chemosphere* 46, 11–19.
- Coughlin, M.F., Kinkle, B.K., Bishop, P.L., 2003. High performance degradation of azo dye acid orange 7 and sulfanilic acid in a laboratory scale reactor after seeding with cultured bacterial strains. *Water Res.* 37, 2757–2763.
- Sandhaya, S., Padmavathy, S., Swaminathan, K., Subrahmanyam, Y.V., Kaul, S.N., 2005. Microaerophilic-aerobic sequential batch reactor for treatment of azo dyes containing simulated wastewater. *Process Biochem.* 40, 885–890.
- Steffan, S., Badri, L., Marzona, M., 2005. Azo dye biodegradation by bacterial cultures immobilized in alginate beads. *Environ. Int.* 31, 201–205.

- Sudarjanto, G., Lehmann, B.K., Keller, J., 2006. Optimization of integrated chemical-biological degradation of a reactive azo dye using response surface methodology. *J. Hazard. Mater.* B138, 160-168.
- Sunnucks, P., Wilson, A.C.C., Beheregaray, L.B., Zenger, K., French, J., Taylor, A.C., 2000. SSCP is not so difficult: the application and utility of single stranded conformation polymorphism in evolutionary biology and molecular ecology. *Mol. Ecol.* 9, 1699-1710.
- Suwardiyono, T.S., Wenten, I.G.. (2005) Treatment of Textile Wastewater by a Coupling of Activated Sludge Process with Membrane Separation *Journal of Water and Environment Technology*, 3, 125-136
- Thomas, B., Aurora, T., Wolfgang, S., 2006. Electrochemical decolourization of dispersed indigo on boron-doped diamond anodes. *Diamond Relat. Mater.* 15, 1513-1519.

IntechOpen

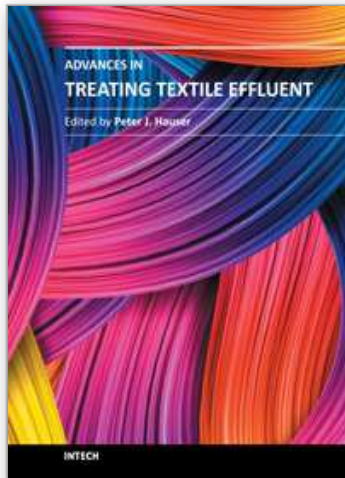

Advances in Treating Textile Effluent

Edited by Prof. Peter Hauser

ISBN 978-953-307-704-8

Hard cover, 154 pages

Publisher InTech

Published online 26, October, 2011

Published in print edition October, 2011

The treatment of textile wet processing effluent to meet stringent governmental regulations is a complex and continually evolving process. Treatment methods that were perfectly acceptable in the past may not be suitable today or in the future. This book provides new ideas and processes to assist the textile industry in meeting the challenging requirements of treating textile effluent.

How to reference

In order to correctly reference this scholarly work, feel free to copy and paste the following:

Lamia Ayed and Amina Bakhrouf (2011). Pilot Plant Experiences Using Activated Sludge Treatment Steps for the Biodegradation of Textile Wastewater, *Advances in Treating Textile Effluent*, Prof. Peter Hauser (Ed.), ISBN: 978-953-307-704-8, InTech, Available from: <http://www.intechopen.com/books/advances-in-treating-textile-effluent/pilot-plant-experiences-using-activated-sludge-treatment-steps-for-the-biodegradation-of-textile-was>

INTECH
open science | open minds

InTech Europe

University Campus STeP Ri
Slavka Krautzeka 83/A
51000 Rijeka, Croatia
Phone: +385 (51) 770 447
Fax: +385 (51) 686 166
www.intechopen.com

InTech China

Unit 405, Office Block, Hotel Equatorial Shanghai
No.65, Yan An Road (West), Shanghai, 200040, China
中国上海市延安西路65号上海国际贵都大饭店办公楼405单元
Phone: +86-21-62489820
Fax: +86-21-62489821

© 2011 The Author(s). Licensee IntechOpen. This is an open access article distributed under the terms of the [Creative Commons Attribution 3.0 License](#), which permits unrestricted use, distribution, and reproduction in any medium, provided the original work is properly cited.

IntechOpen

IntechOpen