

We are IntechOpen, the world's leading publisher of Open Access books Built by scientists, for scientists

4,800

Open access books available

122,000

International authors and editors

135M

Downloads

Our authors are among the

154

Countries delivered to

TOP 1%

most cited scientists

12.2%

Contributors from top 500 universities



WEB OF SCIENCE™

Selection of our books indexed in the Book Citation Index
in Web of Science™ Core Collection (BKCI)

Interested in publishing with us?
Contact book.department@intechopen.com

Numbers displayed above are based on latest data collected.
For more information visit www.intechopen.com



Evaluation of Ultrasound-assisted Modified Fly Ash for Treatment of Acid Mine Drainage

Deniz Sanliyüksel Yucel and Burcu Ileri

Additional information is available at the end of the chapter

<http://dx.doi.org/10.5772/intechopen.69425>

Abstract

The aim of this chapter is to assess the suitability of utilizing fly ash (FA) and modified fly ash (MFA) in the treatment of acid mine drainage (AMD). The effects of various experimental conditions such as mixing speed, fly ash dosage, contact time, and pH on the efficiency of metal removal from AMD was studied in batch experiments. For modification of FA, ultrasound (US) process was conducted at low frequency (20 kHz) to activate surface area and decrease particle size of FA at 90 W for 30 minutes. Chemical, physical and mineralogical compositions of FA, MFA and solid residues (SR) were determined using arrays of X-ray fluorescence (XRF), Brunauer-Emmett-Teller (BET), scanning electron microscopy coupled with energy dispersive X-ray spectrometry (SEM-EDX), X-ray diffraction (XRD), Fourier transform infrared spectroscopy (FTIR) techniques and particle size analysis. The removal efficiency of Al, Fe, Mn, Ni, Zn and SO_4^{2-} from AMD was compared using FA and MFA. According to the obtained results, ultrasound-assisted MFA provided successful results for metal removal in a shorter reaction time and with smaller dosage than FA. As the pH of the solution (ash:AMD) increased, the metal and SO_4^{2-} concentrations in SR increased mainly due to precipitation; this data was verified with XRD and XRF analysis. Preliminary treatment of AMD from Etili coal mine (NW Turkey) indicates that MFA could be an effective and low-cost adsorbent for the treatment of AMD.

Keywords: acid mine drainage, modified fly ash, ultrasound, metal, sulphate, solid residue

1. Introduction

The Can coal basin (Canakkale province, NW Turkey) is rich in lignite (100 Mt); though these reserves, known as Can coals, cannot be described as quality coals due to low calorific value and high sulphur content (max: 14.36 wt%) [1]. In the Can coal basin, the Etili mine has

operated as open pit since the 1980s [2]. When mining activities ceased without any accompanying remediation methods, these depressions filled with surface and ground waters. During the time, artificial lakes formed and showed typical characteristics of acid mine lakes (AML) with low pH (min: 2.59) and high electrical conductivity values (max: 6430 $\mu\text{S}/\text{cm}$), in addition to high SO_4^{2-} (max: 5370 mg/L) and metal (Al, Fe, Mn, etc.) concentrations [3]. Acid mine lakes are located upstream of the Kocabas stream, which passes through the Can coal basin before flowing into the Sea of Marmara. Along this stream, drinking water for several residential areas is supplied from boreholes [4]. The pH value of creeks around the mine lakes varies between 2.85 and 5.75 [5], with these creeks passing close to settlement areas. Soil and groundwater quality has been affected along these creeks. These conditions prohibit discharge of untreated acid mine drainage (AMD) into public streams, as they have a detrimental effect on environment. So, for removal of metals from AMD, suitable physical or chemical treatment processes such as chemical precipitation, adsorption, oxidation-reduction, ion exchange, etc. must be performed [6–12]. Adsorption refers to a mass transfer process by which a substance is transferred from the liquid phase to the surface of a solid and becomes bound by physical and/or chemical interactions [13]. Activated alumina, activated carbon, silica gel, fly ash, saw dust and zeolite are different adsorbent materials reported in the literature [10–16] for removal of pollutants from water with the adsorption process.

Fly ash (FA), which is a low cost and abundant industrial by-product, has been known for its effectiveness in the remediation of different kinds of industrial wastes in Europe and USA since 1960s [14]. In Turkey, 13 million tons of FA is produced annually and this amount is expected to reach 50 million tons per year by 2020 [17, 18]. But only a small amount of FA in Turkey (approximately 1%) is reused in the construction industry (particularly cement industry) [19, 20] and the rest is disposed of in ash dumps or landfill which is an inconvenient solution both from environmental and economical points of view [21]. Recent studies have demonstrated that treatment of AMD with FA is an effective adsorption process for metal uptake from water [16, 22–28]. Ultrasound (US) has been used recently as one of the most successful means of activating adsorbate surfaces [29, 30]. The US technology works according to the principle of cavitation and the adsorbent surface modification is achieved by means of pyrolysis and $\bullet\text{OH}$ radicals which burst in the water under high temperature and pressure and this results in continuity of use of the adsorbent for purification purposes [30–33]. High power US produces a permanent chemical or physical change in a material and $\bullet\text{H}$, $\bullet\text{OH}$ and $\bullet\text{OH}_2$ radicals when water is liquid irradiated with US [34–36]. High intensity shear forces and radicals formed during the US mechanical effect create pits and cracks on adsorbate surfaces resulting in larger specific surface area, higher pore volume and lower particle diameter [37]. The use of US cavitation with adsorption for water treatment has been reported in the literature [38–40]. This chapter is a site-specific research carried out to assess the suitability of utilizing FA and modified fly ash (MFA) in the treatment of AMD from Etili coal mine. Within this chapter, an AML that is one of the largest mine lakes in Etili coal mine 1 km Southwest of Keciagili village with 29.41 deca area in July 2016 not drained since the 1990s was chosen (**Figure 1a** and **b**). Fly ash was collected directly from the fluidized bed combustion thermal power plant precipitator, which is a coal-fired 135 MW generating facility, located in Northwestern Turkey. In this chapter, FA, a coal combustion by-product, was US-assisted modified with the aim of activating the surface area and decreasing particle size. Removal of metal and SO_4^{2-} using FA and MFA was determined under various conditions such as mixing speed, ash

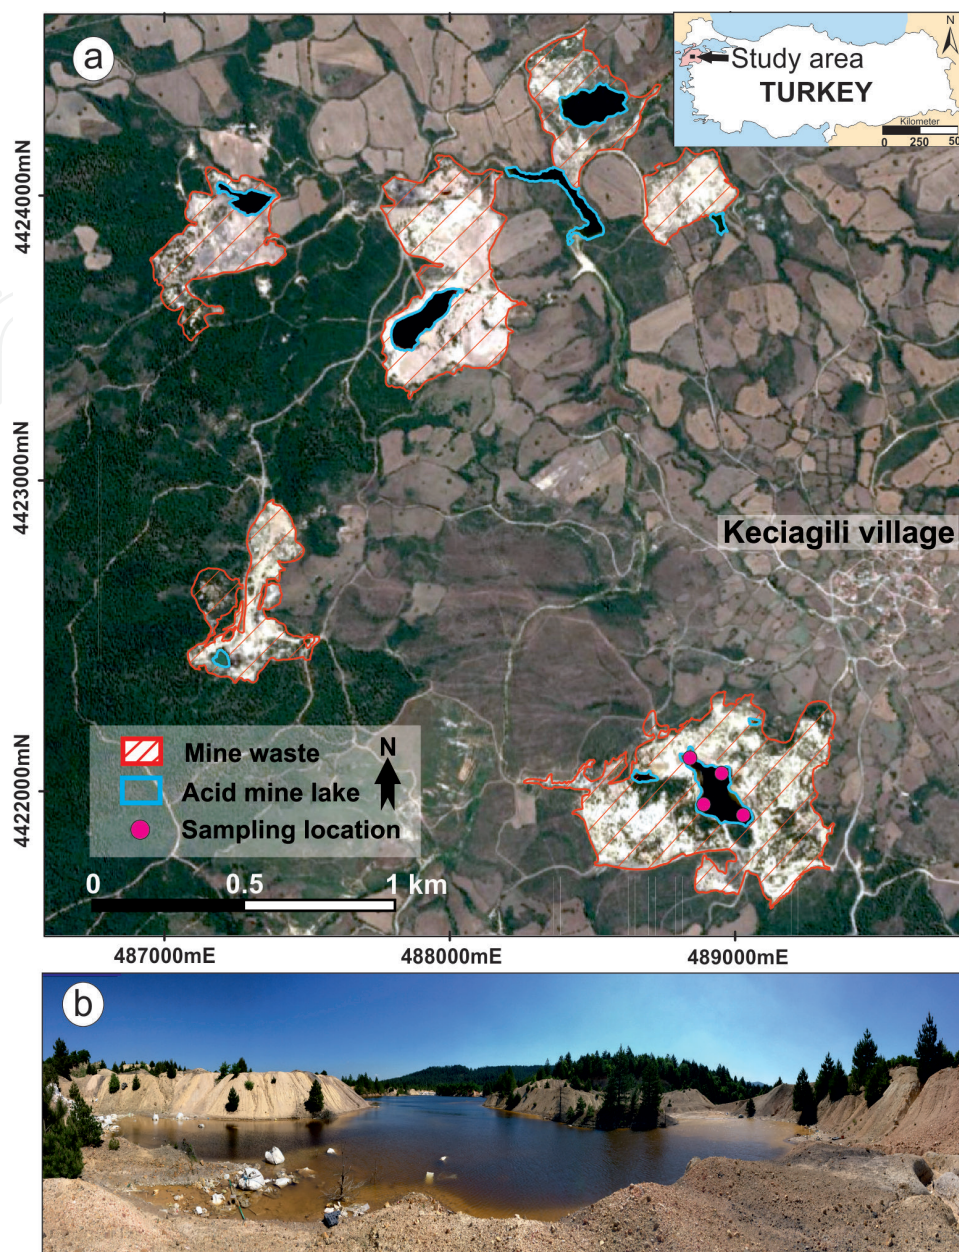


Figure 1. (a) Location map of Etili coal mine (b) snapshot from sampling AML.

dosage, contact time and pH in batch experiments. The possibility of utilizing FA and MFA to remove selected metals and SO_4^{2-} from AMD is evaluated.

2. Materials and methods

2.1. Acid mine lake characterization

Four different sampling points were selected and water samples were taken from 0.5 to 1 m depths in the lake using a bailer sampler (Eijkelkamp). Physicochemical parameters of AML

were measured in the field, including pH, oxidation-reduction potential (ORP, mV), temperature (T , °C), electrical conductivity (EC, $\mu\text{S}/\text{cm}$), dissolved oxygen (DO, mg/L), total dissolved solids (TDS, mg/L) and salinity (Sal, %), using a multi-parameter measurement device (WTW 3410). All water samples were stored in 500-mL polyethylene bottles and refrigerated at 4°C until further analysis. Water samples were analysed for major and trace elements using an inductively coupled plasma-mass spectrometer (ICP-MS) at AcmeLabs (Canada). Acidity was measured as methyl orange acidity with digital titrator (APHA 2310 titration method), and Fe(II) was determined by ferrozine spectrophotometric method using a Hach Lange DR 2800 spectrophotometer. Fe(III) was calculated as the difference between Fe(t) and Fe(II). Sulphate was measured by Hach Lange DR 2800 using SulfaVer 4 method.

2.2. Fly ash modification

The FA modification was achieved using US technology. The US system was equipped with a titanium probe having diameter of 19 mm, connected to a horn-transducer of 20 kHz supported with a booster and eventually plugged to a power supply of 500 W with a cable (VibraCell 505, Sonics&Materials) (**Figure 2**). The batch reactor had a cooling jacket through which tap water was circulated to absorb the heat generated by US treatment. Each 200 mL pure water sample initially containing 10 g of FA was placed in the cooling-jacket reactor, and then modified with US (20 kHz) at 90 W for 10, 30 and 60 minutes. Modified FA was dried in the oven at 80°C for 12 hours. The variations in particle size of MFA at 10, 30 and 60 minutes were determined to identify optimum modification time according to particle size analysis

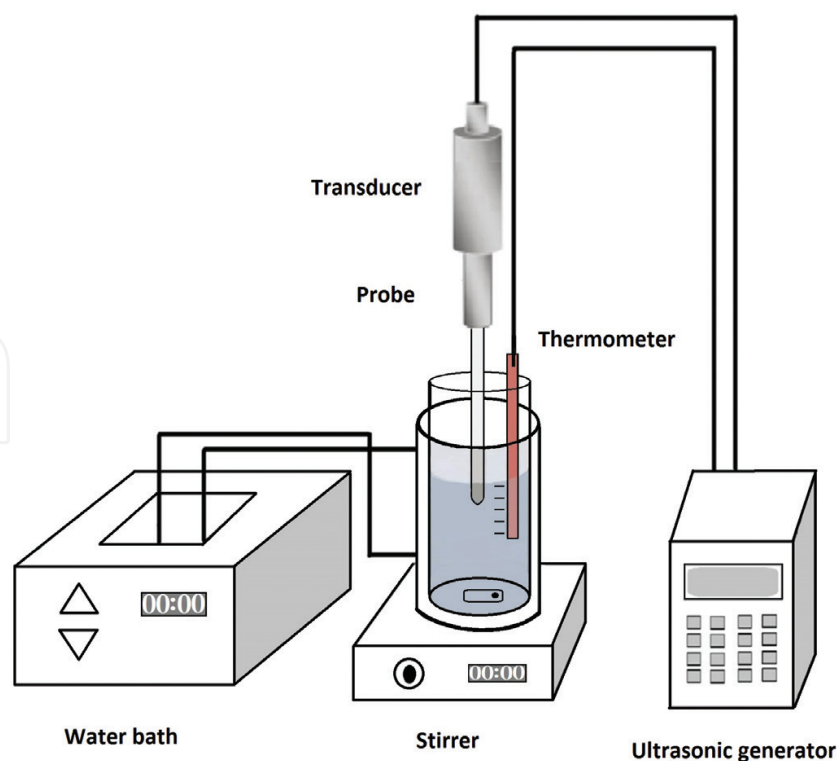


Figure 2. Low frequency ultrasonic system (20 kHz).

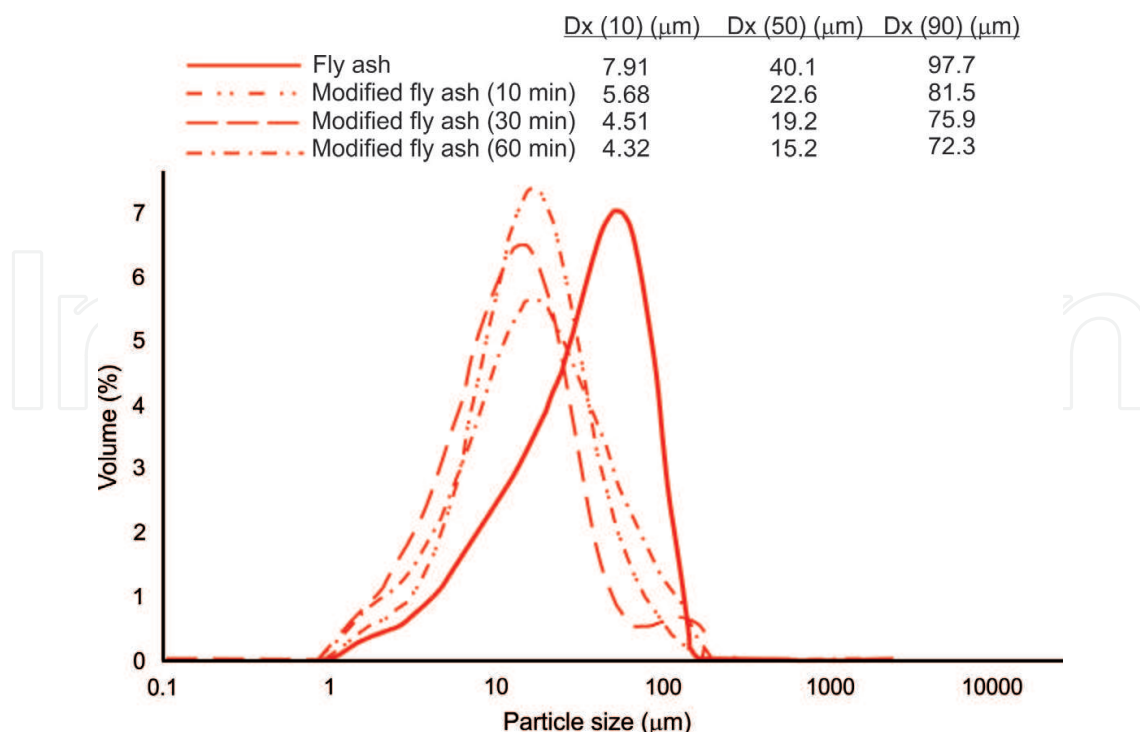


Figure 3. Particle size distribution of FA and MFA.

(Figure 3). The particle size diameter of FA was decreased and surface area was increased by US mechanical effects. The obtained particle size distribution resulted for 30 minutes had similar Dx (10, 50 and 90) values compared to 60 minutes. Therefore, 30 minutes was chosen as optimum time for modification of FA due to reduce US energy, cost and time.

2.3. Batch experiments

Batch experiments were conducted to determine various parameters such as (1) mixing speed (rpm), (2) ash dosage (g), (3) contact time (hour) and (4) pH that affect the removal of metal and sulphate (SO_4^{2-}) from AMD using FA and MFA at ambient temperature. (1) Twenty grams of FA and MFA was mixed with 100 mL AMD samples and was agitated under different mixing speeds (60, 120 and 180 rpm) using an orbital shaker (GFL@3005) to determine optimum mixing speed for 0–6 hours contact time. It was found that removal of metal increased with increasing mixing speed. Thus, 180 rpm was selected for optimum mixing speed. (2) FA and MFA were weighed at 5, 10 and 20 g dosage and subsequently added to AMD of 100 mL volume in a conical flask. The mixed sample was agitated using an orbital shaker at 180 rpm for 0–6 hours to determine optimum adsorbent dosage for Fe removal. (3) The effect of contact time on the adsorption of metal (Al, Fe, Mn, Ni and Zn) and SO_4^{2-} from AMD using 10 and 20 g FA and MFA dosage was evaluated with various contact times (0.2, 0.5, 1, 2, 3, 4, 5 and 6 hours) at 180 rpm. (4) The pH of the AMD was adjusted to 3, 5, 7 and 9 using 1 N NaOH before the tests. All experiments were conducted according to optimum mixing speed (180 rpm), 20 g adsorbent dosage, 6 hour contact time and various pH values to determine Al, Fe, Mn, Ni, Zn and SO_4^{2-} removal from the solution. At the end of mixing, FA and MFA were separated from

suspension by filtration through a 0.45 μm membrane filter. pH and EC values of the suspension were measured with a multi-parameter device. The residual concentrations of the metal ions in the supernatant were determined using ICP-MS technique. The amount of metal ions adsorbed by FA and MFA was taken as the difference between the initial and residual concentration of the metal ions. Each test was repeated at least three times. In each case, the percentage error for the experiment was lower than $\pm 5\%$. The solid residues (SR) including FA:AMD and MFA:AMD determined for optimum Fe removal results could settle for 5 minutes and separated from water. Then, SR was dried in the oven at 80°C for 12 hours to determine SR characterization.

2.4. Fly ash and modified fly ash characterization

The physical, mineralogical and chemical composition of FA, MFA and SR were identified with particle size, Brunauer-Emmett-Teller (BET), scanning electron microscopy (SEM) coupled with energy-dispersive X-ray spectrometry (EDX), X-ray diffraction (XRD), Fourier transform infrared spectroscopy (FTIR) and X-ray fluorescence (XRF) analyses. The particle size distribution of FA, MFA and SR were measured using a laser-based particle size analyzer (PSA), namely a Malvern Mastersizer 3000 PSA, in the Polymer Laboratory at Chemistry Department in Canakkale Onsekiz Mart University. Morphology, particle shape and mineralogical components of FA, MFA and SR were examined through micro-graphs taken by SEM (JEOL SEM-7100-EDX) coupled with EDX performed at the Centre for Material Science in Canakkale Onsekiz Mart University. Specific surface area of FA and MFA was identified by BET (Quantachrome, Quadrasorb SI) analyses at the Centre for Material Science in Canakkale Onsekiz Mart University. Mineralogical compositions of FA, MFA and SR were identified by XRD using Philips PW 1830 instrument at the General Directorate of Mineral Research and Exploration Analysis Laboratories in Ankara, Turkey. Both major and minor element concentrations of FA, MFA and SR were obtained using an XRF spectrometer (PANalytical, Axios) at the General Directorate of Mineral Research and Exploration Analysis Laboratories. The chemical compounds of FA, MFA and SR were identified using a single-beam FTIR-PerkinElmer spectrum 100 spectrometer, equipped with a diamond crystal in the Chemistry Laboratory in Canakkale Onsekiz Mart University. IR spectra were recorded as changes in absorption as a function of wave number ranging from 600 to 4000 cm^{-1} .

3. Results and discussions

3.1. Hydrochemical characteristics of acid mine lake

The pH value of the mine lake was strongly acidic (2.66). Low pH value of the lake increases the dissolution of numerous elements. Electrical conductivity value of the mine lake was measured as 5.2 mS/cm (**Table 1**). Electrical conductivity is related to the concentration of TDS and major ions. Total dissolved solids may be obtained by multiplying the conductance by a factor, which is commonly between 0.55 and 0.75, and generally multiplication factor is approximately 0.67 [41]. Total dissolved solids were measured and calculated as 2720 and

Parameter	Unit	Concentration
T	°C	26.3
pH	-	2.66
ORP	mV	355
EC	mS/cm	5.2
Sal	%	2.7
TDS	mg/L	2720
DO		5.7
Acidity		2000
Ca ²⁺		496
Mg ²⁺		267
Na ⁺		156
K ⁺		3
SO ₄ ²⁻		3600
Cl ⁻		65
Al		249.9
Fe(t)		199.7
Fe ²⁺		37
Fe ³⁺		162.7
Mn		114.74
Zn		6.21
Co		2.29
Ni		1.11
Cu		0.23

Table 1. Hydrochemical characteristics of AML.

3484 mg/L, respectively. Temperature of the lake (26.3°C) was related to climatic fluctuations (e.g. season and different times of day and depth of water body). Oxidation-reduction potential and DO values were measured as 355 mV and 5.7 mg/L, respectively. Oxidation-reduction potential influences the mobility of most metals, which can exist in several oxidation states. Typically, high ORP values correspond to the presence of oxidizing agents. Thus, ORP values are typically found to be high when DO levels are high [42]. Acidity values based on titrations performed in the laboratory were quite high, 2000 mgCaCO₃/L. The titrated values are slightly lower than acidity values (2128 mgCaCO₃/L) calculated using the formula of [43]. Major cation order is Ca²⁺ (496 mg/L) > Mg²⁺ (267 (mg/L) > Na⁺ (156 mg/L) > K⁺ (3 mg/L), and major anion order is SO₄²⁻ (3600 mg/L) > Cl⁻ (65 mg/L). Therefore, lake water is best classified as Ca-SO₄ water. The concentrations of Fe and Al in the mine lake are in most cases greater than those of the common ions Na⁺ and K⁺. The dominant dissolved metals in the lake water,

in order of average abundance, are Al (249.9 mg/L) > Fe (199.7 mg/L) > Mn (111.74 mg/L) > Zn (6.21 mg/L) > Co (2.29 mg/L) > Ni (1.11 mg/L) > Cu (0.23 mg/L). Most the dissolved Fe in the lake water is Fe³⁺ (162.7 mg/L). According to the Turkish inland water quality regulations [44], the mine lake had pH, SO₄²⁻, Al, Fe, Mn, Zn, Co, Ni and Cu values in class IV, and were classified as highly polluted waters.

3.2. Mineralogical, physical and chemical characterization of original and modified fly ash

The mineralogical, physical and chemical properties of fly ash depend on the nature of the parent coal, conditions of combustion, type of emission control devices, storage and handling methods [45, 46]. Fly ash (pH = 10.95) and MFA (pH = 11.58) have alkaline character when added to deionized water 1:2 (solid:solution ratio) at the end of 24 hours (**Table 2**). Electrical conductivity value of MFA (2.24 mS/cm) is slightly lower than EC value of FA (2.35 mS/cm). The chemical composition of the FA was determined by XRF analyses to contain 50.75% SiO₂ + 19.98% Al₂O₃ + 5.37% MgO + 5.35% Fe₂O₃ + 2.15% Na₂O and 1.81% CaO and 10.9% LOI. According to the American Society for Testing Materials [47], the ash is classified as 'F-class fly ashes', the sum of SiO₂ + Al₂O₃ + Fe₂O₃ > 70% and CaO content is less than 5%. The combustion of bituminous or anthracite coal produces F-class FA and F-class FA is pozzolanic [48]. The chemical composition of MFA contains 50.48% SiO₂ + 19.59% Al₂O₃ + 5.58% MgO + 5.39% Fe₂O₃ + 2.05% Na₂O and 1.74% CaO and 11.65% LOI. Specific surface area (BET) of FA is increased with US-assisted modification from 3.21 to

Parameter	Unit	FA	MFA
pH	-	10.95	11.58
EC	mS/cm	2.35	2.24
Specific surface area	m ² /g	3.21	4.54
SiO ₂	wt%	50.75	50.48
Al ₂ O ₃		19.98	19.59
MgO		5.37	5.58
Fe ₂ O ₃		5.35	5.39
Na ₂ O		2.15	2.05
CaO		1.81	1.74
K ₂ O		1.75	1.72
MnO		0.052	0.051
ZnO		0.017	0.017
NiO		0.008	0.008
CuO		0.006	0.006
LOI		10.90	11.65

Table 2. Chemical composition of FA and MFA.

4.54 m²/g. The MFA contains lower amounts of Si and Al and has a higher surface area, LOI and pH than the FA. The results for the mineralogical composition of FA and MFA remained the same as obtained by XRD analysis. Mineralogical composition of FA includes quartz (42%), amorphous phase (23%), mullite (13%), plagioclase (12%), hematite (6%), magnetite (2%), mica (1%) and K-feldspar (1%). Modified FA contains quartz (37%), amorphous phase (31%), mullite (10%), plagioclase (10%), mica (5%), K-feldspar (4%), hematite (2%) and magnetite (1%). Ultrasound-assisted modification decreased particle size diameter of FA and so the percentages of mineral composition changed. Particle size characterization of FA is important for metal adsorption. Adsorption capacity of the smallest particles is better as they are more reactive, and in addition trace elements tend to concentrate in the finest particles. The mean particle size distribution of the FA and MFA is presented in **Figure 3**. The results show that the particle size distribution of the FA and MFA ranges between 1 and 144 μm and 0.9 and 116 μm, respectively. From the cumulative distributions, the following values for Dx (10, 50 and 90) of FA and MFA were observed 7.91, 40.1 and 97.7 μm and 4.51, 19.2 and 75.9 μm, respectively. The size and shape of the FA were scanned with SEM-EDX as shown in **Figure 4a–d**. Generally, FA particles have an irregular and porous microscopic structure. Most of the FA particles exhibit irregular shapes, primarily because most minerals in the coal do not undergo melting but soften only, under the relatively low boiler temperature of 850–900°C [49–51]. Irregularly shaped unburned carbon particles tended to be in the upper end of the size distribution. The occurrence of hematite results from oxidation of pyrite in the combustion units. Fly ash and MFA contain small pores, which range between 0.6 and 11.2 μm. Ultrasound mechanical effect created pits and cracks on FA surface and part of ash particles filled inside the pores (**Figure 5a–d**).

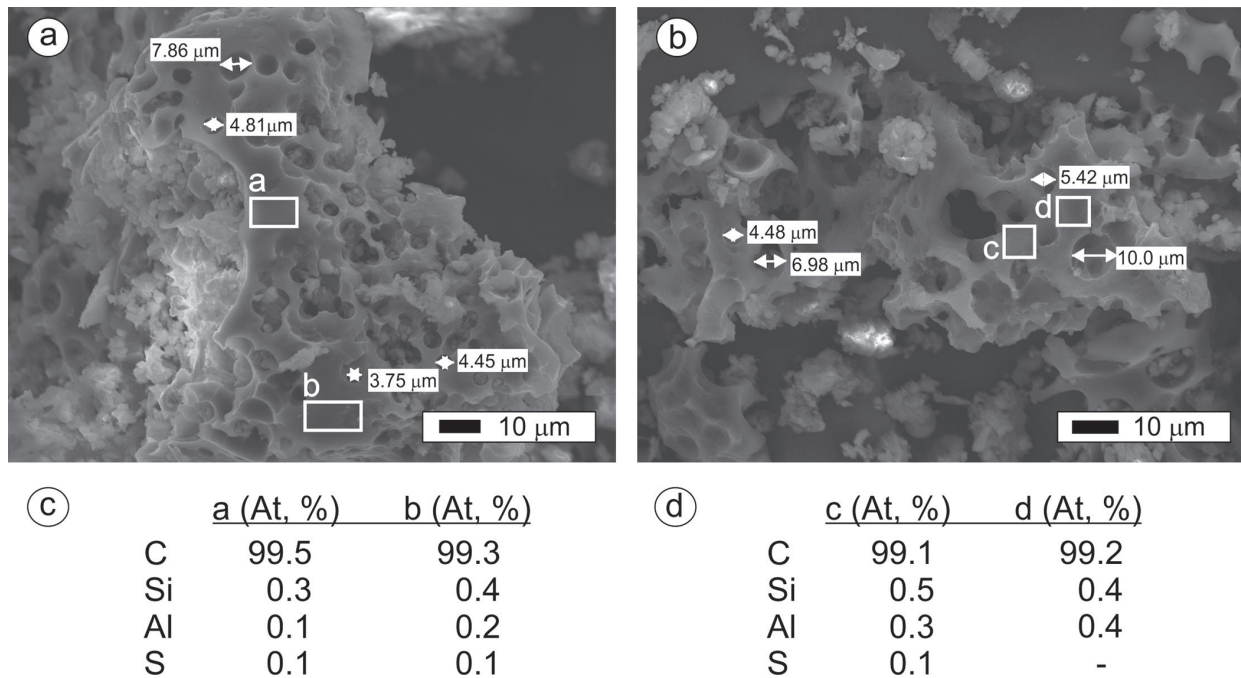


Figure 4. (a, b) SEM images of FA, (c, d) EDX results of FA.

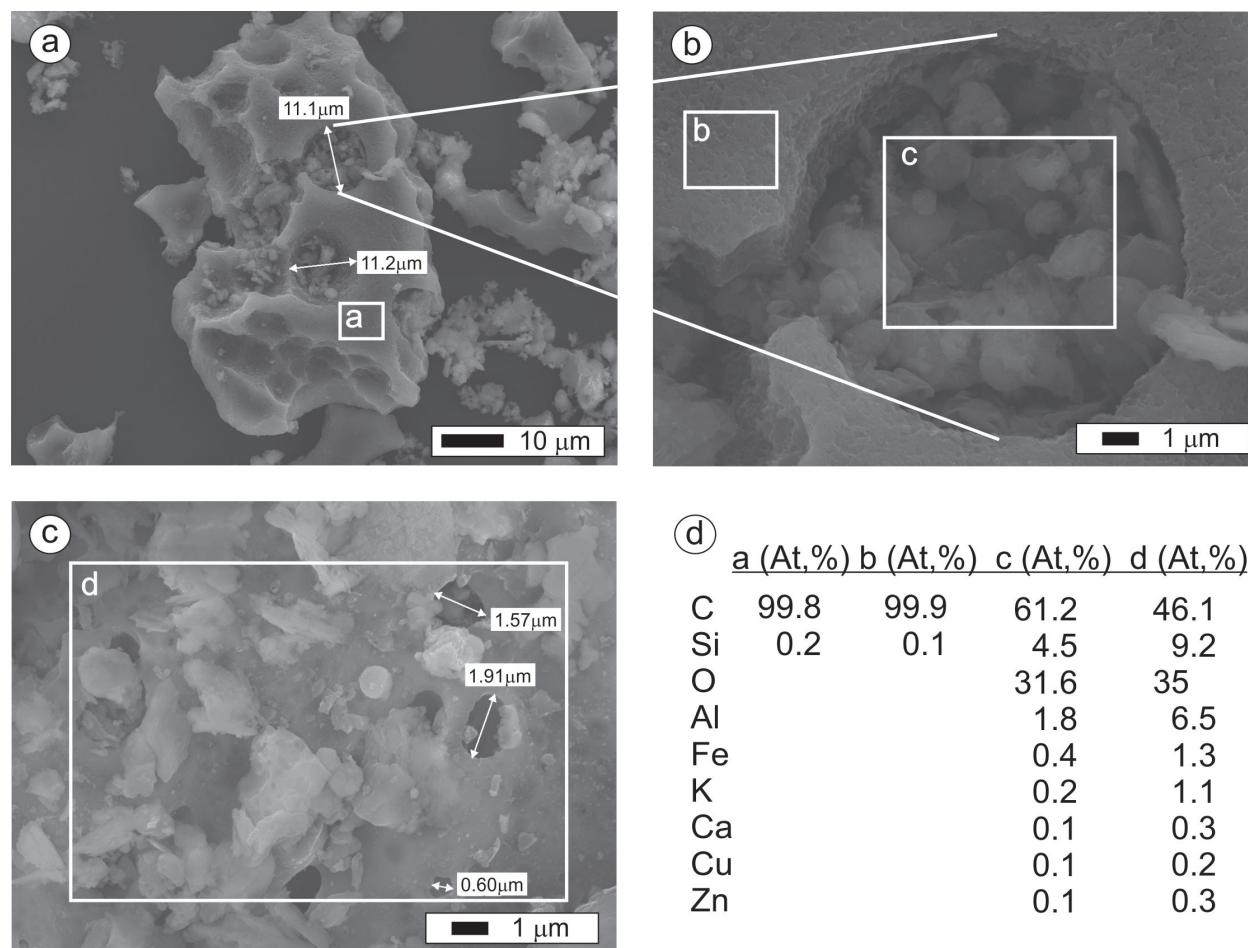


Figure 5. (a–c) SEM images of MFA, (d) EDX results of MFA.

3.3. Metal removal from acid mine drainage using fly ash and modified fly ash

3.3.1. Effect of agitation

At higher agitation speeds, the mass transfer resistance related to ion diffusion through the liquid film surrounding the FA is reduced as the film thickness reduces due to agitation, resulting in greater metal uptake [52]. To determine the effect of agitation on the removal of Fe (t), AMD (100 mL) was homogeneous mixed with FA and MFA (20 g) at 60, 120 and 180 rpm for 0–6 hours. The results of the Fe concentration vs. contact time are shown in **Figure 6a** and **b**. According to the obtained results, the speed of agitation is an important factor for removal of Fe from solution. The maximum removal of Fe increased with increasing mixing speed and the optimum mixing speed was determined as 180 rpm at least time. The Fe concentration of the solution was measured 4.6, 0.38 and 0.1 mg/L; 4.5, 0.30 and 0.05 mg/L for 60, 120 and 180 rpm at the end of 6 hours for FA:AMD and MFA:AMD, respectively.

3.3.2. Effect of adsorbent dosage

Neutralization is generally the first step in AMD treatment [11]. The kinetics of the neutralization reactions was investigated by monitoring the pH and EC values of FA:AMD and

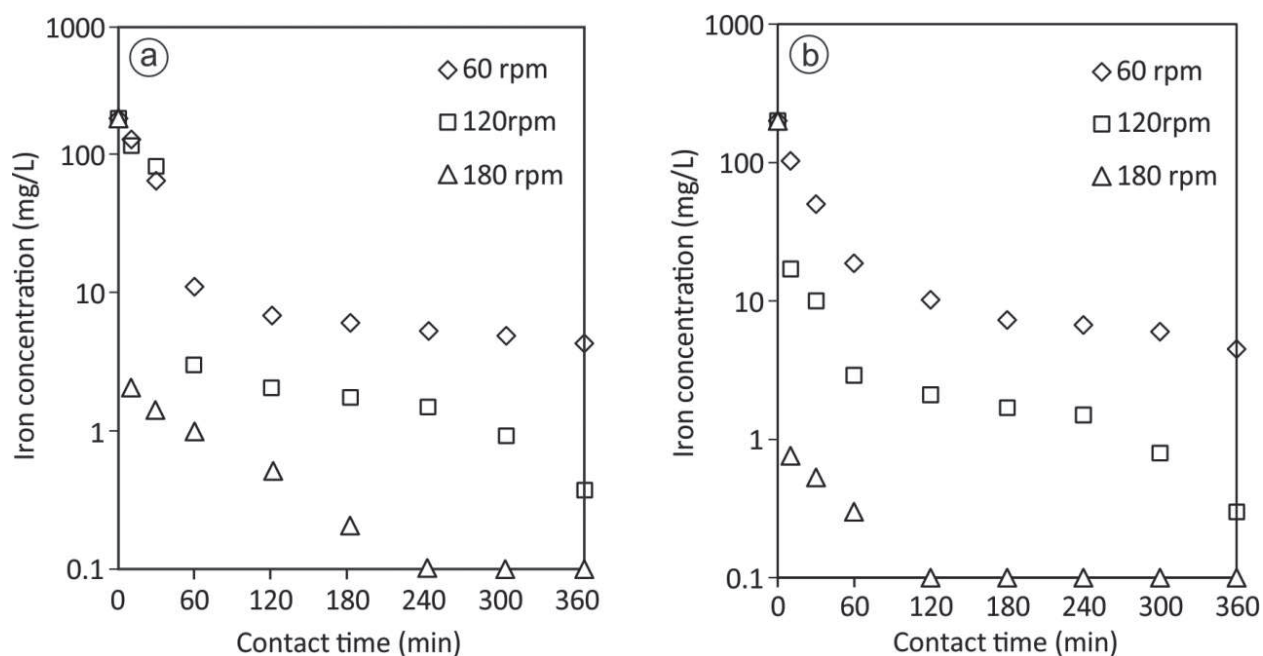


Figure 6. Effect of agitation on Fe concentration of AMD mixing with (a) FA and (b) MFA.

MFA:AMD ratio (1:20, 1:10 and 1:5) over a period of 6 hours. Initial pH (2.66) of the FA:AMD increased within the first 30 minutes for all ash dosages, indicating that soluble material dissolved quickly resulting in the solution. pH values reached 4.28, 4.43 and 5.18 for 5, 10 and 20 g FA dosage at the end of 6 hours, respectively (Figure 7a). Electrical conductivity values ranged from 5.2 to 4.8 mS/cm, 5.2 to 4.81 mS/cm and 5.2 to 4.51 mS/cm were measured for the 5, 10 and 20 g FA dosage at 0–6 hours, respectively (Figure 7b). pH value of the solution reached 5.51, 7.3 and 7.9 for 5, 10 and 20 g MFA dosage at the end of 6 hours (Figure 7c). Low pH value with a minimum of 2.66 was measured in initial, and the highest pH value was measured ash dosage of 20 g at 6 hours, which compared well with the adsorbent dosage and contact time. Alkaline pH value of solution indicates that modification of FA affects the alkalinity. Acid mine drainage reacted with MFA in 6 hours using 1:5 and 1:10 MFA:AMD ratios by weight produces neutral and alkaline process waters. Electrical conductivity values ranged between 5.2 and 4.85 mS/cm, 5.2 and 4.8 mS/cm, 5.2 and 4.2 mS/cm were measured for MFA dosage of 5, 10 and 20 g at 0–6 hours, respectively (Figure 7d). A sudden increase in EC was observed during the first 10 minutes for all MFA dosages, indicating that soluble material dissolved into the solution resulting in a rapid and irregular increase in EC value. Adsorbent dosage is effective parameter for metal removal [53]. In order to determine the effect of adsorbent dosage on the removal of Fe, AMD (100 mL) was homogeneously mixed with FA and MFA (5, 10 and 20 g) at 180 rpm for 0–6 hours. According to FA, various adsorbent dosages (5, 10 and 20 g), Fe concentration were determined 1.43 mg/L at pH = 4.28, 1.03 mg/L at pH = 4.43, 0.1 mg/L at pH = 5.18 at the end of 6 hours, respectively (Figure 8a). According to Turkish inland water quality regulations [44], Fe concentration must be lower than 0.3 mg/L for unpolluted water classification (Class I). Considering this regulation, optimum FA dosage for Fe removal from AMD was determined as 20 g in this chapter. Fe concentration shows approximately 99.9% removal at pH = 5.18 attained by the FA:AMD ratio of 1:5. According to various adsorbent dosages (5, 10 and 20 g) for MFA,

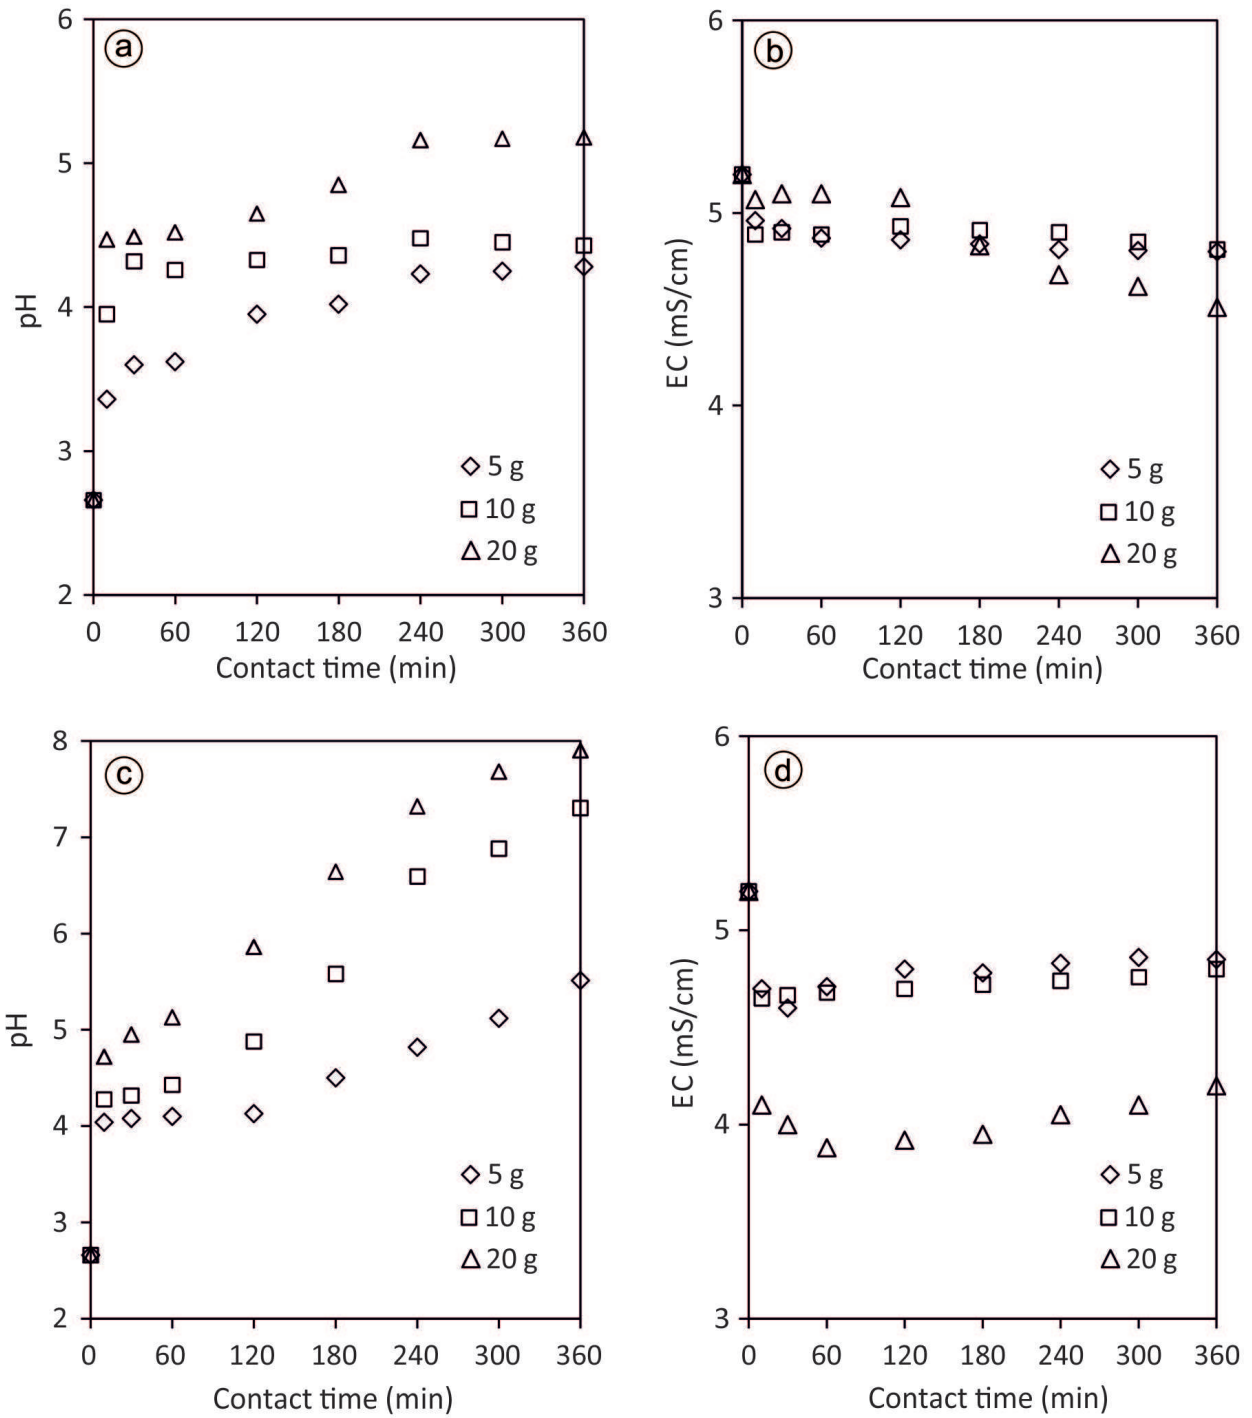


Figure 7. pH and EC vs. contact time as a function of adsorbent dosage, (a, b) FA, (c, d). MFA ($pH_{initial} = 2.66$; $EC_{initial} = 5.2$ mS/cm).

Fe concentration was determined 0.5 mg/L at pH = 5.51, 0.1 mg/L at pH = 7.3 and 0.05 mg/L at pH = 7.9 at the end of 6 hours, respectively (Figure 8b). It was observed that the adsorbent dosage is an effective parameter for Fe removal using FA and MFA into AMD. Previous studies reported that higher adsorption capacity and larger surface area of FA is related to

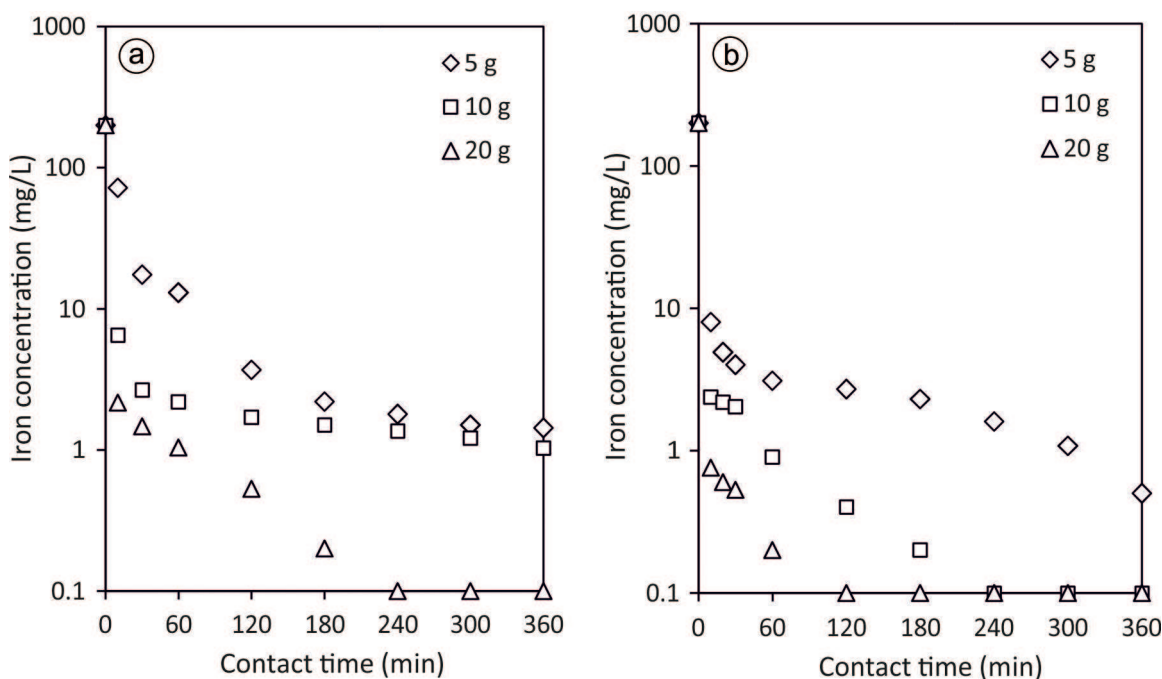


Figure 8. Effect of adsorbent dosage on the Fe concentration vs. contact time (a) FA and (b) MFA.

the efficiency of pollutant removal [54–58]. In this chapter, attempt was made to improve the efficiency of metal removal from AMD with modified FA using US mechanical effect. Modification of FA was provided to increase surface area and decrease diameter range of adsorbent and so, adsorbent dosage reduced by half using MFA. Iron concentration shows approximately 99.9% removal at pH = 7.3 attained by the MFA:AMD ratio of 1:10.

3.3.3. Effect of contact time

In order to determine the effect of contact time on the removal of Al, Fe and SO_4^{2-} , AMD (100 mL) was homogeneously mixed with FA (20 g) and MFA (10 g) at 180 rpm for 0–6 hours. **Figure 9a** and **b** shows the effect of contact time on Al, Fe and SO_4^{2-} removal from AMD. The pH of the solution (FA:AMD) ranged between 2.66 and 5.18. It is shown from **Figure 9a** that the removal percentage of Iron from solution increased rapidly for 20 g FA dosage and reached up to 99% at the end of 2 hours. A further increase in the contact time has a negligible effect on the rate of adsorption of Fe. Therefore, the optimum contact time of 2 hour for 20 g FA dosage could be considered for the adsorption of Fe on FA for entire batch studies. The pH of the solution (MFA:AMD) ranged between 2.66 and 7.3. The adsorb Fe on MFA increased with an increase of contact time in particular of the first 1 hour with 99% removal percentage. Iron concentration was successfully reduced below 0.3 mg/L at the end of 1 hour. Therefore, the optimum contact time of 1 hour for dosage of 10 g MFA could be considered for the adsorption of Fe on MFA for entire batch studies. Aluminium precipitates from AMD when they are diluted or neutralized to a pH of ≥ 4.5 –5 [59] because $\text{pK}_1 = 5$ for Al^{3+} hydrolysis, a necessary condition for onset of precipitation [60]. Removal percentage of Al from solution was calculated 85% (pH = 5.18) for dosage of 20 g FA at the end of 6 hours. Aluminium removal from solution was obtained as 86%

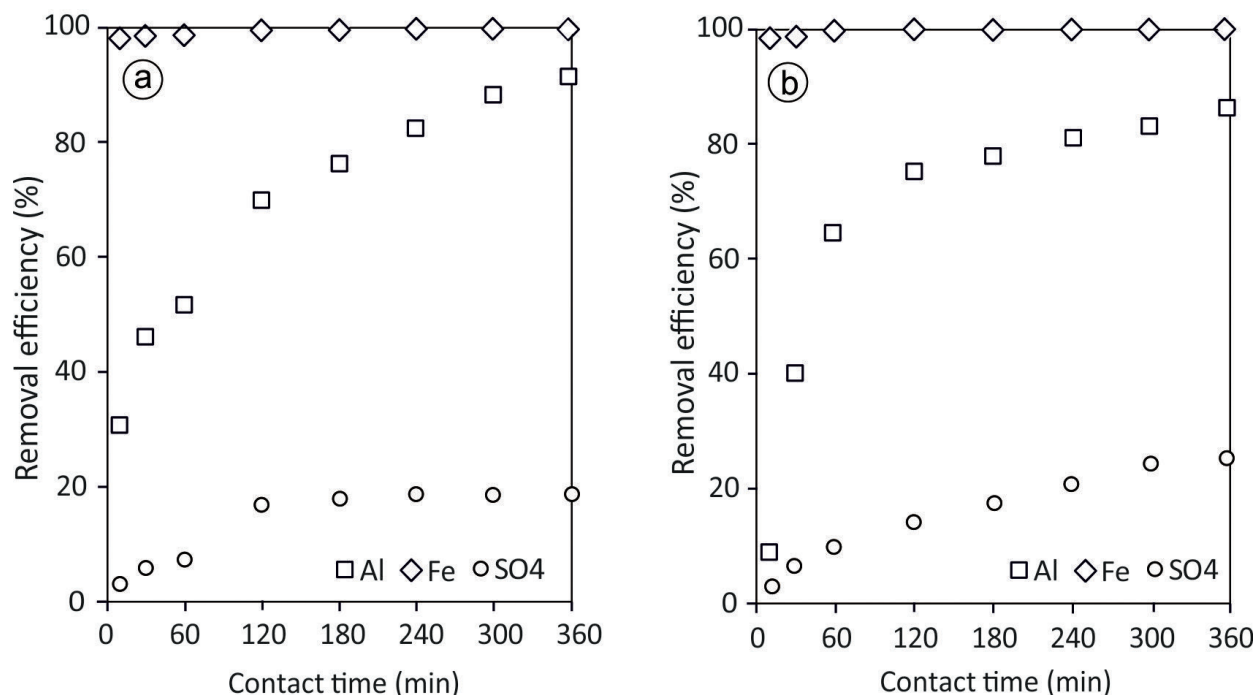


Figure 9. Effect of contact time on the removal of Al, Fe and SO₄²⁻ from AMD using (a) FA (20 g), (b) MFA (10 g).

(pH = 7.3) using 10 g MFA dosage at the end of 6 hours. Modification of FA was provided to reduce adsorbent dosage to half. Initial SO₄²⁻ concentration of AMD was measured 3600 mg/L. The maximum removal efficiency of SO₄²⁻ was obtained 18 and 25% for FA and MFA, respectively. According to the obtained results, the effectiveness of SO₄²⁻ removal from solution using FA and MFA by US enhanced with increasing ash dosage and contact time.

3.3.4. Effect of pH

pH is a major control on the solubility of most metal compounds [61]. The dependence of metal adsorption on pH is different for each metal [62]. Effect of various pH_{initial} (3, 5, 7 and 9) on removal of selected metals (Al, Fe, Mn, Ni and Zn) and SO₄²⁻ from AMD were determined using 20 g dosage of FA and MFA for 6 hours contact time. The removal efficiency of Al, Fe, Mn, Ni and Zn was obtained 85.5, 99.9, 23.4, 67.5 and 51.2% for FA and 90.7, 99.9, 71.6, 93.8 and 99.4% for MFA at pH = 3, respectively (**Figure 10a and b**). The removal efficiency of Al, Fe, Mn, Ni and Zn was obtained 98.3, 99.9, 49.3, 83.7 and 99.3% for FA and 99.9, 99.9, 88.4, 97.8 and 99.7% for MFA at pH = 5, respectively. Ultrasound process can also accelerate chemical reactions [38]. The removal efficiency of metals increased in pH (7 and 9) reached over 97% removal. The obtained results showed that metal removal from AMD using FA and MFA depends on the final pH of solution. Sulphate removal as a function of different solutions and pH is shown in **Figure 10**. Approximately 39% of SO₄²⁻ can be removed from the solution (MFA:AMD) when the pH increased from 2.66 to 8.03.

3.4. Discussion

The AMD in Etili coal mine is highly acidic (pH of 2.66) because of intensive sulphide oxidation and ineffective neutralization processes. The abundance of pyrite in the volcanic rocks,

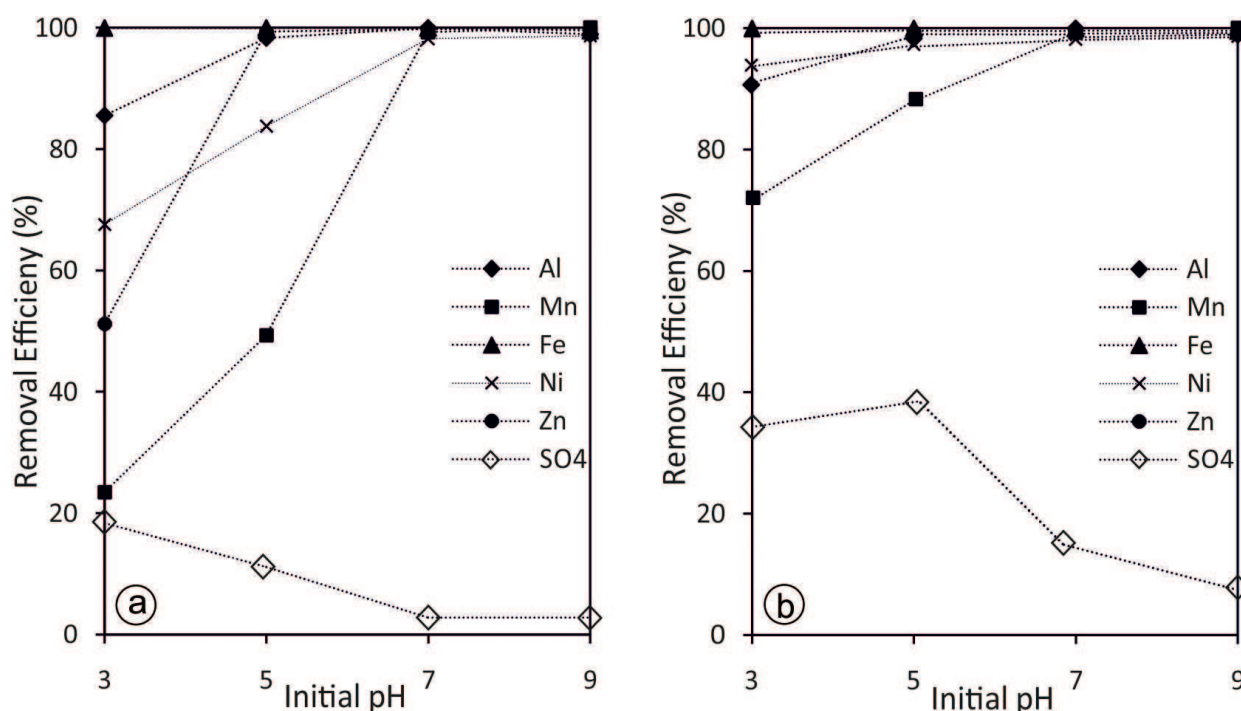


Figure 10. Effect of pH on removal efficiency at various metal and SO_4^{2-} from AMD using (a) FA (20 g) (b) MFA (20 g).

coal, mine wastes and sediments of mine lakes, as evidenced by XRD, SEM/EDX and isotope analyses of SO_4^{2-} , indicates that this mineral is the main sulphide mineral undergoing oxidation [3]. Sulphate is the predominant anion and Fe and Al are the most predominant metal species in AMD. Two anthropogenic pollutants (i.e. AMD and FA), usually formed in close proximity to each other, were reacted together in this chapter. Fly ash collected from the thermal power plant was modified with US process with the aim of activating surface area and decreasing particle size. The pH value of the ash-water system depends mainly on the Ca/S molar ratio in FA, although other minor alkalis or alkaline earth cations may also contribute to the balance [51, 63, 64]. Based on the Ca/S ratio and pH value, FA can be classified into three main groups: strongly alkaline ash (pH 11–13), mildly alkaline ash (pH 8–9) and acidic ash [51]. Fly ash is strongly alkaline, and its surface is negatively charged at high pH (see Table 2). Hence, it can be expected to remove metal ions from solutions by precipitation or electrostatic adsorption [62]. Besides, it contains a certain volume of unburnt carbon, which has a high adsorption capacity. The major inorganic species Al, Fe, Mn and SO_4^{2-} seem to be mainly removed through precipitation of amorphous oxides, (oxy)hydroxides and basic hydroxyl sulphates [16]. The AMD was characterized by high concentrations of Fe^{3+} as compared to Fe^{2+} (Table 1). The initial decrease in concentration for both ratios at pH 4–4.5 indicates removal of Fe^{3+} in the form of hydroxides or (oxy)hydroxysulphates [16]. Aluminium and Fe mobility at mining sites is related to pH and SO_4^{2-} concentration [65]. Saturation of iron-hydroxysulphate minerals generally occurs around pH = 4 and so, at pH > 4, Fe precipitates as a solid and is no longer mobile [61, 65]. Dissolution of FA and MFA components is confirmed through the decrease of Fe in the Fe-oxide fraction at pH 4.5–4.7. It is often suggested that the tendency of metal cations to adsorb on the oxide surfaces is highly related to their pH of hydrolysis [62, 66]. At pH greater than 7, 90.7% of the Al was removed from solution at 20 g MFA dosage and significant proportion of Al from AMD was hydrolysed to form amorphous (oxy)hydroxides. It was observed that the maximum removal

efficiency for Zn and Ni was achieved using FA and MFA at pH of 8. The leaching of Ca and Mg can be assumed to be controlled by the dissolution of Ca and Mg-bearing silicates [67, 68]. According to ICP-MS results, Ca, Mg, Na and K concentrations were observed to increase from 496 to 645 and 802 mg/L; 267 to 335 and 311 mg/L; 156 to 221 and 166 mg/L; 3 to 36 and 16 mg/L for FA:AMD and MFA:AMD, respectively. Calcium, Mg, Na and K concentrations decreased in SR 0.2, 0.5, 0.11 and 0.02% for FA:AMD; 0.22, 0.14, 0.02 and 0.07% for MFA:AMD, respectively, in XRF analysis results (**Table 3**). The removal of SO_4^{2-} depends on CaO containing FA. Soluble CaO (1.74–1.81%) in FA and MFA increased the pH value of AMD. According to particle size analysis, the particle size distribution of SR (FA:AMD) increased 31, 18 and 12% for Dx (10, 50 and 90), respectively. The particle size distribution of SR (MFA:AMD) increased 5, 6 and 12% for Dx (10, 50 and 90), respectively (**Figure 11**). Fly ash and MFA reacted with AMD were explained based on the particle morphology, shape and mineralogical components. These interpretations from the particle surface analysis were supported with SEM images. **Figure 12a** and **b** shows the SEM images of SR (MFA:AMD). Modified fly ash particles viewed in a predominantly irregular-shaped and have pores and creeks. These results confirm that the surfaces of FA particles were disrupted with US shear forces. According to EDX analysis results, Al, Fe, Mn and Zn concentrations in SR accumulated and precipitated on adsorbent surface. The XRD analysis of the sonicated and unsonicated FA showed no mineral phase change (**Table 4**). Gypsum was the only new mineral phase after treatment of AMD with FA and MFA was identified by XRD analysis in the SR. Gypsum was also detected by SEM-EDX analysis (**Figure 12c**). Gypsum crystals are containing 83.1% O, 8% S and 6.7% Ca, as quantified by EDX analysis (**Figure 12d**). As the final pH of solution increased, more CaO is available and more Ca^{2+} ions are resulting in enhanced removal of SO_4^{2-} as gypsum. The FTIR spectra of the FA, MFA and SR are illustrated in **Figure 13**. The FTIR data validate the observations made through XRD. The main band, due

Major component (wt%)	FA:AMD	MFA:AMD
SiO_2	49.5	49.28
Al_2O_3	20.17	19.99
MgO	5.28	5.36
Fe_2O_3	5.60	5.67
Na_2O	2.01	2.03
CaO	1.68	1.45
K_2O	1.70	1.64
MnO	0.072	0.07
ZnO	0.018	0.019
NiO	0.008	0.008
CuO	0.007	0.007
S	0.43	0.40
LOI	11.92	13.41

Table 3. Chemical composition of SR.

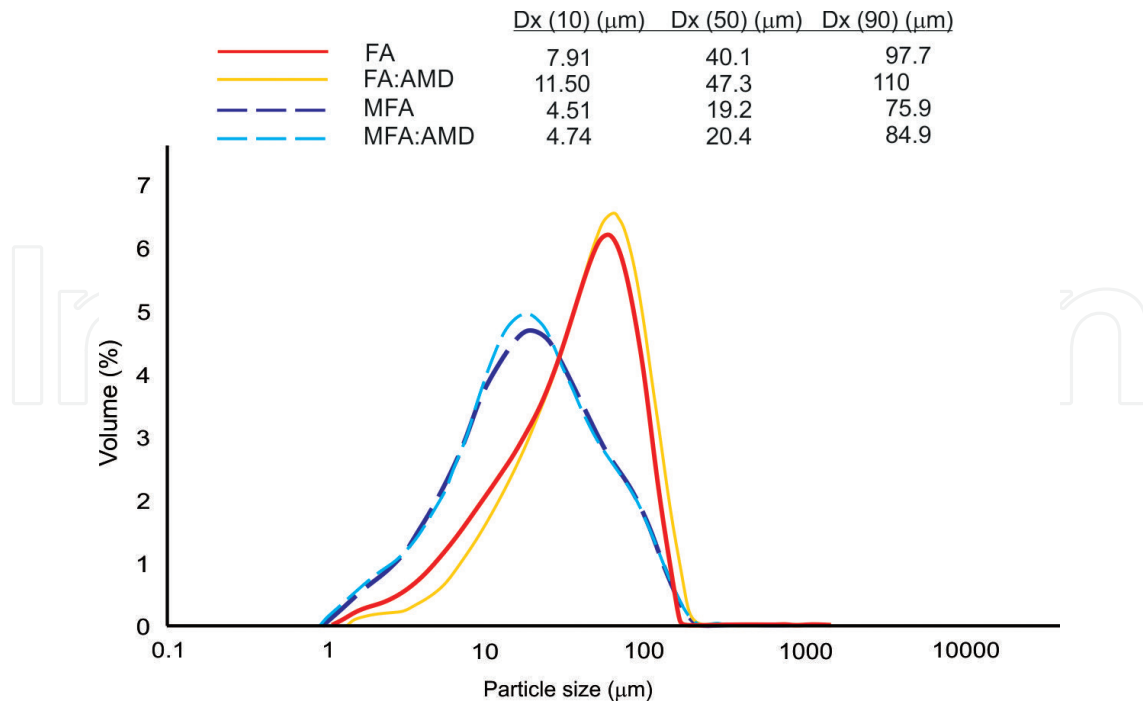


Figure 11. Particle size distribution of FA, MFA and SR.

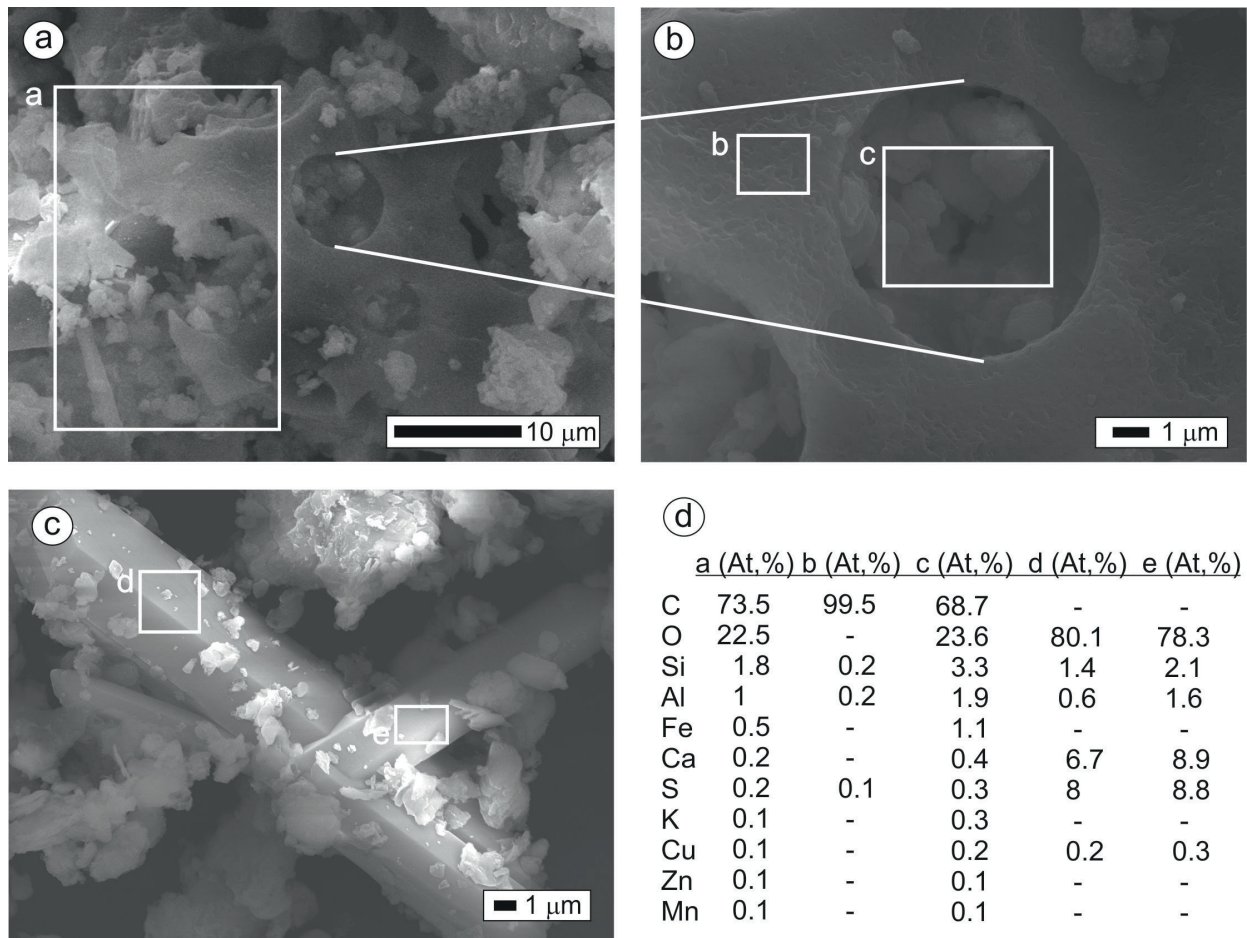


Figure 12. SEM results of: (a, b) SR (MFA:AMD), (c) gypsum and (d) EDX results of SR.

Mineral phases	FA	MFA	FA:AMD	MFA:AMD
	%			
Quartz	42	37	40	33
Amorphous phase	23	31	28	29
Mullite	13	10	7	9
Plagioclase	12	10	8	9
Gypsum	-	-	8	12
Hematite	6	2	4	3
Magnetite	2	1	1	1
Mica	1	5	2	3
K-feldspar	1	4	2	1

Table 4. Mineral phases in FA, MFA and SR.

to Si-O and Al-O vibrations, which is located at 1046 cm^{-1} in FA, moves towards lower frequencies when those are activated [69]. Ultrasound energy strengthens the bond at the solid particle phase interface [38]. Band at about 1000 cm^{-1} , corresponding either to the stretching vibrations of Si-O bonds in SiO_4 or to the skeleton of bonded SiO_4 tetrahedra, shows the greatest change during crystallization [38, 70, 71]. The FTIR spectrum of the FA and MFA of crystallization contains a number of characteristic vibration bands in the regions $1100\text{--}900$ and $850\text{--}650\text{ cm}^{-1}$.

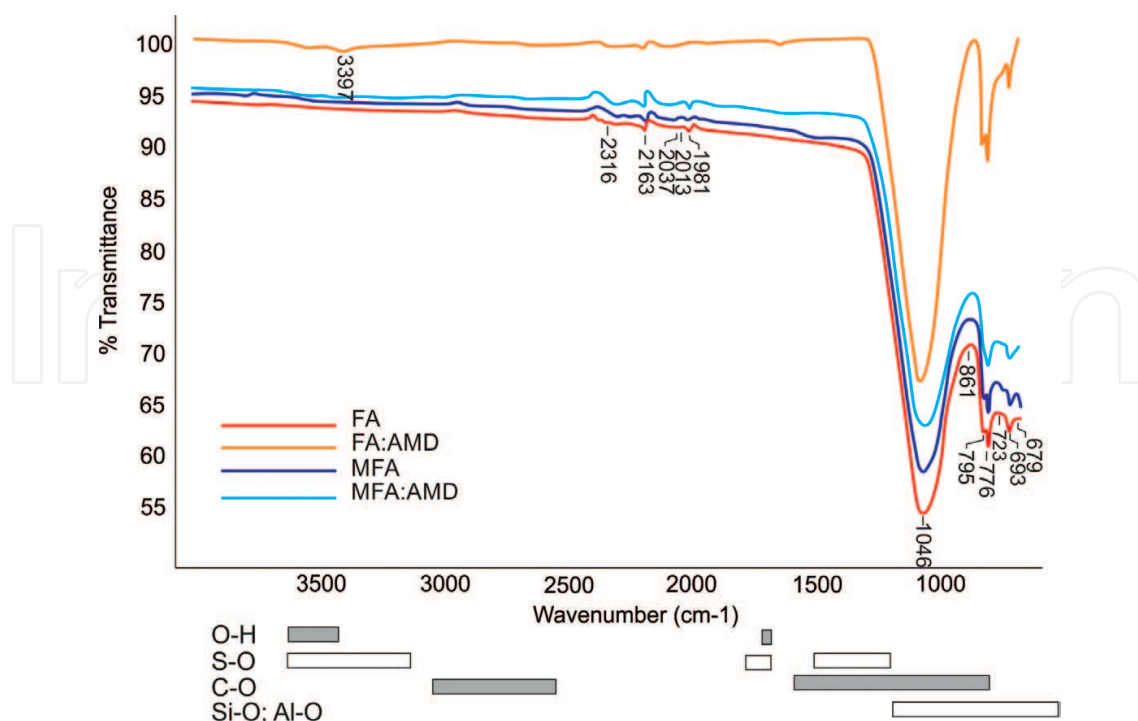


Figure 13. FTIR spectra of FA, MFA and SR.

4. Conclusion

Due to unique properties of the all mines, AMD may display variable hydrogeochemical characteristics; special studies are required for each mine site, though the general approach remains the same. In this chapter, treatment of AMD using FA and MFA under various conditions was investigated. The effect of US on the surface of FA was ensured adsorbent surface activation by ultrasonic cavitation. The physical changes on the surface of the FA caused by the US-assisted modification were identified using arrays of XRF, BET, SEM-EDX, XRD, FTIR techniques and particle size analysis. It was observed that due to the ultrasound-assisted modification, beside the physical properties of FA, the morphological and mineralogical characteristics are varied as well. The MFA has a lower Si and Al concentrations and higher surface area and pH than the FA. The chemical results imply that it is possible to use FA and MFA in order to neutralize AMD followed by precipitation and adsorption of metals. The 99.9% Fe removal was determined using FA with optimum 2 hours contact time and 1:5 (FA:AMD) ratio and using MFA with optimum 1 hour contact time and 1:10 (MFA:AMD) ratio under the same experimental conditions. Modified fly ash provides more successful results in a shorter reaction time and with smaller FA dosage for metal and SO_4^{2-} removal from AMD when compared to FA. Acid mine drainage reacted with MFA resulted in neutral pH after a longer reaction time was accompanied by 39% SO_4^{2-} removal. The five factors that dictate the nature of the final solution in neutralization reactions and metal removal are modification, mixing speed, pH, adsorbent dosage and contact time. Preliminary treatment of AMD revealed that the MFA has the potential to be used as an effective adsorbent to treat AMD. Additionally, this chapter provides an example for other areas with AMD environmental problems.

Acknowledgements

The described work was carried out as part of FBA-2017-1077 numbered project. This project is supported by the Canakkale Onsekiz Mart University, cofinanced by the Coordinatorship of Scientific Research. The authors are grateful to Editors for their constructive comments.

Author details

Deniz Sanliyüksel Yucel^{1*} and Burcu Ileri²

*Address all correspondence to: denizsyuksel@comu.edu.tr

1 Department of Geological Engineering, Canakkale Onsekiz Mart University, Canakkale, Turkey

2 Department of Environmental Engineering, Canakkale Onsekiz Mart University, Canakkale, Turkey

References

- [1] Gurdal G, Bozcu M. Petrographic characteristics and depositional environment of Miocene Can coals, Canakkale-Turkey. *The International Journal of Coal Geology*. 2011;**85**(1):143-160. DOI: 10.1016/j.coal.2010.11.001
- [2] Sanliyüksel Yucel D, Yucel MA, Baba A. Change detection and visualization of acid mine lakes using time series satellite image data in geographic information systems (GIS): Can (Canakkale) County, NW Turkey. *Environmental Earth Sciences*. 2014;**72**(11):4311-4323. DOI: 10.1007/s00244-016-0270-z
- [3] Sanliyüksel Yucel D, Balci N, Baba A. Generation of acid mine lakes associated with abandoned coal mines in northwest Turkey. *Archives of Environmental Contamination and Toxicology*. 2016;**70**(4):757-782. DOI: 10.1007/s00244-016-0270-z
- [4] Yucel MA, Turan RY. Areal change detection and 3D modeling of mine lakes using high-resolution unmanned aerial vehicle images. *Arabian Journal for Science and Engineering*. 2016;**41**(12):4867-4878. DOI: 10.1007/s13369-016-2182-7
- [5] Sanliyüksel Yucel D, Baba A. Geochemical characterization of acid mine lakes and their effect on the environment, NW of Turkey. *Archives of Environmental Contamination and Toxicology*. 2013;**64**(3):357-376. DOI: 10.1007/s00244-012-9843-7
- [6] Feng D, Aldrich C, Tan H. Treatment of acid mine water by use of heavy metal precipitation and ion exchange. *Minerals Engineering*. 2000;**13**(6):623-642. DOI:10.1016/S0892-6875(00)00045-5
- [7] Ulubas T. Use of fly ash for heavy metal (Cu⁺², Pb⁺²) removal [thesis]. Istanbul: Istanbul Technical University; 2000
- [8] Banerjee SS, Jayaram RV, Joshi MV. Removal of nickel(II) and zinc(II) from wastewater using fly ash and impregnated fly ash. *Separation Science and Technology*. 2006;**38**(5):1015-1032. DOI: 10.1081/SS-120018121
- [9] Reynolds K. The use of fly ash for the control and treatment of acid mine drainage. In: *Proceedings of the World of Coal Ash (WOCA)*; 11-15 April 2005; Johannesburg. Lexington: WOCA; 2005. p. 956-961
- [10] Skousen JG, Sexstone A, Ziemkiewicz PF. Acid mine drainage control and treatment. 1st ed. The American Society of Agronomy and Academic Press; *Reclamation of Drastically Disturbed Lands (Agronomy, No. 41)*; 2000. pp. 105-129. DOI:10.2134/agronmonogr41.c5
- [11] Rios CA, Williams CD, Roberts CL. Removal of heavy metals from acid mine drainage (AMD) using coal fly ash, natural clinker and synthetic zeolites. *Journal of Hazardous Materials*. 2008;**156**(1-3):23-35. DOI: 10.1016/j.jhazmat.2007.11.123
- [12] Ahmaruzzaman MA. Review on the utilization of fly ash. *Progress in Energy and Combustion Science*. 2010;**36**(3):327-336. DOI: 10.1016/j.peccs.2009.11.003

- [13] Abas SNA, Ismail MHS, Kamala ML, Izhar S. Adsorption process of heavy metals by low-cost adsorbent: A review. *World Applied Sciences Journal*. 2013;**28**(11):1518-1530. DOI: 10.5829/idosi.wasj.2013.28.11.1874
- [14] Stouraiti C, Xenidis A, Paspaliaris I. Reduction of Pb, Zn and Cd availability from tailings and contaminated soils by the application of lignite fly ash. *Water Air and Soil Pollution*. 2001;**137**(1-4):247-265. DOI: 10.1023/A:1015507017799
- [15] Okafor EC, Opuene K. Preliminary assessment of trace metals and polycyclic aromatic hydrocarbons in the sediments. *International Journal of Environmental Science and Technology*. 2007;**4**(2):233-240. DOI: 10.1007/BF03326279
- [16] Gitari WM, Petrik LF, Key DL, Okujeni C. Partitioning of major and trace inorganic contaminants in fly ash acid mine drainage derived solid residues. *International Journal of Environmental Science and Technology*. 2010;**7**(3):519-534. DOI: 10.1007/BF03326161
- [17] Tutunlu F, Atalay U. Utilization of fly ash in manufacturing of building brick. In: *Proceedings of the International Ash Utilization Symposium, Center for Applied Energy Research, University of Kentucky; 22-24 October 2001; Ankara*. Lexington: CAER; 2001. pp. 13-18
- [18] Ozdemir O, Celik MS. Characterization and recovery of lignitic fly ash by products from the Tuncbilek Power Station. *Canadian Metallurgical Quarterly*. 2002;**41**(2):143-150. DOI: 10.5277/ppmp160206
- [19] Ozdemir O, Ersoy B, Celik MS. Separation of pozzolonic material from lignitic fly ash of Tuncbilek Power Station. In: *Proceedings of the International Ash Utilization Symposium, Center for Applied Energy Research, University of Kentucky; 22-24 October 2001; Istanbul*. Lexington: CAER; 2001. pp. 45-52
- [20] Celik O, Damcı E, Piskin S. Characterization of fly ash and its effects on the compressive strength properties of Portland Cement. *Indian Journal of Engineering and Materials Sciences*. 2008;**15**(5):433-440
- [21] Ersoy B, Kavas T, Evcin A, Baspınar S, Sariisik A, Dikmen S. Production of fired ceramic materials from fly ash with witherite additive. *Afyon Kocatepe University Journal of Science*. 2009;**9**(3):45-52
- [22] Gitari MW, Petrik LF, Etchebers O, Key DL, Iwuoha E, Okujeni C. Treatment of acid mine drainage with fly ash: Removal of major contaminants and trace elements. *Journal of Environmental Science and Health Part A*. 2006;**41**(8):729-1747. DOI: 10.1080/10934520600754425
- [23] Pérez-López R, Nieto JM, Almodóvar GR. Utilization of fly ash to improve the quality of the acid mine drainage generated by oxidation of a sulphide-rich mining waste: Column experiments. *Chemosphere*. 2007;**67**(8):1637-1646. DOI:10.1016/j.chemosphere.2006.10.009
- [24] Gitari MW, Petrik LF, Etchebers O, Key DL, Iwuoha E, Okujeni C. Passive neutralization of acid mine drainage by fly ash and its derivatives: A column leaching study. *Fuel*. 2008;**87**(8-9):1637-1650. DOI: 10.1016/j.fuel.2007.08.025

- [25] Gitari WM, Petrik LF, Etchebers O, Key DL, Okujeni C. Utilization of fly ash for treatment of coal mines wastewater: Solubility controls on major inorganic contaminants. *Fuel*. 2008;**87**(12):2450-2462. DOI: 10.1016/j.fuel.2008.03.018
- [26] Vadapalli VRK, Klink MJ, Etchebers O, Petrik LF, Gitari W, White RA, Key D, Iwuoha E. Neutralization of acid mine drainage using fly ash, and strength development of the resulting solid residues. *South African Journal of Science*. 2008;**104**(7-8):317-322. ISSN: 1996-7489
- [27] Sahoo PK, Tripathy S, Panigrahi MK, Equeenuddin SM. Evaluation of the use of an alkali modified fly ash as a potential adsorbent for the removal of metals from acid mine drainage. *Applied Water Science*. 2013;**3**(3):567-576. DOI:10.3390/met6120300
- [28] Qureshi A, Jia Y, Maurice C, Öhlander B. Potential of fly ash for neutralisation of acid mine drainage. *Environmental Science and Pollution Research*. 2016;**23**(17):17083-17094. DOI: 10.1007/s11356-016-6862-3
- [29] Mason TJ, Peters D. *Practical Sonochemistry, Power Ultrasound Uses and Applications*. 2nd ed. Woodgate: Horwood Publishing Limited; 2002. p. 155. ISBN: 978-1898563839
- [30] Brotchie A, Borisova D, Belova V, Möhwald H, Shchukin D. Ultrasonic modification of aluminum surfaces: Comparison between thermal and ultrasonics effects. *Journal of Physical Chemistry*. 2012;**116**(14):7952-7956. DOI: 10.1021/jp3016408
- [31] Geiger CL, Ruiz NE, Clausen CA, Reinhart DR, Quinn JW. Ultrasound pretreatment of elemental iron: Kinetic studies of dehalogenation reaction enhancement and surface effects. *Water Research*. 2002;**36**(5):1342-1350. DOI: 10.1016/S0043-1354(01)00319-0
- [32] Morais NLPA, Brett CMA. Influence of ultrasound on the corrosion of aluminum. *Key Engineering Material*. 2002;**230-232**:412-415. DOI: 10.4028/www.scientific.net/KEM.230-232.412
- [33] Liang F, Fan J, Guo Y, Fan M, Wang J, Yan H. Reduction of nitrite by ultrasound-dispersed nanoscale zero-valent iron particle. *Industrial and Engineering Chemistry Research*. 2008;**47**(22):8550-8554. DOI: 10.1021/ie8003946
- [34] Adewuyi YG. Sonochemistry: Environmental science and engineering applications. *Industrial&Engineering Chemistry Research*. 2001;**40**(22):4681-4715. DOI: 10.1021/ie0100961
- [35] Adewuyi YG. Sonochemistry in environmental remediation. 1. Combinative and hybrid sonophotochemical oxidation processes for the treatment of pollutants. *Water Environmental Science & Technology*. 2005;**39**(10):3409-3420. DOI: 10.1021/es049138y
- [36] Villeneuve L, Alberti L, Steghens JP, Lancelin JM, Mestas JL. Assay of hydroxyl radicals generated by focused ultrasound. *Ultrasonics Sonochemistry*. 2009;**16**(3):339-344. DOI: 10.1016/j.ultsonch.2008.09.007
- [37] Ileri B, Ayyildiz O, Apaydin O. Ultrasound-assisted activation of zero-valent magnesium for nitrate denitrification: Identification of reaction by-products and pathways. *Journal of Hazardous Materials*. 2015;**292**:1-8. DOI: 10.1016/j.jhazmat.2015.03.004

- [38] Bukhari SS. Microwave and ultrasound assisted zeolitization of coal fly ash [thesis]. Ontario: Western University; 2016
- [39] Bukhari SS, Rohani S, Kazemian H. Effect of ultrasound energy on the zeolitization of chemical extracts from fused coal fly ash. *Ultrasonics Sonochemistry*. 2016;**28**:47-53. DOI: 10.1016/j.ultsonch.2015.06.031
- [40] Kalipci E, Sahinkaya S, Aras S, Ozturk M. Chromium (VI) adsorption with ultrasonically activated carbon. *Journal of Nevsehir University Institute of Science*. 2013;**2**(1):20-25
- [41] Chapman D, Kimstach V. Selection of water quality variables. In: Chapman D, editor. *Water Quality Assessments-A Guide to Use of Biota, Sediments and Water in Environmental Monitoring*. 2nd ed. E & FN Spon: Chapman & Hall; 1996. pp. 59-126. ISBN: 978-0419216001
- [42] Okumusoglu D, Gunduz O. Hydrochemical status of an acidic mining lake in Canakkale, Turkey. *Water Environment Research*. 2013;**85**(7):604-620. DOI: 10.2175/106143013X13698672321463
- [43] Kirby CS, Cravotta III CA. Net alkalinity and net acidity 1: Theoretical considerations. *Applied Geochemistry*. 2005;**20**(10):1920-1940. DOI:10.1016/j.apgeochem.2005.07.002
- [44] SKKY. Turkish Water Pollution Control Regulation, (TWPCR), 2008. The Regulation of Water Pollution Control. Ministry of Environment and Forestry. Official Newspaper. 31.12.2004: Number: 25687
- [45] Shreya N, Paul B. Utilization of fly ash as a carrier in biofertilizer and biopesticide formulation of Chandrapura thermal power station, India. In: *Proceedings of Twenty-Seventh International Conference on Solid Waste Technology and Management (ISCW-2012)*; 11-14 March 2012; Jharkhand. Pennsylvania: ISCW; 2012. p. 24
- [46] Sanliyüksel Yücel D. Removal of heavy metals from aqueous solution using fly ash: Can Thermal Power Plant, NW Turkey as a Case Study. *Karaelmas Science and Engineering Journal*. 2017;**7**(1):291-298. DOI: <http://dx.doi.org/10.7212%2Fzkufbd.v1i1.288>
- [47] ASTM. Standard C618-15 Standard Specification for Coal Fly Ash and Raw or Calcined Natural Pozzolan for use in Concrete. West Conshohocken, PA, USA: ASTM International; 2015
- [48] Lo TY, Cui H, Memon SA, Noguchi T. Manufacturing of sintered lightweight aggregate using high-carbon fly ash and its effect on the mechanical properties and microstructure of concrete. *Journal of Cleaner Production*. 2016;**112**(1):753-762. DOI: 10.1016/j.jclepro.2015.07.001
- [49] Lee GS, Han GY, Kim SD. Coal combustion characteristics in a circulating fast fluidized bed. *Korean Journal of Chemical Engineering*. 1984;**1**(1):71-76. DOI: 10.1007/BF02697421
- [50] Seo MW, Goo JH, Kim SD, Lee SH, Choi YH. Gasification characteristics of coal/biomass blend in a dual circulating fluidized bed reactor. *Energy Fuel*. 2010;**24**(5):3108-3118. DOI: 10.1021/ef100204s

- [51] Yao ZT, Ji XS, Sarker PK, Tang JH, Ge LQ, Xia MS, Xi YQ. A comprehensive review on the applications of coal fly ash. *Earth-Science Reviews*. 2015;**141**:105-121. DOI: 10.1016/j.earscirev.2014.11.016
- [52] Ragheb SM. Phosphate removal from aqueous solution using slag and fly ash. *HBRC Journal*. 2013;**9**(3):270-275. DOI: 10.1016/j.hbrcj.2013.08.005
- [53] Ibis RY. Investigation of the efficacy of the thermal power plant fly ash removal of arsenic from waste water [thesis]. Adana: Cukurova University; 2010
- [54] Bayat B. Comparative study of adsorption properties of Turkish fly ashes I. The case of nickel(II), copper(II) and zinc(II). *Journal of Hazardous Materials*. 2002;**95**(3):251-273. DOI: 10.1016/S0304-3894(02)00140-1
- [55] Bayat B. Comparative study of adsorption properties of Turkish fly ashes II. The case of chromium (VI) and cadmium (II). *Journal of Hazardous Materials*. 2002;**95**(3):275-290. DOI: 10.1016/S0304-3894(02)00141-3
- [56] Mohan S, Gandhimathi R. Removal of heavy metal ions from municipal solid waste leachate using coal fly ash as an adsorbent. *Journal of Hazardous Materials*. 2009;**169**(1-3):351-359. DOI: 10.1016/j.jhazmat.2009.03.104
- [57] Shah AK, Zeenat MA, Memon AR, Laghari AJ, Mughal MA, Shah SFA, Saleem H. Exploitation of low cost coal fly ash adsorbent with coagulants for the treatment of industrial complex nature dyes wastewater. *International Journal of Scientific & Engineering Research*. 2013;**4**(9):109-119. ISSN: 2229-5518
- [58] Kulkarni SJ, Dhokpande SR, Kaware JP. Studies on fly ash as an adsorbent for removal of various pollutants from wastewater. *International Journal of Engineering Research & Technology*. 2013;**2**(5):1190-1195. ISSN: 2278-0181
- [59] Nordstrom DK, Ball JW. The geochemical behavior of aluminum in acidified surface waters. *Science*. 1986;**232**(4746):54-56. DOI: 10.1126/science.232.4746.54
- [60] Nordstrom DK. Hydrogeochemical processes governing the origin, transport and fate of major and trace elements from mine wastes and mineralized rock to surface waters. *Applied Geochemistry*. 2011;**26**(11):1777-1791. DOI: 10.1016/j.apgeochem.2011.06.002
- [61] Smith KS. Strategies to predict metal mobility in surficial mining environments. *The Geological Society of America Reviews in Engineering Geology*. 2007;**17**:25-45. DOI: 10.1130/2007.4017(03)
- [62] Cho H, Oh D, Kim K. A study on removal characteristics of heavy metals from aqueous solution by fly ash. *Journal of Hazardous Materials*. 2005;**127**(1-3):187-195. DOI: 10.1016/j.jhazmat.2005.07.019
- [63] Ward CR, French D, Jankowski J, Dubikova M, Li Z, Riley KW. Element mobility from fresh and long-stored acidic fly ashes associated with an Australian power station. *International Journal Coal Geology*. 2009;**80**(3-4):224-236. DOI: 10.1016/j.coal.2009.09.001

- [64] Izquierdo M, Querol X. Leaching behaviour of elements from coal combustion fly ash: An overview. *International Journal Coal Geology*. 2012;**94**:54-56. DOI: 10.1016/j.coal.2011.10.006
- [65] Degraff JV. Addressing the toxic legacy of abandoned mines on public land in the western United States. In: Degraff JV, editor. *Understanding and Responding to Hazardous Substances at Mine Sites in the Western United States, Reviews in Engineering Geology XVII*. 1st ed. Boulder: The Geological Society of America; 2007. pp. 1-8. DOI: 10.1130/2007.4017(01)
- [66] Gitari WM, Fatoba OO, Petrik LF, Vadapalli RKV. Leaching characteristics of selected South African fly ashes: Effect of pH on the release of major and trace species. *Journal of Environmental Science and Health Part A*. 2009;**44**(2):206-220. DOI: 10.1080/10934520802539897
- [67] Rigol A, Mateu J, Gonzalez-Nunez R, Rauret G, Vidal M. pH stat vs. single extraction tests to evaluate heavy metals and arsenic leachability in environmental samples. *Analytica Chimica Acta*. 2009;**632**(1):69-79. DOI: 10.1016/j.aca.2008.10.066
- [68] Silva LFO, Izquierdo M, Querol X, Finkelman RB, Oliveira MLS, Wollenshlager M, Towler M, Pérez-López R, Macias F. Leaching of potential hazardous elements of coal cleaning rejects. *Environmental Monitoring and Assessment*. 2011;**175**(1):109-126. DOI: 10.1007/s10661-010-1497-1
- [69] Palomo A, Grutzeck MW, Blanco MT. Alkali-activated fly ashes a cement for the future. *Cement and Concrete Research*. 1999;**29**(8):1323-1329. DOI: 10.1016/S0008-8846(98)00243-9
- [70] Stojkovic SR, Adnadjevic B. Investigation of the NaA zeolite crystallization mechanism by i.r. spectroscopy. *Zeolites*. 1988;**8**(6):523-525. DOI: 10.1016/S0144-2449(88)80230-6
- [71] De Man AJM, Van Santen RA. The relation between zeolite framework structure and vibrational spectra. *Zeolites*. 1992;**12**(3):269-279. DOI: 10.1016/S0144-2449(05)80295-7

IntechOpen

