

We are IntechOpen, the world's leading publisher of Open Access books Built by scientists, for scientists

4,800

Open access books available

122,000

International authors and editors

135M

Downloads

Our authors are among the

154

Countries delivered to

TOP 1%

most cited scientists

12.2%

Contributors from top 500 universities



WEB OF SCIENCE™

Selection of our books indexed in the Book Citation Index
in Web of Science™ Core Collection (BKCI)

Interested in publishing with us?
Contact book.department@intechopen.com

Numbers displayed above are based on latest data collected.

For more information visit www.intechopen.com



Thermodynamic Mechanism of Nanofluid Minimum Quantity Lubrication Cooling Grinding and Temperature Field Models

Min Yang, Changhe Li, Yanbin Zhang,
Dongzhou Jia, Runze Li and Wenfeng Ding

Additional information is available at the end of the chapter

<http://dx.doi.org/10.5772/intechopen.74969>

Abstract

Grinding is an indispensable form of machining, in which, a large amount of heat is transferred into workpiece surface, causing surface burn of the workpiece. Flood grinding is easy to cause pollution to the environment while dry grinding and minimum quantity lubrication (MQL) is insufficient of cooling and lubrication effect. The appearance of nanofluid minimum quantity lubrication cooling (NMQLC) technique can effectively solve the problem of heat transfer in grinding zone and also enhance the lubrication characteristics. In this chapter, NMQLC technique, including nanofluid preparation and atomization is summarized first; then a review on the mechanism of grinding thermodynamics under NMQLC condition is presented based on published literatures. Most of the studies, including investigation of grinding forces and temperatures, indicate that NMQLC has realized a lubrication-cooling effect close to that of flood lubrication. According to existing investigations, theoretical models of temperature field are concluded, heat source distribution model, thermal distribution coefficient model, and heat transfer coefficient model under NMQLC condition are developed, and temperature field control equation are determined. This chapter reviews and amasses the current state of the mechanism of grinding thermodynamics and also recommends ways to precision control the grinding temperature field.

Keywords: nanofluid, minimum quantity lubrication, grinding, thermodynamics mechanism, temperature field, thermal models

1. Introduction

The most significant features of grinding process are high grinding wheel speed and high energy consumption. As abrasive grains on grinding wheel surface in grinding process are usually cut at negative rake, the energy consumed for grinding process to remove unit volume of materials is far greater than other machining forms and most of the energy will be converted into heat quantity [1, 2]. And more than 90% of the heat quantity will be transferred inside grinding wheel and workpiece, reducing the life of the grinding wheel and surface quality of the workpiece [3–5].

Cooling and lubrication grinding processing method applied to industrial production at the earliest is flood grinding, namely, injecting a large quantity of grinding fluid in grinding zone in the form of continuous fluid supply. However, the application of a large amount of grinding fluids results in high cost, and moreover, “air barrier” phenomenon generated surrounding the grinding wheel, preventing grinding fluids from entering the wedge-shaped zone between grinding wheel and workpiece [6–8].

As a kind of green and environmentally friendly processing technology appearing at the earliest, dry processing technology has abolished the application of cutting fluids on the precondition that machining precision and tool service life are guaranteed. However, it is difficult for heat quantity generated during the dry grinding process to be taken away by debris and the main heat quantity will still be transferred into grinding wheel and workpiece.

Minimum quantity lubrication (MQL) grinding processing technology is another green machining technology [9–11]. It refers to a grinding processing technology in which minimum quantity lubricant is mixed and atomized with gases under a certain pressure and then sprayed into grinding zone so as to exert cooling and lubricating effects. However, study shows that heat quantity generated by the grinding process and brought away by high-pressure gases are quite limited [12–14].

In view of flood grinding and cooling properties of MQL, researchers have been anxious to seek for a new cooling and lubricating form to apply to the grinding process. Relevant theories about heat transfer enhancement show that the heat transfer capability of solid is greater than that of liquid and gas [15–17]. On this basis, researchers have put forward nanofluid minimum quantity lubrication cooling (NMQLC) technique which adds a certain amount of nanoscale solid particles into degradable minimum quantity lubricant to generate nanofluids, and then nanofluids will be atomized through high-pressure gas and transferred into grinding zone in way of jet flow [18–22]. Sheikholeslami [23, 24] simulated the natural convection of water-based CuO nanofluid considering Brownian motion. Results showed that the Nusselt number decreases with the increase of Hartmann number and increases with the increase of volume fraction and Rayleigh number of nanofluids. NMQLC grinding process has integrated all advantages of MQL grinding process, solved heat transfer problems of MQL grinding, significantly improved workpiece surface quality and burning phenomenon, lengthened service life of grinding wheel and improved working environment. Therefore, it is a green and environmentally friendly, high-efficiency, and low-energy-consumption grinding processing technology [25, 26].

In this chapter, nanofluid preparation and atomization technique are concluded. A review on the mechanism of grinding thermodynamics under NMQLC condition is presented based on published literatures. According to existing investigations, theoretical models of temperature field precision control are obtained. This chapter reviews the current state of the mechanism of grinding thermodynamics and recommends ways to precision control the grinding temperature field.

2. Nanofluid minimum quantity lubrication cooling technique

2.1. Preparation of nanofluids

Preparation of nanofluids is the precondition for NMQLC grinding and high-quality nanofluids can obtain favorable cooling and lubricating effects. Nowadays, preparation method of nanofluids can be divided into two types: single-step method and two-step method. Single-step nanofluid preparation method is to disperse nanoparticles in base fluid while preparing them, which then saves the problems like nanoparticle collection and storage and can effectively avoid the oxidizing reaction of metal nanoparticles in atmosphere. This method is of high cost and small preparation quantity, and it is not suitable for actual batch application in production [6].

Two-step nanofluid preparation method is to add a certain proportion of nanoparticles in base fluid and select corresponding surface dispersant together with supersonic vibration according to physical and chemical properties so that nanoparticles can be distributed uniformly and stably in base fluid and nanofluid with suspension stability will be formed [27]. The two-step nanofluid preparation method is of simple operation and extensive application and it is nearly applicable to the preparation of all kinds of nanofluids.

2.2. Atomization of nanofluids

When nanofluids are applied to NMQLC grinding, studies on their atomization modes are mainly divided into three types: pneumatic atomization, electrostatic atomization, and ultrasonic atomization.

Pneumatic atomization is a process in which the liquid is sprayed in the machining region after small liquid drops are formed through high-pressure gas atomization and it is the most commonly used method for the atomization of nanofluids. Influenced by external forces like aerodynamic force, the liquid will be split while surface tension of the liquid will make the liquid form spherical liquid drops which are also influenced by viscosity. When external force born by the liquid is greater than liquid surface tension and viscous resistance, force balance of the liquid will be broken and the liquid will be split into fine liquid drops which will form nanofluid drop shapes when they are small enough [28].

Besides high-pressure gases are used for atomization of nanofluids, researchers have also put forward electrostatic atomization and ultrasonic atomization. The formers refer to atomizing

the liquid drops under electric charge through high-voltage electrostatic field after nanofluids are sprayed out from the nozzle so as to form electrically charged liquid drop flocks, which will be controllably and orderly transported onto workpiece surface under the effect of electric field force. For ultrasonic atomization, micro shock waves are generated during ultrasonic cavitation and bubble closing process in the liquid to damage the interaction between liquid molecules and then liquid particles are dragged out from liquid surface to form liquid drops [29].

3. A review on the law of grinding thermodynamics

3.1. A review on grinding forces under NMQLC condition

More research has been done on the lubrication effect of the NMQLC technique based on published literatures. A good lubrication in the grinding zone can reduce the grinding wheel/workpiece friction, thereby reducing grinding force and heat generation [30–32]. Manojkumar and Ghosh [33] found that nanofluid could substantially outperform soluble oil in terms of grinding force and G ratio (representing wheel life) under NMQLC. Setti et al. [34] showed that NMQLC could reduce normal force (F_n) on an average of 12 and 28% and reduce F_t on an average of 15 and 27% compared to flood and MQL. Sinha et al. [35] reported that grinding forces, coefficient of friction (μ) can be reduced to the maximum by nanofluids. Kalita et al. [36] measured a decline of 45–50% in force-ratio against grinding with flood cooling and MQL. Shen et al. [37] showed that lubricants with MoS₂ nanoparticles significantly reduce the F_t and the overall grinding performance. Jia et al. [38] found that soybean/castor mixed oil obtained the optimal results and lubricating effect compared to castor oil and other mixed base oils. Zhang et al. [39] reported that the energy ratio coefficient of flood lubrication, MQL, and NMQLC was 36.8, 52.1, and 41.4%, respectively, indicating that NMQLC realized a lubrication cooling effect close to that of flood lubrication. Zhang et al. [40, 41] found that NMQLC grinding using mixed nanoparticles obtain lower grinding force ratios and surface roughness (R_a) values, showing that mixed nanoparticles is superior to pure nanoparticles. Lee et al. [42, 43] carried out micro scale grinding experiments under different lubrication conditions and experimental results demonstrated that NMQLC could significantly reduce the grinding forces and enhance the surface quality. Yang et al. [44] investigated the critical maximum undeformed equivalent chip thickness for ductile-brittle transition (DBh_{max-e}) of zirconia ceramics under different lubrication conditions and found that lubrication condition affects the normal force and ultimately influences the resultant force on workpiece, making DBh_{max-e} decreases with increasing friction coefficient.

Figure 1(a) and **(b)** show the specific tangential grinding force and μ under dry, flood, MQL, and NMQLC conditions in the investigation of Jia et al. [6]. The maximum specific tangential grinding force and μ were obtained in dry grinding. Compared with dry grinding, the specific F_t under MQL, NMQLC, and flood conditions decreased successively by 45.88, 62.34, and 69.33%, respectively. Therefore, flood grinding realized the optimal lubrication effect, followed by NMQLC. It can also be seen from **Figure 1** that the specific tangential grinding force and μ , which NMQLC realized a lubrication cooling effect close to that of flood lubrication.

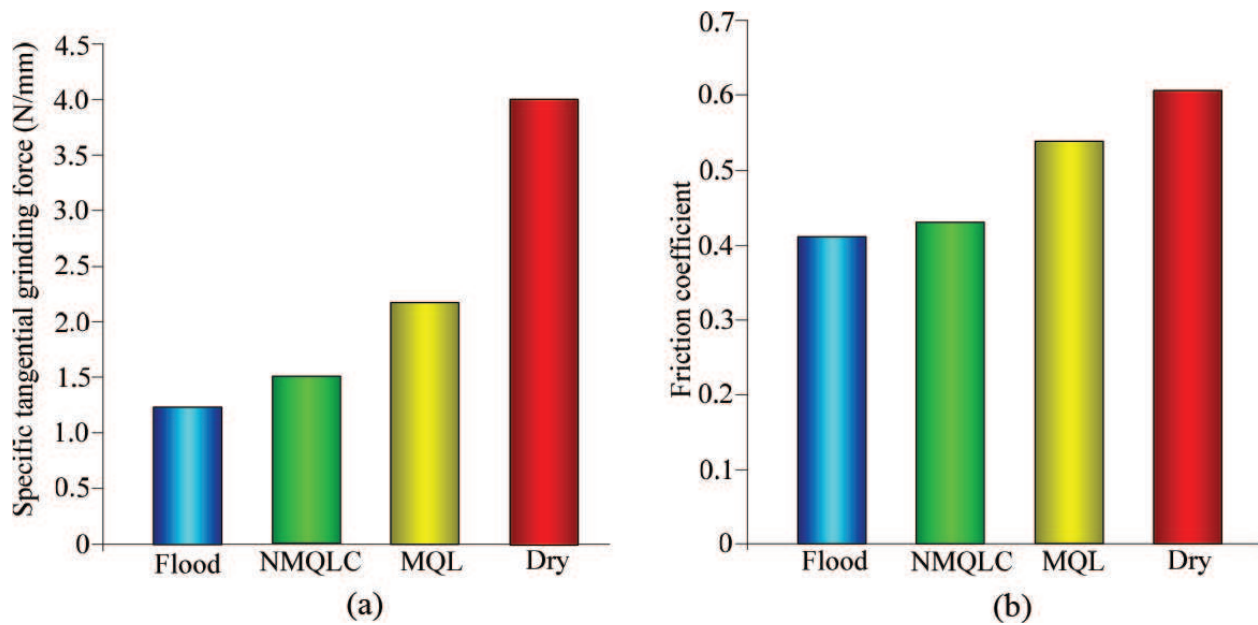


Figure 1. Specific tangential grinding force and frictional coefficient under different lubricating conditions [6]. (a) Specific tangential grinding force. (b) Frictional coefficient.

Table 1 summarizes the details of investigations on nanofluid parameters for the application of NMQLC technique in improving lubrication.

3.2. A review on grinding temperature under NMQLC condition

NMQLC technique was first proposed to solve the problem of inadequate cooling of MQL in grinding [45–48]. Grinding temperature is usually measured by thermocouples. The thermocouples can be placed on the workpiece or on the surface of the grinding wheel. As shown in **Figure 2** [49], a thermocouple forms a junction when the grinding wheel passes over the exposed single pole. The pole is smeared onto the workpiece, thereby forming a junction with the ground surface.

Mao et al. [50] analyzed the effect of nanofluid parameters on grinding performance. It is found that the cooling performance in the grinding zone is improved with the increase of the nanoparticle concentration and nanoparticle diameter. Yang et al. [51] studied the effect of different nanoparticles and concentrations on the temperature field of micro grinding. It was found that different thermal physical properties of nanoparticles have different effects on the temperature field. Yang et al. [52] investigated the dynamic heat flux in micro grinding using different sizes of Al₂O₃ nanoparticles. Results showed that temperatures under NMQLC using nanofluids (30, 50, 70, and 90 nm) are 21.4, 17.6, 16.1, and 8.3% lower, respectively. Li et al. [53] studied the grinding temperature using six types of nanoparticles (MoS₂, ZrO₂, CNT, polycrystalline diamond, Al₂O₃, and SiO₂), and found that CNT nanofluid results in the lowest grinding temperature of 110.7°C with the associated energy proportionality coefficient of 40.1% and the highest heat transfer coefficient of 1.3×10^4 W/(m K).

Authors	Nanoparticle	Particle size (nm)	Base fluid	Concentration
Manojkumar and Ghosh [33]	MWCNT	Not mentioned	Deionized water, soluble oil	0.6, 1 vol.%
Setti et al. [34]	Al ₂ O ₃	40	Water	1 vol.%
Sinha et al. [35]	Ag, ZnO	10 (Ag), 25 (ZnO)	Deionized water	10~30 vol.% (Ag), 0.01~0.5 vol.% (ZnO)
Kalita et al. [36]	MoS ₂	70 nm along major axis and 40 nm along minor axis	Paraffin oil	2, 8 wt.%
Shen et al. [37]	MoS ₂	70 nm along major axis and 40 nm along minor axis	Paraffin oil, CANMIST oil, soybean oil	5, 20 wt.%
Jia et al. [38]	MoS ₂	50	Castor, palm, soybean, peanut, rapeseed, sunflower, maize oil	2, 4, 6, 8, 10 wt.%
Zhang et al. [39]	MoS ₂ , CNT, ZrO ₂	50	Soybean oil	1, 2, 3 vol.%
Zhang et al. [40]	Al ₂ O ₃ /SiC	50	Synthetic lipids	6 wt.%
Zhang et al. [41]	MoS ₂	50	Palm oil	2 vol.%
Lee et al. [42, 43]	Nanodiamond, Al ₂ O ₃	30, 150	Paraffin oil	2, 4 vol.%
Yang et al. [44]	MoS ₂	50	Palm oil	2 vol.%
Jia et al. [6]	MoS ₂	50	Soybean oil	6 wt.%

Table 1. Details of investigations on nanofluid parameters for the application of NMQLC in improving lubrication.

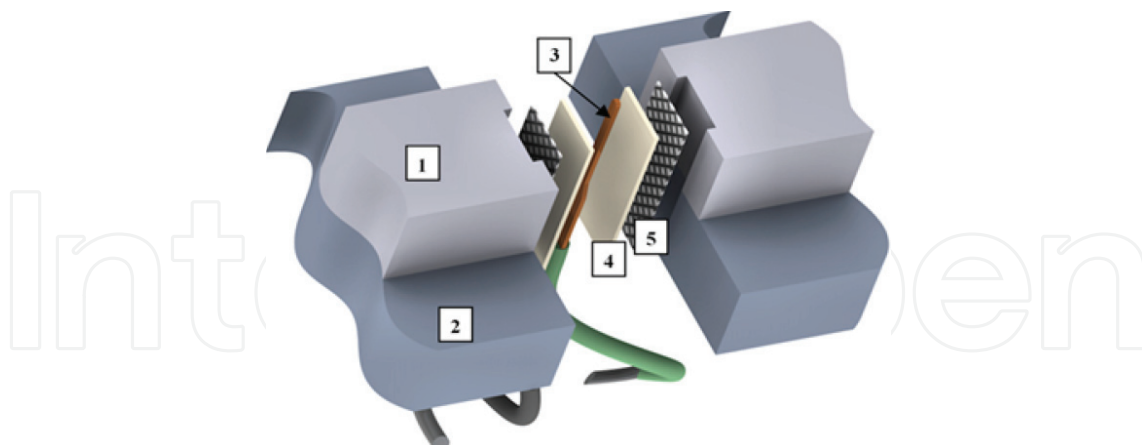


Figure 2. Schematic of single pole configuration thermocouple: where 1-workpiece, 2-workpiece base, 3-thermocouple, 4-mica, 5-varnish layer, 6-grinding wheel [49].

Li et al. [54] analyzed grinding temperature based on the thermal conductivity, viscosity, and contact angle of the nanofluids, and found a lower particle concentration can get a smaller contact angle, thus achieving the optimal heat transfer performance. Lee et al. [55] analyzed

the thermal and flow model for the micro-scale grinding process with experiments. Results showed that the grinding temperatures grinding heat flux into the workpiece and grinding energy partition under NMQLC were much lower than those in the cases of compressed air lubrication and pure MQL. Mao et al. [56] investigated the grinding characteristic under different cooling conditions and the results show that NMQLC grinding can significantly reduce the grinding temperature in comparison to pure water MQL grinding as shown in **Figure 3**.

Table 2 summarizes the details of investigations of nanofluid parameters for the application of NMQLC technique in enhanced heat transfer in grinding zone.

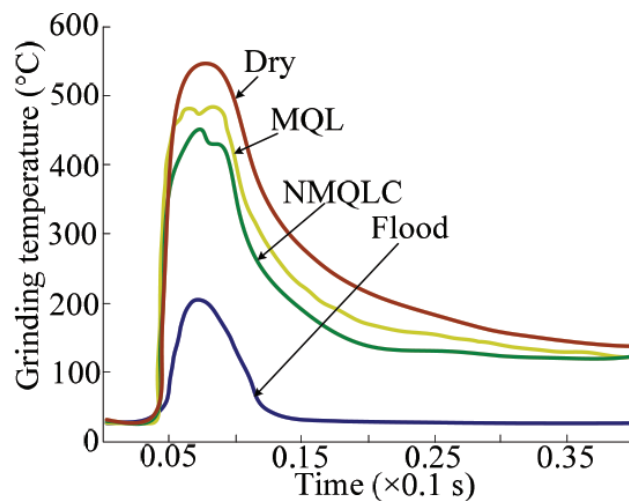


Figure 3. Grinding temperatures under different cooling conditions [56].

Authors	Nanoparticle	Particle size (nm)	Base fluid	Concentration
Mao et al. [50]	Al ₂ O ₃	40, 70, 80	Deionized water, canola oil	1, 3, 5 vol.%,
Yang et al. [51]	Hydroxyapatite, SiO ₂ , Fe ₂ O ₃ , CNTs	Mean particle size is 50 nm, mean length of CNTs is 10–30 μm	Normal saline	2, 4, 6, 8, 10 wt.%,
Yang et al. [52]	Al ₂ O ₃	30, 50, 70, 90	Normal saline	2 vol.%
Li et al. [53]	MoS ₂ , ZrO ₂ , CNT, polycrystalline diamond, Al ₂ O ₃ , SiO ₂	Mean particle size is 50 nm, mean length of CNTs is 10 ~ 30 μm	Palm oil	6 wt.%
Li et al. [54]	CNT	Mean particle size is 50 nm, mean length of CNTs is 10–30 μm	Palm oil	0.5~4 vol.%
Lee et al. [55]	Nanodiamond	30	Paraffin oil	4% vol.%
Mao et al. [56]	Al ₂ O ₃	40	Water	1.2 wt.%

Table 2. Details of investigations for application of NMQLC in enhanced heat transfer in grinding zone.

4. Precise control of temperature field

4.1. Heat source distribution model

In the analysis of temperature fields on workpiece surface, a banding heat source model with continuous equivalent distribution is usually used for heat source in grinding zone to replace the effect of disperse point heat sources to simplify the model [57].

During grinding process, there are three states—scratching, plowing and cutting—between the abrasive grains and workpiece. As shown in **Figure 4** [58], grinding heat sources are under rectangular distribution (heat flux is ξq_w) due to scratching and plowing effects of abrasive grains and triangular distribution (peak heat flux is $u q_w$) due to cutting effect of abrasive grains, where q_w is the average heat flux transferred into workpiece, and ξ and u are, respectively, heat flux coefficients under rectangular heat source distribution and triangular heat source distribution. Abrasive grains exert scratching and plowing effects in OA segment to generate rectangular heat source distribution, and length is a ; they exert cutting effect in AL segment to generate triangular heat source distribution [59]; OL is grinding contact length and its value is l . Point B is the position where peak heat flux of triangular heat sources is located, and OB length is b . On this basis, Zhang and Mahdi [59] established a shape functional equation of triangular heat source distribution:

$$s(x) = \begin{cases} 0 & x \in (-\infty, 0) \\ \xi & x \in (0, a) \\ \frac{\xi(b-x) + u(x-a)}{b-a} & x \in (a, b) \\ \frac{u(x-l)}{b-l} & x \in (b, l) \\ 0 & x \in (l, +\infty) \end{cases} \quad (1)$$

If abrasive grains are quite pure, there are many abrasive grains exerting scratching and plowing effects under dry grinding state or lubricating performance of grinding fluids is poor, and then comprehensive heat source distribution model is approximate to rectangular heat source

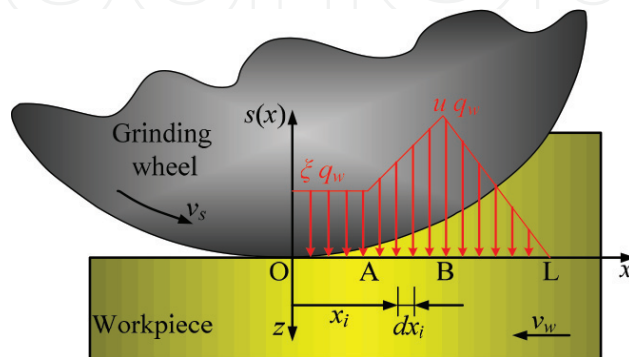


Figure 4. Distribution of heat source [58].

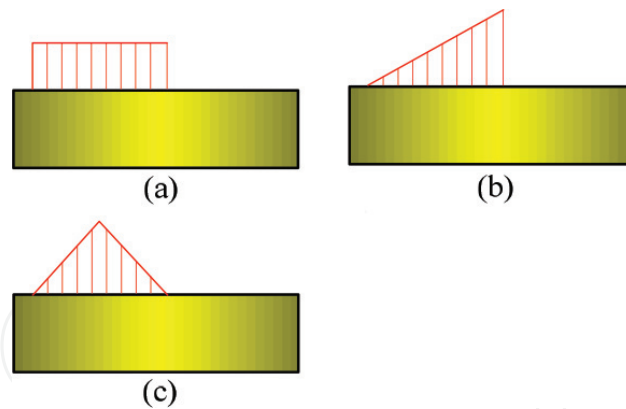


Figure 5. Heat source distribution models in grinding. (a) Rectangular heat source, (b) Right triangular heat source, (c) Isosceles triangular heat source.

distribution model as shown in **Figure 5(a)**. If grinding wheel is dressed very sharp and the lubricating performance of grinding fluids is very good, then abrasive grains mainly exert cutting effect, lengths of scratching and plowing effects are small, and heat source intensity is quite low due to few cutting materials in front end of contact zone. In rear end of contact zone, cutting depth is large, there are many cutting materials and heat source intensity is great, it can be approximate to $a = 0$, $b = l$ and $\xi = 0$, $u = 2$. Comprehensive heat source model can be approximated to right triangular heat source distribution model as shown in **Figure 5(b)**. When $a = 0$, $b = l/2$ and $\xi = 0$, $u = 2$, namely, abrasive grains have strong cutting effect in the middle part of contact zone, generated heat source intensity is great, and comprehensive heat source model can be approximated to isosceles triangular heat source distribution model as shown in **Figure 5(c)**.

4.2. Thermal distribution coefficient

For grinding energies consumed during grinding process, except that a small part of them are consumed on newly generated surface to form needed surface energy, strain energy left on grinding surface layer and kinetic energy for grinding debris to fly out, most part of them are converted into heat energy within contact zone, and these heat energies can be transferred into workpiece, grinding wheel, debris, and grinding fluids in ways of heat conductivity and heat convection. Eqs. (2)–(4) represent the amount of energy transferred into the workpiece (E_w), grinding wheel (E_g), and grinding fluid (E_f), respectively [39]:

$$E_w = \frac{1}{2} \theta_m b' [2(k\rho c)_w v_w l_g]^{\frac{1}{2}} \quad (2)$$

$$E_g = \frac{1}{2} \theta_m b' \left[2(k\rho c)_g \left(\frac{A_r}{A} \right)_s v_s l_g \right]^{\frac{1}{2}} \quad (3)$$

$$E_f = \frac{1}{2} \theta_m b' [2(k\rho c)_f v_s l_g]^{\frac{1}{2}} = \frac{1}{2} \theta_m b' \left\{ 2 \left[\varphi (k\rho c)_n + (1 - \varphi) (k\rho c)_f \right] v_s l_g \right\}^{\frac{1}{2}} \quad (4)$$

where θ_m is the maximum temperature rise; k , ρ , c stand for thermal conductivity, density, and specific heat, respectively; the subscript g , w , n , f stand for the properties of grain, workpiece,

nanoparticles, and base fluid, respectively; $\frac{A_r}{A}$ is the ratio between the actual and nominal contact areas of grinding wheel and workpiece; v_s is the peripheral speed of grinding wheel; φ is the volume fraction of nanoparticles; b' is the width of grinding wheel; and l_g is the geometric contact arc length.

During grinding, the temperature of the workpiece surface is an important factor to be considered, which is reflected in the thermal distribution coefficient (R) attributed to the workpiece. According to the single abrasive grain model, the amount of heat eliminated by abrasive debris and diffused in convection are too limited to be neglected. During grinding, R can be expressed as follows:

$$R = \frac{E_w}{E_w + E_g + E_f} = \frac{1}{1 + \sqrt{\frac{(k\rho c)_g v_s}{(k\rho c)_w v_w} \left(\frac{A_r}{A}\right)} + \sqrt{\frac{\varphi(k\rho c)_n + (1-\varphi)(k\rho c)_f}{(k\rho c)_w} \frac{v_s}{v_w}}} \quad (5)$$

4.3. Heat transfer coefficient

As NMQLC method can be both heat transfer of normal-temperature gas and boiling heat transfer of nanofluid drop, so this method is the sum of two heat convection methods. According to heat transfer state of single nanofluid drop [60, 61], heat transfer coefficient under NMQLC condition can be solved in three stages: natural convection, nucleate boiling, transition boiling, and film boiling as shown in **Figure 6** [62].

4.3.1. Natural-convection heat transfer stage (I)

When workpiece surface temperature is T_{n1} (lower than boiling point of nanofluid), heat transfer surface will not generate boiling heat transfer and heat transfer enhancement is realized mainly through convective heat transfer of normal-temperature air and convection of nanofluids, mainly being the convective heat transfer of nanofluids [63]. According to Yang's study [28], the nonboiling heat transfer coefficient:

$$h_{n1} = \frac{N_l c_{nf} \rho_{nf} V_l}{\pi r_{surf}^2 \cdot t} + h'_a \quad (6)$$

where N_l is the total number of droplets; c_{nf} is the liquid drop specific heat capacity; ρ_{nf} is the density of nanofluids; V_l is the volume of a single droplet; r_{surf} is the spreading radius of a single liquid drop; t is the total time of grinding process; and h'_a is the convective heat transfer coefficient of air at normal temperature.

4.3.2. Nucleate boiling heat transfer and transition boiling heat transfer stages (II and III)

At the end point of nucleate boiling heat transfer and starting point of transition boiling heat transfer, namely, at critical heat flux point, heat transfer coefficient reaches the maximum value h_{n2} . At the end of transition boiling heat transfer stage and in the initial stage of film boiling heat transfer, heat transfer coefficient reaches the minimum value h_{n3} and computational formula of heat transfer coefficient is as follow:

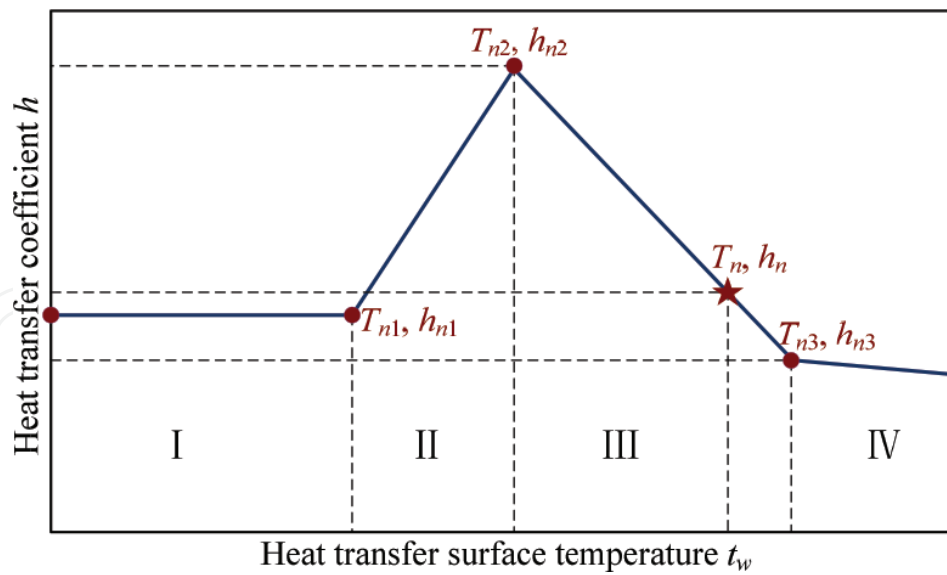


Figure 6. Heat transfer coefficient of grinding surface.

Heat transfer coefficient of critical heat flux density point h_{n2} [64]:

$$h_{n2} = \frac{[h_{fa} + c_l(T_s - T_{nf})]Q'\rho_l}{\pi r_{surf}^2(T_{n2} - T_{nf})} + h'_a \quad (7)$$

where T_s is the saturation temperature; q'_a is the normal-temperature atmospheric-convection heat transfer quantity; h_{fa} is the latent heat of vaporization; T_{nf} is temperature of nanofluid; c_l is the drop specific heat capacity; and Q' is the nanofluid supply during grinding time.

4.3.3. Transition boiling heat transfer and film boiling heat transfer stages (III and IV)

Computational process of heat transfer coefficient h_{n3} at the end point in transition boiling stage, namely, at starting point in film boiling stage is as follows [65]:

$$h_{n3} = \frac{N_l Q' \rho_l [h_{fa} + c_l(T_s - T_l)] \cdot \left[0.027 e^{\frac{0.08 \sqrt{\ln(We/35+1)}}{B^{1.5}}} + 0.21 k_d B e^{\frac{-90}{We+1}} \right]}{b' \cdot l \cdot (T_{n3} - T_l)} + h'_a \quad (8)$$

Therefore, the heat transfer coefficient h_n can be obtained by the interpolation calculation when the surface temperature of the workpiece is T_n .

4.4. Temperature field control equation and boundary condition

As shown in Figure 7, temperature field model in grinding zone is established and the grinding temperature field can be simplified into 2D heat transfer analysis. Field variable T in transient temperature field meets the equilibrium differential equation of heat conduction [66]:

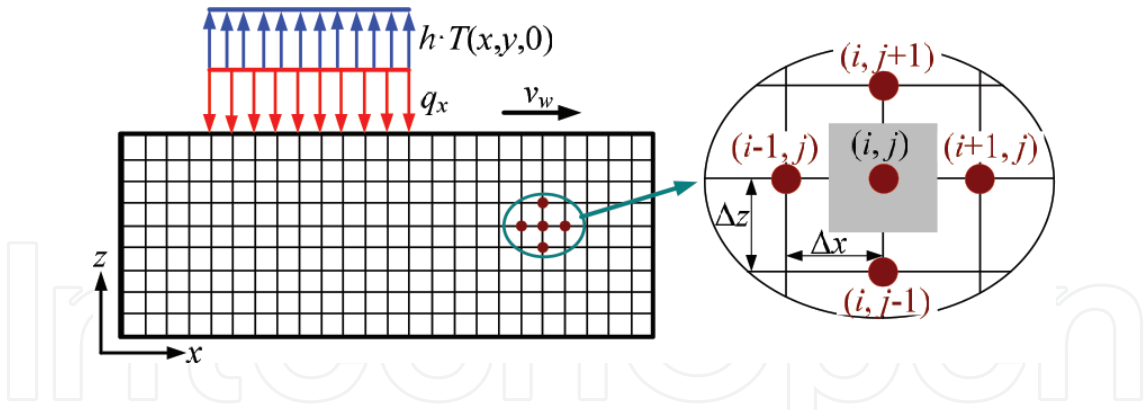


Figure 7. Two-dimensional heat conduction model with nodal network [66].

$$\begin{cases} \frac{\partial^2 T}{\partial x^2} + \frac{\partial^2 T}{\partial z^2} = \frac{1}{\alpha_w} \frac{\partial T}{\partial t} \\ \alpha_w = \frac{k_w}{\rho_w c_w} \end{cases} \quad (9)$$

where α_w is the thermal diffusivity.

Difference in the equation of various nodes in internal grids can be obtained based on (9):

$$T_{t+\Delta t}(i, j) = \left[1 - \frac{2\Delta t(k_x + k_z)}{\rho_w c_w \Delta l^2} \right] T_t(i, j) + \frac{\Delta t \{ k_x \cdot [T(i, j+1) + T(i, j-1)] + k_z \cdot [T(i+1, j) + T(i-1, j)] \}}{\rho_w c_w \Delta l^2} \quad (10)$$

As for boundary conditions analysis in grinding zone, coordinate node (i, j) on the workpiece surface is taken as an example. According to energy conservation law [67, 68], the temperature at the node (i, j) after Δt :

$$T_{t+\Delta t}(i, j) = \frac{\Delta t}{\rho_w c_w \Delta l^2} \{ k \cdot [T(i-1, j) + T(i+1, j) + T(i+1, j) - 3T(i, j)] + [q - h(T_t - T_a)] \cdot \Delta l \} + T(i, j) \quad (11)$$

4.5. Precise control of temperature field

The temperature field at different times during the steady process can be obtained by solving the difference Eq. (11). **Figure 8** shows the temperature isoline under NMQLC at different times and the corresponding time-space distribution of surface temperature. It can be seen that the grinding process can be divided into three stages, namely, cut-in, steady state, and cut-out [66]:

Cut-in: when abrasive grains start to contact and cut the workpiece, the undeformed chip thickness increases gradually and the heat generated on the grinding interface begins to be transmitted into the workpiece surface.

Steady state: the undeformed chip thickness kept at the mean value and workpiece surface temperature stops increasing. The temperature field reaches the steady state.

Cut-out: the undeformed chip thickness decreases gradually in the cut-out region. According to the theory of heat transfer, the heat conduction in the cut-out region is reduced considering the

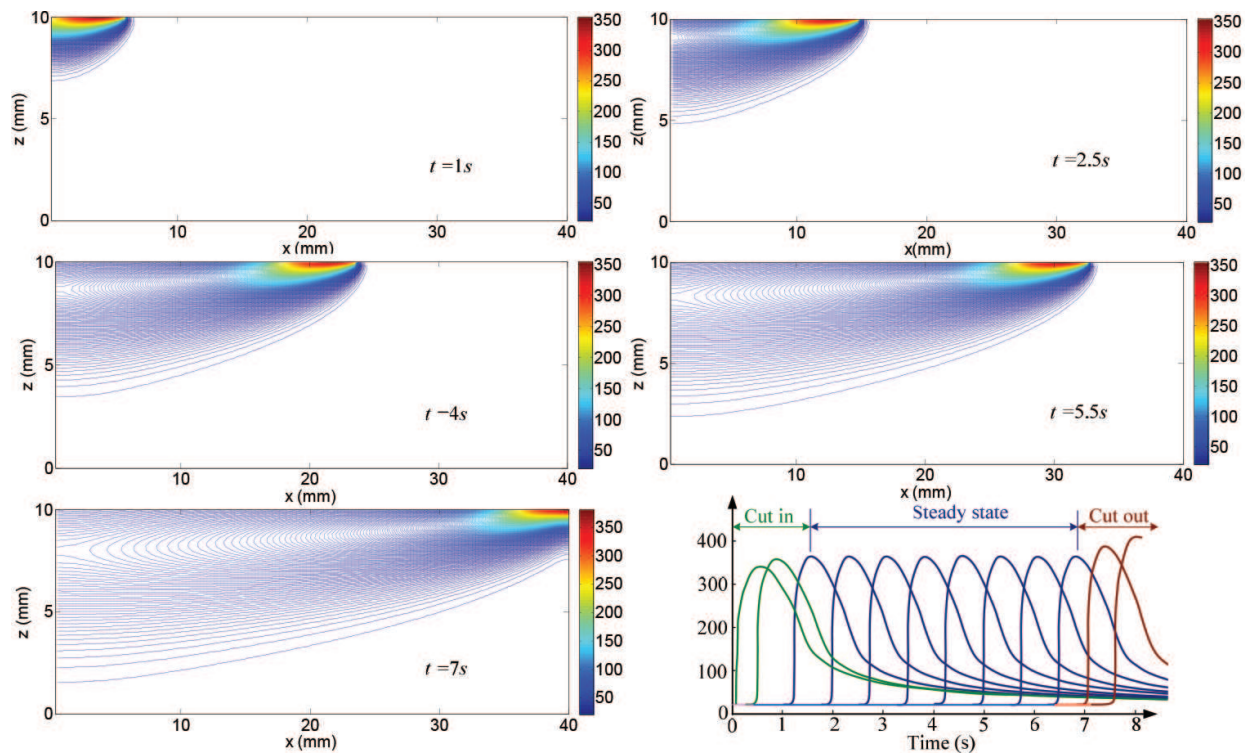


Figure 8. Distributions of the grinding temperature and temperature curves in different states [68].

fixed heat generated on the grinding surface [66]. As the thermal conductivity of the air is very low, more heat is concentrated in the grinding zone, thus increasing the grinding temperature.

5. Conclusions

This chapter has presented a review of published researches in the application of NMQLC during grinding. The following conclusions may be drawn from the present literature review:

1. The amount of nanofluids using NMQLC is very small (7.5–350 mL/h based on published literatures) compared with flood lubrication (usually 60 L/h), so this technique is an environmentally friendly lubrication-cooling method.
2. NMQLC can improve the lubrication condition in grinding area and reduce the friction coefficient effectively, thus reducing the grinding force and specific grinding energy, reducing workpiece surface roughness, and improving the life of grinding wheel.
3. NMQLC can strengthen the heat transfer in the grinding zone that NMQLC could realize a lubrication-cooling effect close to that of flood lubrication.
4. Based on published literatures, nanoparticles that have effective lubrication properties are TiO_2 , SiO_2 , Al_2O_3 , MoS_2 , ZnO , and nanodiamond; nanoparticles that have effective cooling properties are CuO , NiO , CNTs, and SiC . A mixed use of nanoparticles with good lubricated properties and nanoparticles with good cooling properties can obtain lower grinding force, grinding temperature, and better surface quality.

5. The lubricating performance of oil-based nanofluid is better than that of water-based nanofluid and the cooling effect is just reverse.

6. Recommendations for future research

The NMQLC technique has been applied by a large number of researchers and can obtain good lubrication and cooling effect. However, there are three points of misgivings based on the summary of available literatures. In order to achieve precision control of the grinding temperature field, more attention is needed to study these misgivings:

1. Most researchers prepare nanofluid using oil or water as base fluid and all can obtain good lubrication or cooling effect close to that of flood lubrication; however, for the addition of nanoparticles into ester, Sridharan and Malkin [69] did not get the ideal result. It is found that when using plain ester oil as base medium, workpiece thermal distortion for NMQLC grinding was reduced by about the same relative amount as the specific energy compared with pure ester oil, which suggests that the addition of nanoparticles to ester oil maybe had no significant effect on workpiece cooling.
2. Li et al. [68] investigated NMQLC grinding temperature using different workpiece materials: 45 steel, Ni based alloy, and cast iron. Experimental results on specific grinding force and grinding temperature revealed that the grinding condition is inapplicable to grinding 45 steel, indicating that the NMQLC method is not applicable to all workpiece materials.
3. Only a few researchers have studied the effect of nanofluid parameters, including the nanoparticle concentration and size, on grinding performance. Some researchers have proved that a higher nanoparticle concentration is more effective for reducing grinding forces [43, 70]. But for the effect of particle size, there is no unified conclusion. The conclusion of Lee [43] and Yang [52] is that the smaller size of nanoparticles is more effective for reducing grinding forces and temperature; Mao [50] found that, when the diameter of nanoparticle increases, tangential grinding force and temperature decreases slightly while the surface finish is deteriorated.

Acknowledgements

This research was financially supported by the National Natural Science Foundation of China (51575290), Major Research Project of Shandong Province (2017GGX30135) and Shandong Provincial Natural Science Foundation, China (ZR2017PEE011 and ZR2017PEE002).

Nomenclature

CNT	carbon nanotubes
EHD	electro-hydro-dynamic

hBN	hexagonal boron nitride
MWCNTs	multi-walled carbon nanotubes
MQL	minimum quantity lubrication
NMQLC	nanofluid minimum quantity lubrication cooling
UAG	ultrasonic-assisted grinding

Author details

Min Yang¹, Changhe Li^{1*}, Yanbin Zhang¹, Dongzhou Jia¹, Runze Li² and Wenfeng Ding³

*Address all correspondence to: sy_lichanghe@163.com

1 School of Mechanical Engineering, Qingdao University of Technology, Qingdao, China

2 Department of Biomedical Engineering, University of Southern California, Los Angeles, CA, USA

3 College of Mechanical and Electrical Engineering, Nanjing University of Aeronautics and Astronautics, Nanjing, China

References

- [1] Ding WF, Xu JH, Chen ZZ, et al. Interface characteristics and fracture behavior of brazed polycrystalline CBN grains using Cu-Sn-Ti alloy. *Materials Science and Engineering A*. 2013;**559**:629-634. DOI: 10.1016/j.msea.2012.09.002
- [2] Zhang Y, Li B, Li C, et al. Experimental evaluation of cooling performance by friction coefficient and specific friction energy in nanofluid minimum quantity lubrication grinding with different types of vegetable oil. *Journal of Cleaner Production*. 2016;**139**:685-705. DOI: 10.1016/j.jclepro.2016.08.073
- [3] Guo C, Shi Z, Attia H, et al. Power and wheel wear for grinding nickel alloy with plated CBN wheels. *CIRP Annals–Manufacturing Technology*. 2007;**56**:343-346. DOI: 10.1016/j.cirp.2007.05.079
- [4] Ding W, Zhao B, Xu J, et al. Grinding behavior and surface appearance of (TiCp+TiBw)/Ti-6Al-4V titanium matrix composites. *Chinese Journal of Aeronautics*. 2014;**27**:1334-1342. DOI: 10.1016/j.cja.2014.08.006
- [5] Wang Y, Li C, Zhang Y, et al. Comparative evaluation of the lubricating properties of vegetable-oil-based nanofluids between frictional test and grinding experiment. *Journal of Manufacturing Processes*. 2017;**26**:94-104. DOI: 10.1016/j.jmapro.2017.02.001

- [6] Jia D, Li C, Zhang Y, et al. Experimental research on the influence of the jet parameters of minimum quantity lubrication on the lubricating property of Ni-based alloy grinding. *International Journal of Advanced Manufacturing Technology*. 2016;**82**:617-630. DOI: 10.1007/s00170-015-7381-y
- [7] Ding W, Zhu Y, Zhang L, et al. Stress characteristics and fracture wear of brazed CBN grains in monolayer grinding wheels. *Wear*. 2015;**332–333**:800-809. DOI: 10.1016/j.wear.2014.12.008
- [8] Ding WF, Xu JH, et al. Fabrication and performance of porous metal-bonded CBN grinding wheels; using alumina bubble particles as pore-forming agents. *International Journal of Advanced Manufacturing Technology*. 2013;**67**:1309-1315. DOI: 10.1007/s00170-012-4567-4
- [9] Guo S, Li C, Zhang Y, et al. Experimental evaluation of the lubrication performance of mixtures of castor oil with other vegetable oils in MQL grinding of nickel-based alloy. *Journal of Cleaner Production*. 2016;**140**:1060-1076. DOI: 10.1016/j.jclepro.2016.10.073
- [10] Zhu Y, Ding W, Xu J, et al. An investigation of residual stresses in brazed cubic boron nitride abrasive grains by finite element modelling and raman spectroscopy. *Materials & Design*. 2015;**87**:342-351. DOI: 10.1016/j.matdes.2015.08.039
- [11] Li B, Li C, Zhang Y, et al. Grinding temperature and energy ratio coefficient in MQL grinding of high-temperature nickel-base alloy by using different vegetable oils as base oil. *Chinese Journal of Aeronautics*. 2016;**29**:1084-1095. DOI: 10.1016/j.cja.2015.10.012
- [12] Malkin S. *Grinding Technology Theory and Applications of Machining with Abrasives*. Shenyang: Northeastern University Press; 2002. pp. 9-29
- [13] Guo S, Li C, Zhang Y, et al. Analysis of volume ratio of castor/soybean oil mixture on minimum quantity lubrication grinding performance and microstructure evaluation by fractal dimension. *Industrial Crops and Products*. 2018;**111**:494-505. DOI: 10.1016/j.indcrop.2017.11.024
- [14] Li CH. *Theory and Key Technology of Nanofluid Minimum Quantity Grinding*. Beijing: Science Press; 2018. pp. 91-108
- [15] Yang SM, Tao WS. *Heat Transfer*. Beijing: Higher Education Press; 1998. pp. 33-296
- [16] Wang Y, Li C, Zhang Y, et al. Experimental evaluation of the lubrication properties of the wheel/workpiece interface in minimum quantity lubrication (MQL) grinding using different types of vegetable oils. *Journal of Cleaner Production*. 2016;**127**:487-499. DOI: 10.1016/j.jclepro.2016.03.121
- [17] Zhang Y, Li C, Ji H, et al. Analysis of grinding mechanics and improved predictive force model based on material-removal and plastic-stacking mechanisms. *International Journal of Machine Tools & Manufacture*. 2017;**122**:81-97. DOI: 10.1016/j.ijmachtools.2017.06.002
- [18] Sheikholeslami M. Magnetohydrodynamic nanofluid forced convection in a porous lid driven cubic cavity using lattice Boltzmann method. *Journal of Molecular Liquids*. 2017; **231**:555-565. DOI: 10.1016/j.molliq.2017.02.020

- [19] Sheikholeslami M. Magnetic field influence on nanofluid thermal radiation in a cavity with tilted elliptic inner cylinder. *Journal of Molecular Liquids*. 2017;**229**:137-147. DOI: 10.1016/j.molliq.2016.12.024
- [20] Sheikholeslami M. Numerical simulation of magnetic nanofluid natural convection in porous media. *Physics Letters A*. 2017;**381**:494-503. DOI: 10.1016/j.physleta.2016.11.042
- [21] Sheikholeslami M. Influence of Lorentz forces on nanofluid flow in a porous cylinder considering Darcy model. *Journal of Molecular Liquids*. 2017;**225**:903-912. DOI: 10.1016/j.molliq.2016.11.022
- [22] Sheikholeslami M. Influence of Coulomb forces on $\text{Fe}_3\text{O}_4\text{-H}_2\text{O}$ nanofluid thermal improvement. *International Journal of Hydrogen Energy*. 2017;**42**:821-829. DOI: 10.1016/j.ijhydene.2016.09.185
- [23] Sheikholeslami M. CuO-water nanofluid free convection in a porous cavity considering Darcy law. *The European Physical Journal Plus*. 2017;**132**:55. DOI: 10.1140/epjp/i2017-11330-3
- [24] Sheikholeslami M, Sadoughi MK. Simulation of CuO-water nanofluid heat transfer enhancement in presence of melting surface. *International Journal of Heat and Mass Transfer*. 2018;**116**:909-919. DOI: 10.1016/j.ijheatmasstransfer.2017.09.086
- [25] Zhang Y, Li C, Jia D, et al. Experimental evaluation of MoS_2 nanoparticles in jet MQL grinding with different types of vegetable oil as base oil. *Journal of Cleaner Production*. 2015;**87**:930-940. DOI: 10.1016/j.jclepro.2014.10.027
- [26] Zhang Y, Li C, Jia D, et al. Experimental study on the effect of nanoparticle concentration on the lubricating property of nanofluids for MQL grinding of Ni-based alloy. *Journal of Materials Processing Technology*. 2016;**232**:100-115. DOI: 10.1016/j.jmatprotec.2016.01.031
- [27] Mao C, Zou H, Zhou X, et al. Analysis of suspension stability for nanofluid applied in minimum quantity lubricant grinding. *International Journal of Advanced Manufacturing Technology*. 2014;**71**:2073-2081. DOI: 10.1007/s00170-014-5642-9
- [28] Yang M, Li C, Zhang Y, et al. Research on microscale skull grinding temperature field under different cooling conditions. *Applied Thermal Engineering*. 2017;**126**:525-537. DOI: 10.1016/j.applthermaleng.2017.07.183
- [29] Mao C, Zou H, Huang X, et al. The influence of spraying parameters on grinding performance for nanofluid minimum quantity lubrication. *International Journal of Advanced Manufacturing Technology*. 2013;**64**:1791-1799. DOI: 10.1007/s00170-012-4143-y
- [30] Wang Y, Li C, Zhang Y, et al. Experimental evaluation on tribological performance of the wheel/workpiece interface in minimum quantity lubrication grinding with different concentrations of Al_2O_3 nanofluids. *Journal of Cleaner Production*. 2017;**142**:3571-3583. DOI: 10.1016/j.jclepro.2016.10.110
- [31] Wang Y, Li C, Zhang Y, et al. Experimental evaluation of the lubrication properties of the wheel/workpiece interface in MQL grinding with different nanofluids. *Tribology International*. 2016;**99**:198-210. DOI: 10.1016/j.triboint.2016.03.023

- [32] Liu G, Li C, Zhang Y, et al. Process parameters optimization and experimental evaluation for nanofluid MQL in grinding Ti-6Al-4V based on grey relational analysis. *Materials and Manufacturing Processes*. 2017;1-14. DOI: 10.1080/10426914.2017.1388522
- [33] Manojkumar K, Ghosh A. Synthesis of MWCNT nanofluid and evaluation of its potential besides soluble oil as micro cooling-lubrication medium in SQL grinding. *International Journal of Advanced Manufacturing Technology*. 2015;77:1955-1964. DOI: 10.1007/s00170-014-6587-8
- [34] Setti D, Sinha MK, Ghosh S, et al. An investigation into the application of Al₂O₃ nanofluid-based minimum quantity lubrication technique for grinding of Ti-6Al-4V. *International Journal of Precision Technology*. 2014;4:268-279. DOI: 10.1504/IJPTECH.2014.067742
- [35] Sinha MK, Rao PV, Madarkar R, et al. Application of eco-friendly nanofluids during grinding of Inconel 718 through small quantity lubrication. *Journal of Cleaner Production*. 2017;141:1359-1375. DOI: 10.1016/j.jclepro.2016.09.212
- [36] Kalita P, Malshe AP, Rajurkar KP. Study of tribo-chemical lubricant film formation during application of nanolubricants in minimum quantity lubrication (MQL) grinding. *CIRP Annals - Manufacturing Technology*. 2012;61:327-330. DOI: 10.1016/j.cirp.2012.03.031
- [37] Shen B, Kalita P, Malshe A P, et al. Performance of novel MoS₂ nanoparticles based grinding fluids in minimum quantity lubrication grinding. *Transactions of NAMRI/SME*. 2008;36:357-364
- [38] Jia D, Li C, Zhang Y, et al. Specific energy and surface roughness of minimum quantity lubrication grinding Ni-based alloy with mixed vegetable oil-based nanofluids. *Precision Engineering*. 2017;50:248-262. DOI: 10.1016/j.precisioneng.2017.05.012
- [39] Zhang D, Li C, Zhang Y, et al. Experimental research on the energy ratio coefficient and specific grinding energy in nanoparticle jet MQL grinding. *International Journal of Advanced Manufacturing Technology*. 2015;78:1275-1288. DOI: 10.1007/s00170-014-6722-6
- [40] Zhang X, Li C, Zhang Y, et al. Performances of Al₂O₃/SiC hybrid nanofluids in minimum-quantity lubrication grinding. *International Journal of Advanced Manufacturing Technology*. 2016;86:1-15. DOI: 10.1007/s00170-016-8453-3
- [41] Zhang Y, Li C, Jia D, et al. Experimental evaluation of the lubrication performance of MoS₂/CNT nanofluid for minimal quantity lubrication in Ni-based alloy grinding. *International Journal of Machine Tools & Manufacture*. 2015;99:19-33. DOI: 10.1016/j.ijmachtools.2015.09.003
- [42] Lee PH, Nam JS, Li C, et al. An experimental study on micro-grinding process with nanofluid minimum quantity lubrication (MQL). *International Journal of Precision Engineering and Manufacturing*. 2012;13:331-338. DOI: 10.1007/s12541-012-0042-2
- [43] Lee PH, Nam TS, Li C, et al. Environmentally-friendly nano-fluid minimum quantity lubrication (MQL) meso-scale grinding process using nano-diamond particles. *International conference on manufacturing automation*. IEEE. 2011:44-49. DOI: 10.1109/ICMA.2010.27

- [44] Yang M, Li C, Zhang Y, et al. Maximum undeformed equivalent chip thickness for ductile-brittle transition of zirconia ceramics under different lubrication conditions. *International Journal of Machine Tools and Manufacture*. 2017;**122**:55-65. DOI: 10.1016/j.ijmachtools.2017.06.003
- [45] Sheikholeslami M. CuO-water nanofluid flow due to magnetic field inside a porous media considering Brownian motion. *Journal of Molecular Liquids*. 2018;**249**:921-929. DOI: 10.1016/j.molliq.2017.11.118
- [46] Sheikholeslami M. Numerical investigation of nanofluid free convection under the influence of electric field in a porous enclosure. *Journal of Molecular Liquids*. 2018;**249**:1212-1221. DOI: 10.1016/j.molliq.2017.11.141
- [47] Sheikholeslami M, Rokni HB. Numerical simulation for impact of Coulomb force on nanofluid heat transfer in a porous enclosure in presence of thermal radiation. *International Journal of Heat and Mass Transfer*. 2018;**118**:823-831. DOI: 10.1016/j.ijheatmasstransfer.2017.11.041
- [48] Sheikholeslami M, Shamlooei M, Moradi R. Fe₃O₄-ethylene glycol nanofluid forced convection inside a porous enclosure in existence of Coulomb force. *Journal of Molecular Liquids*. 2018;**249**:429-437. DOI: 10.1016/j.molliq.2017.11.048
- [49] Morgan MN, Barczak L, Batako A. Temperatures in fine grinding with minimum quantity lubrication (MQL). *International Journal of Advanced Manufacturing Technology*. 2012;**60**:951-958. DOI: 10.1007/s00170-011-3678-7
- [50] Mao C, Zhang J, Huang Y, et al. Investigation on the effect of nanofluid parameters on MQL grinding. *Materials and Manufacturing Processes*. 2013;**28**:436-442. DOI: 10.1080/10426914.2013.763970
- [51] Yang M, Li C, Zhang Y, et al. Experimental research on microscale grinding temperature under different nanoparticle jet minimum quantity cooling. *Materials and Manufacturing Processes*. 2016;**32**:589-597. DOI: 10.1080/10426914.2016.1176198
- [52] Yang M, Li C, Zhang Y, et al. Microscale bone grinding temperature by dynamic heat flux in nanoparticle jet mist cooling with different particle sizes. *Materials and Manufacturing Processes*. 2018;**33**:58-68. DOI: 10.1080/10426914.2016.1244846
- [53] Li B, Li C, Zhang Y, et al. Heat transfer performance of MQL grinding with different nanofluids for Ni-based alloys using vegetable oil. *Journal of Cleaner Production*. 2017;**154**:1-11. DOI: 10.1016/j.jclepro.2017.03.213
- [54] Li B, Li C, Zhang Y, et al. Effect of the physical properties of different vegetable oil-based nanofluids on MQLC grinding temperature of Ni-based alloy. *International Journal of Advanced Manufacturing Technology*. 2017;**89**:3459-3474. DOI: 10.1007/s00170-016-9324-7
- [55] Lee PH, Sang WL, Lim SH, et al. A study on thermal characteristics of micro-scale grinding process using nanofluid minimum quantity lubrication (MQL). *International Journal of Precision Engineering and Manufacturing*. 2015;**16**:1899-1909. DOI: 10.1007/s12541-015-0247-2

- [56] Mao C, Tang X, Zou H, et al. Investigation of grinding characteristic using nanofluid minimum quantity lubrication. *International Journal of Precision Engineering and Manufacturing*. 2012;**13**:1745-1752. DOI: 10.1007/s12541-012-0229-6
- [57] Jaeger JC. Moving sources of heat and the temperature of sliding contacts. *Journal of the Royal Society of New South Wales*. 1942;**76**:203-224
- [58] Mao C. *Study of Temperature Field and Thermal Damage in Surface Grinding*. Hunan University; 2008
- [59] Zhang L, Mahdi M. Applied mechanics in grinding-IV. The mechanism of grinding induced phase transformation. *International Journal of Machine Tools & Manufacture*. 1995;**35**:1397-1409. DOI: 10.1016/0890-6955(95)93590-3
- [60] Sheikholeslami M. Numerical investigation for CuO-H₂O nanofluid flow in a porous channel with magnetic field using mesoscopic method. *Journal of Molecular Liquids*. 2018;**249**:739-746. DOI: 10.1016/j.molliq.2017.11.069
- [61] Sheikholeslami M, Shehzad SA. Numerical analysis of Fe₃O₄-H₂O nanofluid flow in permeable media under the effect of external magnetic source. *International Journal of Heat and Mass Transfer*. 2018;**118**:182-192. DOI: 10.1016/j.ijheatmasstransfer.2017.10.113
- [62] Sheikholeslami M, Rokni HB. Simulation of nanofluid heat transfer in presence of magnetic field: A review. *International Journal of Heat and Mass Transfer*. 2017;**115**:1203-1233. DOI: 10.1016/j.ijheatmasstransfer.2017.08.108
- [63] Sheikholeslami M. Influence of magnetic field on nanofluid free convection in an open porous cavity by means of lattice Boltzmann method. *Journal of Molecular Liquids*. 2017;**234**:364-374. DOI: 10.1016/j.molliq.2017.03.104
- [64] Sheikholeslami M. CVFEM for magnetic nanofluid convective heat transfer in a porous curved enclosure. *The European Physical Journal Plus*. 2016;**131**:413. DOI: 10.1140/epjp/i2016-16413-y
- [65] Mao C, Zou H, Huang Y, et al. Analysis of heat transfer coefficient on workpiece surface during minimum quantity lubricant grinding. *International Journal of Advanced Manufacturing Technology*. 2013;**66**:363-370. DOI: 10.1007/s00170-012-4330-x
- [66] Shen B, Shih AJ, Xiao G. A heat transfer model based on finite difference method for grinding. *Journal of Manufacturing Science and Engineering*. 2011;**133**:031001. DOI: 10.1115/1.4003947
- [67] Zhang Y, Li C, Jia D, et al. Experimental evaluation of the workpiece surface quality of MoS₂/CNT nanofluid for minimal quantity lubrication in grinding. *Journal of Mechanical Engineering*. 2018;**54**:161-170. DOI: 10.3901/JME.2018.01.161
- [68] Li B, Li C, Zhang Y, et al. Numerical and experimental research on the grinding temperature of minimum quantity lubrication cooling of different workpiece materials using vegetable oil-based nanofluids. *International Journal of Advanced Manufacturing Technology*. 2017;**93**:1971-1988. DOI: 10.1007/s00170-017-0643-0

- [69] Sridharan U, Malkin S. Effect of minimum quantity lubrication (MQL) with nanofluids on grinding behavior and thermal distortion. *Transactions of NAMRI/SME*. 2009;**37**:629-636
- [70] Molaie MM, Akbari J, Movahhedy MR. Ultrasonic assisted grinding process with minimum quantity lubrication using oil-based nanofluids. *Journal of Cleaner Production*. 2016;**129**:212-222. DOI: 10.1016/j.jclepro.2016.04.080

IntechOpen

IntechOpen

