

We are IntechOpen, the world's leading publisher of Open Access books Built by scientists, for scientists

4,800

Open access books available

122,000

International authors and editors

135M

Downloads

Our authors are among the

154

Countries delivered to

TOP 1%

most cited scientists

12.2%

Contributors from top 500 universities



WEB OF SCIENCE™

Selection of our books indexed in the Book Citation Index
in Web of Science™ Core Collection (BKCI)

Interested in publishing with us?
Contact book.department@intechopen.com

Numbers displayed above are based on latest data collected.

For more information visit www.intechopen.com



Introductory Chapter: Nano-Enhanced Phase-Change Material

Mohsen Sheikholeslami Kandelousi

1. Phase-change materials

The consumption of any kind of energy has a significant role in protecting energy in the economic development of any country. Today, request in the sector has led to beautiful and large buildings around the world. It is noteworthy that buildings will spend about 30% of the worldwide energy produced. More energy demand for developing economies is projected; the lack of awareness about the pricing of fossil fuels and the increasing information about environmental problems has donated to the serious consideration of different renewable energies. Among different types of energy, heat transfer is universally observed in nature as geothermal energy and energy radiation in nature. This energy is a side effect of a large amount of energy production units and energy conversion products and systems. Energy storage may be maintained to maintain energy before energy use, or it can be used as a way to maintain calm in buildings, saving energy in different sectors of the society. An energy storage system should have certain features that include proper energy storage material with a specific melting temperature at the optimum range, decent heat transfer well, and pleasant enclosure compatible with the most important energy storage methods. Today, to reduce fossil fuel consumption in buildings, thermal energy storage systems should be employed to augment the efficiently. **Figure 1** shows examples for the industrial and internal application of thermal energy storage systems (see [1, 2]). One of the advantages of utilizing thermal storage is that it can be consistent with supply [3].

2. Techniques for energy storage

2.1 Latent heat

Release or absorption of energy by changing the phase as gas to liquid or liquid to solid can be considered as the main reason for such way.

2.2 Sensible heat

Energy is saved by increasing material temperature. Efficiency of thermal storage relies on temperature difference, specific heat, and amount of material. The best material in this view is water due to its low cost and great heat capacity.

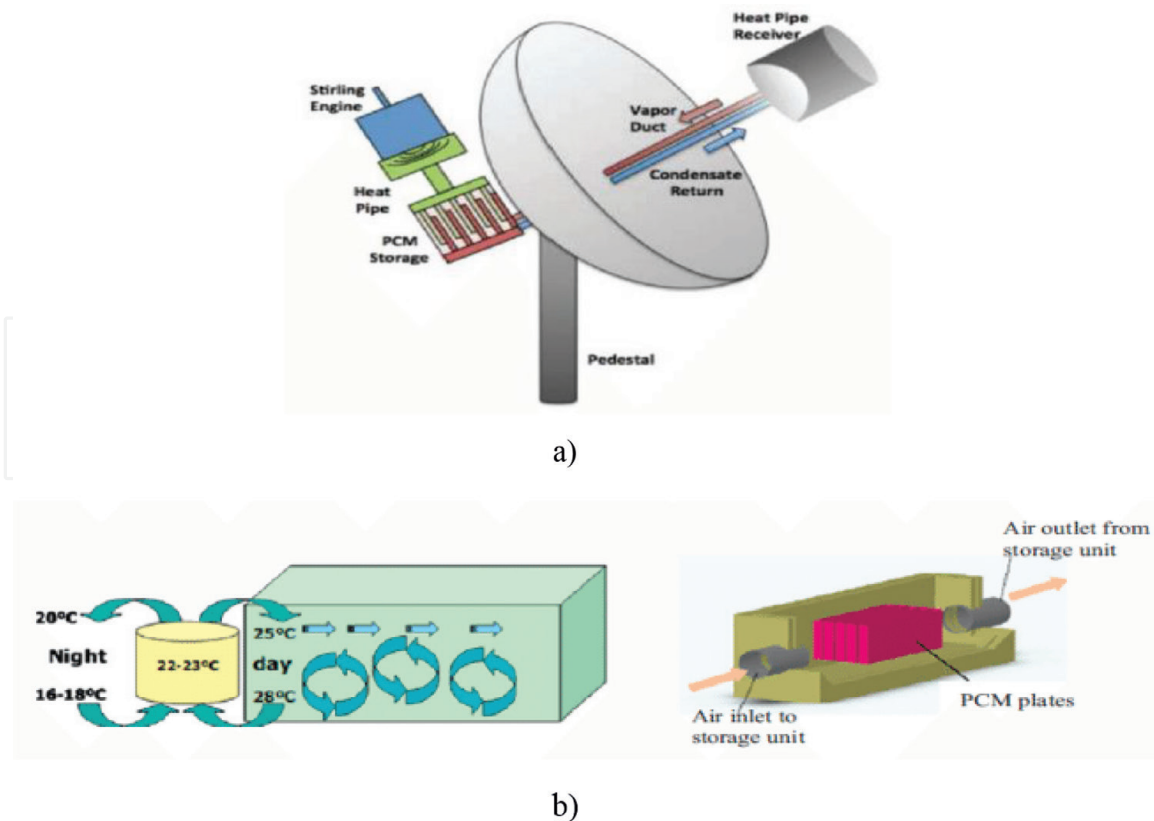


Figure 1. NEPCM for energy storage units [1, 2]. a) Latent energy storage for dish stirling power generation b) PCM in free cooling systems.

2.3 Electrical energy

The electric energy has been stored through the battery. Battery is charged directly to a direct current source and converted to the electrical energy when discharged. Storing of electrical energy is produced by photovoltaic cells with the use of battery during the power loss.

2.4 Mechanical energy

This system includes the storage of gravitational energy, pumped water power storage, and the storage of compressed air energy.

2.5 Thermochemical energy storage

Absorption and discharge of energy through the failure and deformation of the molecular bond during the chemical reaction can be considered as the basis of this method. The mass of material, the type of reaction, and the amount of change affect the stored heat directly. The phase variation can take the form of solid-gas, liquid-gas, solid-solid, and solid-liquid. In change of solid, the heat is saved in a change from one type of crystal to another. These changes generally have low-energy content and a small change in volume relative to the change of solid to liquid. Heat transfer takes place when the phase changes. Liquid phase and solid phase converge up and down by absorbing and releasing heat at temperatures that release or absorb heat at the uniform temperatures. These materials store energy (5–14 times) relative to tangible energy storage. Phase-to-phase materials are more than loneliness for the transfer of heat, but to use this material, there is a need for a heat exchanger between the PCM and source. This is because of the low diffusion factor of PCM.

2.6 Heat storage

Heat storage is a variation of internal energy of the material which can be sensible, latent, and thermochemical forms.

3. PCM

3.1 Categories

Phase materials are organic or mineral compounds can save and absorb high heat energy within them. The storage of heat energy in these materials occurs within phase-change mechanism. In distinctive sources, different categories for PCM were performed, but as the common area of these divisions, mainly phase-change materials fall into two nonorganic categories. The most common organic material of this material is paraffin wax and the most common nonorganic sample of hydrate salt. It is worth noting that there are significant differences between the characteristics of organic phase transition material and nonorganic PCMs. Three important categories must be categorized into hydrate salts, organic matter, and eutectics. Organic materials are also composed of high-carbon and hydrogen chains whose phase-change temperatures are above 0°C (see **Figure 2**). Comparison of the cases is listed in **Table 1**. In the following section, varied chemistry categories of phase-change materials, disadvantages, and advantages are discussed. The criteria for choosing a suitable phase-change material for different uses are discussed below. Then, to define PCMs, plus some examples of applications of these materials, techniques for increasing the efficiency of these materials in energy storage systems have been investigated. Finally, with a review of past work in this area, a summary of the whole chapter is presented.

3.1.1 Inorganic materials

The inorganic PCMs are generally categorized into two groups of metals and hydrated salts. These phase-change materials are denser and more energy-efficient than organic phase-change materials. In terms of price, organic phase-change materials are extensively cheaper. In addition to the benefits mentioned above, inorganic phase-change materials are widely corrosive. Generally, the problem is overcooling, which means they are hardly crystalline when they reach the freezing point.

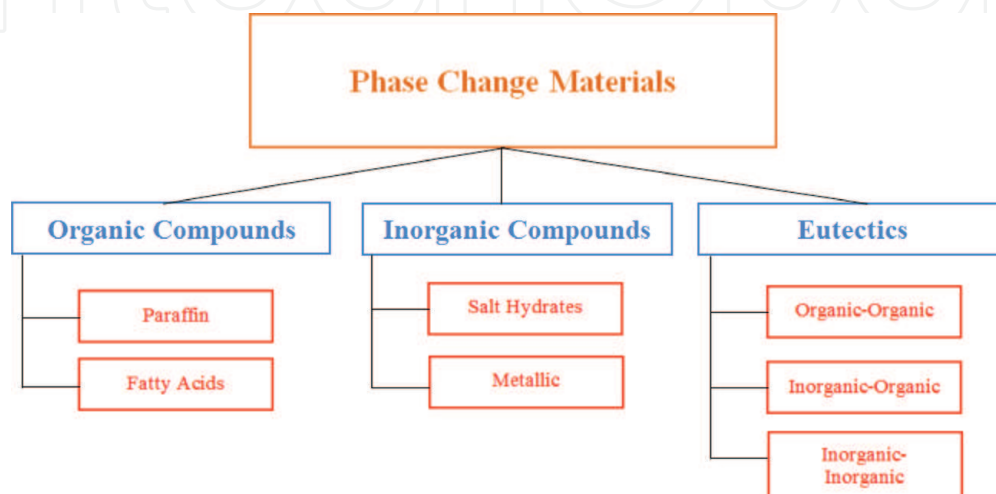


Figure 2.
Different kinds of PCM.

Disadvantages	Benefits	Classification
Corrosion Supercooling	Availability in low cost Low volume change High thermal conductivity High heat of fusion	Inorganic PCMs
Flammability Low thermal conductivity Relative large volume change	Good compatibility Recyclable with other materials No supercooling High heat of fusion Availability in a large temperature range	Organic PCMs
Lack of test data	High volumetric thermal storage density Sharp melting temperature	Eutectics

Table 1.
Various types of PCMs.

3.1.2 Organic materials

The organic PCMs should be separated from the group of paraffin and non-paraffins, such as fatty acids, esters, glycolic acids, and alcohols.

3.1.3 Disadvantages and advantage of organic and nonorganic material

The advantages of organic material include the presence in the temperature range, freezing of overcooling, ability to melt compatible with common materials, non-separable and recyclable, and great fusion heat. The limitations of this organic material include low storage capacity, low thermal conductivity, and thermal flammability. The advantages of nonorganic materials include considerable latent heat and low cost. The limitations of nonorganic material include a large change in volume, overheating, separation, and corrosion.

3.1.4 Phase-change material selection and selection criteria

To select the phase-change material, there exist some parameters that should be studied, namely, thermodynamic characteristics, kinematic properties, chemical properties, and economic features.

3.1.4.1 Thermodynamic characteristics

The melting temperature must react in the wanted temperature range and low vapor pressure at the reaction temperature to decrease the issue of inhibiting melting.

3.1.4.2 Kinematic properties

The high reaction rate is important for avoiding the superconducting fluid phase and high growth rates; therefore, system can restore heat from storage units.

3.1.4.3 Economic features

It is economically low-cost and also available.

3.1.4.4 Chemical properties

The chemical and full cycle and non-degradation after the successive cycles are important issues.

3.1.5 Application of phase-change material

The materials of phase changes have found many applications due to the changing temperature. Materials that melt below 15°C can be used to cool and ventilate room air are used. Materials that melt above 90°C are used to reduce temperatures where temperatures can rise suddenly and prevent fire. The PCM, whose melting temperature is between these two values, is used to store solar energy. PCMs for cold and heating temperatures in smaller proportions have building applications. In addition to the melting point of PCM, in the design of each heat storage unit that operates on the basis of PCM, the following notes must be considered: the material of the desired PCM with the wanted melting temperature and a PCM storage chamber that is talented of absorbing the volume changes of these materials within phase change. It should be noted that in order to get better efficiency, the melting temperature should be within the working temperature range, in addition to its thermal insulation, the phase-change properties can also be used. However, there are plenty of ways to use these materials in design of buildings. But one of the most significant points in the use of such materials, like other static systems, is the issue of calculating economic justification and the time of returning capital after the time of operation. In some cases, the use of PCM can decrease the thermal flux of the entrances to the building by up to 38%. Furthermore, the augment in the number of holes in the PCM in the recipe makes a reduction of 11% in heat flux. However, since the use of these materials in raw form can be disadvantageous due to the type PCM, and also due to the possibility of fluid PCMs, it can be necessary to enclose in the liquid phase. In order to provide both micro- and macrocomponents, phase changes are embedded in the enclosures and are thus encapsulated. In this way, the major difference between microcapsules and microcapsules is in the size of the casings or capsules. In the microcapsule method, the materials are embedded in spheres of 1–30 microns in diameter. In microcapsule method, materials in larger compartments are embedded in envelopes or containers of different sizes. The bulk of these compartments are made of plastic packs, as well as high-density polyethylene panels. Both microcapsules and microscopes have advantages and disadvantages. Encapsulation of materials is carried out using various materials. Encapsulation using plastics and metals is expensive but safe. In the construction industry, both methods can be used, but according to the place of use and also in combination with other building materials, the application of each method creates significant differences among the results and thermal treatment of the building. In the application of microcapsules of phase-change materials as fine-grained concrete, attention to the lack of functional interactions between these materials is important for the initial performance of fine-grained concrete. In this way, micro-capsulation of the material by saturation of the phase change in the fresh concrete is very effective in the thermal behavior of the materials.

3.1.5.1 PCM for heat storage

Newly, several researchers focus on improving the efficiency of building energy in order to enhance the performance of buildings [4]. Among different technologies, PCM has a major contribution to the development of high-efficiency buildings [5].

PCMs are materials that are talented of high absorption, release, and storage of energy at a relatively stable temperature. Thermal energy can be saved by saving energy or sensible energy with thermal changes in material content. This energy is available when the process is reversed. A number of papers have been reviewed [6] on PCMs that have been investigated for heat transfer, transportation, and various issues related to the system. Due to high-density changes, phase-change materials that require supports are not preferred over the high-energy process. Thus, for thermal applications, the latent fusion of PCMs is used. For a specific program, melting point and latent heat are important criteria to be chosen. Many of the phases modifying substances are considered, such as paraffin, water, and salt hydrates. Some properties, including diffusivity and thermal conductivity, are very important [7]. To improve the storage of thermal energy, the first review of nanomaterials in phase-modified materials is given by Elgafy and Lafdi [8]. Some effective applications of phase-change materials have been presented by Salyer et al. [9] and Demirbas [10], which can be referred to solar power plants for saving daytime energy and reuse it the next day, medical treatment, pharmaceuticals, pharmaceuticals, transportation, photovoltaic cells, thermal management systems, and electronic systems to prevent very high temperatures. One of the main uses of this material in the building is energy conservation.

4. Nanotechnology

4.1 Use of nanotechnology in heat storage unit

Development of nanotechnology has led to the emergence of a bunch of high-performance nano-structured materials. These materials are capable of absorbing thermal energy and high release and become for industrial applications. NEPCM has been used for various applications [11–36].

Author details

Mohsen Sheikholeslami Kandelousi^{1, 2}

1 Department of Mechanical Engineering, Babol Noshirvani University of Technology, Babol, Iran

2 Renewable Energy Systems and Nanofluid Applications in Heat Transfer Laboratory, Babol Noshirvani University of Technology, Babol, Iran

*Address all correspondence to: mohsen.sheikholeslami@yahoo.com

IntechOpen

© 2018 The Author(s). Licensee IntechOpen. This chapter is distributed under the terms of the Creative Commons Attribution License (<http://creativecommons.org/licenses/by/3.0>), which permits unrestricted use, distribution, and reproduction in any medium, provided the original work is properly cited. 

References

- [1] Andraka CE, Kruizenga AM, Hernandez-Sanchez BA, Coker EN. Review on phase change materials with nanoparticle in engineering applications. *Journal of Engineering Science and Technology Review*. 2016;**9**:26-386
- [2] Zalba B, Marín JM, Cabeza LF, Mehling H. Free-cooling of buildings with phase change materials. *International Journal of Refrigeration*. 2004;**27**:839-849
- [3] Sharma SD, Sagara K. Latent heat storage materials and systems, a review. *International Journal of Green Energy*. 2005;**2**:1-56
- [4] Hughes BR, Chaudhry HN, Ghani SA. A review of sustainable cooling technologies in buildings. *Renewable and Sustainable Energy Reviews*. 2011;**15**:3112-3120
- [5] Zhu N, Ma Z, Wang S. A review of dynamic characteristics and energy performance of buildings using phase change materials. *Energy Conversion and Management*. 2009;**50**:3169-3181
- [6] Abhat A. Low temperature latent heat thermal energy storage-heat storage materials. *Solar Energy*. 1983;**30**:313-332
- [7] Fleischer SA. *Thermal Energy Storage Using Phase Change Materials, Fundamentals and Applications*. USA: Springer; 2015
- [8] Elgafy A, Lafdi K. Effect of carbon nanofiber additives on thermal behavior of phase change materials. *Carbon*. 2005;**43**:3067-3074
- [9] Salyer IO, Sircar K. A review of phase change materials research for thermal energy storage in heating and cooling applications at the University of Dayton from 1982 to 1996. *International Journal of Global Energy Issues*. 1997;**9**:183-198
- [10] Demirbas F. Thermal energy storage and phase change materials, an overview. *Energy Sources*. 2006;**1**:85-95
- [11] Sheikholeslami M. Finite element method for PCM solidification in existence of CuO nanoparticles. *Journal of Molecular Liquids*. 2018;**265**:347-355
- [12] Sheikholeslami M, Ghasemi A, Li Z, Shafee A, Saleem S. Influence of CuO nanoparticles on heat transfer behavior of PCM in solidification process considering radiative source term. *International Journal of Heat and Mass Transfer*. 2018;**126**:1252-1264
- [13] Sheikholeslami M. Solidification of NEPCM under the effect of magnetic field in a porous thermal energy storage enclosure using CuO nanoparticles. *Journal of Molecular Liquids*. 2018;**263**:303-315
- [14] Sheikholeslami M. Numerical simulation for solidification in a LHTESS by means of nano-enhanced PCM. *Journal of the Taiwan Institute of Chemical Engineers*. 2018;**86**:25-41
- [15] Sheikholeslami M, Ghasemi A. Solidification heat transfer of nanofluid in existence of thermal radiation by means of FEM. *International Journal of Heat and Mass Transfer*. 2018;**123**:418-431
- [16] Sheikholeslami M, Zeeshan A, Majeed A. Control volume based finite element simulation of magnetic nanofluid flow and heat transport in non-Darcy medium. *Journal of Molecular Liquids*. 2018;**268**:354-364
- [17] Zhixiong Li M, Sheikholeslami MS, Shafee A. Nanofluid unsteady heat transfer in a porous energy storage enclosure in existence of Lorentz forces. *International Journal of Heat and Mass Transfer*. 2018;**127**:914-926

- [18] Sheikholeslami M. Application of Darcy law for nanofluid flow in a porous cavity under the impact of Lorentz forces. *Journal of Molecular Liquids*. 2018;**266**:495-503
- [19] Li Z, Sheikholeslami M, Shafee A, Saleem S, Chamkha AJ. Effect of dispersing nanoparticles on solidification process in existence of Lorentz forces in a permeable media. *Journal of Molecular Liquids*. 2018;**266**:181-193
- [20] Sheikholeslami M, Li Z, Shafee A. Lorentz forces effect on NEPCM heat transfer during solidification in a porous energy storage system. *International Journal of Heat and Mass Transfer*. 2018;**127**:665-674
- [21] Sheikholeslami M. Numerical modeling of nanoenhanced PCM solidification in an enclosure with metallic fin. *Journal of Molecular Liquids*. 2018;**259**:424-438
- [22] Sheikholeslami M, Sadoughi MK. Simulation of CuO-water nanofluid heat transfer enhancement in presence of melting surface. *International Journal of Heat and Mass Transfer*. 2018;**116**:909-919
- [23] Sheikholeslami M, Rokni HB. Melting heat transfer influence on nanofluid flow inside a cavity in existence of magnetic field. *International Journal of Heat and Mass Transfer*. 2017;**114**:517-526
- [24] Sheikholeslami M. Numerical investigation for CuO-H₂O nanofluid flow in a porous channel with magnetic field using mesoscopic method. *Journal of Molecular Liquids*. 2018;**249**:739-746
- [25] Sheikholeslami M, Rokni HB. CVFEM for effect of Lorentz forces on nanofluid flow in a porous complex shaped enclosure by means of non-equilibrium model. *Journal of Molecular Liquids*. 2018;**254**:446-462
- [26] Sheikholeslami M. Numerical investigation of nanofluid free convection under the influence of electric field in a porous enclosure. *Journal of Molecular Liquids*. 2018;**249**:1212-1221
- [27] Sheikholeslami M. Influence of magnetic field on Al₂O₃-H₂O nanofluid forced convection heat transfer in a porous lid driven cavity with hot sphere obstacle by means of LBM. *Journal of Molecular Liquids*. 2018;**263**:472-488
- [28] Sheikholeslami M. CuO-water nanofluid flow due to magnetic field inside a porous media considering Brownian motion. *Journal of Molecular Liquids*. 2018;**249**:921-929
- [29] Sheikholeslami M, Darzi M, Li Z. Experimental investigation for entropy generation and exergy loss of nano-refrigerant condensation process. *International Journal of Heat and Mass Transfer*. 2018;**125**:1087-1095
- [30] Zhixiong Li, Sheikholeslami M, Shafee A, Rizwan-ul H, Khan I, Tlili I, Kandasamy R. Solidification process through a solar energy storage enclosure using various sizes of Al₂O₃ nanoparticles. *Journal of Molecular Liquids*. 2019. <https://doi.org/10.1016/j.molliq.2018.11.129>
- [31] Ramzan M, Sheikholeslami M, Chung JD, Shafee A. Melting heat transfer and entropy optimization owing to carbon nanotubes suspended Casson nanoliquid flow past a swirling cylinder-A numerical treatment. *AIP ADVANCES*. 2018;**8**:115130. <https://doi.org/10.1063/1.5064389>
- [32] Sheikholeslami M, Rizwan-ul H, Shafee A, Zhixiong L. Heat transfer behavior of Nanoparticle enhanced PCM solidification through an enclosure with V shaped fins. *International Journal of Heat and Mass Transfer*. 2019;**130**:1322-1342
- [33] Sheikholeslami M. New computational approach for exergy and

entropy analysis of nanofluid under the impact of Lorentz force through a porous media. *Computer Methods in Applied Mechanics and Engineering*. 2019;**344**:319-333

[34] Sheikholeslami M. Numerical approach for MHD Al_2O_3 -water nanofluid transportation inside a permeable medium using innovative computer method. *Computer Methods in Applied Mechanics and Engineering*. 2019;**344**:306-318

[35] Sheikholeslami M, Barzegar Gerdroodbary M, Moradi R, Shafee A, Zhixiong L. Application of Neural Network for estimation of heat transfer treatment of Al_2O_3 - H_2O nanofluid through a channel. *Computer Methods in Applied Mechanics and Engineering*. 2019;**344**:1-12

[36] Zhixiong L, Sheikholeslami M, Shafee A, Ramzan M, Kandasamy R, Al-Mdallal QM. Influence of adding nanoparticles on solidification in a heat storage system considering radiation effect. *Journal of Molecular Liquids*. 2019;**273**:589-605

IntechOpen