

1567. Dynamic and static study of the fluid-structure interaction problem on elastic box plate

Ya-juan Hao¹, Ming-ming Gong², Ai-min Yang³

^{1,2}College of Science, Yanshan University, Qinhuangdao 066004, China

³College of Science, Hebei United University, Tangshan, 063009, China

¹Corresponding author

E-mail: ¹hao_yajj@163.com, ²gongmingmign@163.com, ³yang_aimm@163.com

(Received 18 August 2014; received in revised form 2 December 2014; accepted 5 January 2015)

Abstract. The influence of coupling to the fluid field is neglected in the classic fluid mechanics theory. United Lagrangian-Eulerian method is used to solve the fluid-structure interaction (FSI) problem of the nonviscous and incompressible fluid flow around an elastic box plate taking into account the influence of deformation of the elastic plate. In this approach, each material is described in its preferred reference frame. Fluid flows are given in Eulerian coordinates whereas the elastic body is treated in a Lagrangian framework. The coupling between the fluid and elastic body domains is kinematic and dynamic conditions at the body surface. The kinematic and dynamic conditions are given in Eulerian and Lagrangian coordinates. The dynamic equation of the elastic box plate is expressed combining the dynamic conditions at the interface. The knowledge of both dynamic and static deformations, static pressure and velocity distributions is given by using the Taylor expansions method. The effect of plate deformation is taken into account for the obtained solutions.

Keywords: fluid-structure interaction, united Lagrangian-Eulerian method, elastic box plate, dynamic equation, deformation.

1. Introduction

This paper deals with the mathematical analysis of problems dealing with steady fluid-structure interactions (FSI) phenomena by a new theoretical method. Our attention is the both dynamic and static deformations, static velocity and pressure when flow around the elastic bodies immersed in a fluid stream. Such immersed-body flows are commonly encountered in engineering studies: aerodynamics (airplanes, rockets, projectiles), hydrodynamics (ships, submarines, torpedoes), transportation (automobiles, trucks, cycles), wind engineering (building, bridges, water towers, wind turbines), and ocean engineering (buoys, breakwaters, pilings, cables, moored instruments) [1-3]. And these phenomena have been studied by many authors over the past few years from different points of view (theoretical algorithm, numerical analysis and simulation, etc) [4-7].

Typically, fluid and structure are given in different coordinate systems making a common solution. Fluid flows are given in Eulerian coordinates whereas the structure is treated in a Lagrangian framework. We use united Lagrangian-Eulerian method to present the deformation, pressure and velocity of flow of a nonviscous, incompressible fluid around an elastic box plate. It is a new method of where fluid and structure equations are given in their preferred reference frames. The coupling between the fluid and structure domains is kinematic and dynamic conditions at the body surface. The effect of deformation of the elastic plate is taken into account by united Lagrangian-Eulerian method. It is different from the classic fluid mechanics.

A schematic of steady and irrotational flow of a nonviscous, incompressible fluid around an elastic box plate is shown in Fig. 1. Thus the effect of viscosity, compression and fluid rotation are neglected. An orthogonal xyz coordinate system is used, and all investigated values of the plate and fluid are assumed to be functions independent of the coordinate z . The surfaces A and B of box plate are elastic, and the others are rigid. The surface A is very close to B . This article mainly studies the simply supported plate A . The pressure inside of the box plate is assumed to be constant. The physical parameters of the two-dimensional plate are: the mass density ρ_s , length

H , thickness h and bending stiffness $D = Eh^3/[12(1 - \nu^2)]$, where E is Young's modulus and ν is the Poisson ratio.

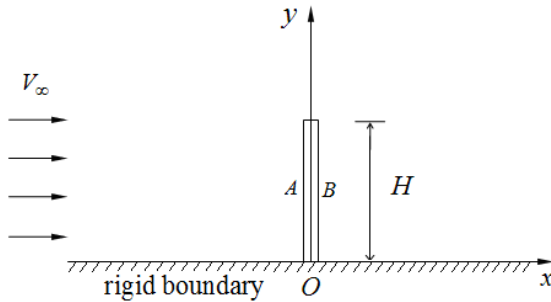


Fig. 1. Schematic of flow around an elastic box plate

2. Dynamic equations

In this section the governing equations for the separate fluid and structural problems are presented together with the surface coupling conditions.

2.1. Structure equations

The displacement field of the middle surface of the surface A of the box plate is given by the following components: w , u ; for x and y axes, respectively.

The theory of minor deflection of the plate is used. The middle surface of the plate can not be flexed. We have the following dynamic equation [8, 9]:

$$D \frac{\partial^4 w}{\partial y^4} + \rho_s h \frac{\partial^2 w}{\partial t^2} = Z_1, \tag{1}$$

where Z_1 is projection of the external mass forces, t is time.

2.2. Fluid equations

The fluid state equations can be written in an Eulerian reference frame. The steady state equations for a potential flow can be described as:

$$\nabla^2 \varphi = 0, \tag{2}$$

$$p = p_\infty + \frac{\rho_\infty}{2} [V_\infty^2 - (\nabla \varphi)^2], \tag{3}$$

in which φ is the velocity potential, p is the pressure. And φ satisfies the condition:

$$\varphi = V_\infty x, \quad (x^2 + y^2 \rightarrow \infty), \tag{4}$$

where p_∞ , ρ_∞ and V_∞ are the pressure, mass density, and velocity of the stationary flow on the infinite boundary, respectively.

2.3. United Lagrangian-Eulerian method

The structure and fluid state equations can be written in Lagrangian and Eulerian reference frames, respectively. The coupling between the fluid and structure are kinematic and dynamic conditions at the surface, as illustrated in Fig. 2. The kinematic condition is the no slip condition,

i.e., continuity in velocity, and the dynamic condition is surface continuity in tractions [9]. They are written as:

$$\mathbf{v} \cdot \mathbf{k}_3^* = (\partial \mathbf{u} / \partial t) \mathbf{k}_3^*, \quad (M^*), \tag{5}$$

$$Z = (p - p_i) \mathbf{k}_3^*, \quad (M^*), \tag{6}$$

in which \mathbf{v} is the velocity vector of fluid flow, \mathbf{u} is the displacement vector of structure, p and p_i are the pressures along outward and inward normal directions. \mathbf{k}_3^* is the outward unit normal vector to the structure at the surface between structure and fluid in the deformed configuration. This can be expressed as:

$$\mathbf{k}_3^* = E_1 \mathbf{k}_1 + E_2 \mathbf{k}_2 + E_3 \mathbf{k}_3, \tag{7}$$

$$E_1 = e_{12} \omega_2 - (1 + e_{22}) \omega_1, \quad E_2 = e_{21} \omega_1 - (1 + e_{11}) \omega_2, \tag{8}$$

$$E_3 = (1 + e_{11})(1 + e_{22}) - e_{12} e_{21}, \tag{9}$$

$$e_{11} = \frac{\partial u_1}{H_1 \partial \alpha_1} + \frac{u_2}{H_1 H_2} \frac{\partial H_1}{\partial \alpha_2} + k_{11} u_3, \quad e_{12} = \frac{\partial u_2}{H_1 \partial \alpha_1} - \frac{u_1}{H_1 H_2} \frac{\partial H_1}{\partial \alpha_2} + k_{12} u_3, \tag{9}$$

$$\omega_1 = \frac{\partial u_3}{H_1 \partial \alpha_1} - k_{11} u_1 - k_{12} u_2. \tag{10}$$

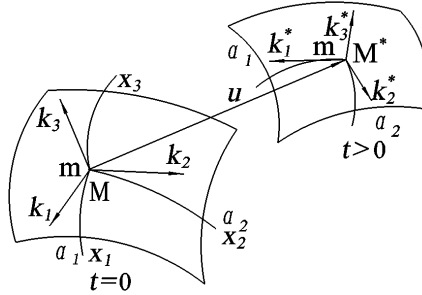


Fig. 2. Two positions of structural elements in space

The scalar contact conditions are given by:

$$\left(\frac{\partial u_1}{\partial t} - v_1 \right) E_1 + \left(\frac{\partial u_2}{\partial t} - v_2 \right) E_2 + \left(\frac{\partial u_3}{\partial t} - v_3 \right) E_3 = 0, \quad (M^*), \tag{11}$$

$$Z_1^* = Z_2^* = 0, \quad Z_3^* = p - p_i, \quad (M^*), \tag{12}$$

where v_i and Z_i ($i = 1, 2, 3$) are the projections of the velocity and the external force vector at point M^* . The velocity function $\mathbf{v}(\mathbf{r})$ and pressure function $p(\mathbf{r})$ can be written in an Eulerian reference frame at point M . The function $\mathbf{v}(\mathbf{r} + \mathbf{u})$ and $p(\mathbf{r} + \mathbf{u})$ can be expressed in terms of Taylor expansion of $\mathbf{v}(\mathbf{r})$ and $p(\mathbf{r})$. Then the kinematic and dynamic conditions can be written as [9]:

$$\left(\frac{\partial u_1}{\partial t} - V_1 \right) E_1 + \left(\frac{\partial u_2}{\partial t} - V_2 \right) E_2 + \left(\frac{\partial u_3}{\partial t} - V_3 \right) E_3 = 0, \quad (M), \tag{13}$$

$$Z_1^* = Z_2^* = 0, \quad Z_3^* = p + \frac{u_1}{h_1} \frac{\partial p}{\partial x_1} + \frac{u_2}{h_2} \frac{\partial p}{\partial x_2} + \frac{u_3}{h_3} \frac{\partial p}{\partial x_3} + \frac{u_1^2}{2 h_1^2} \frac{\partial^2 p}{\partial x_1^2} + \dots, \quad (M), \tag{14}$$

where V_1 , V_2 and V_3 are the projections of the velocity vector at point M . They can be expressed as:

$$V_1 = v_1 + \frac{u_1}{h_1} \left[\frac{\partial v_1}{\partial x_1} + \frac{\partial h_1}{h_2 \partial x_2} v_2 + \frac{\partial h_1}{h_3 \partial x_3} v_3 \right] + \frac{u_2}{h_2} \left[\frac{\partial v_1}{\partial x_2} - \frac{\partial h_2}{h_1 \partial x_1} v_2 \right] + \frac{u_3}{h_3} \left[\frac{\partial v_1}{\partial x_3} - \frac{\partial h_3}{h_1 \partial x_1} v_3 \right] + V_1' \left(\frac{u_1^2}{h_1^2} \frac{\partial v_1}{\partial x_1}, \dots \right). \tag{15}$$

The complex functions V_1', V_2', V_3' are the velocity components concerned with the quadratic expressions of Taylor expansions.

Taking into account the minor deformation of the structure, the kinematic condition of the structure can be expressed as:

$$v_3 = \frac{\partial u_3}{\partial t} + \omega_1 v_1 + \omega_2 v_2 - \frac{u_1}{h_1} \left[\frac{\partial v_3}{\partial x_1} - \frac{\partial h_1}{h_3 \partial x_3} v_1 \right] - \frac{u_2}{h_2} \left[\frac{\partial v_3}{\partial x_2} - \frac{\partial h_2}{h_3 \partial x_3} v_2 \right] - \frac{u_3}{h_3} \left[\frac{\partial v_3}{\partial x_3} + \frac{\partial h_3}{h_1 \partial x_1} v_1 + \frac{\partial h_3}{h_2 \partial x_2} v_2 \right]. \tag{16}$$

The dynamic conditions can be expressed as:

$$Z_1^* = Z_2^* = 0, \quad Z_3^* = p + \frac{u_1}{h_1} \frac{\partial p}{\partial x_1} + \frac{u_2}{h_2} \frac{\partial p}{\partial x_2} + \frac{u_3}{h_3} \frac{\partial p}{\partial x_3}. \tag{17}$$

In this study, for the box plate, $u_3 = w$, $u_2 = u$, $\alpha_2 = x_2 = y$, $\alpha_3 = x_3 = x$, $h_2 = 1$, $h_3 = 1$, $H_2 = 1$, $H_3 = 1$, substituting these terms into Eqs. (16) and (17), the kinematic and dynamic conditions can be written as:

$$\frac{\partial \varphi}{\partial x} = \frac{\partial w}{\partial t} + \frac{\partial w}{\partial y} \frac{\partial \varphi}{\partial y} - w \frac{\partial^2 \varphi}{\partial x^2} - u \frac{\partial^2 \varphi}{\partial x \partial y}, \tag{18}$$

$$Z_1 = p + w \frac{\partial p}{\partial x} + u \frac{\partial p}{\partial y} - p_i. \tag{19}$$

Thus the dynamic equation of the plate is expressed as:

$$D \frac{\partial^4 w}{\partial y^4} + \rho_s h \frac{\partial^2 w}{\partial t^2} = p + w \frac{\partial p}{\partial x} + u \frac{\partial p}{\partial y} - p_i, \quad (x = 0). \tag{20}$$

This article studies minor deflection of plate, then displacement u is neglected.

3. Theoretical solutions of dynamic equations

We study the dynamic and static fluid-structure interactions problems. When the plate is assumed to be absolutely rigid ($w_1 \equiv 0$), the relative velocity potential φ_1 and the pressure p_1 of fluid are introduced. The velocity potential φ_2 and the pressure p_2 which concerning the thin plate bend, w_2 is the deflection of elastic plate, then we obtain:

$$\varphi = \varphi_1 + \varphi_2, \quad p = p_1 + p_2, \quad w = w_2. \tag{21}$$

Then substituting Eq. (21) into Eqs. (2)-(4) and (18)-(20), the following expressions for φ_1 and p_1 can be written:

$$\nabla^2 \varphi_1 = 0, \tag{22}$$

$$p_1 = p_\infty + \frac{\rho_\infty}{2} [V_\infty^2 - (\nabla \varphi_1)^2], \tag{23}$$

$$\varphi_1 = V_\infty x, \quad (x^2 + y^2 \rightarrow \infty), \tag{24}$$

$$\frac{\partial \varphi_1}{\partial x} = 0, \quad (x = 0). \tag{25}$$

The following expressions for φ_2 and p_2 can be written:

$$\nabla^2 \varphi_2 = 0, \tag{26}$$

$$p_2 = -\rho_\infty \left(\frac{\partial \varphi_1}{\partial x} \frac{\partial \varphi_2}{\partial x} + \frac{\partial \varphi_1}{\partial y} \frac{\partial \varphi_2}{\partial y} + \frac{1}{2} (\nabla \varphi_2)^2 \right), \tag{27}$$

$$\varphi_2 = 0, \quad (x^2 + y^2 \rightarrow \infty), \tag{28}$$

$$\frac{\partial \varphi_2}{\partial x} = \frac{\partial w}{\partial t} + \frac{\partial w}{\partial y} \frac{\partial \varphi_1}{\partial y} - w \frac{\partial^2 \varphi_1}{\partial x^2}, \quad (x = 0). \tag{29}$$

Eq. (20) can be written as:

$$D \frac{\partial^4 w}{\partial y^4} + \rho_s h \frac{\partial^2 w}{\partial t^2} = p_1 + p_2 + w \frac{\partial p_1}{\partial x} - p_i, \quad (x = 0). \tag{30}$$

The expression of velocity potential φ_1 is given by [10]:

$$\varphi_1 = -\frac{1}{\sqrt{2}} V_\infty \sqrt{(x^2 - y^2 + H^2) + \sqrt{(x^2 - y^2 + H^2)^2 + 4x^2 y^2}}. \tag{31}$$

Substituting Eq. (31) into (23), the pressure p_1 can be written as:

$$p_1 = p_\infty + \frac{\rho_\infty V_\infty^2}{2} \left\{ 1 - \frac{\left[x + \frac{x(H^2 + x^2 - y^2) + 2xy^2}{\sqrt{4x^2 y^2 + (H^2 + x^2 - y^2)^2}} \right]^2}{2[\sqrt{4x^2 y^2 + (H^2 + x^2 - y^2)^2} + H^2 + x^2 - y^2]} \right. \\ \left. - \frac{\left[y + \frac{y(H^2 + x^2 - y^2) - 2x^2 y}{\sqrt{4x^2 y^2 + (H^2 + x^2 - y^2)^2}} \right]^2}{2[\sqrt{4x^2 y^2 + (H^2 + x^2 - y^2)^2} + H^2 + x^2 - y^2]} \right\}. \tag{32}$$

Let us consider the general forms of the displacement and velocity potential:

$$w = \sum_{n=1,2,3,\dots} W_n \sin \frac{n\pi y}{H} e^{j\omega t}, \tag{33}$$

$$\varphi_2 = \sum_{i=1,2,3,\dots} A_i (x^2 + y^2)^{-\frac{i}{2}} \cos i\theta e^{j\omega t}, \tag{34}$$

where W_n and A_i are coefficients to be determined, $\cos \theta = x/\sqrt{x^2 + y^2}$, $\omega = 2\pi f$, f is frequency of disturbance force, j is imaginary unit. Taking into account the minor deflection of the plate, one item is used for φ_2 .

Substituting Eqs. (33) and (34) into (29) and (30), and using Taylor expansions at $y = H/2$, the following expressions can be written:

$$DW_1 \left(\frac{\pi}{H} \right)^4 - \omega^2 \rho_s h W_1 = p_\infty - p_i + \frac{1}{3} \rho_\infty V_\infty^2 - \frac{8\rho_\infty A_1^2}{H^4}, \tag{35}$$

$$\left(-\frac{2\pi}{H}\right)\left[DW_2\left(\frac{2\pi}{H}\right)^4 - \omega^2\rho_s hW_2\right] = -\frac{8\rho_\infty V_\infty^2}{9H} + \frac{64\rho_\infty A_1^2}{H^5}, \tag{36}$$

$$\frac{4A_1}{H^2} = -\frac{1}{\sqrt{3}}V_\infty W_2\left(\frac{2\pi}{H}\right) + \frac{8}{3\sqrt{3}H}V_\infty W_1. \tag{37}$$

The solutions of the set of Eqs. (35)-(37) are:

$$W_1 = \frac{4\mu H^2 + 9\gamma}{9Q} - \frac{36S(243Q^2S - 27QT + 512H^2S\mu^2 + 1152S\mu\gamma - 96\pi H^2Q\mu^2 - 216Q\mu\gamma)}{9Q(162\pi^2\mu Q^2 - 1728\pi\mu QS + 4608\mu S^2)}, \tag{38}$$

$$W_2 = -\frac{243Q^2S - 27QT + 512H^2S\mu^2 + 1152S\mu\gamma - 96\pi H^2Q\mu^2 - 216Q\mu\gamma}{162\pi^2\mu Q^2 - 1728\pi\mu QS + 4608\mu S^2}, \tag{39}$$

$$A_1 = \frac{2}{3\sqrt{3}}HV_\infty W_1 - \frac{1}{2\sqrt{3}}\pi HV_\infty W_2, \tag{40}$$

where:

$$\mu = \frac{\rho_\infty V_\infty^2 H^2}{2D}, \quad \gamma = \frac{(p_\infty - p_i)H^4}{D}, \quad Q = \pi^4 - \omega^2\rho_s h\frac{H^4}{D}, \quad S = \pi^5 - \omega^2\rho_s h\frac{H^4\pi}{16D},$$

$$T = \sqrt{6\pi^2 H^2 Q^2 \mu^2 - 128\pi H^2 Q S \mu^2 + 512H^2 S^2 \mu^2 + 81Q^2 S^2 - 144\pi\gamma Q S \mu + 768\gamma S^2 \mu}.$$

The solutions of the corresponding static equations are:

$$W_1 = \frac{4\mu H^2 + 9\gamma}{9\pi^4} - \frac{2(936\mu\gamma + 243\pi^8 + 416H^2\mu^2)}{1521\pi^4\mu} + \frac{2\sqrt{\frac{270H^2\mu^2}{2197} + \frac{432\gamma\mu}{2197} + \frac{729\pi^8}{28561}}}{\mu}, \tag{41}$$

$$W_2 = -\frac{936\mu\gamma + 243\pi^8 + 416H^2\mu^2}{3042\pi^5\mu} + \frac{\sqrt{\frac{270H^2\mu^2}{2197} + \frac{432\gamma\mu}{2197} + \frac{729\pi^8}{28561}}}{2\pi\mu}. \tag{42}$$

4. Numerical examples and discussion

In this section, numerical examples are presented. The test elastic plate and fluid flow have the following characteristics: plate mass density $\rho_s = 7850 \text{ kg/m}^3$, thickness $h = 1 \times 10^{-3} \text{ m}$, length $H = 1 \text{ m}$, Young's modulus $E = 200 \times 10^9 \text{ N/m}^2$, Poisson's ratio $\nu = 0.3$, flow velocity $V_\infty = 0.06 \text{ m/s}$, mass density $\rho_\infty = 1000 \text{ kg/m}^3$, pressure $p_\infty = 1 \times 10^5 \text{ Pa}$. The obtained time histories of the deflection and the vibration velocity are shown in Fig. 3 and Fig. 4, respectively. These figures show that the modal shapes of the different frequencies of the vibration plate are different.

The corresponding statics results are shown in Fig. 5-Fig. 10.

Fig. 5 shows the deformation w by varying the length of plate. The deformation w is the maximum value near the middle of the plate, closer to $y = 0$. And w is zero at $y = 0, H$, respectively.

In Fig. 6, the pressures of the plate surface are given for different length of plate. To examine the effect of deformation, we compared the pressure considering the effect of deformation and without the effect (Fig. 7). It shows the pressures considering the effect of deformation are very close to those without the effect of deformation. Thus the effect of deformation can be ignored for the problem of minor deformation.

We define the pressure coefficient $C_p = 2(p - p_\infty)/\rho_\infty V_\infty^2$. Fig. 8 shows the positive pressure

coefficient changes slightly from $y = 0$. The pressure coefficient is negative near $y = H$ and the value changes sharply.

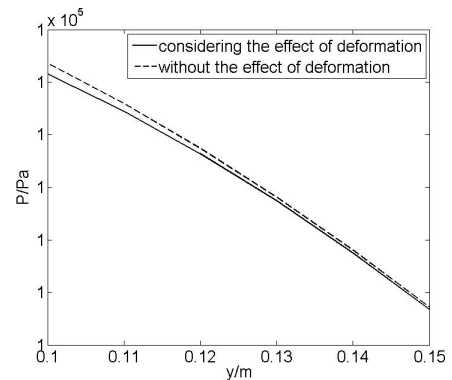
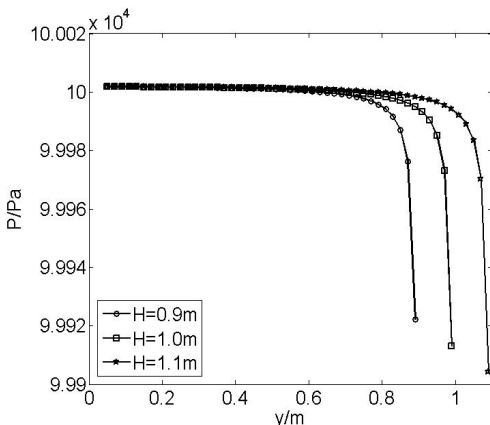
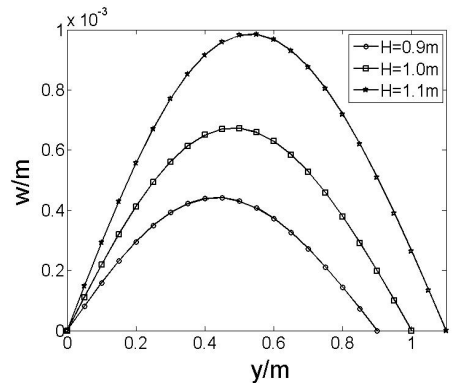
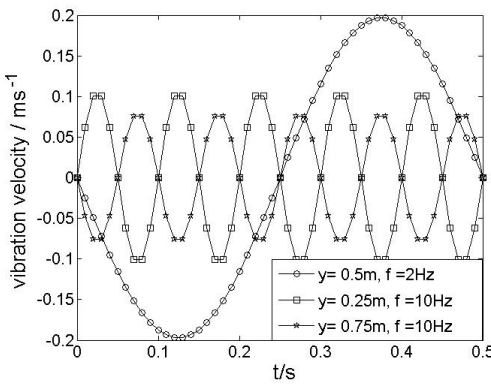
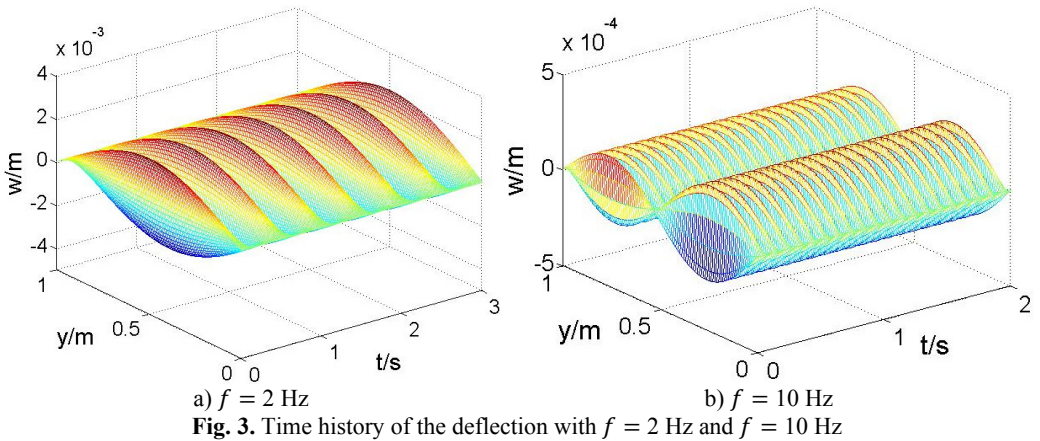


Fig. 9 and Fig. 10 illustrate the fluid velocity from united Lagrangian-Eulerian method. It is seen that a stagnation point where $V = 0$ exists the point $y = 0$ on the front side of the box plate. Bernoulli's equation predicts a maximum pressure at stagnation point because the velocity is zero

at such points. A maximum velocity, and thus a minimum pressure, would exist near the plate tips.

An example of finite element method (FEM) is presented to illustrate the united Lagrangian-Eulerian method for FSI problems discussed in the present paper. The FEM model is depicted in Fig. 11. On the inflow boundary (the bottom) the velocities are prescribed $V_x = 0.06$ m/s and $V_y = 0$, the displacements are prescribed zero. On the outflow boundary (the top) the pressure is zero. The fluid displacement U_y (for y axes) and velocity V_y of flow are zero on the left and the right boundaries. The domain has the dimensions 2 m×2 m. The model consists of 60802 nodes and 60000 elements: fluid 141 elements for the fluid and plane 42 elements for the structure. The time step is 0.1 s.

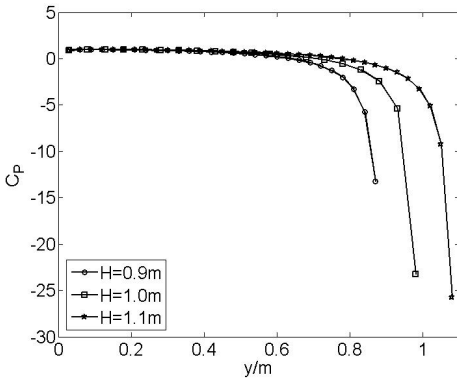


Fig. 8. Pressure coefficient of plate surface for $H = 0.9$ m, 1.0 m and 1.1 m

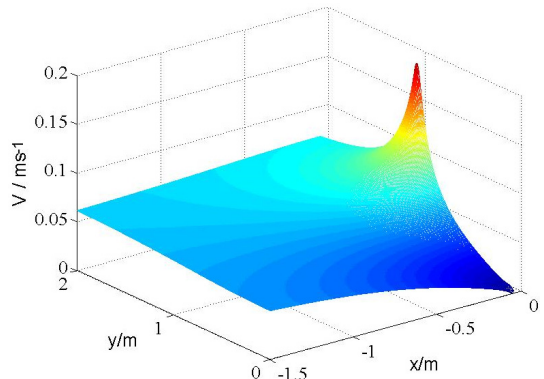


Fig. 9. Fluid velocity with $V_\infty = 0.06$ m/s and $H = 1$ m

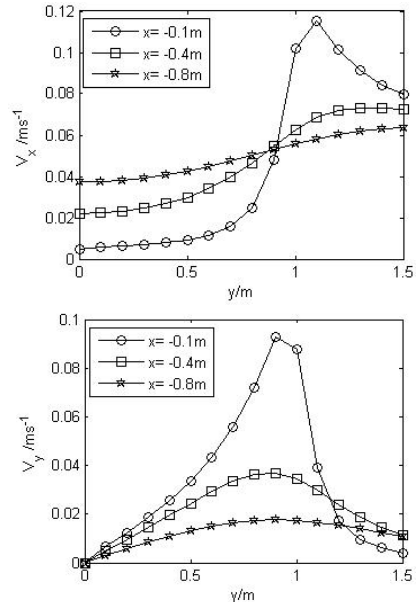
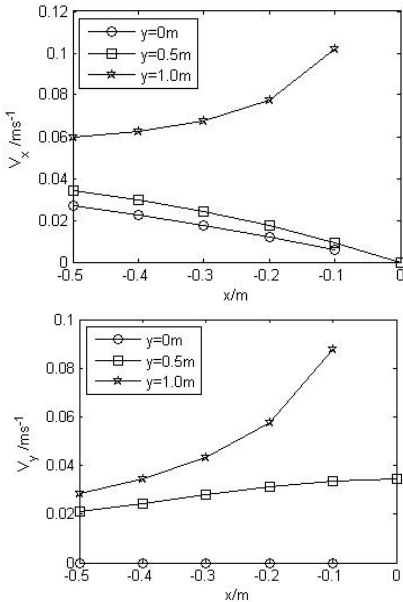


Fig. 10. $V_x - x$, $V_x - y$, $V_y - x$ and $V_y - y$ curves when $V_\infty = 0.06$ m/s and $H = 1$ m at various values of x or y

Fig. 12 and Fig. 13 present the deformation of the plate and the velocity vector of the fluid, which are obtained from FEM. It is seen that FEM solutions are consistent with theoretical results.

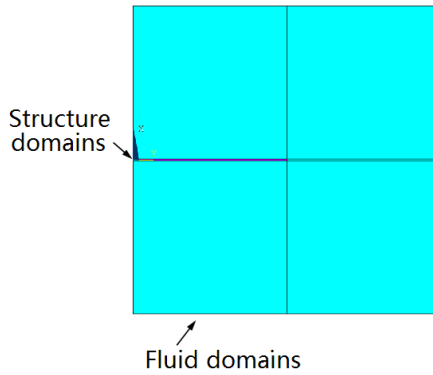


Fig. 11. FEM model of fluid flow around an elastic plate

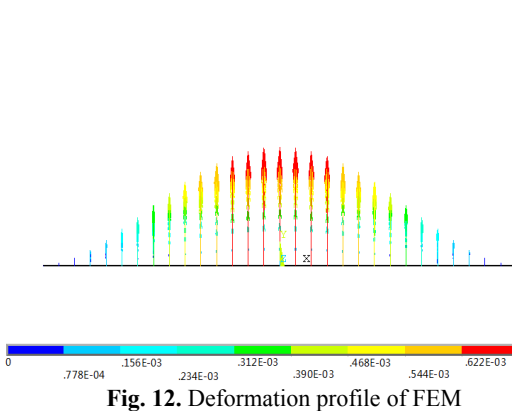


Fig. 12. Deformation profile of FEM

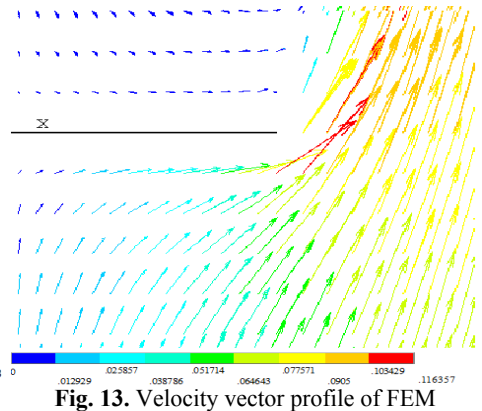


Fig. 13. Velocity vector profile of FEM

5. Conclusions

Flow around an elastic box plate provides an example in this study. To united Lagrangian-Eulerian method, the plate and fluid state equations can be written in Lagrangian and Eulerian reference frames, respectively. The coupling between the fluid and plate domains is kinematic and dynamic conditions at the surface. The theoretical deformation, pressure and velocity of the problem of flow around an elastic box plate have been derived. Numerical results reveal the streamlines with very high velocities and low pressures near the plate tips. It is shown that the united Lagrangian-Eulerian method is an effectively method for the problem of elastic structure acted by ideal fluid flow.

Acknowledgements

This work was supported by National Natural Science Foundation of China (No. 11102181) and by Natural Science Foundation of Hebei Province (No. A2012203117).

References

- [1] Nayer G. D., Kalmbach A., Breuer M., Sicklinger S., Wuchner R. Flow past a cylinder with a flexible splitter plate: A complementary experimental–numerical investigation and a new FSI test case (FSI-PfS-1a). *Computers and Fluids*, Vol. 99, 2014, p. 18-43.
- [2] Yakubov S., Cankurt B., Abdel-Maksoud M., Rung T. Hybrid MPI/OpenMP parallelization of an Euler-Lagrange approach to cavitation modeling. *Computers and Fluids*, Vol. 80, 2013, p. 365-371.

- [3] **Flores F., Garreaud R., Muñoz R. C.** CFD simulations of turbulent buoyant atmospheric flows over complex geometry: Solver development in Open FOAM. *Computers and Fluids*, Vol. 82, 2013, p. 1-13.
- [4] **Chen S. S.** A review of flow-induced vibration of two circular cylinders in cross-flow. *ASME Journal of Pressure Vessel Technology*, Vol. 108, 1986, p. 382-393.
- [5] **Zdravkovich M. M.** Review of interference-induced oscillations in flow past two parallel circular cylinders in various arrangements. *Journal of Wind Engineering and Industrial Aerodynamics*, Vol. 28, 1988, p. 183-200.
- [6] **Chen W. Q., Ren A. L., Deng J.** Numerical simulation of flow-induced vibration on two circular cylinders in a cross-flow; Part I: transverse y-motion. *Acta Aerodynamica Sinica*, Vol. 23, 2005, p. 442-448, (in Chinese).
- [7] **Lee T. R., Chang Y. S., Choi J. B., Kim D. W., Liu W. K., Kim Y. J.** Immersed finite element method for rigid body motions in the incompressible Navier-Stokes flow. *Computer Methods in Applied Mechanics and Engineering*, Vol. 197, 2008, p. 2305-2316.
- [8] **Kovalenko A. D., Grigorenko I. M., Iljin L. A.** *Theory of Conical Thin Shell*. Kyiv, Ukraine Academy of Sciences Press, 1963, (in Russian).
- [9] **Iljgamov M. A.** *The Introduction to Nonlinear Hydroelasticity*. Moscow, Nauka, 1991, (in Russian).
- [10] **Dong Z. N., Zhang Z. X.** *Nonviscous Fluid Mechanics*. Beijing, Tsinghua University Press, 2003, (in Chinese).



Ya-juan Hao received Ph.D. degree in Department of Civil Engineering and Mechanics from Yanshan University, Qinhuangdao, China, in 2010. Now she works at Yanshan University. Her current research interests include fluid-structure interaction and dynamics.



Ming-ming Gong is a current Master student of College of Science, Yanshan University, Qinhuangdao, China. Her current research interest is fluid-structure interaction.



Ai-min Yang works at College of Science, Hebei United University, Tangshan, China. His current research interests include control, dynamics and local fractional derivative.