

1 *Evaluation of the efficiency of an experimental biocover to reduce BTEX*
2 *emissions from landfill biogas*

3

4

5 *Abderrahim Lakhout^{1,2}, Waldir N.Schirmer³, Terry R. Johnson⁴, Hubert Cabana¹ and*
6 *Alexandre R.Cabral^{2,*}*

7 ¹*Environmental Engineering Laboratory, Department of Civil Engineering, Université de*
8 *Sherbrooke, Sherbrooke, Quebec, Canada.*

9 ²*Geoenvironmental Group, Department of Civil Engineering, Université de Sherbrooke,*
10 *Sherbrooke, Quebec, Canada.*

11 ³*Department Environmental Engineering, Universidade Estadual do Centro-oeste,*
12 *Paraná, Brazil.*

13 ⁴*Groundwater Protection Program, Waste Management Inc., Suite 202J, 3701 Shoreline*
14 *Drive, Wayzata MN 55391, USA.*

15

16

17

18 ***Corresponding Author:**

19 Alexandre R. Cabral, ing.,Ph.D

20 Department of Civil Engineering

21 Université de Sherbrooke

22 2500, boul. de l'Université Sherbrooke (Québec), Canada, J1K 2R1

23 Tel : 819-821-7906, Fax : 819 821-7974

24 E-mail : Alexandre.Cabral@USherbrooke.ca

Lakhout, A., Schirmer, W.N., Johnson, T.R., Cabana, H. and Cabral, A.R. (2014). Evaluation of the efficiency of an experimental biocover to reduce BTEX emissions from landfill biogas. *Chemosphere*, 97, 98-101.

25 **Abstract:**

26 Landfill emissions include volatile organic compounds (VOCs) and, particularly,
27 benzene, toluene, ethyl-benzene and xylene isomers (collectively called BTEX). The
28 latter are the most common VOCs found in landfill biogas. BTEX affect air quality and
29 may be harmful to human health. In conjunction with a study aiming to evaluate the
30 efficiency of passive methane oxidizing biocovers, a complementary project was
31 developed with the specific goal of evaluating the reduction in VOC emissions due to the
32 installation of a biocover. One of the biocovers constructed at the Saint-Nicéphore
33 (Quebec, Canada) landfill site was instrumented for this purpose. The total BTEX
34 concentration in the raw biogas ranged from 28.7 to 65.4 ppmv, and the measured
35 concentration of BTEX in biogas emitted through the biocover ranged from below the
36 limit of detection (BLD) to 2.1 ppmv. The other volatile organic compounds (OVOC)
37 concentration varied from 18.8 to 40.4 ppmv and from 0.8 to 1.2 ppmv in the raw biogas
38 and in the emitted biogas, respectively. The results obtained showed that the biocover
39 effectiveness ranged from 67 to 100% and from 96 to 97% for BTEX and OVOC,
40 respectively.

41

42

43 **Key words:** biogas, biocover efficiency, landfill, volatile organic compounds

44 **1. Introduction**

45 Landfill biogas (LFG) is produced under anaerobic conditions by the biodegradation
46 of the waste materials (Chiriac et al., 2007). The composition of LFG varies significantly
47 both spatially and temporally but generally includes 40 to 45 vol% CO₂, 55 to 65 vol%
48 CH₄, and minor quantities of organic alcohols, aromatic hydrocarbons, halogenated
49 compounds, sulfur compounds, etc. LFG typically includes numerous volatile organic
50 compounds (VOCs) (Durmusoglu et al., 2010; Rasi et al., 2011), which are formed in
51 landfills as intermediary or final products of microbial or abiotic degradation processes
52 (Chiriac et al., 2007; Rasi et al., 2011).

53 Common VOCs found in LFG are benzene, toluene, ethyl-benzene and xylene
54 isomers (Durmusoglu et al., 2010), commonly referred as BTEX. The BTEX compounds
55 form an important group of VOCs because of their deleterious effect on the tropospheric
56 chemistry and due to their neurotoxic, carcinogenic and teratogenic properties (Allen et
57 al., 1997; Durmusoglu et al., 2010). The VOC concentrations in LFG range from 0.2 to
58 4500 mg m⁻³ and their concentration range depends on the age, quantity, quality and
59 origin of the waste - which can vary from one landfill cell to another, as well as on the
60 climatic conditions prevailing in the area where the landfill is installed (Durmusoglu et
61 al., 2010).

62 One promising biotechnology to attenuate landfill surface emissions is to install a
63 biocover over the site (Hrad et al., 2012). Although a significant body of literature exists
64 about the reduction of methane emissions from landfills with such technology (Scheutz et

65 al., 2009), few studies (e.g. Scheutz et al., 2008; Durmusoglu et al., 2010) have focused
66 on VOC removal by biocovers.

67 **2. Materials and Methods**

68 **2.1. Description of the Experimental Passive Methane Oxidizing Biocovers**

69 The experimental biocover (Fig. 1) was constructed in 2006 within an existing final
70 cover of the Saint-Nicéphore (Quebec, Canada) landfill in an area where the waste mass
71 was approximately 5 yr old. This biocover is 2.75 m wide, 9.75 m long and 1.2 m deep
72 and is composed of the following layers, from bottom up: i) a 0.3 m layer of 12.7 mm
73 clean gravel, whose role is to distribute the biogas as uniformly as possible; ii) a 0.1 m
74 transitional layer of 6.4 mm gravel; and iii) a 0.8 m substrate layer. The substrate
75 consisted of a mixture of five volumes of compost (before sieving through a 12 mm
76 industrial sieve) and one volume of coarse sand. The biocover was fed to the gravel layer
77 from a dedicated biogas well at a controlled flow rate. The biogas loading during the
78 monitoring campaign was approximately 7 L min⁻¹.

79 **2.2. Biogas sampling**

80 Ten sampling campaigns took place from August 14, 2012 through September 10,
81 2012. For each sampling campaign, a 10 L sample of raw biogas was collected from a
82 biogas collecting well into Tedlar bags (Fig. 2a). In order to collect the emitted biogas, a
83 260 L rectangular steel flux chamber was used (Fig. 2c). The flux chamber is 1.8 m (L),
84 1.2 m (W) with a height of 0.12 m. The chamber was mounted on a metal frame that was
85 inserted to a depth of 0.1 m into the biocover (Fig. 2b). A peristaltic pump was used to
86 collect 10 L samples from the flux chamber into the Tedlar bags. The peristaltic pump

87 flux rate was adjusted to a value equal to the methane surface flux, which was measured
88 as part of the activities of another on-going project.

89 **2.3. Analytical equipment**

90 A solid-phase micro-extraction (SPME) fibre (Carboxen/PDMS, 85 μm , Supelco,
91 Bellefonte, PA, USA) was used to extract and concentrate VOCs from the biogas
92 collected at Saint-Nicéphore landfill site. The SPME method has been frequently
93 employed to identify VOCs from various sources (Davoli et al., 2003; Kleeberg et al.,
94 2005; Capelli et al., 2012).

95 For the identification and the quantification of VOCs, a GC-MS (G1800A, Hewlett-
96 Packard, Agilent Technologies, Mississauga, ON, Canada) equipped with an electron
97 ionization detector and an HP-5 MS fused-silica column (30 m X 0.25 mm id., 0.25 mm
98 film thickness, Hewlett-Packard, Agilent Technologies, Mississauga, ON, Canada) was
99 used. The analyses were conducted in full-scan mode over an m/z range of 50 to 450 amu.
100 Calibration curves were prepared from 5 concentrations for each BTEX compound, each
101 time using triplicates. The detection limit was (in ppbv): 1.8, 38.1, 4.1 and 24.5 for
102 benzene, toluene, ethyl-benzene and xylene, respectively. The total BTEX and the other
103 volatile organic compound (OVOC) concentrations were expressed in terms of “toluene-
104 equivalent” (Chiriac et al, 2011). The performances of the biocover were evaluated in
105 terms of BTEX and OVOC removal efficiency (RE, %) and its associated elimination
106 capacity (EC, $\text{g m}^{-3} \text{ h}^{-1}$).

107 **3. Results and discussions**

108 The BTEX concentrations in the raw biogas ranged from below the limit of detection
109 (BLD) to 21.9 ppmv (Table 1). Xylene exhibits the highest value, followed by toluene,
110 and ethylbenzene. In the emitted biogas, the BTEX concentration is in the range of BLD
111 to 1 ppmv (Table 1) and the highest value (1 ppmv) was obtained for toluene. Xylene and
112 ethylbenzene concentrations varied within a narrow range of concentrations (0.5 to 0.7
113 ppmv). Benzene was not detected in either raw biogas or emitted biogas. In addition to
114 BTEX compounds, OVOCs were quantified in the raw and in the emitted biogas. A
115 summary of the OVOC concentrations is presented in Table 1. Over the sampling period,
116 the OVOC concentrations ranged from 18.8 to 40.4 ppmv in the raw biogas, and from 0.8
117 to 1.2 ppmv in the emitted biogas. The total BTEX concentration ranged from 28.7 to
118 65.4 ppmv in the raw biogas, and from BLD to 2.1 ppmv in the emitted biogas.

119 Results of the RE to reduce VOC emissions are given in Table 2. The RE in reducing
120 biogas emissions ranged from 67 to nearly 100% for BTEX, and from 96 to 97% for
121 OVOCs. The associated EC ranged from 0.5 to 0.9, from 0.1 to 0.5 and from 0.7 to 1.2
122 $\text{mg m}^{-3} \text{ h}^{-1}$ for toluene, ethylbenzene and xylene, respectively. For OVOC, EC was in the
123 range of 0.9 to 1.9 $\text{mg m}^{-3} \text{ h}^{-1}$.

124 The high rates of RE to reduce VOC emissions obtained can be influenced by a
125 number of factors such as: i) the moisture and the temperature in the biocover, ii) the soil
126 pH (Lu et al., 2002), and iii) the organic nutrients available in the biocover soil (Lu et al.,
127 2002). The organic matter content indicates the presence of nutrients for bacterial growth
128 (e.g. Ait-Benichou et al., 2009). In our biocover, organic matter content equal to 20%
129 $\text{go.m/g}_{\text{dry soil}}$. It was reported that a biofilter composed of natural packing materials like

130 compost demonstrated better performance in VOC removal compared to soil amendment
131 (Cho et al., 2009).

132 During the sampling period, the atmospheric temperature at the Saint-Nicéphore
133 landfill site varied from 13 to 28 °C. Over the same period, the soil temperature at 10 cm
134 in the biocover ranged from 30 to 35 °C. According to Cho et al. (2009) the suitable
135 temperature to remove BTEX in biofilters ranged from 23 to 33 °C.

136 The BTEX biodegradation reaction is inhibited in acidic environments (Hunt et al.,
137 1998). According to Lu et al (2002), biofilter efficiency to remove BTEX is greater than
138 80% when pH was in the range of 7.5 to 8. In this study, the pH value of the biocover
139 was equal to 7.2 ± 0.1 .

140 Over the sampling period, the degree of water saturation (S_r) of the biocover was
141 measured at a depth of 10 cm and it was under 80%. These values are still lower than the
142 value beyond which the air within the pores of the substrate become occluded (i.e. $S_r \sim$
143 85%) (Nagaraj et al., 2006). According to He et al. (He et al., 2008) and to Ait-Benichou
144 et al. (Ait-Benichou et al., 2009), the high values of the S_r of the biocover can be
145 attributed to the water-retention capacity of the organic matter rich substrate (compost).
146 When the value of S_r is below 13%, methanotrophic bacteria become inactive (Humer
147 and Lechner, 1999).

148 **4. Conclusions**

149 Our results showed that the biocover installed on the landfill of Saint-Nicéphore is
150 effective reducing VOC emissions into atmosphere. It can be concluded that the biocover

151 represents an interesting biotechnology to reduce VOC emissions from landfill sites into
152 the atmosphere. To facilitate a better understanding of biocover VOC removal efficiency
153 from landfill sites, it would be of interest expanding our knowledge regarding: i) the
154 methanotroph count at the vertical profiling of biocover; ii) estimation of RE at different
155 vertical levels of the cover soil; iii) the vegetation effect on RE to reduce VOC emissions
156 from landfill; and iv) the relationship between methane oxidation and VOC removal by
157 the biocover.

158 **Acknowledgments**

159 This study was supported by a Cooperative Research and Development Grant from
160 NSERC (Canada) and Waste Management (grant # CRD 379885-08). The invaluable
161 help of Jean-Guy Lemelin and Serge Bérubé for their technical support must be
162 acknowledged.

163

References

- 165 Ait-Benichou, S., Jugnia, L.-B., Greer, C.W., Cabral, A.R., 2009. Methanotrophs and
166 methanotrophic activity in engineered landfill biocovers. *Waste Manag.* 29,
167 2509-2517.
- 168 Allen, M.R., Braithwaite, A., Hills, C.C., 1997. Trace organic compounds in landfill gas
169 at seven U.K. waste disposal sites. *J. Environ. Sci. Technol.* 31, 1054-1061.
- 170 Capelli, L., Sironi, S., Del Rosso, R., Bianchi, G., Davoli, E., 2012. Evaluating the
171 dispersion of toxic odour emissions from complex sources. *J. Environ. Sci.*
172 *Health. Part A Toxic/Hazard. Subst. Environ. Eng.* 47, 1113-1122.
- 173 Chiriac, R., Carre, J., Perrodin, Y., Fine, L., Letoffe, J.-M., 2007. Characterisation of
174 VOCs emitted by open cells receiving municipal solid waste. *J. Hazard.*
175 *Mater.* 149, 249-263.
- 176 Cho, E., Galera, M.M., Lorenzana, A., Chung, W.-J., 2009. Ethylbenzene, o-xylene, and
177 BTEX removal by *Sphingomonas* sp. D3K1 in rock wool-compost
178 biofilters. *Environ. Eng. Sci.* 26, 45-52.
- 179 Davoli, E., Gangai, M.L., Morselli, L., Tonelli, D., 2003. Characterisation of odorants
180 emissions from landfills by SPME and GC/MS. *Chemosphere* 51, 357-368.
- 181 Durmusoglu, E., Taspinar, F., Karademir, A., 2010. Health risk assessment of BTEX
182 emissions in the landfill environment. *J. Hazard. Mater.* 176, 870-877.
- 183 He, R., Ruan, A., Jiang, C., Shen, D.-S., 2008. Responses of oxidation rate and microbial
184 communities to methane in simulated landfill cover soil microcosms.
185 *Bioresour. Technol.* 99, 7192-7199.

186 Humer, M., Lechner, P.P., 1999. Alternative approach to the elimination of greenhouse
187 gases from old landfills. *Waste Manag. Res.* 17, 443-452.

188 Hunt, M.J., Borden, R.C., Barlaz, M.A., 1998. Determining anaerobic BTEX decay rates
189 in a contaminated aquifer. *J. Hydrol. Eng.* 3, 285-293.

190 Kleeberg, K.K., Liu, Y., Jans, M., Schlegelmilch, M., Streese, J., Stegmann, R., 2005.
191 Development of a simple and sensitive method for the characterization of
192 odorous waste gas emissions by means of solid-phase microextraction
193 (SPME) and GC-MS/olfactometry. *Waste Manag.* 25, 872-879.

194 Lu, C., Lin, M.-R., Chu, C., 2002. Effects of pH, moisture, and flow pattern on trickle-
195 bed air biofilter performance for BTEX removal. *Adv. Environ. Res.* 6, 99-
196 106.

197 Nagaraj, S., T., Lutenecker, J., A., Pandian, S., N., Manoj, M., 2006. Rapid estimation of
198 compaction parameters for field control. *Geotech. Test. J.* 29, 497-506.

199 Rasi, S., Lantela, J., Rintala, J., 2011. Trace compounds affecting biogas energy
200 utilisation - A review. *Energ. Convers. Manage.* 52, 3369-3375.

201 Scheutz, C., Bogner, J., Chanton, J.P., Blake, D., Morcet, M., Aran, C., Kjeldsen, P.,
202 2008. Atmospheric emissions and attenuation of non-methane organic
203 compounds in cover soils at a French landfill. *Waste Manag.* 28, 1892-1908.

204 Scheutz, C., Kjeldsen, P., Bogner, J.E., De Visscher, A., Gebert, J., Hilger, H.A., Huber-
205 Humer, M., Spokas, K., 2009. Microbial methane oxidation processes and
206 technologies for mitigation of landfill gas emissions. *Waste Manag. Res.* 27,
207 409-455.

208

Figure captions

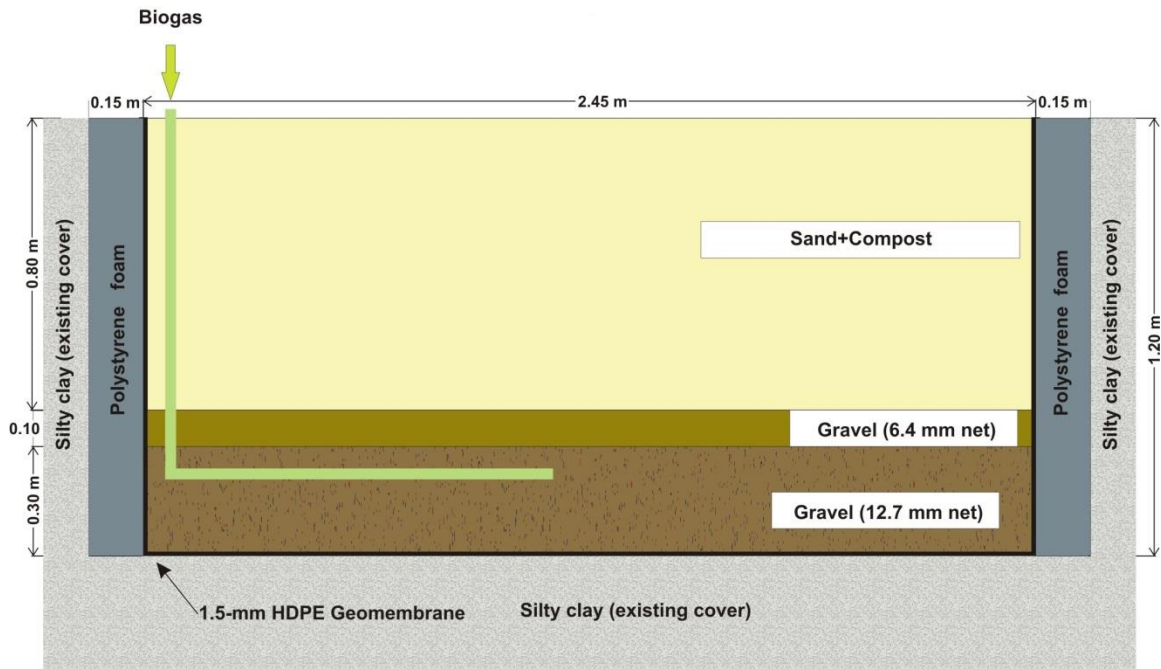


Fig. 1 Scheme of biocover installed in Saint-Nicéphore site



Fig. 2 Equipment to collect raw and emitted biogas a) Tedlar bags, b) metal frame, and c) flux chamber

Table captions

Table1 VOC concentrations range in LFG during the sampling period

Compound	Raw biogas (ppmv)	Emitted biogas(ppmv)
Benzene	BLD ¹	BLD
Toluene	11.1 to 19.2	BLD to 1
Ethylbenzene	1.5 to 9.5	0.5 to 0.6
Xylene	13.3 to 21.9	0.6 to 0.7
C _{TBTEX} ²	28.7 to 65.4	BLD to 2.1
C _{OVOCs} ³	18.8 to 40.4	0.8 to 1.2

¹= Below the limit of detection; ²= Total BTEX concentration; ³= Other volatile organic compounds concentrations; BTEX excluded.

Table 2 Efficiency and elimination capacity of the biocover

Compound	Biocover	
	EC*	Efficiency
	(mg m ⁻³ h ⁻¹)	(%)
Benzene	N.A.	N.A.
Toluene	0.5 to 0.9	95 to 100
Ethyl-benzene	~0.1 to 0.5	67 to 94
Xylene	0.7 to 1.2	95 to 97
OVOCs**	0.9 to 1.9	96 to 97

* = Elimination capacity; N. A. = Not applicable; ** = Other volatile organic compounds (BTEX excluded)

