

An Exertion to Alleviate Stitch Defects During Garments Production

Mst. Farzana Sultana, Lecturer

Tahmina Akhter, Lecturer

Jaglal Hoque Mridha, Lecturer

Department of Textile Engineering, Northern University Bangladesh

Doi:10.19044/esj.2019.v15n36p489 [URL:http://dx.doi.org/10.19044/esj.2019.v15n36p489](http://dx.doi.org/10.19044/esj.2019.v15n36p489)

Abstract

In garments industry sewing is the most critical phase during an apparel production. Different types of sewing and stitching defects are occurred in this phase due to various problems. As today's world each customer is expecting a very high quality garments with product variety, it has become a very challenging task for garments quality management. Here all the data were collected from Gardenia Wears Limited situated at Barmi- Sreepur, Gazipur, Dhaka and data were analyzed for reducing Defects per Hundred Unit (DHU%) and also top 10 stitch defects were identified and analyzed later. Finally the work shows reduction of DHU% from 5.23% to 3.48% and also reduce the top ten stitch defects with comparison to before trial and after trial data of ten days and it is proved that an industry can achieve higher production capability & profitability with improved quality product and also saving cost due to reducing DHU%.

Keyword: Sewing defects, Stitch defects, DHU%

1. Introduction

In garments industry after completion of a shipment some garments are found to be rejected by the manufacturers. As they think that garments are soft goods and it will be non-repairable defects if low quality raw materials are used or faulty processes are operated or for employee casual behavior. So some check points should be kept in factory to control such issues. As a lot of garments are rejected after shipments, there is no over-night solution that can minimize the rejection percentage. Most of the organizations identified these garments rejected as these garments can't be used by any means. Reworking on garments is common but it hampers company production rate. If any industry decides to work on rejected garment pieces before delivery, it can't be possible because of not only hampering in smooth production rate but also

focusing on rejected poor quality products that leaves a bad impact on factory economy as a whole (Juran J.M et al, 2008; Montgomery D.C., 2009; Dean J.W et al, 1994; Glock R.E et al, 2009). Every order is unique. But through these kind of rework it can be shown the ways to handling such problems & bring down the rejection rate to minimum. For quality and productivity improvement rework is a must. Garments defects is a vital cause that can affect both manufacturer and purchaser if it can be possible to control defects rate during various activities in sewing departments through a proper supervision and strict operation condition (Pritesh Kankariya et al, 2009; Juran J.M et al, 2008). Through this study it is possible to know the way of handling the issues related to garments defects, to bring down the rejection rate of garments to minimum by reducing DHU%, to produce a large no. of good quality products for minimization of DHU%, to save cost & to control defects by taking various actions in sewing department. Due to improper material handling during stitching, using defective feed mechanism, improper tension on thread, using blunt needle point & bent or damaged needle etc problems of different types of sewing & stitching defects are found during production such as skipped stitch, staggered stitch, broken stitch, uneven stitch, seam puckering, raw edge, variable stitch density etc. To rectify & minimize defects at first it is important to know the defects mentioned below:

- ❖ **Skipped stitch/Drop stitch/Broken stitch:** In a successive stitches if one or more stitches fail in connecting the upper thread with the lower thread then it is called skipped stitch. Because of having m/c problems during stitching sometimes such type of defects may happen but rework is possible for removing defects in order to improve product quality (Pranjali Chandurkar et al, 2017).
- ❖ **Raw edge/frayed seam:** If the tail end remains with the seam then it is called frayed seam which will cause a bad appearance. That's why it is considered as defective.
- ❖ **Uneven stitch:** When an operator stitches, if it becomes loose or wavy instead of straight, it may cause uneven stitch. It is occurred for variation of fabric properties, improper function during wear of garments (Dean J.W et al, 1994).
- ❖ **Seam puckering:** During stitching due to unequal stretch on the plies of fabric, fabric dimensional stability, extension in sewing thread, sewing thread shrinkage, undesirable & uneven surface or gathering of fabric are seen on garments which is called seam puckering. As it destroys the appearance & function of garments it is considered as defective (Md. Islam M. et al, 2016)..



Broken stitch

open seam

skipped stitch

uneven stitch

2. Material & Method:

2.1 Material

For executing the method following buyer's item were selected for analysis to reduce DHU%.

Buyer: TOTTUS

Fabric type: 100% cotton twill

Style no: V20JHBERPRINT

SAM: 2.39

Suppliers: Mahmud Denim Mills Ltd.

No. of operation: 25

Size: 28, 30, 32, 34, 36, 38

Fabric GSM: 185

Shade: COMBO-1, 2, 3, 4, 5, 6, 7, 8(AOP)

Mixing: 60/40 cotton fabric

2.2 Method:

For experimental work at first needed to select a style that are running on sewing floor for production. 10 days data were collected before trial of minimizing DHU% by noting down the total inspected pieces, total rejected pieces. Then from the data it were also identified the top ten defects that are happening during sewing of the preselected style. After that some corrective actions were taken to analyze whether it was possible to minimize the DHU% or not by changing sewing m/c setting such as resetting tensioner, time synchronization during stitch formation, awareness of operator about the physical properties of fabrics, proper lubrication on thread and machine, proper adjustment on feeding mechanism, using proper needle, needle point & good quality sewing thread, adjustment on sewing thread tension etc. Then after trial again 10 days data taken by collecting the information of total inspected pieces & total rejected pieces. Again the data for top 10 stitching defects noted down after trial. Finally the result between 10 days data of DHU% on before trial with the DHU% of after trial were compared. It is also showed the difference between top 10 stitch defects before trial with the after trial. Below a table is given on the causes & corrective actions taken to reduce defects during production based on different stitch varieties.

Table 2.1: Causes & corrective actions taken during production to reduce defects

Causes of stitch defects	Corrective actions taken
1. Improper time synchronization between needle & hook for loop formation.	1. M/c settings were changed with proper timing between needle and hook.
2. Irregular thread tension due to loose or tight thread.	2. Thread tension were properly adjusted during stitching.
3. Fabric flagging during sewing.	3. Adjusting the pressure of presser foot.
4. Thread balance way was improper.	4. Bobbin thread tension way were properly adjusted.
5. For needle deflection.	5. Increasing needle size & using correct needle point.
6. Defective motion of feed dog.	6. Proper adjustment of feed dog.
7. Using sewing thread without lubrication.	7. Proper lubrication were given on sewing thread.
8. Needle was heated too much.	8. Using needle lubricant.

3. Result & Discussion:

3.1 Experimental Data (10 days DHU% Report before trial):

Table 3.1: Day wise DHU% Report before Trial

Style- V20JHBERPRINT				
Serial No	No. Of Days	Total No. Of Defects	Total Check Points	Total DHU%
1.	Day 1	195	3000	6.50%
2.	Day 2	149	3050	4.88%
3.	Day 3	160	2984	5.36%
4.	Day 4	146	3140	4.64%
5.	Day 5	161	2700	5.96%
6.	Day 6	154	2789	5.52%
7.	Day 7	151	2900	5.20%
8.	Day 8	145	3100	4.67%
9.	Day 9	112	2450	4.57%
10.	Day 10	144	2890	4.98%
		Total defects=1517	Total checked pieces=29003	

Now, Defects per hundred units

$$\frac{\text{Total no. of defects}}{\text{Total no. of inspected pieces}} = \times 100$$

$$\frac{1517}{29003} = \times 100$$

= 5.23%

3.2 Experimental Data (10 days DHU% Report after trial):

Table 3.2: Day wise DHU% report after trial

Style: V20JHBERPRINT				
Serial no	No. of Days	Total no. of Defects	Total Check points	Total DHU%
1.	Days 1	129	2950	4.37%
2.	Days 2	119	2800	4.25%
3.	Days 3	105	2770	3.79%
4.	Days 4	132	3250	4.06%
5.	Days 5	111	3100	3.58%
6.	Days 6	105	3000	3.50%
7.	Days 7	125	2900	4.31%
8.	Days 8	121	3300	3.66%
9.	Days 9	68	3500	1.94%
10.	Days 10	65	3427	1.89%
		Total defects= 1080	Total Checked pieces= 30997	

Now, Defects per hundred units

$$= \frac{\text{Total no. of defects}}{\text{Total no. of inspected pieces}} \times 100$$

$$= \frac{1080}{30997} \times 100$$

$$= 3.48\%$$

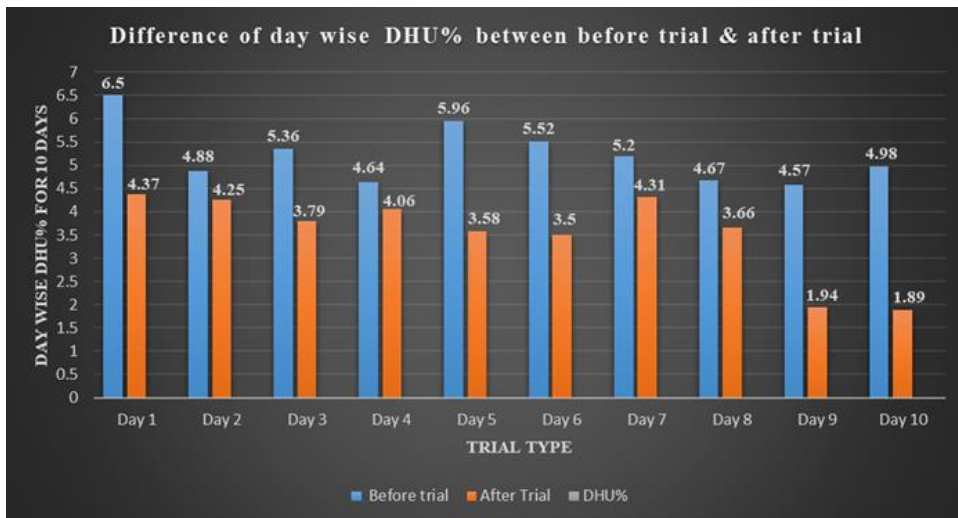


Figure 3.1: Chart on difference of day wise DHU% between 10 days of before trail and 10 days of after trial

The chart shows day wise DHU% report before trial & after trial for 10 days. It also shows that the highest DHU% before trial was 6.5% & lowest 4.57% whereas after trial highest DHU% was 4.37% & lowest 1.89%.

3.3 Experimental data (Day to Day data For Top Ten Stitch Defects for 10 days Before Trail):

Table 4.3: Defects/day For Top 10 Stitch Defects before Trial

Serial no.	Defects/Day	1	2	3	4	5	6	7	8	9	10	Total
1.	Skipped stitch	27	25	20	14	13	12	13	12	12	12	160
2.	Broken stitch	21	17	19	17	19	13	11	7	13	10	147
3.	Puckering	13	15	17	18	15	19	12	9	11	13	142
4.	Uneven stitch	21	9	12	10	10	7	14	15	9	11	118
5.	Measurement	23	21	22	16	22	17	13	10	15	20	179
6.	Bar tack missing	16	15	13	15	14	13	16	16	13	12	143
7.	Short stitch	20	15	16	14	15	14	12	10	10	11	137
8.	Join stitch	23	20	18	19	17	15	15	14	15	14	170
9.	Up & Down	10	12	12	10	13	11	14	12	10	11	115
10.	Others	26	29	27	33	29	24	22	23	22	29	264

3.4 Experimental data (Day to Day data For Top Ten Stitch Defects for 10 days After Trail):

Table 4.4: Defects/day For Top 10 Stitch Defects after Trial

Serial no.	Defects/Day	1	2	3	4	5	6	7	8	9	10	Total
1.	Skipped stitch	11	12	7	5	6	10	7	9	7	3	77
2.	Broken stitch	16	16	15	13	16	16	8	9	9	7	125
3.	Puckering	13	15	12	11	9	11	14	10	4	5	104
4.	Uneven stitch	11	9	12	9	4	9	10	13	10	8	95
5.	Measurement	20	18	14	17	15	17	13	6	6	7	133
6.	Bar tack missing	9	12	3	9	9	7	5	4	7	2	67
7.	Short stitch	10	11	7	6	5	10	7	4	2	4	66
8.	Join stitch	12	12	10	11	6	7	5	9	6	5	83
9.	Up & Down	7	9	8	5	10	8	3	3	5	3	61
10.	Others	21	20	19	16	18	14	17	17	19	14	175


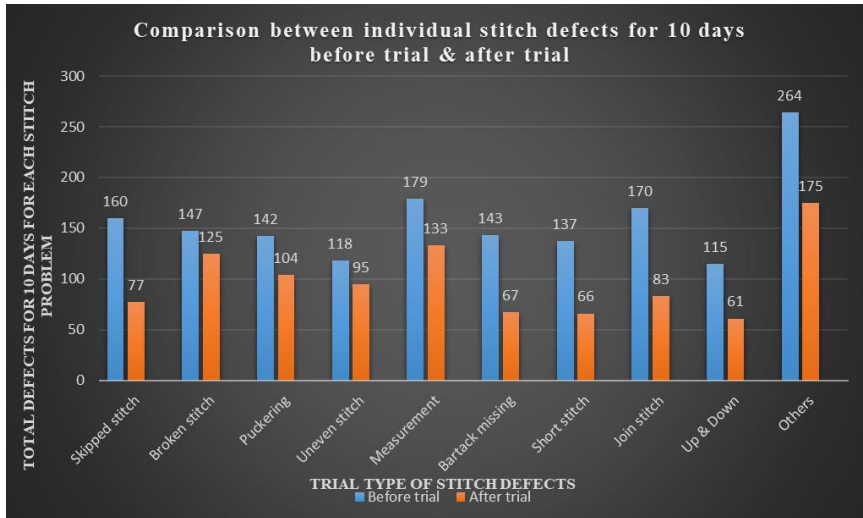


Figure 3.2: Chart on difference of total defects for each stitch defect between before trail data and after trial data

The chart shows the stitch defects in total for 10 days individually before trial & after trail. It presents that each defects minimized individually in comparison with before trail & after trail. The chart shows for stitch defects like skipped stitch, broken stitch, puckering, uneven stitch, measurement, bar tack missing, short stitch, join stitch, up & down, others before trial value were respectively 160, 147, 142, 118, 179, 143, 147, 170, 115, 264 whereas after trial were respectively 77, 125, 104, 95, 133, 67, 66, 83, 61, 175.

Figure 3.3: Chart on difference between total DHU% before trail data and after trial data

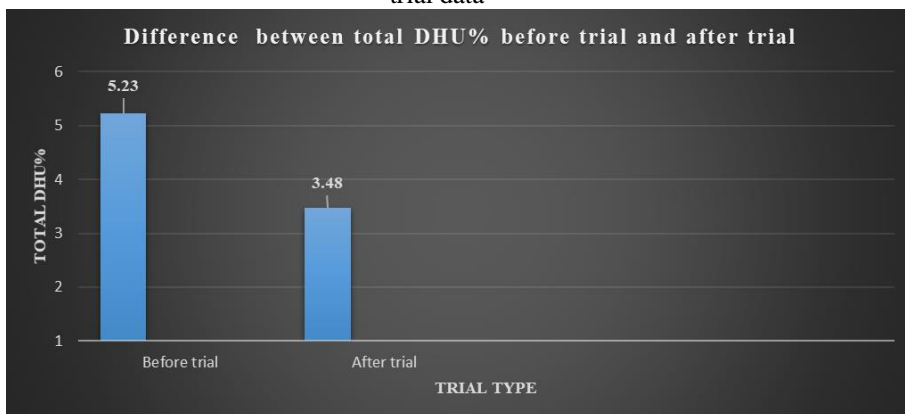

The chart represents the difference between total DHU% for 10 days before trial and after trial. It shows that the total DHU% before trial was 5.23% whereas after trail was 3.48%.

3.5 Experimental Result:

1. Reduction of DHU% like before trial DHU% for 10 days were 5.23% & after trial were 3.48%.
2. Reduction of top ten stitch defects individually such as skipped stitch, broken stitch, puckering, uneven stitch, measurement, bar tack missing, short stitch, join stitch, up & down, others before trial value were respectively 160, 147, 142, 118, 179, 143, 147, 170, 115, 264 whereas after trial value were respectively 77, 125, 104, 95, 133, 67, 66, 83, 61, 175.
3. DHU% decreases from 5.23% to 3.48% that means it decreases 1.75% from before trial value.

Conclusion

It can be concluded that by taking various actions including setting tensioner of m/c, proper lubrication of m/c and threads, time synchronization, skilled operators, consciousness of operators about physical properties of fabric, proper handling of material etc. it is possible to bring down the DHU%. The result shows that the total DHU% for 10 days before trial was 5.23% and after trial total DHU% for 10 days is 3.48% which is less than before trial value. But these results can be even better if corrective actions are taken with consciousness and carefulness.

References:

1. Juran J.M., Gryna F.M., Quality Planning & Analysis: For Enterprise Quality, Edition 2008, Tata McGraw-Hill Publication.
2. Montgomery D.C., Introduction to Statistical Quality Control, Edition 2009, John Wiley and Sons, Inc. Publication.
3. Dean J.W. and Bowen D.E., Management Theory and Total Quality: Improving Research and Practice and Theory Development, the Academy of Management Review, Vol. 19, Issue 3, 1994, 392-418.
4. Glock R.E., Kunz G.I., Apparel Manufacturing: Sewn Product analysis, 4th Edition, Pearson Publication.
5. Pritesh Kankariya, KeshavValase, Performance improvement in Garment industries by reducing defects using six sigma methodologies, International Journal of Scientific Research Engineering & Technology Vol. 6(3), 2017, 228-236.
6. Pranjali Chandurkar, Madhuri Kakde, Chitra Patil, Minimization of Defects in Knitted Fabric, International Journal on Textile Engineering and Processes, Vol. 2(3), 2016, 13-18.
7. Md. Islam M., Khan A.M., Md. Khan M.R., Minimization of Reworks in Quality and Productivity Improvement, The Apparel Industry, International Journal of Engineering and Applied Sciences, Vol. 1(4), 2013, 147-16.