

FILE COPY

Columbia University in the City of New York

LAMONT GEOLOGICAL OBSERVATORY  
PALISADES, NEW YORK

DELINEATION OF SEA FLOOR ROUGHNESS  
IN THE WESTERN NORTH ATLANTIC

by

R. G. Markl, J. I. Ewing and G. M. Bryan

Technical Report No. 2

CU-2-67 NAVSHIPS N-00024-67-C-1186

July 1967



## INTRODUCTION

The increasing importance of having detailed knowledge of sea floor macro- and micro-topography has led to a study of six areas of the North Atlantic Ocean (Fig. 1). Five of these areas are contiguous and concentrated along the western margin, the sixth, a detailed grid study, was made in the eastern Atlantic Ocean.

The usefulness of 12 kc echo sounder data in the prediction of bottom loss has been discussed by Bryan (1964), Bryan and Ewing (1964) and Bryan and Markl (1966). In addition to echo sounder data, seismic reflection profiler records have recently been used extensively because of the excellent resolution of the water-sediment interface now being obtained with that equipment. As in previous work, areas of the sea floor are indicated by A, B, and C designations based principally on bottom roughness and texture (see Fig. 9). A, B, and C types have been defined previously as:

- A Locally and regionally smooth (abyssal plains)
- B Locally smooth but regionally rough
- C Locally and regionally rough (usually areas where basement crops out)

AB and BC symbols imply intermediate degrees of roughness; A+C indicates that both very smooth and very rough topography coexist and that there is not enough information available to separate the two. The A, B, and C designations correspond to low, medium, and high bottom loss. Quantitative loss estimates corresponding to these letter designations are available in the above references. In areas of smooth

bottom, seismic reflection profiles and sediment core samples provide a means of defining the influence of sub-bottom structure and sediment type on bottom loss.

Detailed reports on the individual areas are being prepared by other workers at this Observatory. These reports will provide fundamental information concerning the sediment types and the geologic structure and evolution of the individual areas. The following brief descriptions and maps outlining areas by degree of bottom roughness are initial products of these forthcoming reports.

#### DESCRIPTIONS OF AREAS

Figure 2 includes the northwestern part of the Demerara Abyssal Plain (labelled A) and a very large sediment-filled east-west trough, probably a fracture, just to the north, at about 17°N. The Demerara Abyssal Plain is bounded on the northwest by a ridge (labelled C) which is the southern wall of the trough. Most of the filling of the trough probably occurred during the Pleistocene glacial periods when vigorous turbidity currents, apparently from the Amazon Delta, overflowed the Demerara Abyssal Plain, eroding a large canyon in the process. The canyon (labelled B) enters the trough near its eastern end; the sediments flowing through it have built a smooth plain that slopes evenly to the western end for a distance of about 250 miles.

Cores taken from the floor of the canyon and from the floor of the trough penetrated a few meters of pelagic lutites and bottomed

in sand. The presence of the lutite indicates that a substantial period of time has elapsed since the last turbidite flow. Cores from the Demerara Abyssal Plain typically contain lutite with silt layers and manganese common in the upper portion.

Figure 3 shows an area including the northern tip of the Nares Abyssal Plain and extending toward the southeast. The dominant topographic feature in this area is a long ditch, undoubtedly a fracture, which has been partially filled by sediments overflowing the Nares Plain. The fracture, called the Conrad fracture, has been traced for a distance of about 600 miles into the abyssal hills province (shown as C-type topography). The sediments in this fracture have formed a very smooth, gently sloping surface as did those in the 17° trough. Despite comparable smoothness, the reflectivity of this plain may not be as high as plains nearer continental areas. The seismic profiler data suggest that the turbidites in this area do not have as high a percentage of coarse material. This is undoubtedly a consequence of proximity to the source area. The 17° trough is much nearer its source area, the Amazon Delta, and therefore received an abundance of sand.

Figure 4 includes the Bermuda Rise, a large elevated region surrounded on the north and east by the Sohm Abyssal Plain and on the west by the Hatteras Abyssal Plain. It is flanked on the south by the Nares Abyssal Plain and between the Nares and the southern extension of the Sohm, by an area of abyssal hills.

The Bermuda Rise is divided into two parts; the central and northwestern portion of the rise is represented by a B-type sea floor which is occasionally pierced by peaks of basement. The southern and southeastern portion (shown as BC) is characterized by greater regional roughness which is due primarily to the thinner sediment cover overlying the rough basement topography.

All of the abyssal plains (labelled A) are very smooth and are composed of densely stratified abyssal turbidites - bottom loss in these areas should be quite low. In the southern extension of the Sohm Plain, labelled A+C, the turbidites interfinger with numerous protruding peaks of basement rock. Farther south, and labelled as C-type, is the abyssal hills province, the roughest topographic region in the North American Basin. Unconsolidated sediments are quite thin here, but isolated smooth pockets of ponded sediments do exist locally. To the east the abyssal hills merge with the similarly rough western flank of the Mid-Atlantic Ridge.

Figure 5 shows an area which includes the shallow Blake Plateau, part of which is quite smooth and part roughened by current scour, the Blake-Bahama Outer Ridge and Basin system, and the western margin of the Hatteras Abyssal Plain. This region has been studied in detail by Bryan and Markl (1966) from the standpoint of the microtopography peculiar to it. Areas exhibiting microtopography are indicated as stippled zones. These zones frequently cut across the macrotopographic (A, B, C) boundary lines. Therefore, for example,

in an area indicated as A-type (very smooth and with corresponding expectation of low bottom loss) the presence of microtopography may be expected to increase loss to the equivalent of B or even C-type areas.

Figure 6 is continuous with Figure 5 and shows an area of the continental slope and rise in the region between the Hudson and Hatteras Canyons. A prominent terrace (labelled A) has been constructed in this area by the ponding of turbidites between the continental slope (labelled C) and a ridge of older, acoustically transparent sediments. The surface of the terrace is smooth and appears to be highly reflective, probably similar to the Hatteras and Sohm abyssal plains. The lower continental rise, which lies between the terrace and the plains and is labelled B, is probably widely variable in reflectivity. It is characterized by numerous ridges of acoustically transparent sediment. The crests of some of the ridges form the sea floor, others are buried under turbidites. The majority of the continental rise is shown as AB; it is generally smooth, but due to the regional slope and the presence of minor irregularities does not qualify as a true A-type area.

Figure 7 is a very detailed map of an area in the eastern North Atlantic on the lower flank of the Mid-Atlantic Ridge. This area is typical of much of the ridge flank in that while overall the sea floor is quite rough, areas which are very smooth do exist. The smooth areas are ponded sediments which have slumped off the neighbor-

ing high areas and flowed into the depressions. In some places the small abyssal plains thus formed are almost perfectly level; in others they have been mildly distorted and tilted by recent tectonics. This figure was derived from a detailed grid survey made under precise (satellite) navigational control. It shows that even in such rugged regions as the ridge flanks sizable smooth areas exist where bottom loss could be expected to be quite low.

Figure 8 incorporates the boundaries as detailed in the foregoing figures and graphically portrays the overall distribution of bottom roughness in the western North Atlantic.

#### DISCUSSION

In a qualitative analysis such as this study, it is difficult to maintain a consistent feeling for the classification of roughness by A, B, and C types between diverse areas and especially between areas of vastly different sizes. The normal approach is to appraise the roughness within an area and then subdivide it into the three classes. If the full spectrum of roughness is represented a valid classification will be achieved, if it is not, the A, B, C class lines will be distorted.

The relative degree of detail in which the several areas of study have been delineated is difficult to ascertain or to portray; however, in general it can be visualized as directly related to the scales of the maps. The accuracy is largely dependent on the amount



of ship's track available from the area; however, even in areas having close control, if the topography varies little, few boundary lines will be required, thereby giving the impression that the control in the area may be insufficient. Also, since transitions between zones frequently are extremely gradual in nature the positions of zonal boundary lines are frequently somewhat arbitrary even when close control exists.

Regarding the figures shown in this report, Figures 2 and 3 represent about the same degree of refinement; Figure 4, the largest area by far, is the least detailed; Figures 5 and 6 were studied in minute detail but are, due to the overall smoothness and the gradualness of transitions, impractical to subdivide in greater detail along macrotopographic lines; Figure 7, because of very close control, is extremely detailed; if shown on the scale of Figure 4 it would be lumped as a C area as is the rest of the Mid-Atlantic Ridge at the present state of refinement in that province.

#### ACKNOWLEDGMENTS

This work was supported by the U. S. Navy under Contract N-00024-67-C-1186 with the Naval Ship Systems Command. This publication is for technical information only and does not represent recommendations or conclusions of the sponsoring agency. Reproduction of this document in whole or in part is permitted for any purpose of the United States Government.

The authors have made use of preliminary results of investi-

gations being conducted by C. Windisch, R. Embley, H. Kagami, R. Anderson and F. Shepard.

#### REFERENCES

- Bryan, G. M. Proceedings of Seminar on Reflection of Sound by the Ocean Bottom; USNUSL, May 25, 26 (1964).
- Bryan, G. M and J. Ewing. Proceedings of the 22nd U. S. Navy Symposium on Underwater Acoustics; October 26-28 (1964).
- Bryan, G. M. and R. G. Markl. Microtopography of the Blake-Bahama Region; Tech. Rep. No. 8, CU-8-66- Nobsr 85077 (1966).

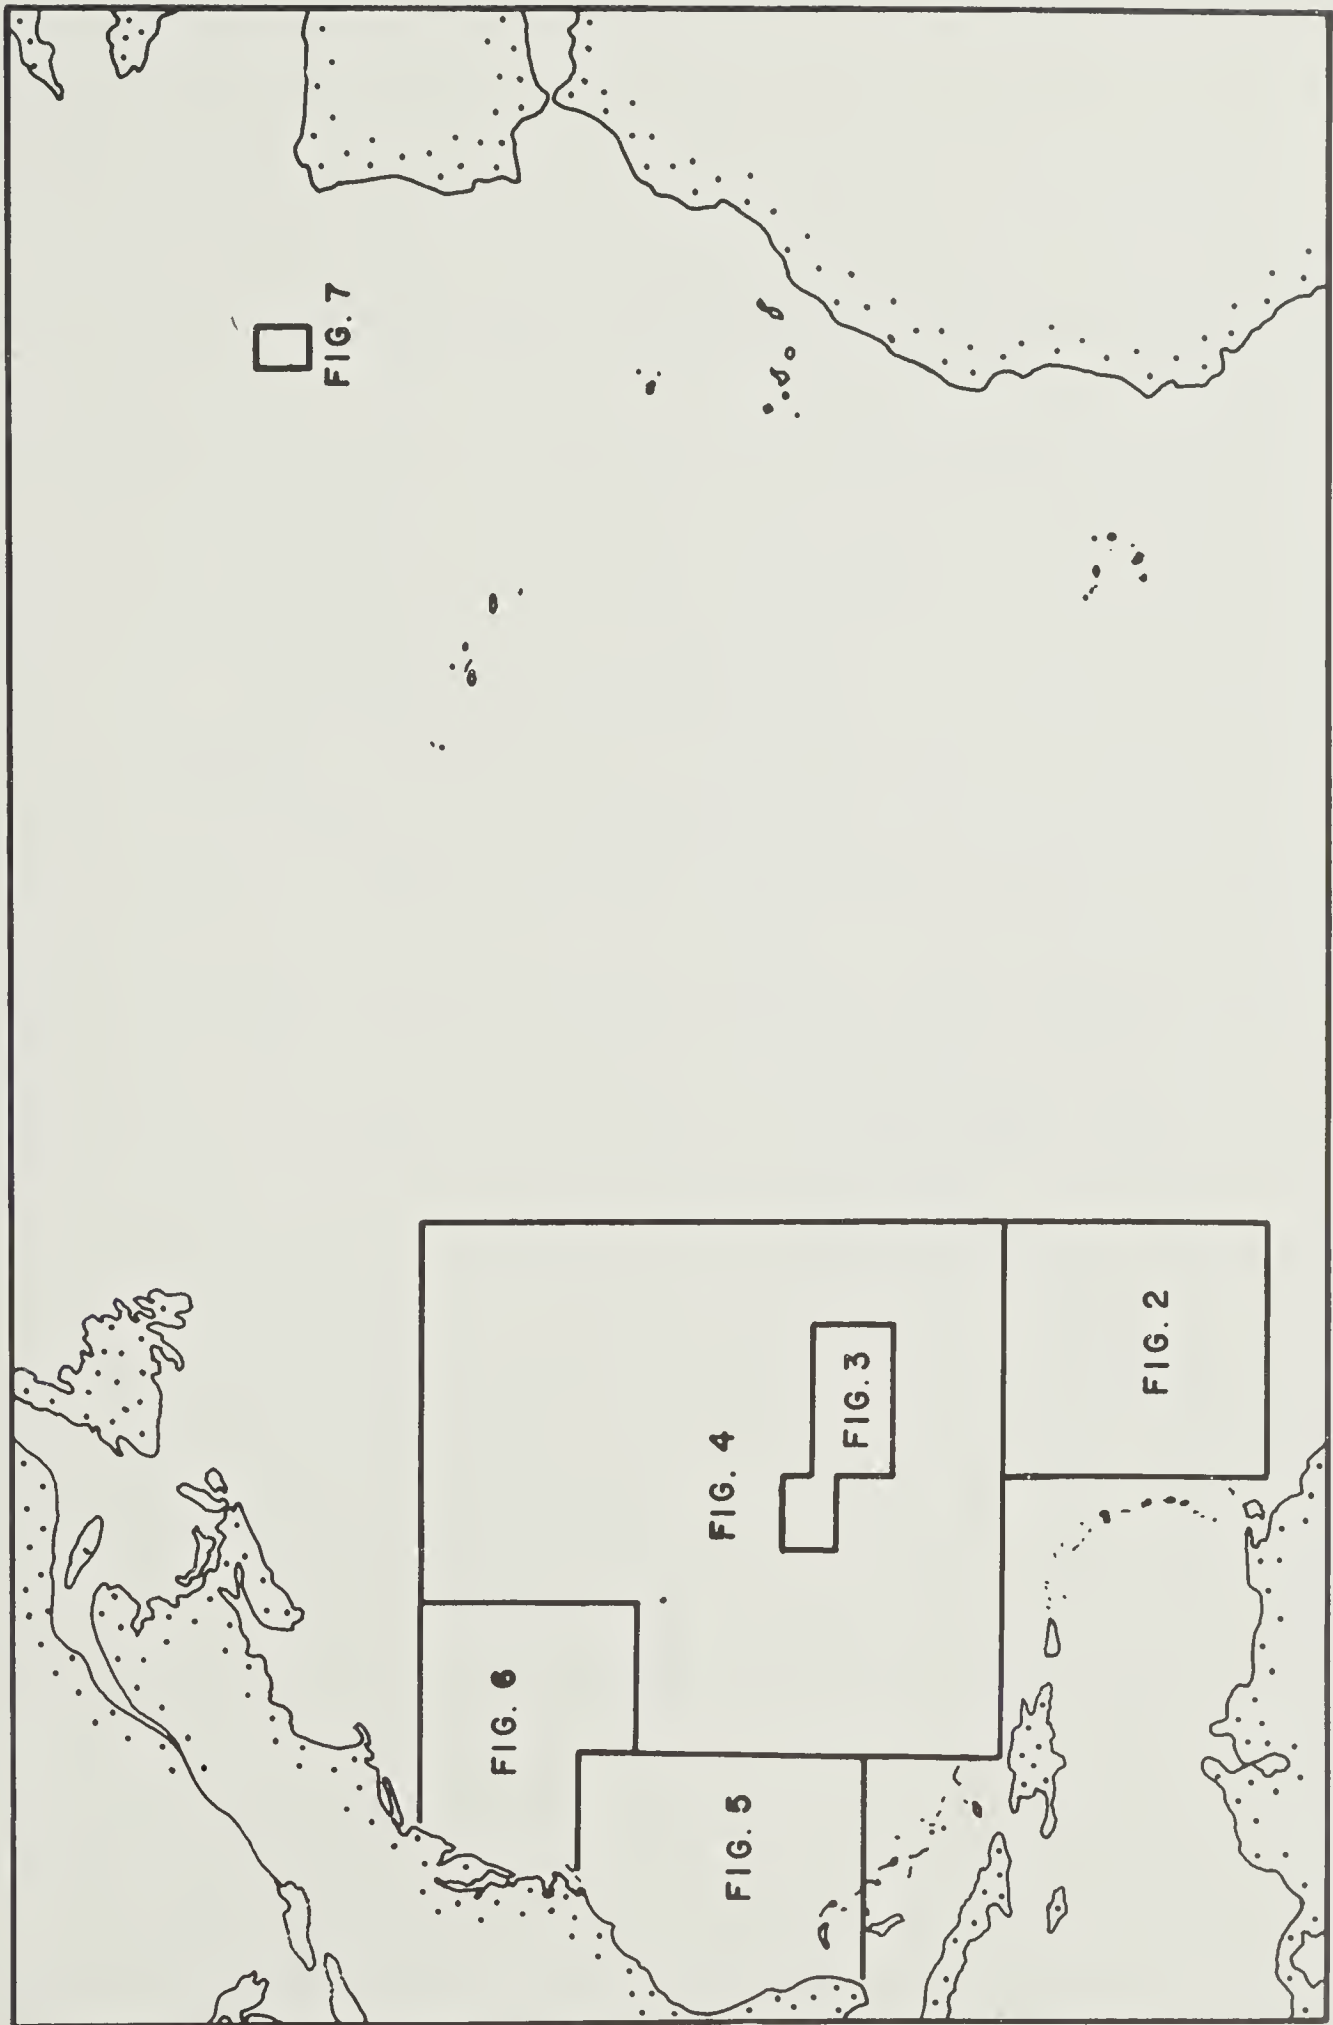


Fig. 1 Locations of the six areas studied.



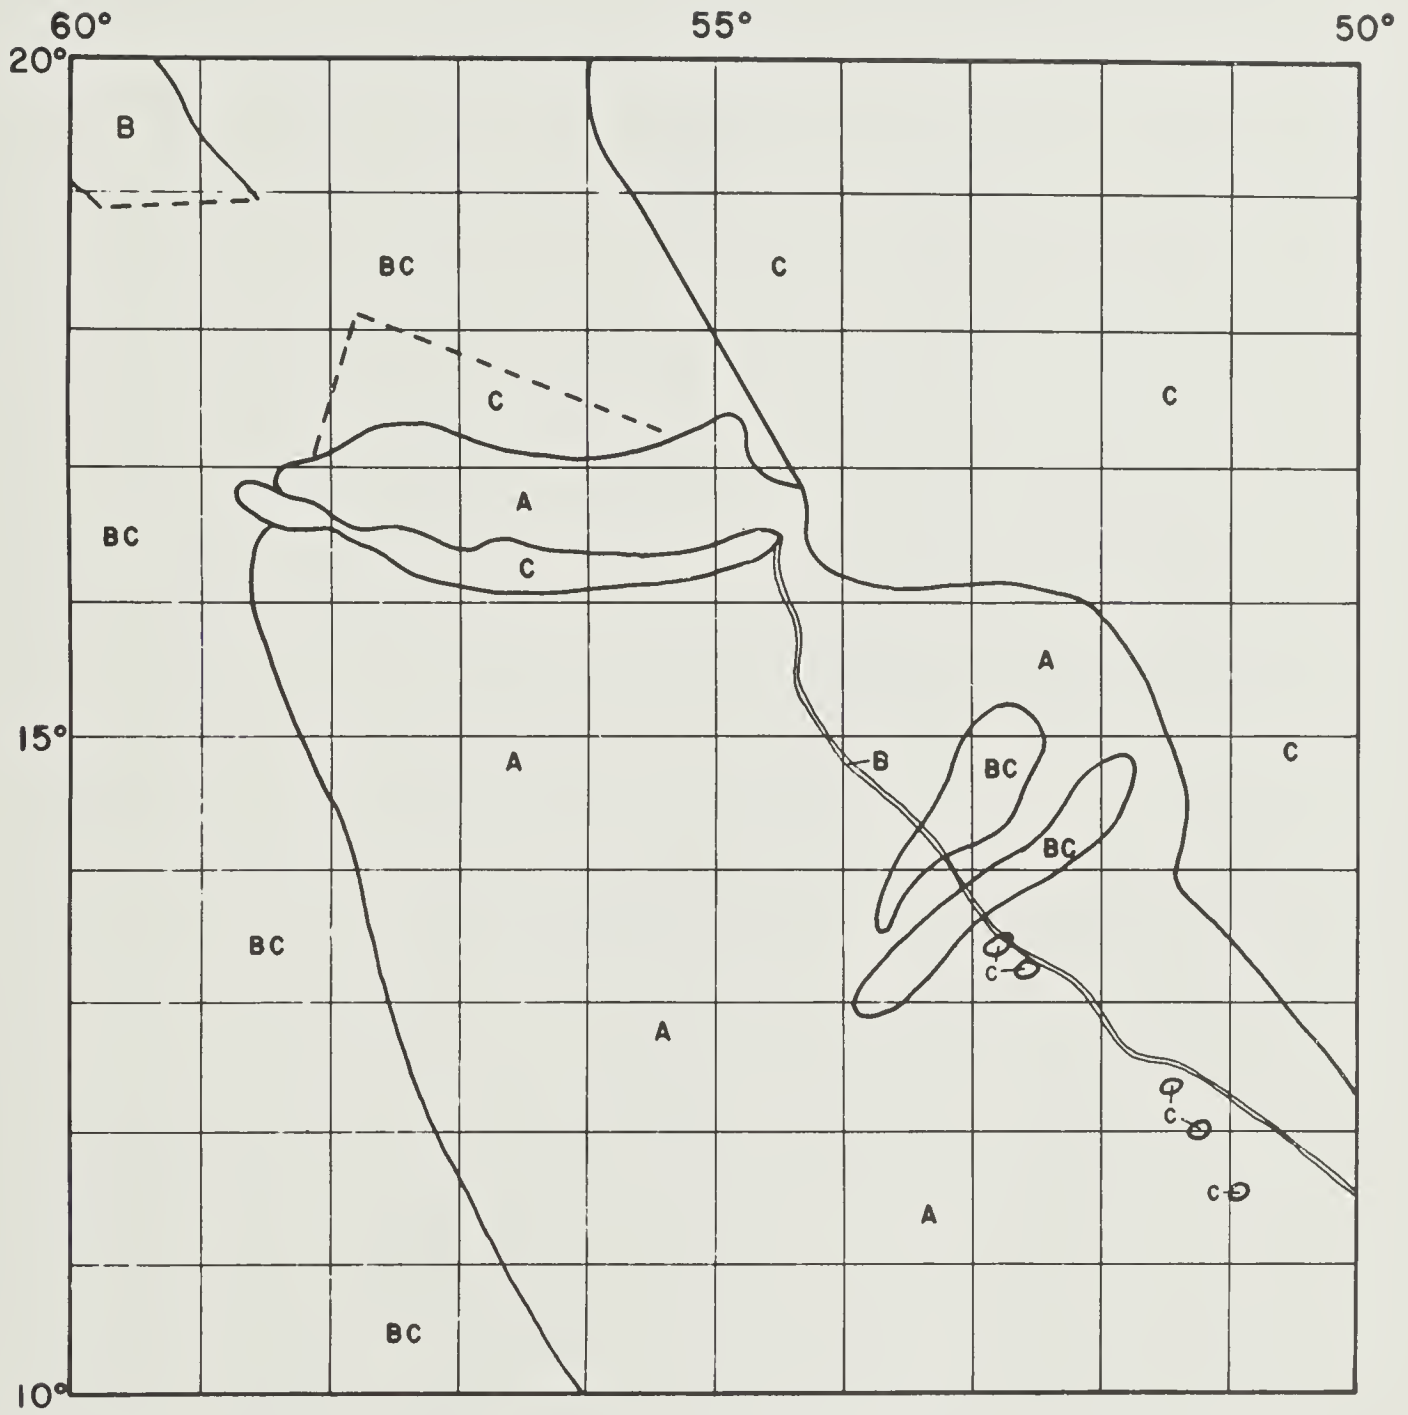


Fig. 2



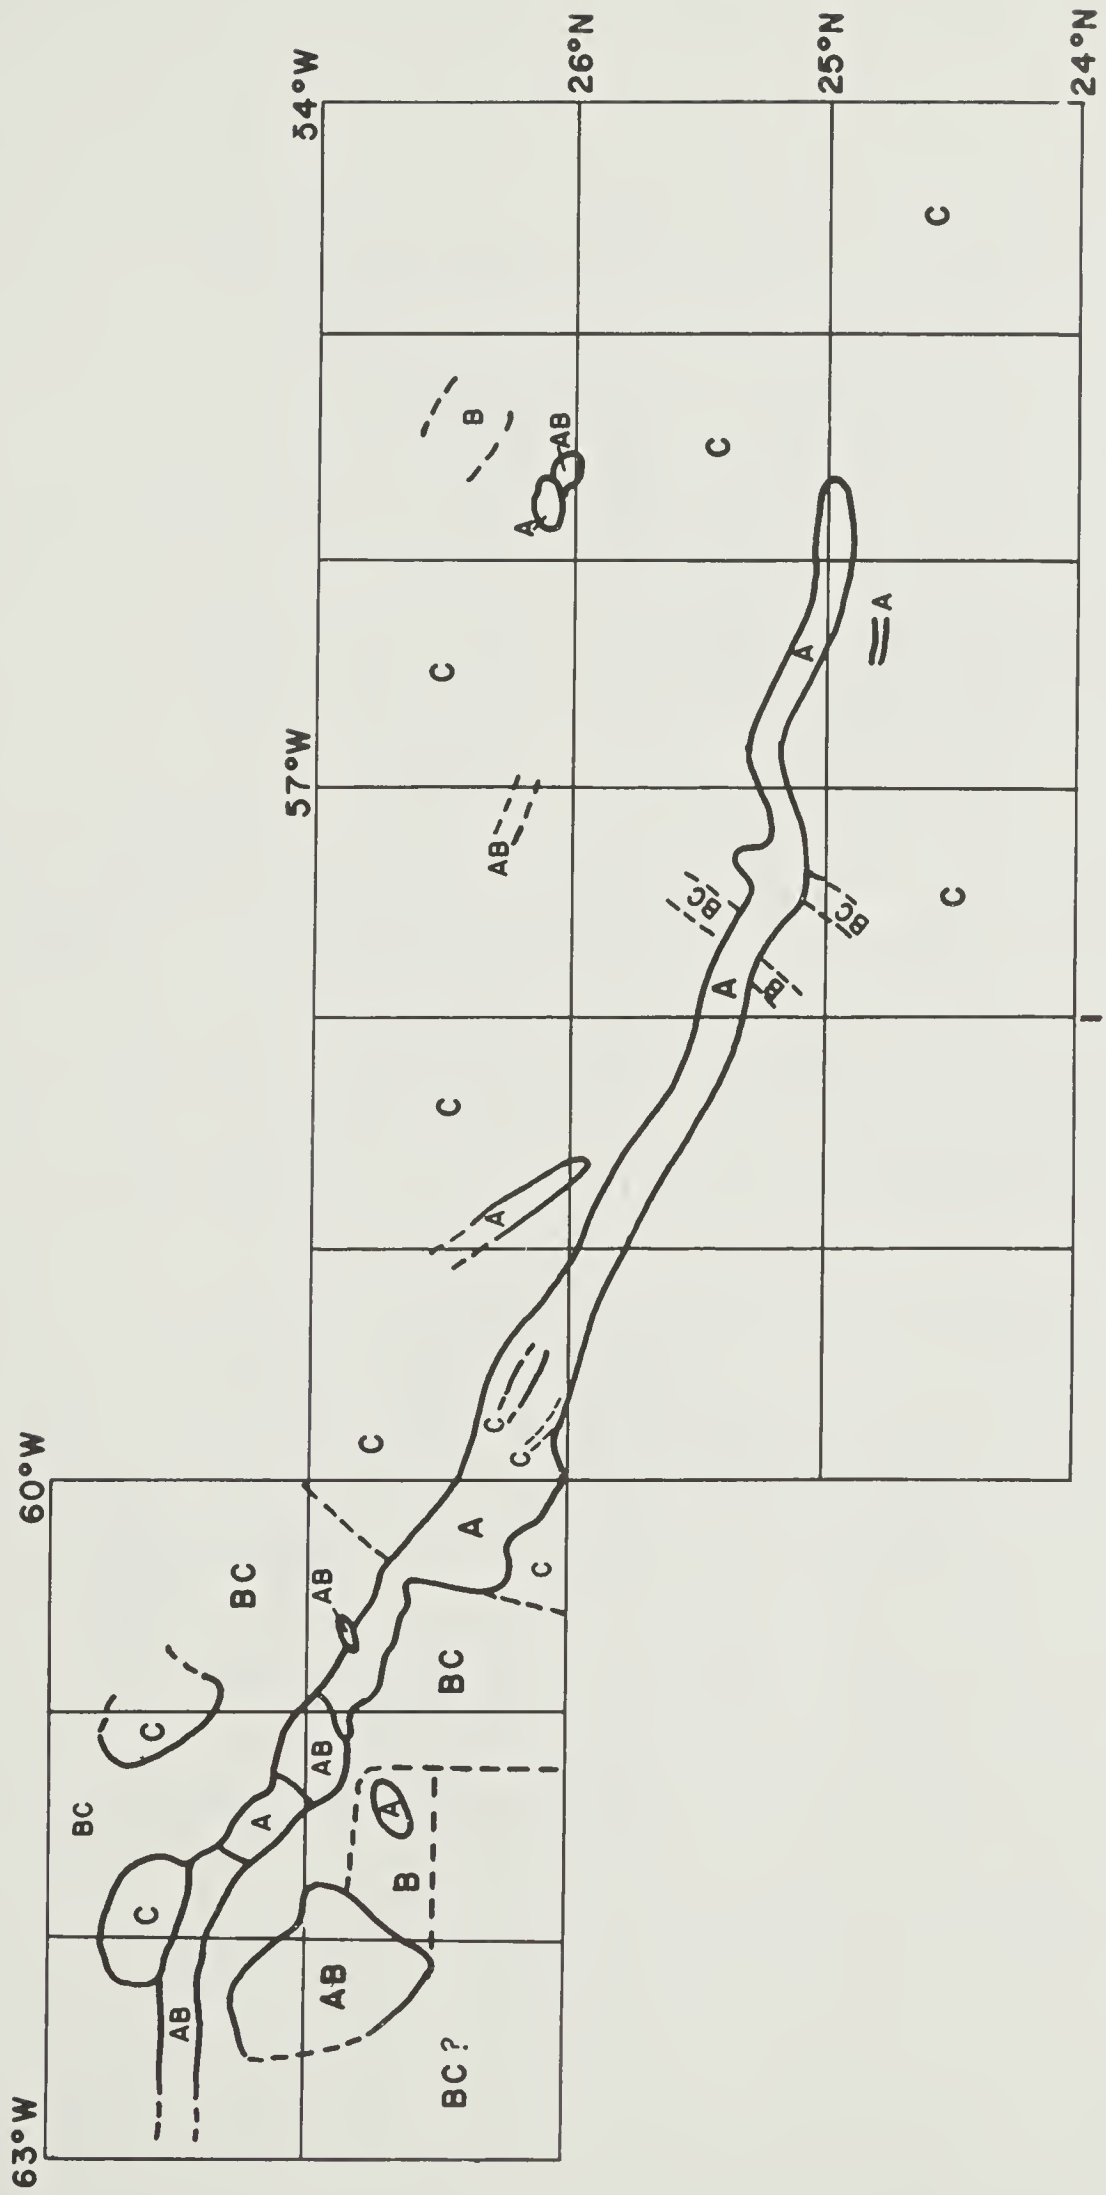


Fig. 3





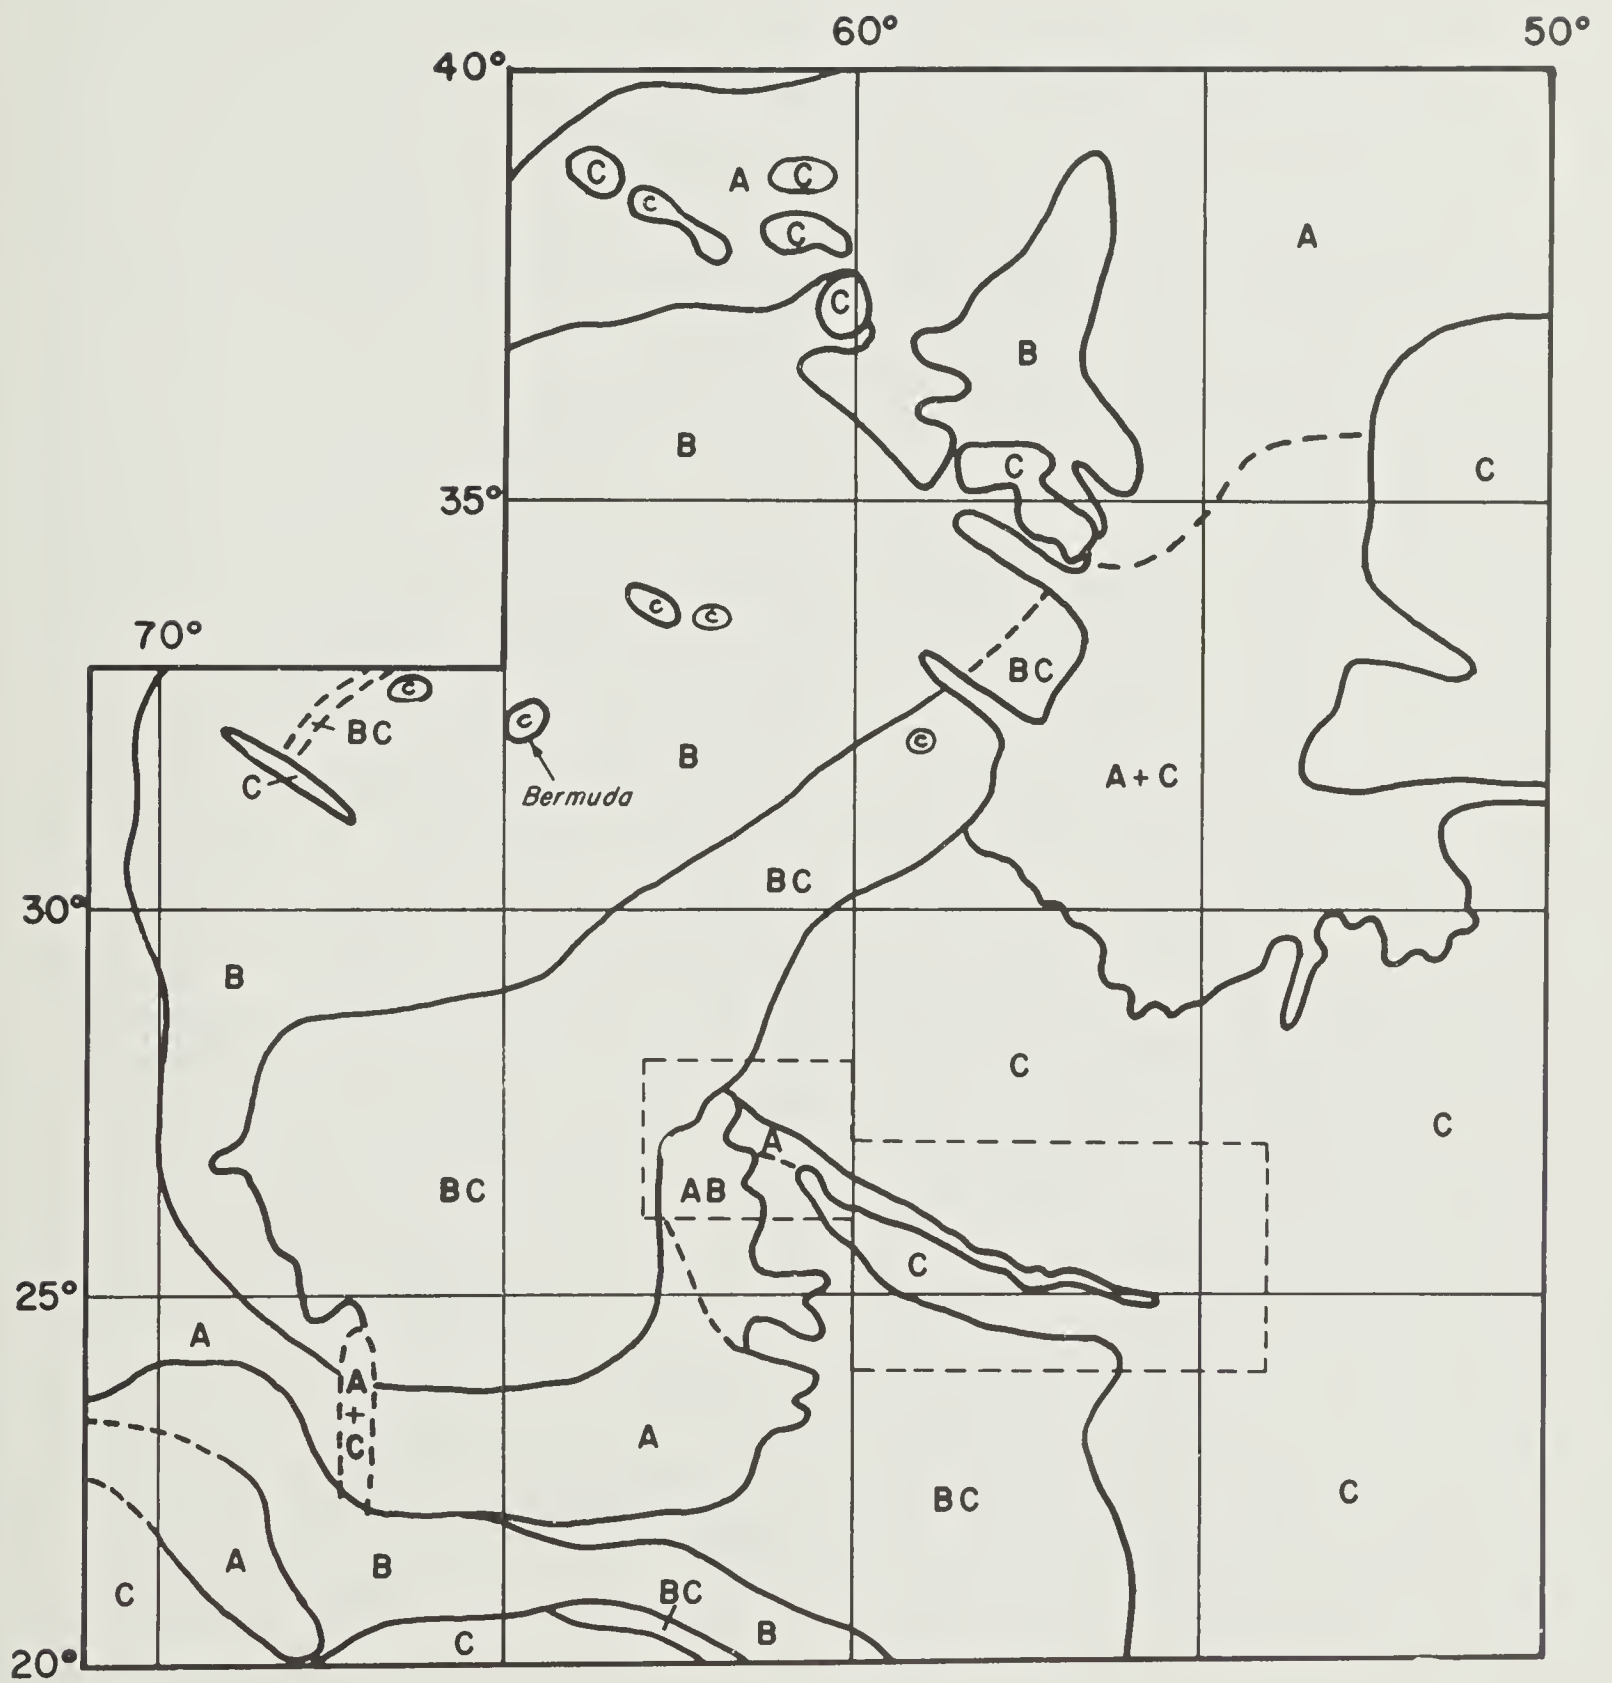


Fig. 4 Note that the area of Fig. 3 is indicated by dashed outline.



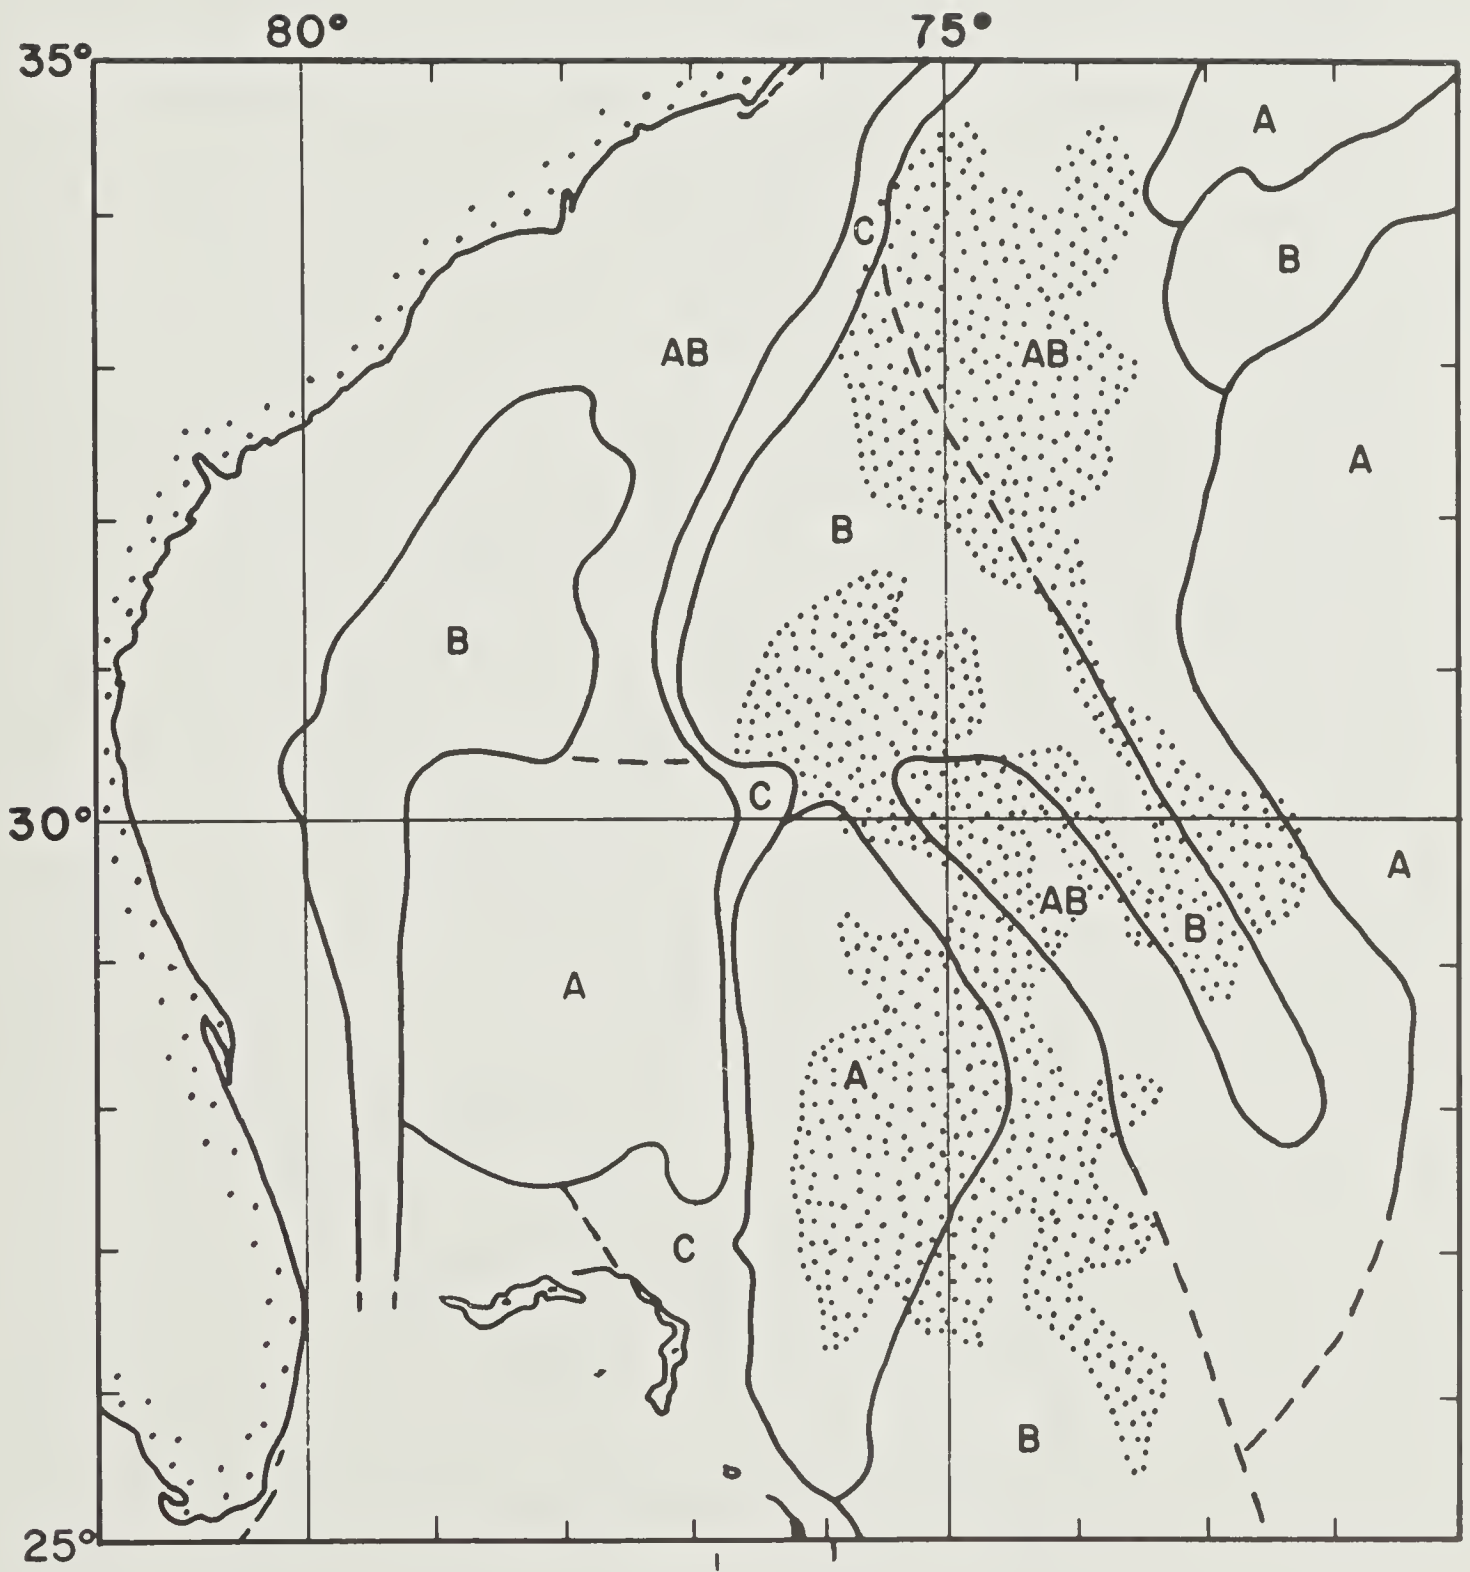


Fig. 5





Fig. 6



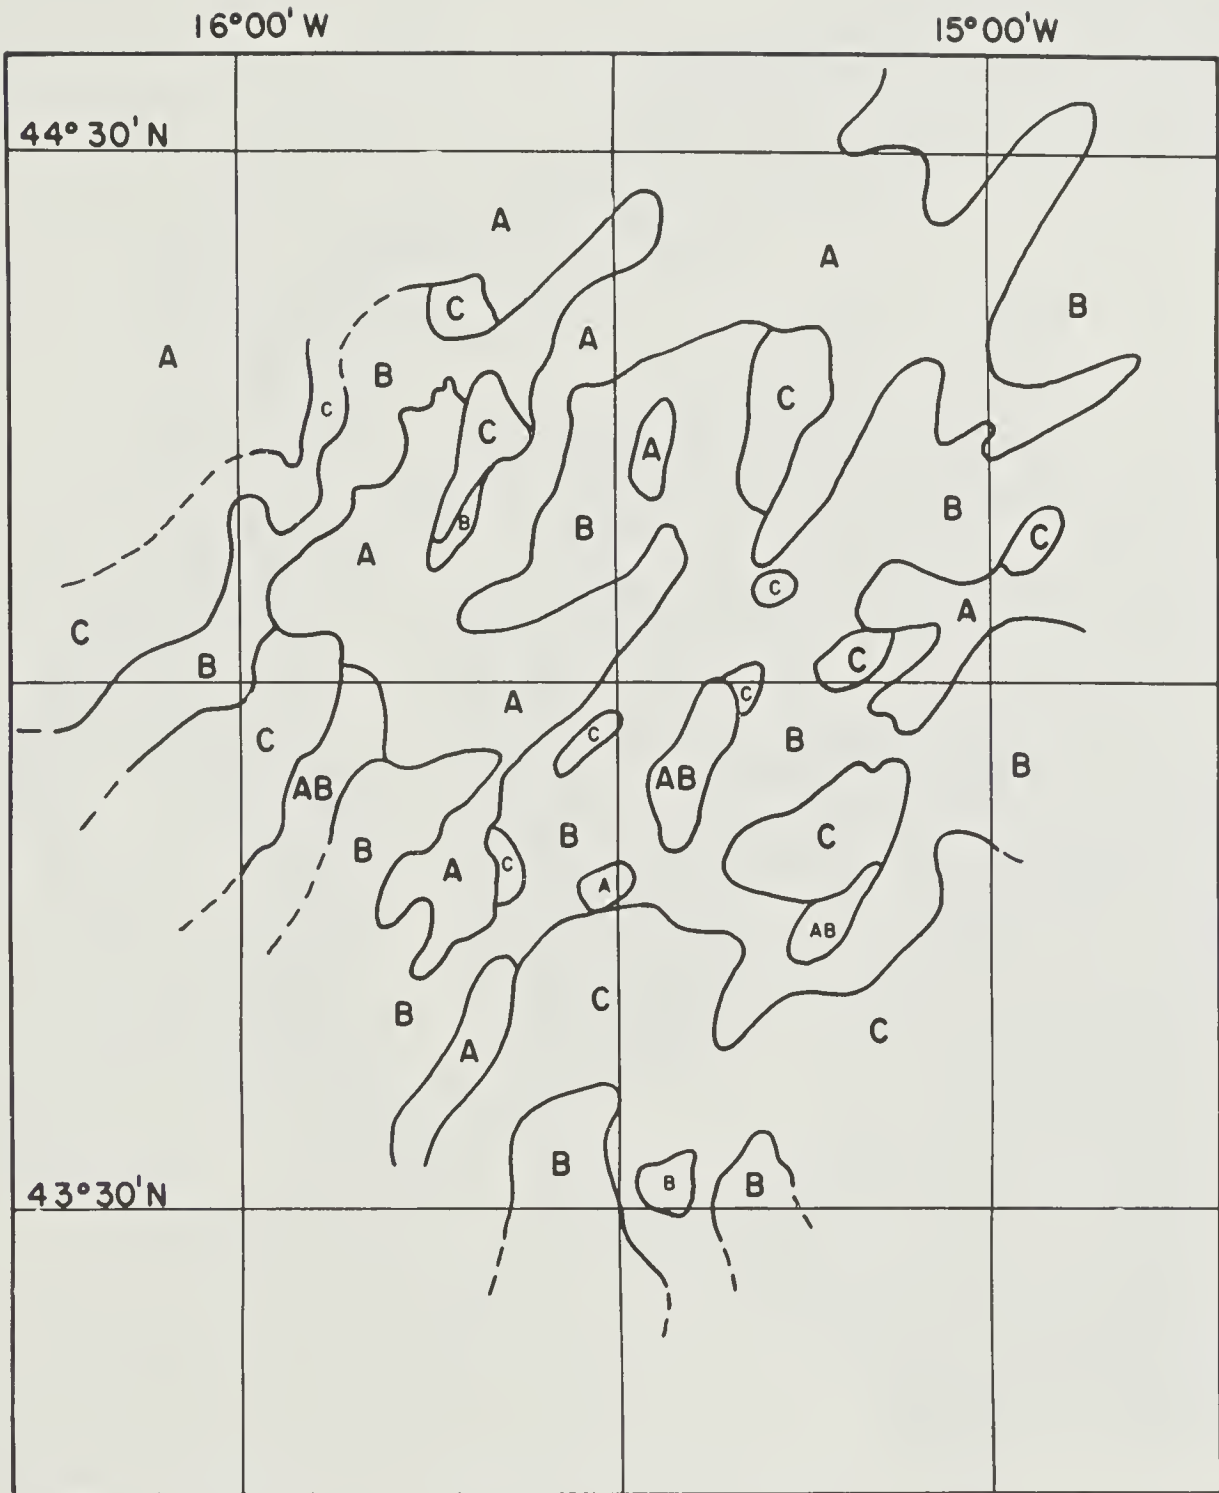


Fig. 7





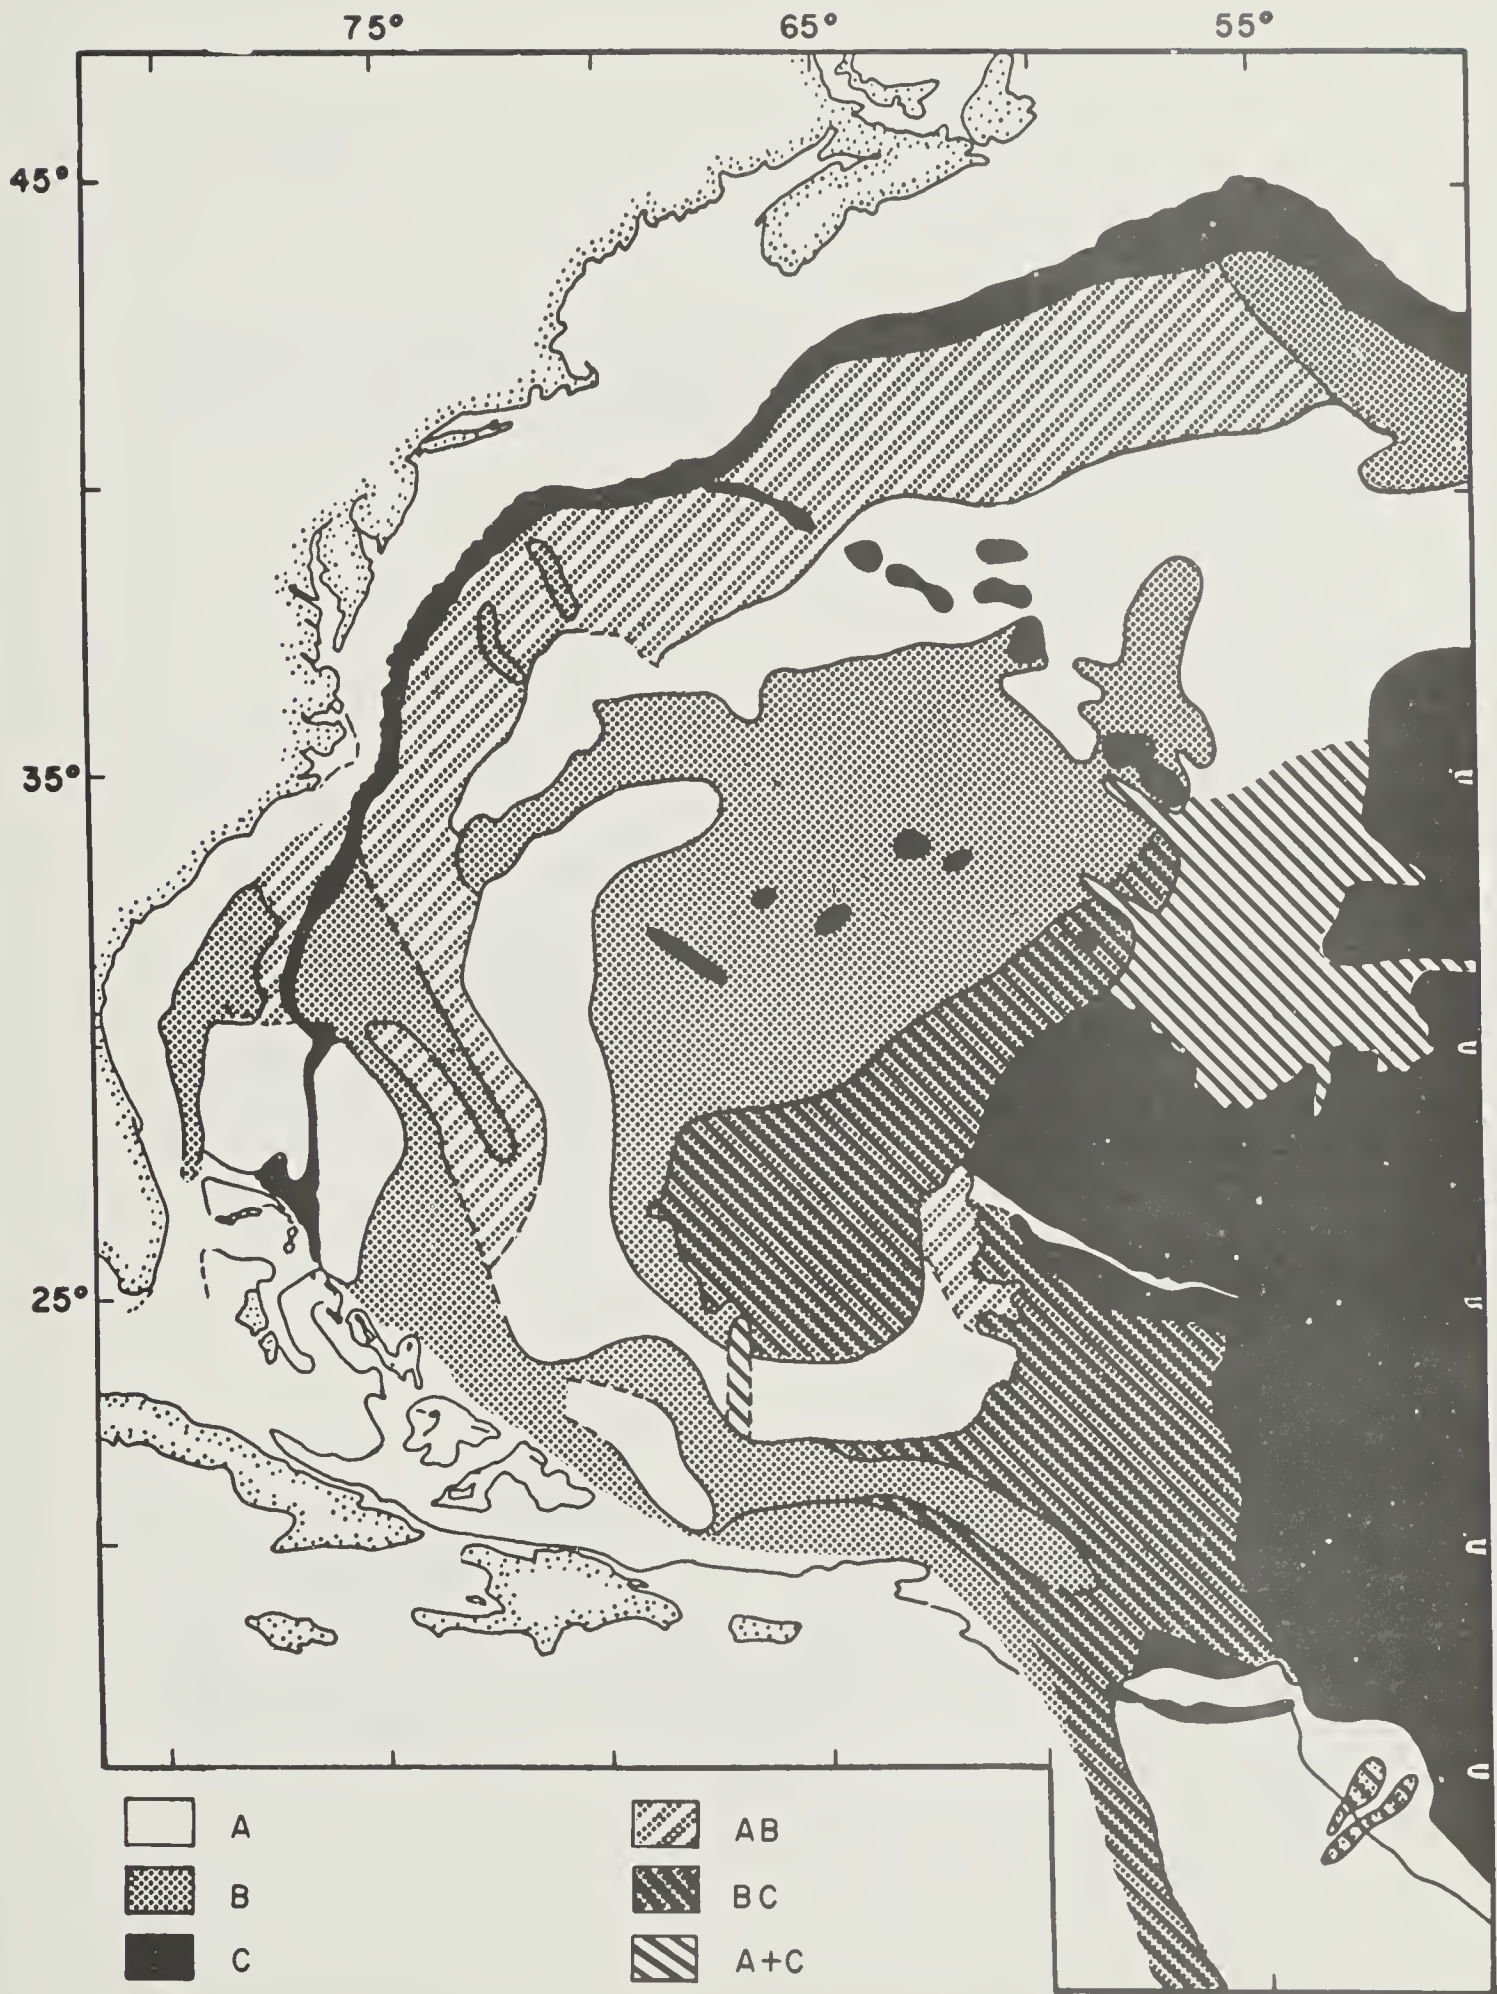



Fig. 8 Overall distribution of bottom roughness in the western North Atlantic Ocean.



A-TYPE



B-TYPE

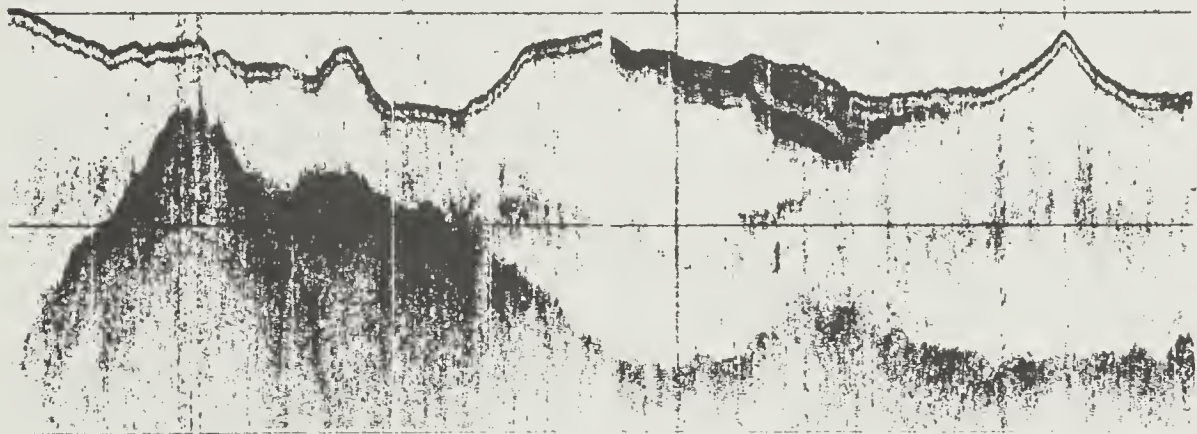

C-TYPE

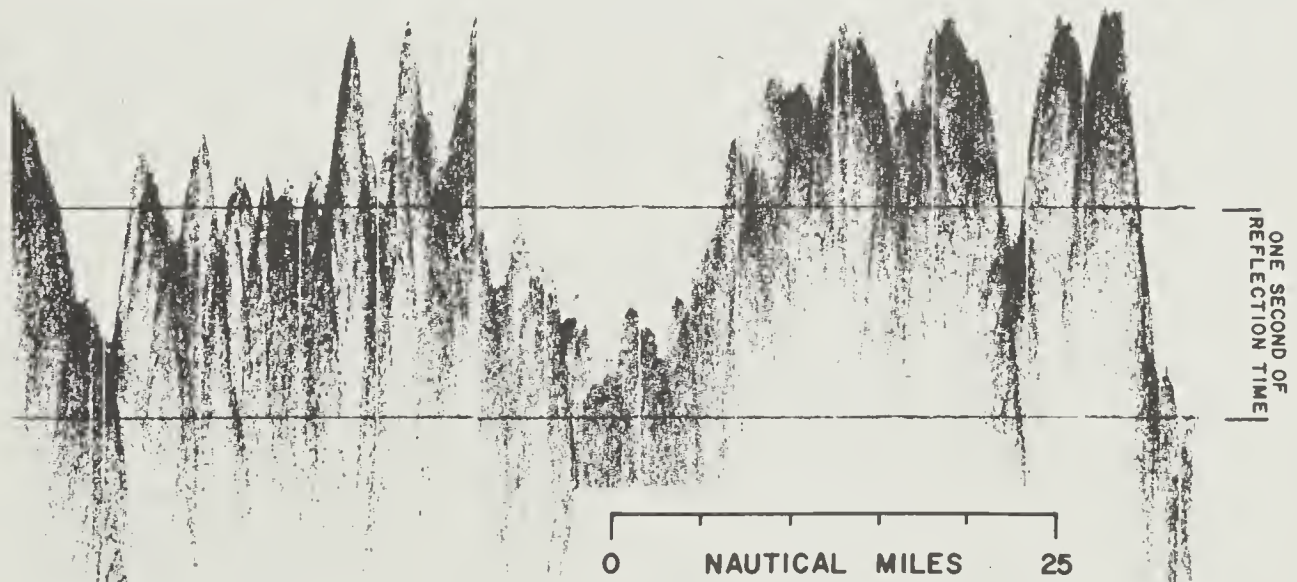


Fig. 9 Seismic reflection profiles illustrating typical A, B, and C-type topography.



DISTRIBUTION LIST

LAMONT GEOLOGICAL OBSERVATORY  
 COLUMBIA UNIVERSITY  
 PALISADES, NEW YORK

U. S. Navy Underwater Sound Laboratory, New London, Conn.	2
U. S. Navy Electronics Laboratory, Point Loma, San Diego, Calif. 92152	1
Marine Physical Laboratory, Univ. of Calif., San Diego, Calif. 92152	1
Scripps Inst. of Oceanography, La Jolla, Calif.	1
Woods Hole Oceanographic Inst., Woods Hole, Mass. 02543	1
Commander, Naval Ship Systems Command, Navy Dept., Wash., D. C. 20360	
	Code 1622K 1
	Code 2021 3
Commander, Submarine Development Group TWO, Via: CDR Submarine Force, U. S. Atlantic Fleet, c/o Fleet Post Office, New York, N. Y.	1
Commander, Submarine Force, U. S. Pacific Fleet, c/o Fleet Post Office, San Francisco, Calif.	1
Chief of Naval Research, Navy Dept., Washington, D. C. 20360	
	Code 408 1
	Code 466 1
Defense Research Laboratory, Univ. of Texas, Austin, Texas	1
Office of Naval Research, 346 Broadway, New York 13, N. Y.	1
Commander, U. S. Naval Oceanographic Office, Navy Dept., Wash., D. C.	2
Commander, Naval Weapons Systems Command (Code 222) Navy Dept., Washington, D. C. 20360	1
Hudson Laboratories, 145 Palisade Street, Dobbs Ferry, New York Attention: Dr. R. A. Froach	1
Bell Telephone Laboratories, Inc., Whippany, New Jersey Attention: Dr. W. A. Tyrrell	
The Oceanographer of the Navy, The Madison Building, 732 N. Washington Street, Alexandria, Va. 22314	1
Chief of Naval Material, Code 327, Navy Dept., Wash., D. C. 20360	1
Chief of Naval Operation (OP-716) Navy Dept., Wash., D. C.	1
Commanding Officer and Director, Naval Ordnance Laboratory, Silver Spring, Maryland	1
Director, Marine Laboratory, University of Miami, #1 Rickenbacker Causeway, Miami 49, Florida	1
Director, U. S. Naval Research Laboratory, Wash. 25, D. C.	Code 5500 1

Director, Applied Physics Laboratory, University of Washington, Seattle, Washington	1
Director, Dept. of Oceanography, Texas A&M College, College Station, Texas	1
Director, Arctic Research Laboratory, P. O. Box 1070, Fairbanks, Alaska	1
Mr. Philip S. Shandler, Resident Representative, Office of Naval Research, Hudson Laboratories, 145 Palisade St., Dobbs Ferry, N. Y.	1
Committee on Undersea Warfare, National Academy of Science, National Research Council, 2101 Constitution Ave., N. W., Washington, D. C. - Att: Executive Sec.	1
Commanding Officer & Director, U. S. Navy Radiological Defense Laboratory, San Francisco Bay Naval Shipyard, Hunters Point, San Francisco, Calif.	1
Naval Ships Research and Engineering Center, Carderock, Maryland	1
Defense Documentation Center, Cameron Station, Alexandria, Virginia	10
Director, Dept. of Oceanography, Florida Atlantic Univ., Boca Raton, Fla.	1
Dean, Dept. of Oceanography, Univ. of Rhode Island, Narragansett Marine Laboratory, Kingston, Rhode Island	1
Director, Dept. of Oceanography, Oregon State Univ., Corvallis, Oregon	1
Director, Chesapeake Bay Institute, Johns Hopkins Univ., Balt, Md.	1
Commanding Officer & Director, U. S. Navy Marine Engineering Laboratory, Annapolis, Maryland	1

Unclassified

Security Classification

DOCUMENT CONTROL DATA - R&D

(Security classification of title, body of abstract and indexing annotation must be entered when the overall report is classified)

1. ORIGINATING ACTIVITY (Corporate author) Lamont Geological Observatory Columbia University Palisades, New York	2a. REPORT SECURITY CLASSIFICATION Unclassified
	2b. GROUP

3. REPORT TITLE  
**DELINEATION OF SEA FLOOR ROUGHNESS IN THE WESTERN NORTH ATLANTIC**

4. DESCRIPTIVE NOTES (Type of report and inclusive dates)  
**Technical Report**

5. AUTHOR(S) (Last name, first name, initial)  
Markl, R. G.                      Bryan, G. M.  
Ewing, J. I.

6. REPORT DATE July 1967	7a. TOTAL NO. OF PAGES 8	7b. NO. OF REFS 3
-----------------------------	-----------------------------	----------------------

8a. CONTRACT OR GRANT NO. NAVSHIPS N-00024-67-C-1186 b. PROJECT AND TASK NO. SR 104-03-01 Task 8112 c. DDO ELEMENT  d. DDO SUBELEMENT	9a. ORIGINATOR'S REPORT NUMBER(S) Technical Report No. 2- CU-2-67
	9b. OTHER REPORT NO(S) (Any other numbers that may be assigned this report)

10. AVAILABILITY/LIMITATION NOTICES  
**Distribution of this document is unlimited**

11. SUPPLEMENTARY NOTES	12. SPONSORING MILITARY ACTIVITY Department of the Navy NAVSHIPS Washington, D. C.
-------------------------	---

13. ABSTRACT

The range of roughness of the western North Atlantic sea floor has been assessed and subdivided, largely on the basis of 12 kc echo sounder and seismic profiler data, into three major categories. Charts delineating the areal extent of these three degrees of roughness have been made.

DD FORM 1 JAN 64 1473

Unclassified  
Security Classification

14. KEY WORDS	LINK A		LINK B		LINK C	
	ROLE	WT	ROLE	WT	ROLE	WT
Sea floor topography Bottom loss Western North Atlantic 12 kc echo sounder Seismic reflection profiler						

INSTRUCTIONS

1. ORIGINATING ACTIVITY: Enter the name and address of the contractor, subcontractor, grantee, Department of Defense activity or other organization (*corporate author*) issuing the report.

2a. REPORT SECURITY CLASSIFICATION: Enter the overall security classification of the report. Indicate whether "Restricted Data" is included. Marking is to be in accordance with appropriate security regulations.

2b. GROUP: Automatic downgrading is specified in DoD Directive 5200.10 and Armed Forces Industrial Manual. Enter the group number. Also, when applicable, show that optional markings have been used for Group 3 and Group 4 as authorized.

3. REPORT TITLE: Enter the complete report title in all capital letters. Titles in all cases should be unclassified. If a meaningful title cannot be selected without classification, show title classification in all capitals in parenthesis immediately following the title.

4. DESCRIPTIVE NOTES: If appropriate, enter the type of report, e.g., interim, progress, summary, annual, or final. Give the inclusive dates when a specific reporting period is covered.

5. AUTHOR(S): Enter the name(s) of author(s) as shown on or in the report. Enter last name, first name, middle initial. If military, show rank and branch of service. The name of the principal author is an absolute minimum requirement.

6. REPORT DATE: Enter the date of the report as day, month, year, or month, year. If more than one date appears on the report, use date of publication.

7a. TOTAL NUMBER OF PAGES: The total page count should follow normal pagination procedures, i.e., enter the number of pages containing information.

7b. NUMBER OF REFERENCES: Enter the total number of references cited in the report.

8a. CONTRACT OR GRANT NUMBER: If appropriate, enter the applicable number of the contract or grant under which the report was written.

8b, 8c, & 8d. PROJECT NUMBER: Enter the appropriate military department identification, such as project number, subproject number, system numbers, task number, etc.

9a. ORIGINATOR'S REPORT NUMBER(S): Enter the official report number by which the document will be identified and controlled by the originating activity. This number must be unique to this report.

9b. OTHER REPORT NUMBER(S): If the report has been assigned any other report numbers (*either by the originator or by the sponsor*), also enter this number(s).

10. AVAILABILITY/LIMITATION NOTICES: Enter any limitations on further dissemination of the report, other than those imposed by security classification, using standard statements such as:

(1) "Qualified requesters may obtain copies of this report from DDC."

(2) "Foreign announcement and dissemination of this report by DDC is not authorized."

(3) "U. S. Government agencies may obtain copies of this report directly from DDC. Other qualified DDC users shall request through \_\_\_\_\_."

(4) "U. S. military agencies may obtain copies of this report directly from DDC. Other qualified users shall request through \_\_\_\_\_."

(5) "All distribution of this report is controlled. Qualified DDC users shall request through \_\_\_\_\_."

If the report has been furnished to the Office of Technical Services, Department of Commerce, for sale to the public, indicate this fact and enter the price, if known.

11. SUPPLEMENTARY NOTES: Use for additional explanatory notes.

12. SPONSORING MILITARY ACTIVITY: Enter the name of the departmental project office or laboratory sponsoring (*paying for*) the research and development. Include address.

13. ABSTRACT: Enter an abstract giving a brief and factual summary of the document indicative of the report, even though it may also appear elsewhere in the body of the technical report. If additional space is required, a continuation sheet shall be attached.

It is highly desirable that the abstract of classified reports be unclassified. Each paragraph of the abstract shall end with an indication of the military security classification of the information in the paragraph, represented as (TS), (S), (C), or (U).

There is no limitation on the length of the abstract. However, the suggested length is from 150 to 225 words.

14. KEY WORDS: Key words are technically meaningful terms or short phrases that characterize a report and may be used as index entries for cataloging the report. Key words must be selected so that no security classification is required. Identifiers, such as equipment model designation, trade name, military project code name, geographic location, may be used as key words but will be followed by an indication of technical context. The assignment of links, rules, and weights is optional.



COLUMBIA LIBRARIES OFFSITE



CU90641981

