

Blockchain Wallets in Health care systems

Authors:

Andrea fernando and Prof. Dr. Khurum Abbass

Abstract:

The whole concept of Blockchain is fascinating, no doubt. However, there is a catch here. As cryptocurrencies are becoming the order of the day in financial markets, a lot of patience goes into understanding and managing them. We know that cryptocurrencies are digital money, so where do we store them? The answer to this question is **Blockchain Wallets**. We classify, and compare the advantages and disadvantages of various routing protocols. We also address Emergency health issues and suggest how it can be improved.

1. INTRODUCTION

A transaction's private and public keys are stored in the blockchain wallet store. With multiple blockchains in the network, there may arise a need for interactions among stakeholders to authenticate a transaction. Blockchain Sign up is done first and then the blockchain wallet log in is required. These interactions are necessary to allow users to purchase or sell one or several cryptocurrencies. Before understanding how blockchain wallets work, let us first discern the role of public and private keys that are stored on blockchain wallets for authenticating a transaction. These keys are overall non-identical pairs of large numbers. While the public key can be shared with anyone, private keys are generally kept as a secret. No matter how many times you attempt to open the wallet, it will grant you access only when the order of private and public keys match with each other. Only when private and public keys pair together, users can grant access to the blockchain wallet to visualize the value of their digital assets and conduct operations on them.. [4] [5]

A WBAN consists of several sensors and possibly actuators equipped with a radio interface. Each WBAN has a sink or personal server such as a PDA, that receives all information from the sensors and provides an interface towards other networks or medical staff. Connecting health monitoring sensors wirelessly improves comfort for patients but induces a number of technical challenges like coping with mobility and the need for increased reliability [6].

An important requirement in WBANs is the energy efficiency of the system. The sensors placed on the body only have limited battery capacity or can scavenge only a limited amount of energy from their environment. Consequently, in order to increase the lifetime of the network, energy efficient measures need to be taken. From that point of view, several researchers are developing low power sensors and radios. Another possibility is the design of optimized network protocols to lower the energy consumption while satisfying the other requirements [7].

A Wireless Body Area Network consists of small, intelligent devices attached on or implanted in the body which are capable of establishing a wireless communication link. These devices provide continuous health monitoring and real-time feedback to the user or medical personnel. Furthermore, the measurements can be recorded over a longer period of time, improving the quality of the measured data [3]. Generally speaking, two types of devices can be distinguished: sensors and actuators. The sensors are used to measure certain parameters of the human body, either externally or internally. Examples include measuring the heartbeat, body temperature or recording a prolonged electrocardiogram (ECG). The actuators (or actors) on the other hand take some specific actions according to the data they receive from the sensors or through interaction with the user. E.g., an actuator equipped with a built-in reservoir and pump administers the correct dose of insulin to give to diabetics based on the glucose level measurements. Interaction with the user or other persons is usually handled by a personal device, e.g. a PDA or a smart phone which acts as a sink for data of the wireless devices. In order to realize communication between these devices, techniques from Wireless Sensor Networks (WSNs) and ad hoc networks could be used. However, because of the typical properties of a WBAN, current protocols designed for these networks are not always well suited to support a WBAN.

2. Types of Blockchain Wallets

The WBAN technology is the consequence of the existing WSN technology. A number of tiny wireless sensors, strategically placed on the human body, create a wireless body area network that can monitor various vital signs, providing real-time feedback to the user and medical personnel. In a WBAN, each medical sensor monitors different vital signs such as temperature, blood pressure, or ECG. The system consists of multiple sensor nodes that monitor body motion and heart activity, a network coordinator, and a personal server running on a personal digital assistant or a personal computer [8].

Figure 1 shows secure 3-level WBAN architecture for medical and non-medical applications. Level 1 contains in-body and on-body BAN Nodes (BNs) such as Electrocardiogram (ECG) – used to monitor electrical activity of heart, Oxygen saturation sensor (SpO₂) – used to measure the level of oxygen, and Electromyography (EMG) – used to monitor muscle activity [9].

Level 2 contains a BAN Network Coordinator (BNC) that gathers patient's vital information from the BNs and communicates with the base-station. Level 3 contains a number of remote base-stations that keep patient's medical/non-medical records and provides relevant (diagnostic) recommendations. The traffic is categorized into on demand, emergency, and normal traffic. On-demand traffic is initiated by the BNC to acquire certain information. Emergency traffic is initiated by the BNs when they exceed a predefined threshold. Normal traffic is the data traffic in a normal condition with no time critical and on-demand events [11].

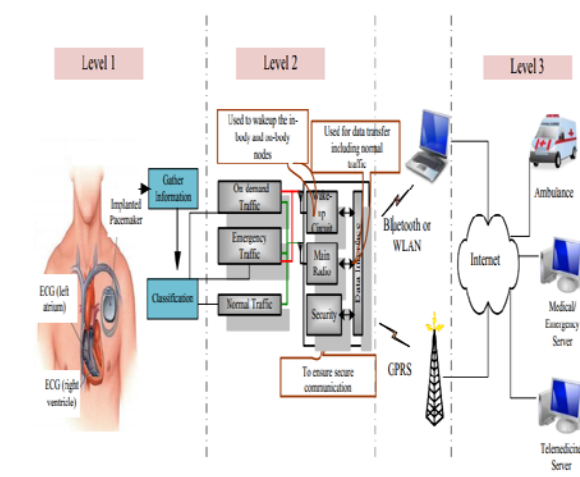


Figure 1: Secure 3-Level WBAN Architecture For Medical And Non-Medical Applications

The normal data is collected and processed by the BNC. The BNC contains a wakeup circuit, a main radio, and a security circuit, all of them connected to a data interface. The wakeup circuit is used to accommodate on-demand and emergency traffic. The security circuit is used to prevent malicious interaction with a WBAN [10], [14], [13].

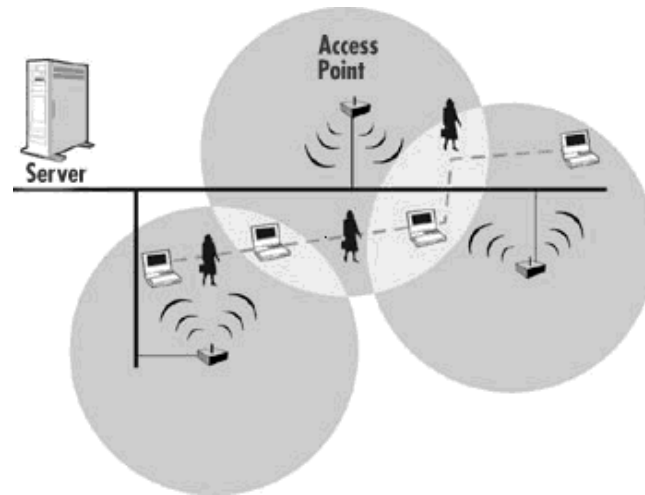


Figure 1-3: Microcells and Roaming

3. EOS Blockchain Protocol

MAC protocols used in WBAN must be low power consuming, accurate and with less latency. The most important thing is the protocol should give good performance on varying traffic load. Some popular protocols for WBAN are TMAC, SMAC, ZigBee MAC and Baseline MAC [4].

A. *TMAC*:

It is a duty-cycling protocol. In this protocol the node is awoken for a particular period that is called active time. Duty cycle changes according to the information traffic load of the network. When traffic load is high than the duty cycle becomes large so that nodes can handle high traffic load. When traffic load is low then duty cycle is adjusted to small value so that nodes can save their power reducing the problem of idle listening. TMAC protocol is able to handle varying load with low power consumption.

B. *SMAC*:

SMAC protocol is similar to TMAC but only difference is its fixed duty cycle. This protocol is the previous version. This protocol is not efficient in handling continuously varying data rates in WBAN.

C. *ZigBee MAC*:

ZigBee MAC protocol can use two schemes- CSMA/CA or TDMA. While using CSMA/CA mechanism this protocol gives average performance but using TDMA mechanism (applying Guaranteed Time Slot or GTS) it reduces the power consumption up to a great extent. At high rates the data loss becomes high in TDMA mechanism so it is best when there is less no of nodes or low traffic load.

D. *Baseline MAC*:

This MAC protocol uses CSMA/CA scheme. The performance of Baseline MAC in terms of energy consumption is not average but throughput is average.

4. LITERATURE SURVEY

In [13] (2012) proposed a reliable topology design and provisioning approach for Wireless Body Area Networks (named RTDP-WBAN) that takes into account the mobility of the patient while guaranteeing a reliable data delivery required to support healthcare applications' needs. To do so, they first proposed a 3D coordinate system able to calculate the coordinates of relay-sensor nodes in different body postures and movements. This system uses a 3D-model of a standard human body and a specific set of node positions with stable communication links, forming a virtual backbone. Next, they investigated the optimal relay nodes positioning jointly with the reliable and cost-effective data routing for different body postures and movements. Therefore, they use an Integer Linear Programming (ILP) model, that is able to find the optimal number and locations of relay nodes and calculate the optimal

data routing from sensors and relays towards the sink, minimizing both the network setup cost and the energy consumption. They solved the model in dynamic WBAN (Stand, Sit and Walk) scenarios, and compare its performance to other relaying approaches.

In [14] (2013) presented an analytical discussion about energy efficiency of Medium Access Control (MAC) protocols for Wireless Body Area Sensor Networks (WBASNs). For this purpose, different energy efficient MAC protocols with their respective energy optimization techniques; Low Power Listening (LPL), Scheduled Contention and Time Division Multiple Access (TDMA), are elaborated. They also analytically compared path loss models for In-body, On-body and Off-body communications in WBASNs. These three path loss scenarios are simulated in MATLAB and results shown that path loss is more in In-body communication because of less energy level to take care of tissues and organs located inside human body. Secondly, power model for WBASNs of Carrier Sense Multiple Access with Collision Avoidance (CSMA/CA) and beacon mode is also presented. The results shown that power of CSMA/CA mode is less as compared to beacon mode. Finally, they suggested that hybrid mode is more useful to achieve optimization in power consumption, which consequently results in high energy efficiency.

In [15] (2014) proposed a mechanism to route data in WBANs with minimum path-loss over the link; and in which the merits of single-hop and multi-hop are utilized. The proposed scheme uses a cost function to select the most appropriate route to sink. This cost function is calculated based on their distance from the sink as well as their residual energy. Nodes with lesser value of cost function are elected as parent node. Other nodes become children of that parent node and forward their data to parent node. Two of the eight nodes forward their data directly to sink as they are placed near the sink; and will serve as the parent nodes. The channel for wearable BAN can be basically described by path loss models with two parameters of frequency and distance. It is calculated from its distance to sink with constant frequency 2.4GHz. The results shows that proposed routing scheme has considerably enhanced the network stability time and in terms of cross-layer application, it has reduced the path-loss to a significantly low-level

5. CONCLUSION

The increasing use of wireless networks and the constant miniaturization of electrical devices has empowered the development of Wireless Body Area Networks (WBANs). In these networks various sensors are attached on clothing or on the body or even implanted under the skin. The wireless nature of the network and the wide variety of sensors power numerous new, practical and innovative applications to improve health care and the Quality of Life. The sensors of a WBAN measure for example the heartbeat, the body temperature or record a prolonged electrocardiogram. In this survey, we have reviewed the current research on Wireless Body Area Networks. In particular, this work presents an overview of the research on the human body, MAC-protocols in WBAN, challenges in WBAN and also describes the various applications in WBAN.

6. References

- [1] Z. Haider, M. Saleem, and T. Jamal, "Analysis of Interference in Wireless", in Proc. of ArXiv, arXiv:1810.13164 [cs.NI], Oct. 2018.
- [2] T. Jamal and P. Mendes, "Relay Selection Approaches for Wireless Cooperative Networks", in Proc. of IEEE WiMob, Niagara Falls, Canada, Oct. 2010.
- [3] T. Jamal, P. Mendes, and A. Zúquete, "Opportunistic Relay Selection for Wireless Cooperative Network", in Proc. of IEEE IFIP NTMS, Istanbul Turkey, May 2012.

- [4] T. Jamal and P. Mendes, "Cooperative relaying in user-centric networking under interference conditions", in Proc. of IEEE Communications Magazine, vol. 52, no. 12, pp. 18–24, Dec 2014.
- [5] P. Mendes, W. Moreira, T. Jamal, and Huiling Zhu, "Cooperative Networking in User-Centric Wireless Networks", In: Aldini A., Bogliolo A. (eds) User-Centric Networking. Lecture Notes in Social Networks. Springer, Cham, ISBN 978-3-319- 05217-5, May 2014.
- [6] T. Jamal, P. Mendes, and A. Zúquete, "Relayspot: A Framework for Opportunistic Cooperative Relaying", in Proc. of IARIA ACCESS, Luxembourg, June 2011.
- [7] T. Jamal, and SA Butt, "Malicious Node Analysis in MANETS", in Proc. of International Journal of Information Technology, PP. 1-9, Springer Publisher, Apr. 2018.
- [8] T. Jamal, and P. Mendes, "COOPERATIVE RELAYING FOR DYNAMIC NETWORKS", EU PATENT, (EP13182366.8), Aug. 2013.
- [9] T. Jamal, and P. Mendes, "802.11 Medium Access Control In MiXiM", in Proc. of Tech Rep. SITILabs-TR-13-02, University Lusófona, Lisbon Portugal, Mar. 2013.
- [10] T. Jamal, M. Alam, and MM Umair, "Detection and Prevention Against RTS Attacks in Wireless LANs", in Proc. of IEEE C-CODE, Islamabad Pakistan, Mar. 2017.
- [11] L. Lopes, T. Jamal, and P. Mendes, "Towards Implementing Cooperative Relaying", In Proc. of Technical Report COPE-TR-13-06, CopeLabs University Lusofona Portugal, Jan 2013.
- [12] T. Jamal, P. Mendes, and A. Zúquete, "Interference-Aware Opportunistic Relay Selection", In Proc. of ACM CoNEXT student workshop, Tokyo, Japan, Dec. 2011.
- [13] T. Jamal, "Cooperative MAC for Wireless Network", In Proc. of 1st MAP Tele Workshop, Porto, Portugal, 2010.
- [14] T. Jamal and P. Mendes, "Analysis of Hybrid Relaying in Cooperative WLAN", In Proc. of IEEE IFIP Wireless Days (WD), Valencia, Spain, November 2013.
- [15] T. Jamal, and P. Mendes, "Cooperative Relaying for Wireless Local Area Networks", In: Ganchev I., Curado M., Kassler A. (eds) Wireless Networking for Moving Objects. Lecture Notes in Computer Science, vol 8611. Springer, Cham, (WiNeMo), Aug. 2014.
- [16] T. Jamal, and SA Butt, "Cooperative Cloudlet for Pervasive Networks", in Proc. of Asia Pacific Journal of Multidisciplinary Research, Vol. 5, No. 3, PP. 42-26, Aug 2017.
- [17] T. Jamal, P. Mendes, and A. Zúquete, "Wireless Cooperative Relaying Based on Opportunistic Relay Selection", in Proc. of International Journal on Advances in Networks and Services, Vol. 5, No. 2, PP. 116-127, Jun. 2012.
- [18] SA Butt, and T. Jamal, "Frequent Change Request from User to Handle Cost on Project in Agile Model", in Proc. of Asia Pacific Journal of Multidisciplinary Research 5 (2), 26-42, 2017.
- [19] T. Jamal, and P. Amaral, "Flow Table Congestion in Software Defined Networks", in Proc. of IARIA 12th ICDS, Rome Italy, Mar. 2018.
- [20] R. Sofia, P. Mendes, W. Moreira, A. Ribeiro, S. Queiroz, A. Junior, T. Jamal, N. Chama, and L. Carvalho, "Upns: User Provided Networks, technical report: LivingExamples, Challenges, Advantages", Tech. Rep. SITI-TR-11- 03, Research Unit in Informatics Systems and Technologies (SITI), University Lusofona, Lisbon Portugal, Mar. 2011.

- [21] T. Jamal, and P. Mendes, "Cooperative Relaying in Wireless User-Centric Networks", Book Chapter In: Aldini, A., Bogliolo, A. (eds.) User Centric Networking. Lecture Notes in Social Networks, Springer, Cham, pp. 171–195, 2014.
- [22] T. Jamal, P. Mendes, and A. Zúquete, "Design and Performance of Wireless Cooperative Relaying", PhD Thesis MAP-Tele, University of Aveiro, Oct. 2013.
- [23] T. Jamal, P. Mendes, and A. Zuquete, "RelaySpot: Cooperative Wireless Relaying", in Proc. of MAP-Tele Workshop, Aveiro, Portugal, May 2011.
- [24] T. Jamal, and P. Mendes, "Cooperative Wireless Relaying, Key Factors for Relay Selection", in Proc. of MAP-Tele Workshop, Porto, Portugal, Dec. 2009.
- [25] SA Butt, and T. Jamal, "Study of Black Hole Attack in AODV", in Proc. of International Journal of Future Generation Communication and Networking, Vol. 10, No.9, pp. 37-48, 2017.
- [26] T. Jamal, and SA Butt, "Low-Energy Adaptive Clustering Hierarchy (LEACH) Enhancement for Military Security Operations", In Proc. Of Journal of Basic and Applied Scientific Research, ISSN 2090-4304, 2017.
- [27] T. Jamal, and P. Mendes, "RelaySpot, OMNET++ Module", Software Simulator Extension In Proc. of COPE-SW-13-05, 2013.
- [28] T. Jamal and Z. Haider, "Denial of Service Attack in Cooperative Networks", in Proc. of ArXiv, arXiv: CoRR Vol. arXiv:1810.11070 [cs.NI], Oct. 2018.
- [29] M. Asam and T. Jamal, "Security Issues in WBANs", in proc of Arxiv, Volume arXiv:1911.04330 [cs.NI], November 2019.
- [30] M. Asam and Z. Haider, "Novel Relay Selection Protocol for Cooperative Networks", in proc of Arxiv, Volume arXiv: 1911.07764 [cs.NI], November 2019.
- [31] SA Butt and T. Jamal, "A multivariant secure framework for smart mobile health application", in Transactions on Emerging Telecommunications Technologies, Aug. 2019.
- [32] S. A. Butt, T. Jamal, and M. Shoaib, "IoT Smart Health Security Threats," in proc. of 19th International Conference on Computational Science and Its Applications (ICCSA), Saint Petersburg, Russia, 2019, pp. 26- 31. doi: 10.1109/ICCSA.2019.000-8.
- [33] M. Asam and A. Ajaz, "Challenges in Wireless Body Area Network", in Proc. of International Journal of Advanced Computer Science and Applications, Volume 10, No. 11, Nov. 2019.
- [34] SA Butt and T. jamal, "Predictive Variables for Agile Development Merging Cloud Computing Services", in Proc. of IEEE Access, Volume 7, 2019. DOI: 10.1109/ACCESS.2019.2929169.
- [35] T Jamal, P Amaral, A Khan, SAB, Kiramat, "Denial of Service Attack in Wireless LAN", in Proc of 12th ICDS 2018, Rome Italy.
- [36] M. Asam, K. Ghmman and Z. Haider, "Ubiquity of Healthcare System", in Proc of e-LIS [Preprint], Dec 2019, <http://eprints.rclis.org/39303/>
- [37] A Khalid, SA Butt, T Jamal, and S Gochhait, "Agile Scrum Issues at Large-Scale Distributed Projects: Scrum Project Development At Large", in International Journal of Software Innovation (IJSI), Vol 8, Issue 2, Pages: 85-94, IGI Global 2020.

- [38] S Gochhait, SA Butt, T Jamal, and A Ali, "Cloud Enhances Agile Software Development" Book Chapter in Cloud Computing Applications and Techniques for E -Commerce, Pages: 28-49, IGI Global, 2020.
- [39] Z Haider, T Jamal, M Asam, S Butt, A Ajaz. In "International Journal of Security and Its Applications", Vol. 14, No. 1, Pages 15-30, ISSN: 2207-9629, 2020.
- [40] M. Naeem, Tauseef Jamal, Jorge Diaz-Martinez, Shariq Aziz Butt and Nicolo Montesano, , "Trends and Future Perspective Challenges in Big Data", in Proc. Of The Sixth Euro-China Conference on Intelligent Data Analysis and Applications (ECC2019) Arad-Romania, March 2020.