



UNIVERSITI PUTRA MALAYSIA

***RIVERBANK FILTRATION AS A CONJUNCTIVE USE BETWEEN
SURFACEWATER AND GROUNDWATER FOR WATER SECURITY***

MOHD KHAIRUL NIZAR BIN SHAMSUDDIN

FPAS 2019 1



**RIVERBANK FILTRATION AS A CONJUNCTIVE USE BETWEEN
SURFACEWATER AND GROUNDWATER FOR WATER SECURITY**

By

MOHD KHAIRUL NIZAR BIN SHAMSUDDIN

**Thesis Submitted to the School of Graduate Studies, Universiti Putra
Malaysia, in Fulfillment of the Requirements for the Doctor of Philosophy**

January 2019

All material contained within the thesis, including without limitation text, logos, icons, photographs and all other artwork, is copyright material of Universiti Putra Malaysia unless otherwise stated. Use may be made of any material contained within the thesis for non-commercial purposes from the copyright holder. Commercial use of material may only be made with the express, prior, written permission of Universiti Putra Malaysia.

Copyright © Universiti Putra Malaysia



Abstract of thesis presented to the Senate of Universiti Putra Malaysia in fulfillment of the requirement for the degree of Doctor of Philosophy

RIVERBANK FILTRATION AS A CONJUNCTIVE USE BETWEEN SURFACEWATER AND GROUNDWATER FOR WATER SECURITY

By

MOHD KHAIRUL NIZAR BIN SHAMSUDDIN

January 2019

Chairman : Wan Nor Azmin Sulaiman, PhD
Faculty : Environmental Studies

Climate change has caused limited water resources in many parts of the world. In fact, high occurrences of river pollution in Malaysia have led to the decrease in drinking water resources. This causes the closure of water intakes and water treatment plants which have impacted water supply, and thus, affected economic activities in the manufacturing industry and other sectors. Riverbank filtration (RBF) is one of the solutions to providing raw water for public supply in tropical countries. RBF is natural process using natural soil (aquifer) to treat surface water and seeping from the bank or bed of a river or lake to the pumping wells where, surface water and groundwater were used conjunctively for water supply. In this study, a pilot site consisting of three areas located at Langat river basin, Linggi river basin and Muda river basin based on hydrogeology and land use were monitored. Nevertheless, RBF needed to be assessed on its feasibility based on the local site geological characteristics. Therefore, this research was carried out to fill in the knowledge gap in evaluating the capability of combined use groundwater and surface water using RBF system by using a number of research methods. For that reason, measuring the efficiency of RBF involved geophysical data, sieve (particle size) analysis, pumping test data, isotope analysis, statistical tools, numerical modelling, and water quality data technique. The physicochemical and microbiological parameters of the local surface water and groundwater were analysed before and during water abstraction. Abstraction of water revealed a 5–98 % decrease in turbidity, as well as reductions in HCO_3^- , Cl^- , SO_4^{2-} , NO_3^- , Ca^{2+} , Al^{3+} and As concentrations compared with those of surface water. In addition, amounts of E. coli, total coliform and Giardia were significantly reduced (99.9 %). However, water samples from test wells during pumping showed high

concentrations of Fe^{2+} and Mn^{2+} . From the numerical modelling, the proposed method performs filtration safely and achieves the ideal pumping rate. Results indicate that the migration of river water into the aquifer is generally slow and depends on the pumping rate and distance from well to the river. Most river water arrives at the well by the end of a pumping period of 1 to 5 days. During the 9.7-day pumping period, 33 % of the water pumped from the well was river water based on the distance at 36 m from river, and 38 % of the water pumped from 18 m distance from river throughout 4.6 day was river water. In examining the interaction between the surface water and the groundwater, environmental isotopes like $\delta^2\text{H}$ and $\delta^{18}\text{O}$ were studied primarily. The environmental isotope and hydro-chemical sampling results had emphasised that the area near river basin had a connection with the river and groundwater was actively recharging the near-river shallow alluvial aquifer, via RBF method. The approximate hydraulic conductivity (K) values of samples taken from riverbanks and streambeds, respectively, were then calculated by employing empirical equation methods, pumping test and permeability tests indicated that the value of K was important in clogging processes and the velocities and residence times in the subsoil. Furthermore, samples of groundwater and surface water of standard drinking water quality for both wet and dry seasons have been collected and analysed for various parameters and water indices. Result was indicated that all groundwater and surface water samples can be categorised as excellent and good categories respectively. In conclusion, Malaysia riverbank were suitability of RBF systems had a higher potential area and were able to generate potable drinking water but various method such as geophysical, hydro-chemical, geochemical, stable isotope approaches pumping test, statistical tools and numerical modelling must be priority to applied during the RBF studies. RBF is acceptable as a conjunctive use of surface water and groundwater for national water security applicable during climate change.

Abstrak tesis yang dikemukakan kepada Senat Universiti Putra Malaysia
sebagai memenuhi keperluan untuk ijazah Doktor Falsafah

SUSUPAN TEBING SEBAGAI KEGUNAAN KONJUKTIF DI ANTARA AIR PERMUKAAN DAN AIR TANAH BAGI SEKURITI AIR

Oleh

MOHD KHAIRUL NIZAR BIN SHAMSUDDIN

Januari 2019

Pengerusi : Wan Nor Azmin Sulaiman , PhD
Fakulti : Pengajian Alam Sekitar

Perubahan iklim telah menyebabkan sumber air yang terhad di kebanyakan bahagian di dunia. Malah, kejadian pencemaran sungai yang tinggi di Malaysia telah mengakibatkan penurunan sumber air minuman. Ini menyebabkan penutupan muka sauk dan loji rawatan air yang memberi kesan kepada bekalan air, malah, mempengaruhi aktiviti ekonomi dalam industri perkilangan dan sektor lain. Susupan tebing sungai (RBF) merupakan salah satu penyelesaian untuk menyediakan air mentah bagi bekalan air awam di negara-negara tropika. RBF adalah proses semulajadi yang menggunakan tanah asal (akuifer) untuk merawat air permukaan dan air tersebut meresap dari tebing sungai atau dasar sungai atau tasik ke telaga pengepaman di mana, air permukaan dan air tanah digunakan secara gunasama untuk bekalan air. Dalam kajian ini, sebuah tapak perintis yang terdiri daripada tiga kawasan yang terletak di lembangan sungai Langat, lembangan sungai Linggi dan lembangan sungai Muda yang berdasarkan kepada hidrogeologi dan penggunaan tanah dipantau. Walau bagaimanapun, RBF perlu dinilai berdasarkan kemungkinan ciri hidrologi dan hidrogeologi tapak setempat. Oleh itu, kajian ini dijalankan untuk mengisi jurang pengetahuan dalam menilai keupayaan gabungan air tanah dan air permukaan menggunakan sistem RBF dengan menggunakan beberapa kaedah penyelidikan. Oleh sebab itu, mengukur kecekapan RBF melibatkan data geofizik, analisis ayakan (saiz zarah), data ujian pengepaman, analisis isotop, statistik, pemodelan numerikal, dan data kualiti air. Parameter fizikokimia dan mikrobiologi air permukaan dan air tanah tempatan dianalisa sebelum dan semasa abstraksi air. Pengekstrakan air menunjukkan 5-98% penurunan dalam kekeruhan, serta pengurangan kepekatan HCO_3^- , Cl^- , SO_4^{2-} , NO_3^- , Ca^{2+} , Al^{3+} berbanding dengan air permukaan. Di samping itu, jumlah E. coli, jumlah coliform dan Giardia berkurangan (99.9%). Walau bagaimanapun, sampel air dari salur ujian semasa pam menunjukkan kepekatan tinggi Fe^{2+} dan Mn^{2+} . Dari kaedah pemodelan numerikal yang boleh dicadangkan untuk mencapai

penapisan dengan selamat dan mencapai kadar pengepaman yang ideal. Keputusan menunjukkan bahawa migrasi air sungai ke dalam akuifer biasanya lambat dan bergantung pada kadar pengepaman dan jarak dari telaga ke sungai. Kebanyakan air sungai tiba di telaga pada penghujung tempoh pengepaman 1 hingga 5 hari. Sepanjang tempoh pengepaman 9.7 hari, 33% air yang dipam dari telaga adalah air sungai berdasarkan jarak di 36 m dari sungai, dan 38% daripada air yang dipam dari jarak 18 m selama 4.6 hari adalah air sungai. Manakala, dalam mengkaji interaksi antara air permukaan dengan air tanah, isotop persekitaran seperti $\delta^2\text{H}$ dan $\delta^{18}\text{O}$ diberi keutamaan dalam kajian. Keputusan persampelan isotop dan persekitaran hidro-kimia telah menekankan bahawa kawasan berhampiran lembah sungai mempunyai hubungan dengan sungai dan air tanah dan secara aktif mengimbuh akuifer aluvial cetek berhampiran sungai, melalui kaedah RBF. Seterusnya, nilai kekonduksian hidraulik (K) dari sampel yang diambil dari tebing sungai dan dasar sungai, kemudiannya dikira dengan menggunakan kaedah persamaan empirikal, dari ujian pengepaman dan ujian kebolehtelapan menunjukkan bahawa nilai K adalah penting dalam proses penyumbatan dan halaju dan masa simpanan air tanah di dalam tanah. Malah, sampel air tanah dan air permukaan untuk tujuan analisis kualiti air minuman standard bagi musim basah dan kering telah dikumpulkan dan dianalisis untuk pelbagai parameter dan indeks air. Keputusan menunjukkan bahawa semua sampel air tanah dan air permukaan boleh dikategorikan sebagai kategori yang sangat baik dan baik. Sebagai kesimpulan dari penyelidikan ini, tebing sungai Malaysia mempunyai potensi yang lebih tinggi dan dapat menghasilkan air minuman yang boleh diminum dengan menggunakan sistem RBF tetapi pelbagai kaedah seperti geofizik, hidro-kimia, geokimia, pendekatan isotop yang stabil, ujian pam, alat statistik dan pemodelan numerikal mesti menjadi keutamaan untuk digunakan semasa kajian RBF. Dalam kajian ini juga, RBF ini boleh diterima sebagai penggunaan bersama air permukaan dan air tanah sebagai jaminan air negara yang boleh digunapakai semasa musim perubahan iklim.

ACKNOWLEDGEMENTS

I would like to take this opportunity to thank Prof Dr Wan Azmin Sulaiman, Associate Prof Mohammad Firuz Ramli, Dr Faradiella Mohd Kusin, Dr Saim Suratman and Dr. Kamarudin Samuding for giving me valuable suggestions and continuous encouragement during the preparation of this thesis. I wish to thank all other staff of the Faculty of Environment, Universiti of Putra Malaysia who has helped me during the years of the study here.

I would like to thank a number of research officer at the National Hydraulic Research Institute of Malaysia (NAHRIM) especially Mr Ismail Tawnie, Mr. Azrul Normi, Mr. Anuar Sefie, Mr. Arshad Osman, Mr. Ali Sarudin and Mr. Syaiful Bahren Saadudin who has helped me in getting all the related data on RBF study and who has helped and accompanying me in the field works.

Thanks also to the staff of the Minerals and Geoscience Malaysia (JMG), Kedah, Negeri Sembilan and Selangor who have directly or indirectly helped me during data collection.

I would also like to thank the Malaysian Meteorological Department (JMM), Drainage and Irrigation Department (DID) and Department of Environment (DOE) for allowing me access to essential hydrological and environmental data which they hold.

Lastly, the warmest thank to my dearest wife, Mrs Zurina Salleh and my lovely daughters Ms Nur Damia Husna who have been very supportive during the preparation of this thesis.

I certify that a Thesis Examination Committee has met on 8 January 2019 to conduct the final examination of Mohd Khairul Nizar bin Shamsuddin on his thesis entitled "Riverbank Filtration as a Conjunctive Use Between Surfacewater and Groundwater for Water Security" in accordance with the Universities and University Colleges Act 1971 and the Constitution of the Universiti Putra Malaysia [P.U.(A) 106] 15 March 1998. The Committee recommends that the student be awarded the Doctor of Philosophy.

Members of the Thesis Examination Committee were as follows:

Ahmad Makmom bin Abdullah, PhD

Professor
Faculty of Environmental Studies
Universiti Putra Malaysia
(Chairman)

Mohd Yusoff bin Ishak, PhD


Senior Lecturer
Faculty of Environmental Studies
Universiti Putra Malaysia
(Internal Examiner)

Aimrun Wayayok, PhD

Senior Lecturer
Faculty of Engineering
Universiti Putra Malaysia
(Internal Examiner)

Rashid Umar, PhD

Professor
Aligarh Muslim University
India
(External Examiner)



RUSLI HAJI ABDULLAH, PhD

Professor and Deputy Dean
School of Graduate Studies
Universiti Putra Malaysia

Date: 26 March 2019

This thesis was submitted to the Senate of Universiti Putra Malaysia and has been accepted as fulfilment of the requirement for the degree of Doctor of Philosophy. The members of the Supervisory Committee were as follows:

Wan Nor Azmin Sulaiman, PhD

Professor
Faculty of Environmental Studies
Universiti Putra Malaysia
(Chairman)

Mohammad Firuz Ramli, PhD

Associate Professor
Faculty of Environmental Studies
Universiti Putra Malaysia
(Member)

Faradiella Mohd Kusin, PhD

Senior Lecturer
Faculty of Environmental Studies
Universiti Putra Malaysia
(Member)

Kamaruding Samuding, PhD

Environmental Division,
Malaysian Nuclear Agency
Malaysia
(Member)

ROBIAH BINTI YUNUS, PhD

Professor and Dean
School of Graduate Studies
Universiti Putra Malaysia

Date:

Declaration by Graduate Student

I hereby confirm that:

- this thesis is my original work;
- quotations, illustrations and citations have been duly referenced;
- this thesis has not been submitted previously or concurrently for any other degree at any other institutions;
- intellectual property from the thesis and copyright of thesis are fully-owned by Universiti Putra Malaysia, as according to the Universiti Putra Malaysia (Research) Rules 2012;
- written permission must be obtained from supervisor and the office of Deputy Vice-Chancellor (Research and Innovation) before thesis is published (in the form of written, printed or in electronic form) including books, journals, modules, proceedings, popular writings, seminar papers, manuscripts, posters, reports, lecture notes, learning modules or any other materials as stated in the Universiti Putra Malaysia (Research) Rules 2012;
- there is no plagiarism or data falsification/fabrication in the thesis, and scholarly integrity is upheld as according to the Universiti Putra Malaysia (Graduate Studies) Rules 2003 (Revision 2012-2013) and the Universiti Putra Malaysia (Research) Rules 2012. The thesis has undergone plagiarism detection software.

Signature: _____ Date: _____

Name and Matric No.: _____

Declaration by Members of Supervisory Committee

This is to confirm that:

- The research conducted and the writing of this thesis was under our supervision; Guide to Thesis Preparation
- Supervision responsibilities as stated in the Universiti Putra Malaysia (Graduate Studies) Rules 2003 (Revision 2012-2013) are adhered to.

Signature: _____
Name of
Chairman of
Supervisory
Committee: _____

Signature: _____
Name of
Member of
Supervisory
Committee: _____

Signature: _____
Name of
Member of
Supervisory
Committee: _____

Signature: _____
Name of
Member of
Supervisory
Committee: _____

TABLE OF CONTENTS

	Page
ABSTRACT	i
ABSTRAK	iii
ACKNOWLEDGEMENTS	v
APPROVAL	vi
DECLARATION	viii
LIST OF TABLES	xvi
LIST OF FIGURES	xviii
LIST OF ABBREVIATIONS	xxii
CHAPTER	
1 INTRODUCTION	1
1.1 Background of the study	1
1.2 Problem Statement and current challenges	3
1.3 Needs of the study	5
1.4 Objectives of this study	6
1.5 Scope of the study	6
1.6 Limitation of the study	7
1.7 Significance of the study	7
1.8 Research Framework of the study	8
1.9 Outline of thesis	11
2 LITERATURE REVIEW	14
2.1 Introduction	14
2.2 Concepts of conjunctive use of surfacewater and groundwater	16
2.3 The History Development of Conjunctive Use Surfacewater and Groundwater Using RBF	17
2.4 Factors and Overview of RBF	18
2.5 Limitations of RBF system	19
2.6 Discussion and recommendation about the applicability of RBF in Malaysia	21
2.7 Summary	23
3	25

EVALUATION POTENTIAL OF THE CONJUNCTIVE USE OF THE SURFACE WATER AND GROUNDWATER USING THE RIVERBANK FILTRATION IN MALAYSIA

3.1	Introduction	25
3.2	Materials and methods	27
3.2.1	Development of the riverbank filtration sites	27
3.3	Results and discussion	30
3.3.1	RBF systems	30
3.3.1.1	Langat River	30
3.3.1.2	Linggi River	33
3.3.1.3	Muda River	39
3.4	Identification of the hydraulic conductivity using the grain-size analysis	40
3.5	Pumping test	44
3.6	Quality characteristics of water extracted during the pumping test	47
3.7	RBF process during the pumping test	57
3.8	Removal of microbes from the aquifer system	58
3.9	Proposed RBF sites and Alternative Options	60
3.9.1	Horizontal Collector Wells (HCW)	60
3.9.2	Development of the inverted wells at the Linggi River Basin	60
3.10	Conclusions	65
4	HYDROCHEMICAL ASSESSMENT OF SURFACEWATER AND GROUNDWATER QUALITY AT RBF SITE	67
4.1	Introduction	67
4.2	Methodology	69
4.2.1	Study Site	69
4.2.2	Monitoring and Test Wells	69
4.2.3	Data Collection and treatment	69
4.2.4	Data analyses	70
4.2.5	Analytical Methods	71
4.3	Results and Discussion	72
4.3.1	Hydrochemical Characteristics	72
4.3.2	Surface and Ground Water Classification	73
4.3.3	Surface and Groundwater Spatial Pattern Discrimination	73
4.3.4	Correlation between Variables Source Identification Using PCA and Factor	74
4.3.5	Analysis (FA)	75
4.4	Conclusion	76

5	FORECASTING OF GROUNDWATER LEVEL USING ARTIFICIAL NEURAL NETWORK BY INCORPORATING RIVER RECHARGE AND RIVER BANK FILTRATION	86
5.1	Introduction	86
5.2	Materials and Methods	88
5.2.1	Study area	88
5.2.2	Geology and Hydrogeology	88
5.2.3	ANN Architectures and Training Algorithms	89
5.2.4	Feed forward neural network (FNN)	89
5.2.5	Training Algorithms	90
5.2.6	Design of ANN	90
5.2.6.1	Model 1: Dynamic prediction	93
5.2.6.2	Model 2: Time series prediction	93
5.2.7	Evaluation of ANN efficiency	95
5.2.8	Correlation Coefficient (R)	95
5.2.9	Mean square Error (MSE)	95
5.2.10	Root Mean Square Error (RMSE)	95
5.2.11	Coefficient Determination (R^2)	96
5.2.12	Residual error (RE)	96
5.3	Results and discussion	96
5.4	Conclusion	111
6	PARTICLE TRACKING ANALYSIS OF RIVER-AQUIFER INTERACTIONS VIA RIVERBANK	112
6.1	Introduction	112
6.2	Materials and method	113
6.2.1	Conceptual model	113
6.2.2	Numerical modelling	116
6.2.3	Model parameters	117
6.2.4	Steady-state (no pump well is activated) groundwater flow model and calibration	119
6.2.5	Transient groundwater flow simulation and calibration	123
6.2.6	Particle tracking simulation	124
6.3	Result and Discussion	124
6.3.1	Calibration Results for Groundwater Flow Simulation	124

	6.3.2	Forward tracking from the river travel times and pathline determination	125
	6.3.3	Varied pumping rates and river pumping simulations	127
	6.3.4	Riverbank filtration influence zone	128
	6.3.5	Backward tracking of particles: delineation of capture zone analysis	128
	6.3.6	Mixture of groundwater, river water, and pond at the pumping well	129
	6.4	Conclusion	132
7		ASSESSMENTS OF SEASONAL GROUNDWATER RECHARGE AND DISCHARGE USING ENVIRONMENTAL STABLE ISOTOPES AT LOWER MUDA RIVER BASIN, MALAYSIA	133
	7.1	Introduction	133
	7.2	Study Area	135
	7.2.1	Quaternary geology and hydrogeology	136
	7.3	Material and Methods	137
	7.4	Results and Discussion	140
	7.4.1	Comparison of $\delta^{18}\text{O}$ and chloride (Cl^-)	141
	7.4.2	Isotopic compositions of rainfall	141
	7.4.3	Isotopic compositions of river water	144
	7.4.4	Isotopic compositions of groundwater	145
	7.4.5	Deuterium excess factor	149
	7.5	Conclusion	149
8		VERTICAL HYDRAULIC CONDUCTIVITY OF RIVERBANK AND HYPORHEIC ZONE SEDIMENT AT MUDA RIVER RIVERBANK FILTRATION SITE, MALAYSIA	152
	8.1	Introduction	152
	8.2	Study area	155
	8.2.1	Geological setting	155
	8.3	Material and methods	156
	8.3.1	Sediment sampling and grainsize analysis	156
	8.3.2	Grainsize analysis from empirical formulae	158
	8.3.3	Riverbed Sediment Sampling	159
	8.3.4	In situ permeability test	159
	8.3.5	Determination of hydraulic parameters by pumping tests	160

8.4	Result and discussion	161
8.4.1	Kg and Kgs values using the empirical formulas	161
8.4.2	K value from pumping test	178
8.4.3	Measurement of permeability from falling head permeability tests in boreholes	180
8.5	Conclusion	182
9	GEOCHEMICAL CHARACTERISTIC AND WATER QUALITY INDEX OF GROUNDWATER AND SURFACE WATER AT LOWER RIVER MUDA BASIN, MALAYSIA	184
9.1	Introduction	184
9.2	Study area	187
9.2.1	Quaternary Geology and Hydrogeology	187
9.3	Material and methods	187
9.4	Result and discussion	190
9.4.1	Groundwater and Surfacewater Characterization	190
9.4.2	Trace Elements Geochemistry	191
9.4.3	Hydrogeochemical Facies and Process	192
9.4.4	Mineral Saturation index (MSI)	192
9.4.4.1	Saturation index and water mineral	192
9.4.4.2	Chloro-alkaline indices (CAI)	200
9.4.4.3	Chadha's diagram water type	200
9.4.4.4	Geochemical reactions	201
9.4.4.5	Enrichments of ions	207
9.4.4.6	Processes controlling the groundwater and surface water chemistry	208
9.4.5	Water quality for irrigation	228
9.4.5.1	Chloride ions	228
9.4.5.2	Electrical conductivity	229
9.4.6	Suitability for irrigation	229
9.4.6.1	Magnesium hazard	230
9.4.6.2	Total hardness	230
9.4.6.3	Permeability index (PI)	231
9.4.6.4	Kelly's index	232

	9.4.6.5	Sodium adsorption ratio (SAR)	232
	9.4.6.6	Soluble sodium percentage (SSP) or Sodium Percent (Na%)	233
	9.4.6.7	Residual sodium carbonates (RCS)	233
	9.5	Conclusion	239
10	SUMMARY, CONCLUSION AND RECOMMENDATIONS FOR FUTURE RESEARCH		241
	10.1	Summary and Conclusion	241
	10.2	Recommendations	245
	10.3	Future research	246
	REFERENCES		248
	APPENDICES		305
	BIODATA OF STUDENT		357
	LIST OF PUBLICATIONS		358

LIST OF TABLES

Table		Page
3.1	Values from Hazen (1911), Kozeny-Carmen (1956), D10, D20, D50, and D60 values obtained from grain size analysis	48
3.2	Constant pumping test and Recovery test results for TW2, PZ3 and PZ4 for Langat River Basin	48
3.3	Result of pumping test analyses for value of Transmissivity (T) and hydraulic conductivity (K) based on the Theis equation for Muda Riverbank RBF	50
3.4	Water quality during pumping test (abstraction), for period of 24 hours, 48 hours and 72 hours and percentage removals of chemicals at TW1 and TW2 wells, Pond A, Pond B and Pond C and Langat River and Drinking Water Standard, Department of Standard Malaysia (DSM), (2010).3.4	53
3.5	Water quality during pumping test (abstraction), for period of 24 hours, 48 hours and 72 hours and percentage removals of chemicals Linggi River (SL-TW1 and SL-TW2 and monitoring wells SL-W11, SL-W12, SL-W13, SL-W14, SL-SW15, JL-4, JL-5, Upstream and downstream) and Drinking Water Standard, Department of Standard Malaysia (DSM), (2010)	54
3.6	Water quality during pumping test (abstraction), for period of 24 hours, 48 hours and 72 hours and percentage removals of chemicals at Muda River (TW1 and TW2 and upstream and downstream river) and Drinking Water Standard, Department of Standard Malaysia (DSM), (2010)	55
3.7	Occurrence of total coliform, fecal coliform, E.coli, Cryptosporidium and Giardia in surfacewater and groundwater in Langat River RBF, Linggi River RBF and Muda RBF River during pumping test	61
4.1	Descriptive statistics (mean, SD (standard deviation), minimum and maximum) of the surface water quality of Jenderam Hilir	78
4.2	Classification matrix for DA of spatial variations in surface water and groundwater interaction study at Bank filtration site	80
4.3	Pearson correlation coefficients for 13 hydrogeochemical variables of water samples. Coefficients are significant at the 0.05 level and those higher than 0.70 were shown as bold fonts.	82
4.4	Loading of 28 hydrochemical variables on nine significant varifactors (VF).Coefficients are significant at the 0.05 level and those higher than 0.50 were shown as bold fonts	84
5.1	Performance statistic for model 1 and model 2.	102
6.1	Input parameters for the model and simulation strategies for this study	121
7.1	Sampling 24 locations including surfacewater and groundwater of the study area	139
8.1	Summary of the applied formulas, key parameters and citation	162
8.2	List of symbols of equations	165
8.3	Pumping Rate for 3 days for test wells at the study area	166

8.4	Measured hydraulic conductivity, porosity, statistical moments, d values, and mud percentage for all samples	168
8.5	Values of geometry mean of Kv (in m/s) for methods used by grain-size analyses for six layer in lower muda basin	174
8.6	Mean of Kg Value from empirical data for streambed (right, left and middle of river) until 9 m depth	177
8.7	Results of Transsimitivity (T), Hydraulic Conductivity (K) and storage (s) from pumping test and observation wells	180
8.8	Field permeability test from falling head test versus depths for riverbed and riverbanks from observation wells	181
9.1	Minimum, maximum and average of ionic concentrations and other physical parameters of groundwater and surface water and guidelines for maximum permissible levels for raw water quality and and drinking-water standards (DSM 2010)	194
9.2	The interpretation of the probable source rock was done following many sequential steps and based on the computed results	214
9.3	Geochemical Classification of groundwater and surfacewater quality based on suitability of water for irrigation purposes. Percentage of groundwater samples falling in various irrigational classifications. The ranges of the parameter are mentioned in the meg/L	235

LIST OF FIGURES

Figure		Page
1.1	Existing of water use in Muda River Basin	9
1.2	Frame work of riverbank filtration study for Langat, Linggi, and Muda river basin	9
1.3	Summary of the process for feasibility study of Riverbank Filtration	10
1.4	Scope of work for feasibility study tu fulfill the Riverbank filtration study	10
1.5	Framework for Riverbank filtration (RBF) study	13
2.1	Basic scheme of RBF and main attenuation processes (Hiscock and Grischek, 2002)	19
3.1	A simplified map of the study area and schematic profile of Langat River (Sg. Langat).A is crosssection of AA', B is crosssection of BB', C is crosssection for CC', D is crosssection for DD', E is crosssection for EE', F is cross section of TW1 test wells and G is crosssection of TW 2 test wells	34
3.2	The 2-D image profile for the survey line L1-L1' at the site of Langat river	35
3.3	The 2-D image profile for the survey line L2-L2' at the site of Langat river	36
3.4	The 2-D image profile for the survey line L1-L1' at the site of Linggi river	37
3.5	The 2-D image profile for the survey line L1-L1' at the site Muda river	38
3.6	The location of the cross section lines (AA', BB', CC'and DD') and the test wells and monitoring wells at the study area	42
3.7	Location of wells and surfacewater resources at the study area of Kedah and Penang	43
3.8	Schematic of cross section of Muda River and between 2 states Kedah and Penang	43
3.9	Constant pumping test of SL-TW2 and piezometer SL-MW15, SL-MW14, SL-MW13, SL-MW 12, SL-MW11 and SL-JL13 at Linggi River RBF calculating using Theis equation	49
3.10	Recovery test of test well SL-TW2 and piezometer SL-MW15, SL-MW14, SL-MW13, SL-MW 12, SL-MW11 and SL-JL13 at Linggi River RBF	51
3.11	Contour of water level during pumping water after 72 hours of pumping for Linggi River RBF	52
3.12	Plan views of proposed RBF 1 and RBF 2 and the cross section of pipe jacking between RBF 1 and RBF 2	63
3.13	Schematic diagram of RBF option using pipe jacking and treatment system	63

3.14	Design of Inverted Wells in Linggi River Basin	64
4.1	Piper trilinear diagram for the data obtained from chemical analysis of river, lake and groundwater sample from Jenderam Hilir	77
4.2	Box and whisker plots of some parameters separated by DA associated with the water quality data of Langat and Jenderam Hilir rivers, lakes and groundwater	81
5.1	Geological log and DW1 well design	91
5.2	Geological log and DW2 well design	92
5.3	Typical feedforward neural network of the study	94
5.4	Daily groundwater level fluctuations at Langat River Basin	99
5.5	Well hydrographs at sites DW1 and DW2 with river stage and surface water flow hydrograph at Langat River Basin	100
5.6	Daily groundwater level fluctuations with groundwater temperature	101
5.7	Scatter plot for observation and predicted value for DW1 (a) and DW2 (b) in Model 1	103
5.8	Scatter plot for observation and predicted value for DW1 (a) and DW2 (b) in Model 2	104
5.9	Groundwater level prediction for DW1 (a) and DW2 (b) in a dynamics model	105
5.10	Groundwater level prediction for DW1 (a) and DW(b) a time series model	106
5.11	Residual error percentage of groundwater level for DW1 (a) and DW2 (b) in Model 1	107
5.12	Residual error percentage of groundwater level for DW1(a) and DW2(b) Model 2	108
5.13	Predicted groundwater level versus (time) daily. The lower and upper limits are also shown in Model 1 (DW1 (a) and DW2 (b) and Model 2 (DW1(c) and DW2 (d))	110
6.1	Modelled area in the study site. Kg is Kampung (village), and Sg is Sungai (river)	115
6.2	Conceptual model of Jenderam Hilir bank filtration site	115
6.3	Generalized hydrostratigraphy of the Jenderam Hilir bank filtration site	116
6.4	Diagram of the hypothetical river–aquifer systems: a. no hydraulic gradient between river and aquifer; b. a regional hydraulic gradient toward the river, accumulating water from the aquifer; Ho is the water table prior to pumping; h is the hydraulic head at location x, y; Q is the pumping rate (Figures are modified from Chen, 2001)	118
6.5	Model setup for the RBF method in study area	120
6.6	Distribution of horizontal hydraulic conductivities in	122

	the aquifer of layer two	
6.7	Computed vs observed head for the steady-state model (January 2010)	126
6.8	Computed vs. observed head for transient state (January 2010 to December 2010)	126
6.18	Pathlines of induced river water converging at the pumping well for DW1. Travel time along each pathline varies with the use of Chen's method	130
6.19	Pathlines of induced river water converging at the pumping well for DW2. Travel time along each pathline varies with the use of Chen's method	131
7.1	Location of the study area within states of Penang and Kedah	138
7.2	The isotopic data for precipitation (rainwater), groundwater and surfacewater collected during October, November, March, May, August 2014-2016	142
7.3	Chloride versus $\delta^{18}\text{O}$ concentration for river water and groundwater in the Lower Muda River Basin.	143
7.4	Plot of $\delta^2\text{H}$ vs. $\delta^{18}\text{O}$ for precipitation samples for wet and dry seasons. LMWL represents the local meteoric water line	146
7.5	Plot of $\delta^2\text{H}$ vs. $\delta^{18}\text{O}$ for river water samples during (a) dry season and (b) wet seasons	147
7.6	Relationship between $\delta^2\text{H}$ and $\delta^{18}\text{O}$ for groundwater during (a) wet seasons and (b) dry season.	148
7.7	Relationship between $\delta^{18}\text{O}$ (‰) and d-excess for Lower Muda River Basin aquifer	151
8.1	Location of the study area and geology located at two states Penang and Kedah	157
8.2	The schematic hydrogeological cross sections, illustrating the riverbank and streambed in Muda River Basin	157
8.3	Estimated hydraulic conductivity using the empirical methods for six layers for 22 borehole (symbols) with geometric mean (blue line)	175
8.4	Estimated hydraulic conductivity using the empirical methods for streambeds(symbols) RVB1 (a), RVB2 (b) and RVB3 (c) with depth and geometric mean (blue line)	176
9.1	Location of the study area located at two states Penang and Kedah and 22 Monitoring and four tests wells	188
9.2	Lithologs of boreholes (BH1 to BH22) showing a semi-permeable layer that is made up of clay sand from the ground level, the permeable (aquifer) material which is sandy gravel and a hard layer of marine clay at the bottom layer.	188

9.3	Piper trilinear diagram showing hydrogeochemical facies of groundwater and surfacewater.	199
9.4	Disequilibrium indices of carbonate minerals and silicate	203
9.5	Saturation index (SI) of surface water and groundwater with respect to calcite and dolomite	204
9.6	Variation in CAI and CAII in groundwater and surfacewater	205
9.7	Groundwater and surfacewater water type and process of evaluation from Chadha's plot	206
9.8	Gibbs diagram show the mechanism governing the hydrogeochemistry of water (a) major cations versus TDS and (b) major anions versus TDS	209
9.9	Hydrologic processes, statistical analyses of the correlations between certain pairs of parameters (a,b,c,d,e,f,g,h,i)	213
9.10	Scatter plot between a) $\text{Ca}^{2+} + \text{Mg}^{2+}$ versus $\text{HCO}_3^- + \text{SO}_4^{2-}$, b) $\text{Ca}^{2+} + \text{Mg}^{2+}$ versus HCO_3^- versus $\text{Cl}^- + \text{SO}_4^{2-}$, (d) $\text{Cl}^- + \text{SO}_4^{2-}$ versus $\text{Na}^+ + \text{K}^+$, (e) $\text{Ca}^{2+} + \text{Mg}^{2+}$ versus total cations (TZ^+), (f) $\text{Na}^+ + \text{K}^+$ versus total cations (TZ^+), (g) $\text{Ca}^{2+} + \text{Mg}^{2+}$ versus Na^+ , (h) Na^+ versus Cl^- , (i) SO_4^{2-} versus Ca^{2+} , (j) Na^+/Cl^- versus $\text{EC}(\mu\text{S}/\text{cm})$	227
9.11	Classification of irrigation water based on the permeability index (after Doneen 1964)	236
9.12	Rating of groundwater samples on the basis of electrical conductivity and percentage sodium (Wilcox, 1955)	237
9.13	Wilcox diagram depicting the irrigational suitability of groundwater (after Richards 1954)	238

LIST OF ABBREVIATIONS

a.g.l.	Above ground level
a.m.s.l.	Above mean sea level
BI	Bank Filtration
DA	Discriminant Analysis
DBPs	Disinfection by-product
DW	Test well
PW	Pumping Well
<i>E. coli</i>	Escherichia Coli
HAA	Haloacetic acid
MGD	Department of Minerals and Geoscience of Malaysia
DID	Department of Irrigation and Drainage
DSM	Department of Standard
K	Hydraulic Conductivity
KLIA	Kuala Lumpur International Airport
km	Kilometers
LUAS	Lembaga Urus Air Selangor
LK	lakes
m	meters
MAR	Managed Aquifer Recharge
MLD	Million liters per day
MMD	Malaysia Meteorological Department
MOH	Ministry of Health Malaysia
MPN	most-probable number
msl	mean sea level
MW	Monitoring well
MAE	mean absolute error
NRMS	normalized root mean square error
NAHRIM	National Hydraulic Research Institute of Malaysia
PCA	Principal Component
pH	Acidity/Alkalinity
Pintu	Gate
Q	Discharge/low flow
RBF	Riverbank filtration
RMS	root mean square
RW	River water
R&D	Research and development
Sungai	River
S_w	drawdown
T	Transmissivity
THM	Trihalomethane
TOC	Top of casing
VF	Varimax Factors
W_e	Well efficiency
WHO	World Health Organisation
DID	Department of Irrigation and Drainage
ENSO	El Nino-Southern Oscillation
FAO	Food and Agriculture Organization

IOD	Indian Ocean Dipole
IPCC	Intergovernmental Panel on Climate Change
KeTTHA	Ministry of Energy, Green Technology and Water
KPKT	Ministry of Housing and Local Government/ Ministry of Urban Wellbeing, Housing and Local Government
KTAK	Ministry of Energy, Water and Communication
MOE	Ministry of Education
MOSTI	Ministry of Science, Technology and Technology and Innovation
NAHRIM	National Hydraulic Research Institute of Malaysia
NRE	Ministry of Natural Resources and Environment
RWH	Rain Water Harvesting
SIRIM	Standards and Industrial Research Institute of Malaysia
SPAN	National Water Services Commission
RBI	Riverbank Filtration
RBF	Riverbank Filtration

CHAPTER 1

INTRODUCTION

1.1 Background of the study

Malaysia is located on the north of the equator, where its tropical climate supplies an average annual precipitation of 2940mm. The annual average rainfall differs between Peninsular (west) Malaysia (2490mm) and the less inhabited eastern states of Sarawak (3640mm) and Sabah (2560mm) on north Borneo. Rainfall is intense during the two monsoonal periods, between November-February and May-August. The total annual runoff is projected as 494 billion m³, in contrast to the current water requirement of 14.7 billion m³ and a project total requirement by 2050 of 18.2 billion m³ (DID, 2010). The total obtainable water storage in Malaysia is 12 billion m³, with net supplied by the direct river abstraction. The water supply is unequal in spite of huge water supply, neither spatially nor temporally. For instance, there have been cases of water shortage in the capital of Kuala Lumpur and neighboring Negeri Sembilan and Selangor states in 2014. This is mainly caused by absence of rainfall and low storage amount in fulfilling high demands. Moreover, “food basket” states, such as Kedah and Perlis in north east Peninsular Malaysia have also experienced water shortage issues which have affected the irrigation water supplies, and conflict with the provision of potable water supplies being transported from Kedah to Penang. Recently, the water supply condition in Malaysia had transformed from “one of relative abundance to one of relative scarcity” because of progressive pressure, water mismanagement, and climate change (Zakaria et al., 2013).

Henceforth, the Malaysian Government in February 2012 framed and sanctioned the National Water Resources Policy (NWRP). The policy comprehends a shift in attention on water as a reserve, which is different from previous observation of equating water management specially with the water supply industry. NWRP describes many strategies and action plans to address the issues and distresses for both instant and long-term to manage availability of water resources and demand in the country. Based on the aforementioned policy statement, NWRP offers definite guidelines and strategies with regard to water resources management to safeguard water security and sustainability. The security and sustainability of water resources shall be made as a national priority. This is crucial to ensure sufficient and safe water for all, through sustainable consumption, conservation and effective management of water resources facilitated by a mechanism of shared partnership containing the entire stakeholders. In the tropical nations, such as Malaysia, the focal source of dependable water supply is the river water where rainfall uninterruptedly replenish the river flow. Nevertheless, due to increased development and economic activities, the management of water resources can be very precarious owing to the upsurge in demand, as well as environmental degradation.

Importantly, pollution of rivers has caused the surface water inappropriate for treatment and in certain cases, has resulted in sudden increase in the treatment costs. Hence, there is a necessity to utilize groundwater as supplementary source of water supply to guarantee uncontaminated and dependable water supply solution without abandoning the resource potential of the polluted surface water. This can be accomplished via the conjunctive utilization between surfacewater and groundwater using Riverbank Filtration (RBF) scheme. Notably, river bank/bed filtration provides a virtuous practice to treat and protect the surface water, as well as groundwater. This is because; RBF utilizes the bed or a reservoir, lake or river and an adjacent sand and gravel aquifer as the natural filters. The technology can be utilized directly to the remaining surface water reservoirs, streams, lakes, and rivers, and now, it is frequently a guiding element in the hydrogeological examination of new source supplies. RBF is the influx of river water to the aquifer induced by a hydraulic gradient.

Collector wells or vertical wells are positioned on the banks in a definite distance from the river produce a pressure head change between the river and the aquifer, which prompts the water from the river to flow downward through the porous media into the pumping wells. By using the system of drinking water extraction, two distinct water resources are applied. Additionally, the surface water from the river percolates in the direction of the well; and the groundwater of the surrounding aquifer is applied (Schön, 2006). Majority of RBF systems are built in alluvial aquifers positioned alongside riverbanks. These aquifers contain many deposits ranging from sand, sand and gravel, large cobbles, and boulders. The ideal conditions usually comprise coarse-grained and permeable water-bearing deposits that are hydraulically connected with riverbed materials. These deposits are created in deep and wide valleys or in narrow and shallow valleys. RBF systems in deep and wide valleys may have a broader variety of choices as wells (vertical and horizontal collector wells) can be located at larger depths (which can offer greater capacities) and can be positioned further away from the river to rise the degree of filtration of the investigation on RBF has been scant in Malaysia. The growth may be delayed because of other selections, which could produce big projects, including inter basins water transfer from Pahang to Selangor. Therefore, such systems could not be applied in the future because more rivers are getting polluted. The RBF technology has been a routine practice in the Europe for more than 100 years, predominantly in nations including Switzerland, where 80% of the drinking water comes from RBF wells, 50 % in France, 48 % in Finland, 40 % in Hungary, 16 % in Germany, and 7 % in the Netherlands (Tufenkji et al., 2002). In Germany, for instance, 75 % of the city of Berlin relies on RBF, whereas in Düsseldorf, RBF has been applied since 1870 as the main drinking water supply (Schubert, 2002). In the United States of America (USA), however, this method has been applied for approximately half a century, particularly in the states of Ohio, Kentucky, Indiana, and Illinois, amongst others (Ray et al., 2002). Furthermore, lately RBF has been applied for drinking water supply in India (Sandhu et al., 2010), China, and South Korea (Ray, 2008).

1.2 Problem Statement and current challenges

The population of the state of Negeri Sembilan, Kedah, Penang and Selangor, one of most developed states in Malaysia, has now reached around 6 million as of 2010 (Department of Statistic Malaysia 2010). In Selangor, domestic demand grew at an average compounded rate of 5.9% from 1960 to 2006. Hence, for that year, the water used and demand was divided between the domestic and the non-domestic sectors by a ratio of 61 to 39 (Figure 1.1). Incidences of closure of water intakes have been due to river pollution, which had geared this study to find an alternative solution of being too dependent on surface water use. Since the last 20 years, there have been several occasions where the water intakes and the treatment plants have been closed as a result of serious river pollution. The closure of water intakes and water treatment plants has impact on water supply, and thus, on economic activities for industries and other sectors. The main sources of river water pollution are discharge of domestic sewage, pollutants from agro-based industries/farming, run-offs from earthworks and land clearing, and effluent discharge from manufacturing activities. The water operator incurred higher cost of water treatment; particularly in conventional sedimentation treatment plant, in which the high concentrated values of pollutants require higher volumes of chemicals. Pollution of river water has made river water unsuitable for source of raw water for treatment, and in certain cases, the treatment costs have raised unexpectedly. Constructing a new reservoir is one of the alternatives to increase the supply. However, it may damage the natural ecology and upset the balance in nature. Existing dams can no longer cope with such high demand, whereas building new dams will increase the government expenditure and affect the environment in long term. Thus, in order to supply safe drinking water and reduce disruption due to pollution, RBF is one of the best methods to provide water from both river and groundwater. According to Khairuddin and Abd Malek (2002), the sources of the Langat River pollution come from industrial discharge (58%), domestic sewage from treatment plants (28%), construction projects (12%), and pig farming. Research on the water contamination of the Langat River has been published by several authors, for instance, Zakaria and Mahat (2005) reported the sources and concentration of polycyclic aromatic hydrocarbon (PAHs) in the river sediment in the Langat Estuary and that the area was dominated by phylogenic sources, which meant that most of the PAH compounds came from the atmosphere, such as street dust. Farizawati et al. (2005) reported a study of *Cryptosporidium* and *Giardia* from cattle farms located near Langat and Semenyih Rivers that showed that out of 24 samples of water taken from the Semenyih river, 4.2% was positive for *Giardia* cysts with a concentration of 1.3 cysts/l, and 20.8% were positive with *Cryptosporidium* cysts with a range of 0.7–2.7 cysts/l. Liza (2010) identify the point source and non-point source pollutions during the base and storm flow events with secondary data from Department of Environment (DOE) from 2004 until 2008 and ranked according to statistical analysis as: E. coli (Non-Point Sources (NPS))> E. coli (Point Sources (PS)). TSS (NPS). COD (NPS)> NH₃-N (NPS)>BOD (NPS)>COD (PS)>TSS (PS)> NH₃-N (PS)>BOD (PS). The strong concentrations of BOD and COD are related to anthropogenic pollution sources from sewage treatment plants and industrial effluents. Lee et al. (2006) examined organochlorine insecticides from sediment, lake water and the Langat River. The

study showed that endrin, chlordane, and aldrin were present in all water samples with concentrations for endrin: 0.02-0.21 µg/L, chlordane: 0.05-0.16 µg/L, and aldrin 0.03-0.13 µg/L. The source was from the river upstream flow through an area of oil palm plantation, where these insecticides might have been used for pest control in the past. Osman et al. (2012) identified sources of organic contaminants using chemometric techniques to classify the pollution sources in the Langat river basin based on the analyses of water and sediment samples collected from 24 stations to monitor 14 organic contaminants from PAHs, sterols, and pesticides groups. On the other hand, Othman and Gasim (2005) reported that heavy metal concentrations, such as mercury (Hg), cadmium (Cd), zinc (Zn), lead (Pb), copper (Cu), nickel (Ni), iron (Fe), cobalt (Co), and manganese (Mn) in the water of the Semenyih river watershed were determined in the water samples. Al-Odaini et al. (2011) monitored pharmaceuticals in the Langat River, which indicated that the samples collected from selected sampling stations along the Langat River were found to contain 15 out of the 19 targeted pharmaceuticals. In the past 20 years, judicial intervention and huge financial investment were undertaken to save the Langat River, but despite all attempts, contribution of contaminants from both the upstream of the Langat River and from the urbanization itself are still rising and need a comprehensive and strategic planning and management for the Langat River Basin. While, reports submitted by Binnie and Gourley (1961 and 1979) to the government of Negeri Sembilan had shown that the Linggi river is highly polluted and heavily-polluted requiring extensive treatment. In a report by DOE (2012) also classified that Linggi River was in the slightly polluted condition. The rapid urbanization and industrialization in and around the Linggi River Basin has resulted in increased water quality problems in the state (Nather & Firuza (2010)).

The water resources of the Muda River basin are in high demand for agriculture and water supply to towns and industry. Water from Muda Dam is also diverted to Pedu dam which has the biggest storage capacity at 1,080 MCM among the four dams. This arrangement is part of a comprehensive freshwater distribution system that covers the irrigation and potable water needs of Kedah and southern Perlis. The biggest user of water benefitting from this system is MADA granary area which has a size of 97,000 ha. The Muda River supplies about 32% of the MADA area irrigation needs. The Pulau Pinang granary area which stands at 9,800ha receives irrigation water directly from the lower part of the Muda River. The total irrigation water use is estimated at 3,800 MLD on average while potable water use is at 1,160 MLD. About 80% and 96% of public water supply need for Pulau Pinang and Kedah is derived from the Muda River respectively (Lee, 2009). According to National Water Resources Study (DID, 2010), the state of Kedah is currently in deficit for water based on available rainfall and consumptive demands. The shortfall is made up via the major water storages. Projected domestic demands are predicted to increase due to population growth while at the same time irrigation demands are predicted to decrease assuming improved future efficiencies.

1.3 Needs of the study

RBF has been demonstrated to be operative in eradicating majority of the impurities exist in the surface water. Evidence has indicated that RBF is a competent technique for substantial elimination of turbidity (Dash et al., 2008; Dillon et al., 2002; Wang et al., 1995), natural organic matter (NOM), pesticides, pharmaceuticals (Massmann et al., 2004; Verstraeten et al., 2002; Wang, 2002; Kühn and Müller, 2000), and salinity (Dillion et al., 2002). Moreover, taste and odour that cause compounds may not be eliminated from the surface water by conservative treatments technique (Worch et al., 2002). The prospective of RBF technique also shown to offer an important obstacle to microorganisms (Weiss et al., 2005; Gollnitz et al., 2003; Wang, 2002). In addition, RBF has shown to significantly decrease the manifestation of *Giardia* and *Cryptosporidium* in drinking water applications when the flow path length and the filtration periods are adequate (Gollnitz et al., 2003). Over 100 years, the RBF technique has been applied for the Rhine, Elbe, and Danube rivers to produce drinking water. The Europeans have established effective elimination of particulate matter, manmade or natural organic, compounds, certain common bacteria, algae, disinfectant by-product precursors and an enormous quantities of chemicals and other micro-pollutants (Kühn and Müller, 2000; Grischek et al., 1998). Over the past years, majority of surface water in Malaysia are have been contaminated by numerous contaminants- domestic sewage, industrial waste, non-point sources, and discharge from agriculture activities. This has resulted in higher amount of chemicals usage in the treatment process, mostly in conventional sedimentation treatment plant. These chemicals are costly and are inappropriate for long-term treatment process as they are associated with severe health complications. Disinfection by-product (DBP) is among the key elements that have resulted in the establishment of new RBF treatment. The DBP can cause long-term illnesses like reproduction disorders, abortion and cancer. Thus, analysis on RBF is essential to establish a improved and sustainable treatment system for the water treatment industry in Malaysia. As this the first investigation on RBF study conducted using several techniques in Malaysia, the data and index value will offers insights for potential use of RBF as it is well-established method in the European nations. River-aquifer interactions are controlled by the unstable water level of the river. Majority of studies on river-aquifer interaction have concentrated on the discharge losses in streams owing to extraction of the groundwater by a pumping well (Hantush, 1965; Chen and Yin, 1999, 2001). Moreover, Chen (2001) highlighted that research on river discharge depletion must be extended by containing a determination of the subsequent features: the distance of the infiltrated river water that can travel into the aquifer during a pumping period, the travel time from the river-aquifer boundary to the pumping well, and the area of aquifer affected by the river water. A number of investigation have applied analytical solutions to deal with the movement of infiltrated river water inside a nearby aquifer (Chen, 2001; Chen and Yin, 2001). The current study applied numerical simulations using the groundwater flow code MODFLOW, a 3-D, cell-centred, finite difference, and saturated groundwater flow model developed by the USGS to commence particle-tracking simulations by means of MODPATH (a 3-D, particle-tracking code) established by the USGS. This model computes the paths for the imaginary particles of water moving via

the simulated groundwater system. The simulations offer valuable info on significant factors relating to filtration including pumping rate and optimal distance between the riverbank and the production well. In the present study, travel periods, pathlines, and the influential zones of river water were decided between a river and an adjacent pumping well for seasonal groundwater extractions. These flow/transport parameters were assessed to describe the interactions amongst water in the river and the alluvial aquifer. Utilizations of such particle-tracking methods are essential in transport studies when conducting RBF to estimate the attenuation of pathogens during transport and artificial recharge. This is crucial to ensure that sufficient soil-retention time requirements are fulfilled for the eradicating human pathogens as the key objective of RBF operations.

1.4 Objectives of this study

The general objective of the current study is to assess the performance of RBF of an alluvium river bank.

Specific objectives:

- i. To assess the prospective of Langat river Basin, Linggi river Basin and Muda river basin hydraulic properties, water quality and water quantity;
- ii. To recognize sufficient storage of groundwater aquifer for water supply;
- iii. To simulate the properties of well placement and pumping rate through modelling (MODFLOW);
- iv. To evaluate water interaction and groundwater recharge to appropriately manage aquifers;
- v. To evaluate the important factor for establishing the index system of RBF.

1.5 Scope of the study

The study emphasize the features of RBF in the Langat river basin, Linggi river Basin and Muda river basin aquifer as the efficacy of RBF is determined by hydrogeological setting. The geology including hydrogeology characterisation is the vital component in assessing the probable of RBF positions. The comprehensive profiling of alluvial aquifers is a significant factor in choosing appropriate well sites and well design. The aquifer thickness, sediments, and ranges of alluvium are components of hydrogeology conditions that are essential in deciding the existing intake of water by RBF. Hydraulic conductivity of the aquifer and existing drawdown in the well are main constituents of the hydrogeology conditions to be applied for intake water from the well. The main elements for choosing and establishing appropriate RBF sites are the alluvial aquifer sediments and the thicknesses of the aquifer (Figure 1.2) and procedure for feasibility study of Riverbank Filtration (Figure 1.3). The scope of the procedure for feasibility study are displayed in Figure 1.4 encompassed soil

examination at the suggested Horizontal Collector Wells W location (XC) @ 40 m depth; If geological profile is favourable, a test well will be built at XC added with 8 piezometers (X1-X8). Moreover, an aquifer test and water quality analysis as well as aquifer test analysis were performed. In addition, river depth profiles was determined at 9 sites. The current study also was particularly carried out to assess the performance of the method to treat polluted surface water. Furthermore, estimation of the effective rate of water abstraction was carried out for the examine location. Physicochemical and microbiological parameters of the local surface water bodies and groundwater were examined beforehand and throughout water abstraction as well as simultaneously to specify that a conjunctive use of surface and groundwater that could be improved via the RBF system for sustainability of water resource utilization in the examined location. The current study recognized the hydrochemistry effect to RBF in the study zone was analyzed to comprehend the interaction amongst surface and groundwater. This study is intended to deepen our understanding regarding the link and to persuade the water quality managers with regard to application of RBF technique to decrease specific parameters. The numerical models of the aquifer combined with groundwater flow system and the effect of groundwater pumping, and RBF operation on the influence of wells placement and pumping rate on flow paths, travel time, the size of the pumping and capture zone delineation and groundwater mixing in the pumping well that influenced the filtration process were safely attained during the pumping rate and established according to the information using the numerical modeling packages, MODFLOW and MODPATH. The developed model was applied for designing and to managing the RBF technique constituent. The models offered essential evidence required to establish a suitable water operator to construct, pumps and sample schedules for RBF practices and guarantee meeting sufficient soil retention times.

1.6 Limitation of the study

Hydrology characteristic of river, fluctuation in the river stage, changing in the hydraulic gradient from the river to the aquifer, clogging process, hydraulic conductivity of the alluvial deposits and dynamic is associated limitation of the study to remove certain biological, inorganic and organic contaminants. As a pretreatment, these aspect should be taken account. Also space for research around riverbanks is limited to conduct systematic surveys according to the scope of the study. However, continuous of monitoring and observations and using various methods of the pilot sites could result in some what good interpretations. In study area, limitations of study could be financial constraints that limits the study of RBF systems.

1.7 Significance of the study

The implication of the study is threefold: First, the hydrogeological features of the study location (Langat River Basin, Linggi River Basin and Muda River Basin), which have not been demonstrated in several studies (Ngah, 1988; Tahir

and Abdul Hamid, 2003; Japan International Cooperation Agency (JICA) and Department of Mineral and Geosciences Malaysia (DMGM), 2002; and Ismail, 2008). This is crucial to investigate the variations or uniformity relating to the hydrogeological features from the feature of groundwater occurrence and interaction between hydrogeological subsurface and surfacewater. Thus it is crucial to address these issues in order to deepen the understanding. The evaluation of the current hydrogeological characteristics of the Langat river basin, Linggi river basin and Muda river basin whereas the community is at its uttermost of socioeconomic prosperity is important for RBF system study. The hydrogeological setting of the Langat river basin, Linggi river basin and Muda river basin may be dissimilar. Consequently, groundwater occurrences in the study location are addressed with regard to conjunctive use surfacewater and groundwater via Riverbank Filtration (RBF) to the origin of recharge either from natural precipitation on the study location or base flow from the River Basin.

Second, Langat river basin, Linggi river basin and Muda river basin as a main source of water resources. Therefore, the current research is linked to the government's initiative as described 11th Malaysia Plan to re-establish surfacewater groundwater resources as the conjunctive use via the RBF (GOM, 2010). The consumption of groundwater and surfacewater as the conjunctive utilized for water supply and feasibility study may encounter if the inadequate of groundwater and surfacewater extraction via RBF in consequence of aquifer feature is not addressed.

Third, three techniques, explicitly, geochemical, geophysical, and integrated techniques (Bear and Cheng, 2010), are generally applied to evaluate groundwater and surfacewater interaction according to RBF systems. The well-established technique that incorporates geophysical and geochemical techniques, which has not been formerly applied to examine the outcome of RBF systems. The current research also applied the statistical methodology to evaluate the importance and correlation of RBF controlling factors. The findings of the research considerably provide novel understanding with regard to RBF studies, particularly in Malaysia in the perspective of tropical environments.

1.8 Research Framework of the study

The research outline was adopted from preceding studies. The overall framework of the study is described in Figure 1.5.

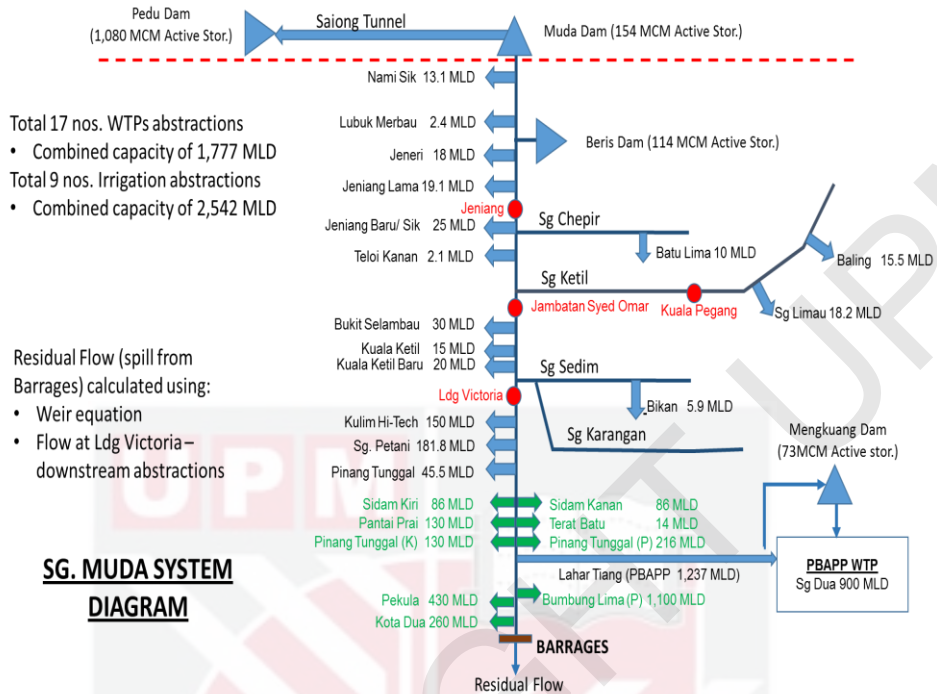


Figure 1.1: Existing of water use in Muda River Basin

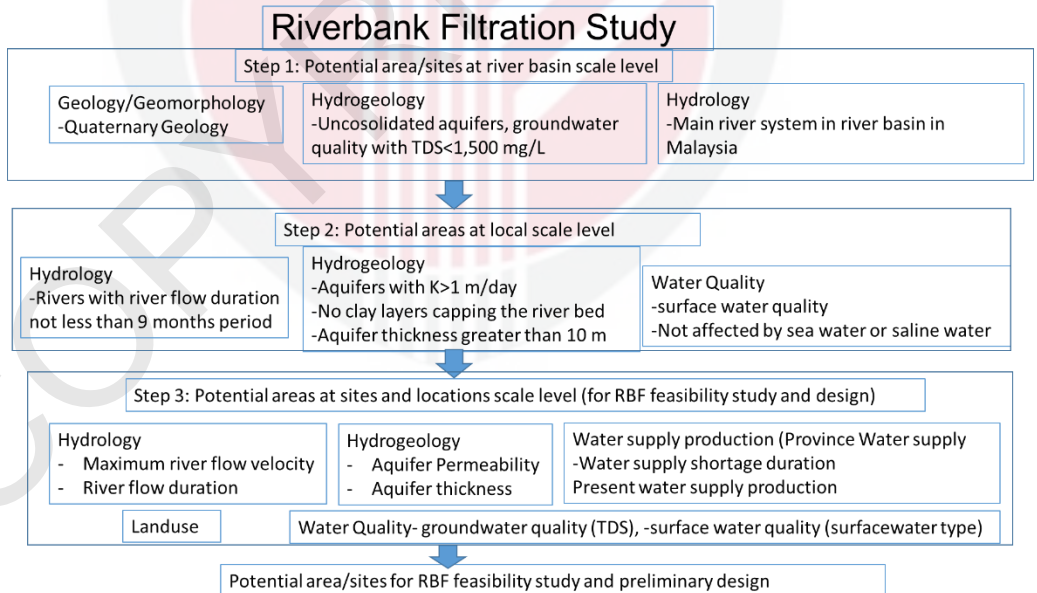


Figure 1.2: Frame work of riverbank filtration study for Langat, Linggi, and Muda river basin

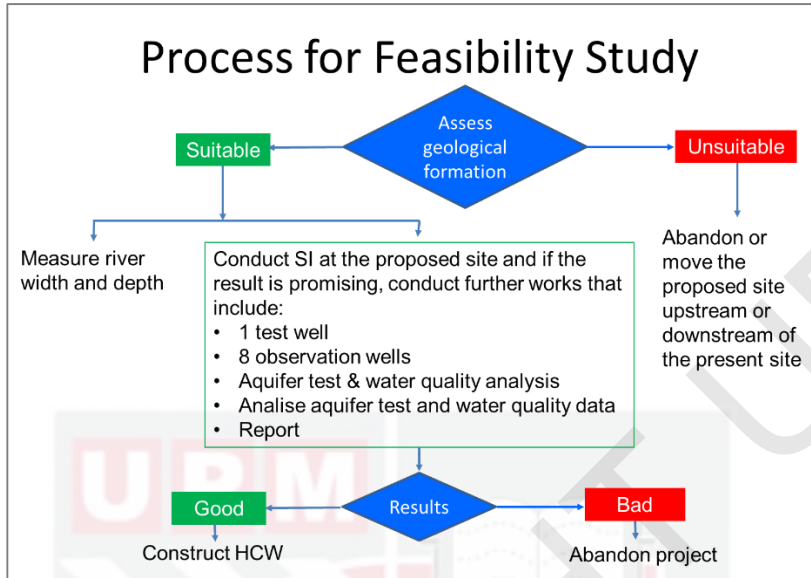


Figure 1.3: Summary of the process for feasibility study of Riverbank Filtration

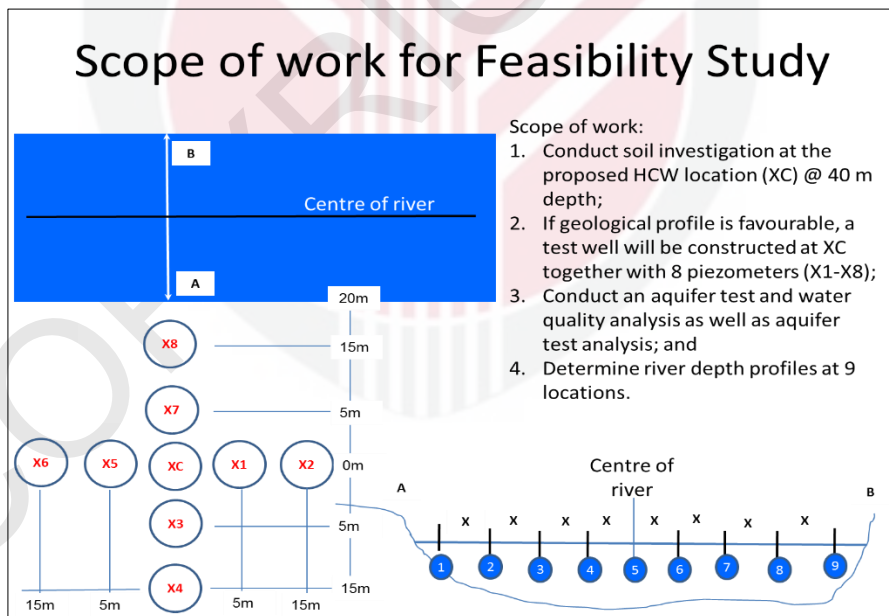


Figure 1.4: Scope of work for feasibility study to fulfill the Riverbank filtration study

1.9 Outline of thesis

As constructing new-fangled dams and water intake is complex due to social, political and environmental issues. Therefore, efforts pertaining water resources preparation has been changed towards highlighting sustainable conjunctive application of RBF to complement surface water and to recharge the aquifer during episodes of any surplus inflow. RBF is progressively being refilled by filtration from river sources, is a resource incomparable in providing wealth. Thus, comprehensive investigation is required. In lack of any surface storage facilities, the only substitute storage is to permit bridging of dry periods. The study emphases on sustainable conjunctive application via RBF to increase the surface water combination with groundwater for irrigation as an extra source in Malaysia. The chapter (2) includes an extensive summary of literature review relating to the theory of RBF technology, its strengths and limits and the key issues with regard to surface water (Langat river, Linggi River and Muda River) issue and pollution. Previously, RBF was not utilized purposefully in Malaysia and the competences of RBF is largely unidentified. Chapter, 3 outlines a case study location, which was carried out in Peninsular Malaysian that evaluates the performance of the Riverbank Filtration (RBF) process in the metropolitan tropical areas of the nation. As such, a number of anthropogenic activities such as agricultural, industrial, and the municipal inflows have influenced the surface water.

The authors examined three distinct sites neighboring the Linggi River, Langat River, and the Muda River and their appropriateness was evaluated in building and establishing the RBF systems. The goal is to examine the designated operational RBF locations in the state (under study ever since 2012) and subsequently explain further prospective RBF locations reliant on the water concerns and the hydrogeological appropriateness, which is centered on the drilling at the prospective locations and at that time, observing the numerous water quality factors. In conclusion, the authors demonstrated that the designated locations neighboring the Linggi River, Langat River, and Muda River were appropriate for establishing RBF systems as they had an advanced prospective zone and were competent to produce clean drinking water for the consumers. Chapter 4, emphases on the surface–groundwater quality evaluated using multivariate statistical analyses centered on analytical quantitative data. Multivariate statistical analyses were applied, comprising discriminant analysis (DA) and principal component analysis (PCA). It can be applied to recognize surface water–groundwater interaction mechanisms and the influence of the sources of surface water (e.g. river and lake) pollution on groundwater quality in RBF sites by utilizing hydrochemical datasets. Chapter 5, emphases on groundwater tables predicting throughout applied RBF technique to recognize sufficient storage of groundwater aquifer for water supply reasons. This research demonstrates the establishment and utilization of artificial neural networks (ANNs) to forecast groundwater tables positioned in confined aquifer nearby to the Langat River. The findings demonstrate that precise estimates can be accomplished through time series 1-day in advance of forecasting groundwater table and the interaction between river and aquifer. The results of the research

can be applied to support policy marker to manage groundwater resources via RBF technique.

Chapter 6 describes a case study of the RBF methods, which assesses the properties of groundwater pumping and RBF operation on the installation of wells. This study also concludes the outcome of pumping rate on flow paths, travel time, the size of the pumping and capture zone delineation, and groundwater mixing in a pumping well in Jenderam Hilir, Malaysia. The recommended technique implements filtration carefully and accomplishes the ultimate pumping rate. Numerical modeling packages, MODFLOW and MODPATH (particle tracking) were utilized. Chapter 7 describe a precise estimation of groundwater recharge that is required to appropriately manage aquifers, particularly for RBF technique reasons. Learning the environmental isotopes such as ($\delta^2\text{H}$, $\delta^{18}\text{O}$) are essential primary tools in investigating the interaction amongst the surface and the water. This research utilized isotopes to obtain an improved understanding of the water interactions in the River Basin. This is a suggestion of the filtration of river water into adjacent alluvial aquifers as an alternative of taking groundwater discharge on its way to the river. According to the environmental isotope sampling, it has been evidenced that the recharging of the alluvial aquifers by surface water occurs through bank filtration, and that the recharge that occurs throughout increased rainfall events gains more dominance when it is positioned further away from the river. This is valuable evidence in achieving further understanding of the degree and nature of hydrogeology procedures occurs at the river-aquifer interface and how they are linked to geochemical process and policies of water allocation. On the origin accessing the stream-aquifer interactions and RBF systems, it is very important to regulate the vertical riverbank and streambed hydraulic conductivity. In the chapter 8, the riverbank and streambed concentrated in this study are a riverbank and streambed layers of sediments. In the investigation, there were several tests applied to conclude riverbank and streambed vertical hydraulic conductivity like grain-size analysis, pumping test and in situ falling-head standpipe permeability tests. Overall, the findings revealed that the aquifer of the concentrated zone demonstrates the potential for RBF and have the probable to enhance the water quality and quantity is referable. Geochemical characteristic and water quality index of groundwater surface water were emphases in Chapter 9. This chapter assessed with regard to factors influencing surface water and groundwater quality via numerous indices. In this study, samples of groundwater and surface water of standard drinking water quality for both wet and dry seasons have been gathered. The samples have been assessed for numerous physicochemical parameters, together with: temperature, dissolved oxygen (DO), pH, electrical conductivity (EC), total dissolved solid (TDS), salinity, dissolved silica (SiO_2), ionic concentration of major cations (i.e. Ca^{2+} , Mg^{2+} , Na^+ , K^+) and major anions (i.e. Cl^- , HCO_3^- , SO_4^{2-} , and NO_3^- , PO_4^{3-}), and trace elements (i.e. As, Fe_{Total} , Cr^{2+} , Cu_{Total} , Hg^{2+} , Mn_{Total} , Ni_{Total} , Pb_{Total} , Sb^{3+} , Se_{Total} , Sn^{4+} , and V^{4+}). Assessment sample quality for both sources for the aim of irrigation has also been carried out via several index techniques such as SP, SAR, PI, KI, MH, Salinity Hazard, RSC, Chloride and EC. Lastly, Chapter 10 presents the findings and the case studies.

RESEARCH FRAMEWORK FOR RIVERBANK FILTRATION (RBF)

BACKGROUND KNOWLEDGE/FOCUS/INTEREST

- a reliable and proven natural water treatment technology
- ability to remove persistent contaminants and microbes
- can support or even replace other treatment processes in a water treatment scheme
- however, site specific and requires extensive site investigations and pilot studies to assess its feasibility based on local conditions
- RBF systems in Europe and USA have been designed based on local experiences and requirements
- No guidelines are available for the transfer of this sustainable and multiple-contaminant removal technology
- Though very appropriate for both developed and developing countries, RBF has not been utilized (fully) in developing countries due to lack of knowledge and tools/methods for design of such systems
- The high turbidity and poor water quality in many rivers represent only some of the risks inherent in this practice. Drinking water solutions that either minimize direct abstraction of surface water or further improve its quality before treatment and distribution would provide additional and much-needed drinking water security going into the future.

RESEARCH GAP:

- The first study in tropical countries and all data will provide a good platform to introduce this method in Malaysia.
- No available data/information and guidelines are available for the transfer of this sustainable and multiple-contaminant removal technology
- Though very appropriate for both developed and developing countries, RBF has not been utilized (fully) in developing countries due to lack of knowledge and tools/methods for design of such systems

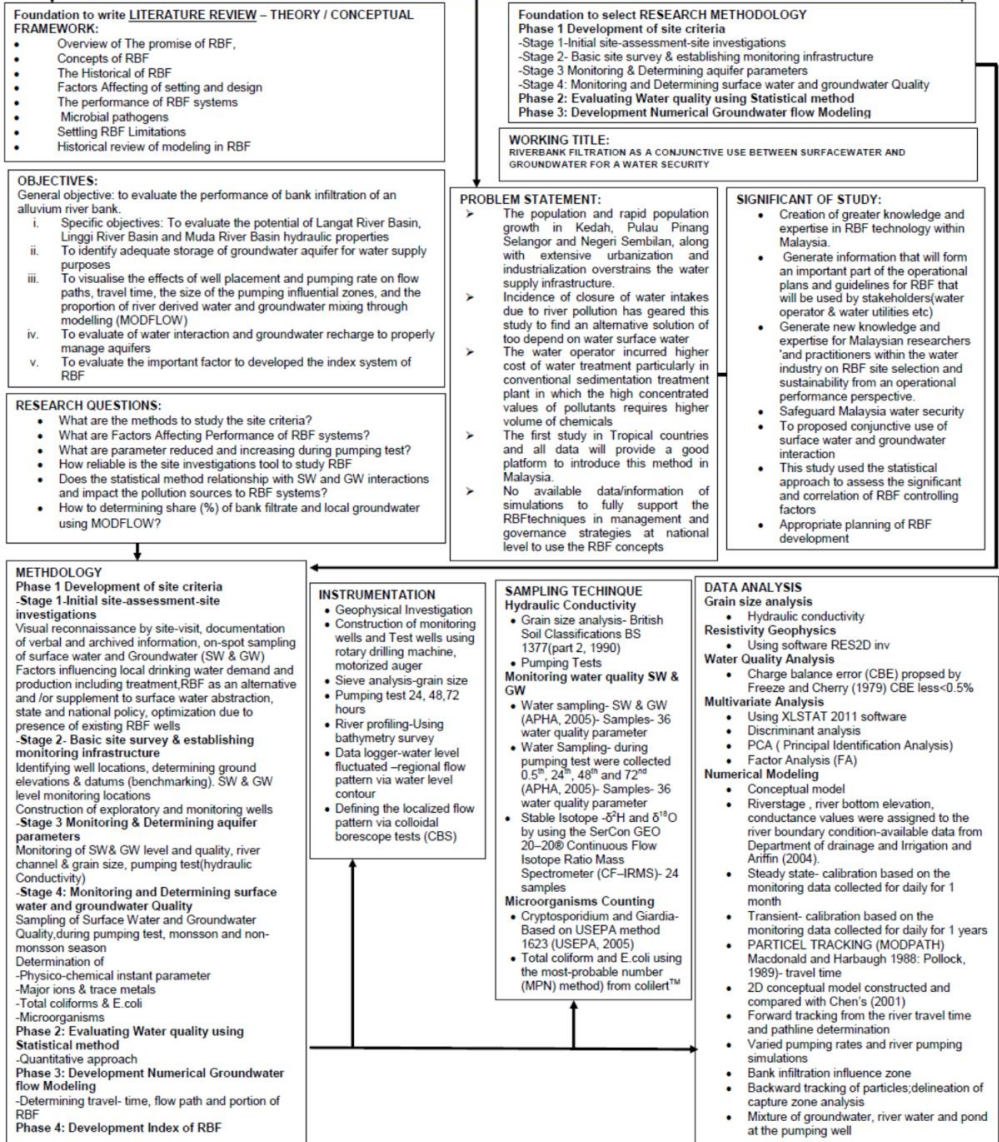


Figure 1.5: Framework for Riverbank filtration (RBF) study

REFERENCES

- Abd Rashid, N.A., Mohd, M.H., Rahim, N., Abustan, I., & Mn, Adlan. (2015). Artificial barrier for riverbank filtration as improvement of soil permeability and water quality. *Jurnal Teknologi* 74 (11).
- Abdalla, F.A., & Shamrukh, M., (2011). Riverbank Filtration as an Alternative Treatment Technology: AbuTieg Case Study, Egypt. Riverbank Filtration for Water Security in Desert Countries, Nato Science for Peace and Security Series-C: Environmental Security. Springer, pp. 255–268.
- Abdel-Fattah, A., Langford, R., & Schulze-Makuch, D. (2008). Applications of particle-tracking techniques to bank filtration: a case study from El Paso, Texas, USA. *Environmental geology*, 55(3), 505-515.
- Abdel-Lah, A. (2013). Riverbank filtration for water supply in semi arid environment. *Journal of Engineering Sciences*, 41 (3), 840–850.
- Abdel-Lah, A., Shamrukh, M. (2006). Riverbank filtration: A promise method for water supply from Nile, Egypt. In: *Proceedings of 7th International Symposium on Water Supply Technology*, Yokohama, Japan, November 2006, pp. 385–395 Abstr 5:08595
- Adlan, M. N., MAZ, M. R. R., Ghazali, M. F., Selamat, M. R., & Othman, S. Z. (2016, June). A study on the soil characteristic and properties of riverbank soil samples from Sungai Perak, Kota Lama Kiri, Kuala Kangsar, Malaysia. In *IOP Conference Series: Materials Science and Engineering* (Vol. 133, No. 1, p. 012003). IOP Publishing.
- Ahmed, A. K. A., & Marhaba, T. F. (2017). Review on river bank filtration as an in situ water treatment process. *Clean Technologies and Environmental Policy*, 19(2), 349-359.
- Ahmed, N., Sen, Z., & Ahmad, M. (2003). Ground water quality assessment using multi-rectangular diagrams. *Groundwater*, 41(6), 828-832.
- Alabdula'aly, A. I., Al Zarah, A. I., & Khan, M. A. (2011). Assessment of trace metals in groundwater sources used for drinking purposes in Riyadh region. *Int J Water Resour Arid Environ*, 1(1), 5-9.
- Al-Odaini, N. A., Zakaria, M. P., Yaziz, M. I., & Surif, S. (2010). Multi-residue analytical method for human pharmaceuticals and synthetic hormones in river water and sewage effluents by solid-phase extraction and liquid chromatography–tandem mass spectrometry. *Journal of chromatography A*, 1217(44), 6791-6806.

- Alther, G.A. (1989). A simplified statistical sequence applied to routine water quality analysis. A case history, *Groundwater* 17:556-561.
- Alyamani, M. S., & Şen, Z. (1993). Determination of Hydraulic Conductivity from Complete Grain-Size Distribution Curves. *Groundwater*, 31(4), 551-555.
- American Public Health Association (APHA) (2005) Standard methods for the examination of water and wastewater, 21st ed. *American Water Works Association*, Water Environment Federation, Washington
- Amy, G., & Drewes, J. (2007). Soil aquifer treatment (SAT) as a natural and sustainable wastewater reclamation/reuse technology: fate of wastewater effluent organic matter (EfOM) and trace organic compounds. *Environmental monitoring and assessment*, 129(1-3), 19-26.
- Anderson, M. P., Woessner, W. W., & Hunt, R. J. (2015). *Applied groundwater modeling: simulation of flow and advective transport*. Academic press..
- Anderson, M.P., & Woessner, W.W. (1992). Applied groundwater modeling: simulation of flow and advective transport, Gulf Professional Publishing. *Journal of Water Resource and Protection* 3 (5), 2011.
- Appelo, C.A.J., & Postma, D. (1993). *Geochemistry, groundwater and pollution*. Balkema, Rotterdam. doi:10.1002/esp.3290200510.
- Arrifin, J. (2004). *Development of sediment Transport model for rivers in Malaysia using regression analysis and artificial neural network*. Ph.D. Thesis, University Science Malaysia, Penang.
- Ascott, M. J., Lapworth, D. J., Goody, D. C., Sage, R. C., & Karapanos, I. (2016). Impacts of extreme flooding on riverbank filtration water quality. *Science of the Total Environment*, 554, 89-101.
- ASTM D 2434-68 (1994). *Standard test method for permeability of granular soils (constant-head)*.
- ASTM D6391, (2011). *Standard Test Method for Field Measurement of Hydraulic Conductivity Using Borehole Filtration*.
- Ayub, M.S. (2005). *Malaysian meteoric water line: an input to isotopes hydrological studies*. TAG brown Bag Seminar No 1, Malaysia Institute for Nuclear Technology Research (MINT).
- Ball, K. (2012). Louisville launches innovative RBF project. *Journal-American Water Works Association*, 104(3), 60-67.
- Banoeng-Yakubo, B., Yidana, S. M., & Nti, E. (2009). Hydrochemical analysis of

- groundwater using multivariate statistical methods—the Volta region, Ghana. *KSCE Journal of Civil Engineering*, 13(1), 55-63.
- Barr, D. W. (2001). Coefficient of permeability determined by measurable parameters. *Groundwater*, 39(3), 356-361.
- Bartak, R., Grischek, T., Ghodeif, K. O., & Wahaab, R. A. (2014). Shortcomings of the RBF pilot site in Dishna, Egypt. *Journal of Hydrologic Engineering*, 20(9), 05014033.
- Bartak, R., Page, D., Sandhu, C., Grischek, T., Saini, B., Mehrotra, I., Jain C. K., & Ghosh, N. C. (2015). Application of risk-based assessment and management to riverbank filtration sites in India. *Journal of water and health*, 13(1), 174-189.
- Barzegar, R., Moghaddam, A. A., Najib, M., Kazemian, N., & Adamowski, J. (2016). Characterization of hydrogeologic properties of the Tabriz plain multilayer aquifer system, NW Iran. *Arabian Journal of Geosciences*, 9(2), 147.
- Bauder, J. W., & Brock, T. A. (2001). Irrigation water quality, soil amendment, and crop effects on sodium leaching. *Arid Land Research and Management*, 15(2), 101-113.
- Baveye, P., Vandevivere, P., Hoyle, B.L., Deleo, P.C., & De Lozada, D.S. (1998). Environmental impact and mechanisms of the biological clogging of saturated soils and aquifer materials. *Critical Reviews in Environmental Science and Technology*, 28 (2), pp. 123–191.
- Bencala, K. E., Gooseff, M. N., & Kimball, B. A. (2011). Rethinking hyporheic flow and transient storage to advance understanding of stream-catchment connections. *Water Resources Research*, 47(3).
- Benotti, M. J., Song, R., Wilson, D., & Snyder, S. A. (2012). Removal of pharmaceuticals and endocrine disrupting compounds through pilot-and full-scale riverbank filtration. *Water Science and Technology: Water Supply*, 12(1), 11-23.
- Binnie, D., & Gourley, (1961). Report on Proposed Water Supply to Seremban and Port Dickson-Linggi Scheme. Malaysian Government: Seremban, Negeri Sembilan, Malaysia.
- Binnie, D., & Gourley (1979). Report on Development Plan for Seremban and Port Dickson Water Supply. Malaysian Government: Seremban, Negeri Sembilan, Malaysia
- Berger, P. (2002). Removal of *Cryptosporidium* using bank filtration.

In *Riverbank filtration: Understanding contaminant biogeochemistry and pathogen removal* (pp. 85-121). Springer, Dordrecht.

Beyer, W. (1964). Zur Bestimmung der Wasserdurchlässigkeit von Kiesen und Sanden aus der Kornverteilungskurve (Determination of the hydraulic conductivity of gravels and sands from particle distribution curves). *Wasserwirtsch Wassertech* 14(6):165–168.

Bhattacharya, S. K., Gupta, S. K., & Krishnamurthy, R. V. (1985). Oxygen and hydrogen isotopic ratios in groundwaters and river waters from India. *Proceedings of the Indian Academy of Sciences-Earth and Planetary Sciences*, 94(3), 283-295.

Bhuiyan, M. A. H., Ganyaglo, S., & Suzuki, S. (2015). Reconnaissance on the suitability of the available water resources for irrigation in Thakurgaon District of northwestern Bangladesh. *Applied Water Science*, 5(3), 229-239.

Binley, A., Ullah, S., Heathwaite, A.L., Heppell, C., Byrne, P., Lansdown, K., Trimmer, M., & Zhang, H. (2013). Revealing the spatial variability of water fluxes at the groundwater-surfacewater interface. *Water Resources Research*, 49(7), 3978-3992.

Bishop, C.M. (1995). *Neural networks for pattern recognition*. Oxford University Press, New York.

Blanford, W., Boving, T., Al-Ghazawi, Z., Shawaqfah, M., Al-Rashdan, J., Saadoun, I., Schijven, J., & Ababneh, Q. (2010). River bank filtration for protection of Jordanian surface and groundwater. In *World Environmental and Water Resources Congress 2010: Challenges of Change*, pp. 776-781.

Blasch, K. W., & Bryson, J. R. (2007). Distinguishing sources of ground water recharge by using $\delta^2\text{H}$ and $\delta^{18}\text{O}$. *Groundwater*, 45(3), 294-308.

Blavier, J., Verbanck, M. A., Craddock, F., Liégeois, S., Latinis, D., Gargouri, L., Debaste F. R. F., & Haut, B. (2014). Investigation of riverbed filtration systems on the Parapeti river, Bolivia. *Journal of Water Process Engineering*, 1, 27-36.

Boadu, F. K. (2000). Hydraulic conductivity of soils from grain-size distribution: new models. *Journal of Geotechnical and Geoenvironmental Engineering*, 126(8), 739-746.

Bobba, A. G. (2012). Ground Water-Surface Water Interface (GWSWI) modeling: recent advances and future challenges. *Water resources management*, 26(14), 4105-4131.

Bosch, J.H.A. (1986). *Young Quaternary Sediments in the Coastal Plain of*

Southern Perak, Peninsular Malaysia. Geology Survey Malaysia Quaternary Geology Report .1186, 83 pp.

- Boving, T. B., Choudri, B. S., Cady, P., Cording, A., Patil, K., & Reddy, V. (2014). Hydraulic and hydrogeochemical characteristics of a riverbank filtration site in rural India. *Water Environment Research*, 86(7), 636-648.
- Bradley, P. M., Barber, L. B., Duris, J. W., Foreman, W. T., Furlong, E. T., Hubbard, L. E., Keefe, S.H., & Kolpin, D. W. (2014). Riverbank filtration potential of pharmaceuticals in a wastewater-impacted stream. *Environmental pollution*, 193, 173-180.
- British Standards Institution (1990). BS 1377 British Standards: Part 2:1990 *Methods of test for soils for civil engineering purposes*, Part 2. Classification tests 61pp.
- Bruchet, A., Robert, S., Esperanza, M., Janex-Habibi, M. L., Miège, C., Coquery, M., Budzinski H., & Lemenach, K. (2011). Natural attenuation of priority and emerging contaminants during river bank filtration and artificial recharge. *European journal of water quality*, 42(2), 123-133.
- Brunke, M. (1999). Colmation and depth filtration within streambeds: retention of particles in hyporheic interstices. *International Review of Hydrobiology*, 84(2), 99-117.
- Brunke, M., & Gonser, T. O. M. (1997). The ecological significance of exchange processes between rivers and groundwater. *Freshwater biology*, 37(1), 1-33.
- Brunner, N., Starkl, M., Sakthivel, P., Elango, L., Amirthalingam, S., Pratap, C.E., Thirunavukkarasu, M., & Parimalarenganayaki, S. (2014). Policy preferences about managed aquifer recharge for securing sustainable water supply to Chennai City, *India. Water* 6 (12), 3739–3757.
- Bruno, M. C., Maiolini, B., Carolli, M., & Silveri, L. (2009, January). Impact of hydropeaking on hyporheic invertebrates in an Alpine stream (Trentino, Italy). In *Annales de Limnologie-International Journal of Limnology* (Vol. 45, No. 3, pp. 157-170). EDP Sciences.
- BS 5930 Code of Practice for Site Investigations British Standards Institution (1999) 191 pages
- Buckman, H.O., & Brady, N.C. (1967). The nature and properties of soils. The MacMillan Company, New York, New York.
- Burden, R. J. (1982). Hydrochemical variation in a water-table aquifer beneath grazed pastureland. *Journal of Hydrology*, 61-75.

- Busby, J.F., Lee, R.W., & Hanshaw, B.B. (1983). *Major geochemical processes related to the hydrology of the Madison aquifer system and associated rocks in parts of Montana, South Dakota and Wyoming*. U.S. Geological Survey Water-Resources Investigation Report 83-4093, 180 p.
- Butler, J. J., Zlotnik, V. A., & Tsou, M. S. (2001). Drawdown and stream depletion produced by pumping in the vicinity of a partially penetrating stream. *Groundwater*, 39(5), 651-659.
- Cady, P., Boving, T. B., Choudri, B. S., Cording, A., Patil, K., & Reddy, V. (2013). Attenuation of bacteria at a riverbank filtration site in rural India. *Water Environment Research*, 85(11), 2164-2174.
- Caldwell, T. G. (2006). Presentation of data for factors significant to yield from several riverbank filtration systems in the US and Europe. In *Riverbank filtration hydrology* (pp. 299-344). Springer, Dordrecht.
- Campbell, A. T., & Wallis, P. (2002). The effect of UV irradiation on human-derived *Giardia lamblia* cysts. *Water Research*, 36(4), 963-969.
- Campolo, M., Andreussi P., and Soldati A. (1999). River flood forecasting with neural network model, *Water Resources Research* 35(4):1191–1197
- Cardenas, M.B. & Zlotnik, V.A. (2003). A simple constant-head injection test for streambed hydraulic conductivity estimation. *Ground Water* 41(6):867–871.
- Carman, P. C. (1937). Fluid flow through granular beds. *Trans. Inst. Chem. Eng.*, 15, 150-166.
- Carman, P. C. (1938). Determination of the specific surface of powders I. Transactions. *J. Soc. Chemical Industries.*, 57, 225-234.
- Carman, P. C. (1956). *Flow of gases through porous media*. Academic press.
- Carrier, W. D. (2003). Goodbye, hazen; hello, kozeny-carman. *Journal of Geotechnical and Geoenvironmental Engineering*, 129(11), 1054-1056.
- Cerling, T. E., Pederson, B. L., & Von Damm, K. L. (1989). Sodium-calcium ion exchange in the weathering of shales: Implications for global weathering budgets. *Geology*, 17(6), 552-554.
- Chadha, D. K. (1999). A proposed new diagram for geochemical classification of natural waters and interpretation of chemical data. *Hydrogeology journal*, 7(5), 431-439.
- Chapelle, F.H., McMahon, P.B., Dubrovsky, N.M., Fuhii, R.F., Oasksford, E.T., & Vroblesky, D.A. (1995). Deducing the distribution of terminal electron-

- accepting processes in hydrologically diverse groundwater systems. *Water Resources Research* 31(2), 359-371.
- Chapman, T. G., & Malone, R. W. (2002). Comparison of models for estimation of groundwater recharge, using data from a deep weighing lysimeter. *Mathematics and Computers in Simulation*, 59(1-3), 3-17.
- Chapuis, R. P. (2004). Predicting the saturated hydraulic conductivity of sand and gravel using effective diameter and void ratio. *Canadian geotechnical journal*, 41(5), 787-795.
- Chapuis, R. P., & Montour, I. (1992). Évaluation de l'équation de Kozeny-Carman pour prédire la conductivité hydraulique. In *Proceedings, 45ième Conférence Canadienne de Géotechnique* (pp. 78-1).
- Chapuis, R. P., Dallaire, V., Marcotte, D., Chouteau, M., Acevedo, N., & Gagnon, F. (2005). Evaluating the hydraulic conductivity at three different scales within an unconfined sand aquifer at Lachenaie, Quebec. *Canadian Geotechnical Journal*, 42(4), 1212-1220.
- Chen, X. (2000). Measurement of streambed hydraulic conductivity and its anisotropy. *Environmental Geology*, 39(12), 1317-1324.
- Chen, X. (2001). Migration of induced-infiltrated stream water into nearby aquifers due to seasonal ground water withdrawal. *Groundwater*, 39(5), 721-729.
- Chen, X. (2003). Analysis of pumping-induced stream-aquifer interactions for gaining streams. *Journal of hydrology*, 275(1-2), 1-11..
- Chen, X. (2004). Streambed hydraulic conductivity for rivers in south-central Nebraska. *JAWRA Journal of the American Water Resources Association*, 40(3), 561-573.
- Chen, X. (2005). Statistical and geostatistical features of streambed hydraulic conductivities in the Platte River, Nebraska. *Environmental Geology*, 48(6), 693-701.
- Chen, X. (2007). Hydrologic connections of a stream-aquifer-vegetation zone in south-central Platte River valley, Nebraska. *Journal of Hydrology*, 333(2-4), 554-568.
- Chen, X., & Shu, L. (2002). Stream-Aquifer interactions: Evaluation of depletion volume and residual effects from ground water pumping. *Groundwater*, 40(3), 284-290.
- Chen, X., & Yin, Y. (1999). Evaluation of streamflow depletion for vertical

- anisotropic aquifers. *Journal of Environmental Systems*, 27(1).
- Chen, X., & Yin, Y. (2001). Streamflow Depletion: Modeling of Reduced Baseflow ANI Induced Stream Filtration from Seasonally Pumped Wells. *JAWRA Journal of the American Water Resources Association*, 37(1), 185-195.
- Chen, X., Burbach, M., & Cheng, C. (2008). Electrical and hydraulic vertical variability in channel sediments and its effects on streamflow depletion due to groundwater extraction. *Journal of Hydrology*, 352(3-4), 250-266.
- Chen, X., Dong, W., Ou, G., Wang, Z., & Liu, C. (2013). Gaining and losing stream reaches have opposite hydraulic conductivity distribution patterns. *Hydrology and Earth System Sciences*, 17(7), 2569-2579.
- Chen, X., Song, J., Cheng, C., Wang, D., & Lackey, S. O. (2009). A new method for mapping variability in vertical seepage flux in streambeds. *Hydrogeology Journal*, 17(3), 519-525.
- Chen, Z. Y., Wan, L., Nie, Z. L., Shen, J. M., & Chen, J. S. (2006). Identification of groundwater recharge in the Heihe Basin using environmental isotopes. *Hydrogeology & Engineering Geology*, 33(6), 9-14.
- Cheng, C., & Chen, X. (2007). Evaluation of methods for determination of hydraulic properties in an aquifer–aquitard system hydrologically connected to a river. *Hydrogeology Journal*, 15(4), 669-678.
- Cheng, C., Song, J., Chen, X., & Wang, D. (2011). Statistical distribution of streambed vertical hydraulic conductivity along the Platte River, Nebraska. *Water resources management*, 25(1), 265-285.
- Cheong, J. Y., Hamm, S. Y., Kim, H. S., Ko, E. J., Yang, K., & Lee, J. H. (2008). Estimating hydraulic conductivity using grain-size analyses, aquifer tests, and numerical modeling in a riverside alluvial system in South Korea. *Hydrogeology Journal*, 16(6), 1129.
- Chua, L. H., Lo, E. Y., Freyberg, D. L., Shuy, E. B., Lim, T. T., Tan, S. K., & Ngonidzashe, M. (2007). Hydrostratigraphy and geochemistry at a coastal sandfill in Singapore. *Hydrogeology journal*, 15(8), 1591-1604.
- Clark, I.D., & Fritz, P. (1997). *Environmental isotopes in hydrogeology*. Lewis Publishers, New York, NY, USA.
- Cloutier, V., Lefebvre, R., Therrien, R., & Savard, M. M. (2008). Multivariate statistical analysis of geochemical data as indicative of the hydrogeochemical evolution of groundwater in a sedimentary rock aquifer system. *Journal of Hydrology*, 353(3-4), 294-313.

- Coplen, T. B., Herczeg, A. L., & Barnes, C. (2000). Isotope engineering—using stable isotopes of the water molecule to solve practical problems. In *Environmental tracers in subsurface hydrology* (pp. 79-110). Springer, Boston, MA.
- Coppola Jr, E., Szidarovszky, F., Poulton, M., & Charles, E. (2003). Artificial neural network approach for predicting transient water levels in a multilayered groundwater system under variable state, pumping, and climate conditions. *Journal of Hydrologic Engineering*, 8(6), 348-360.
- Coppola, E. A., McLane, C. F., Poulton, M. M., Szidarovszky, F., & Magelky, R. D. (2005a). Predicting conductance due to upconing using neural networks. *Groundwater*, 43(6), 827-836.
- Coppola, E. A., Rana, A. J., Poulton, M. M., Szidarovszky, F., & Uhl, V. W. (2005b). A neural network model for predicting aquifer water level elevations. *Groundwater*, 43(2), 231-241.
- Coulibaly, P., Anctil, F., & Bobee, B. (1999). Hydrological forecasting using artificial neural networks: the state of art. *Canadian Journal of Civil Engineering* 26(3):293–304.
- Coulibaly, P., Anctil, F., & Bobee, B. (2000). Daily reservoir inflow forecasting using artificial neural networks with stopped training approach. *Journal of Hydrology* 230:244–257.
- Coulibaly, P., Anctil, F., Aravena, R., & Bobee, B. (2001). Artificial neural network modeling of water table depth fluctuations. *Water Resources Research* 37(4):885–896.
- Courtier, D.B. (1962). Note on terraces and other alluvial features in parts of Province Wellesley South Kedah and North Perak. Geological Survey Professional paper E-62. 1-T, 6 pp .
- Courtier, D.B. (1974). Geology and Mineral Resources of the neighbourhood of Kulim, Kedah. Geological Survey of Malaysia Map Bulletin 3, 50 pp.
- Craig, H. (1961). Isotopic variation in meteoric waters. *Science* 133:1702–1703.
- CSE (2007). Sewage Canal. How to clean up the Yamuna. *Centre for science and environment*, New Dehli.
- Custodio, E. (2002). Aquifer overexploitation: what does it mean?. *Hydrogeology journal*, 10(2), 254-277.
- Dalai, C., & Jha, R. (2014). Review on water treatment techniques used for riverbank filtration. *International Journal of Civil Engineering Research*. 5 (3),

221-226.

- D'Alessio, M., Yoneyama, B., & Ray, C. (2015). Fate of selected pharmaceutically active compounds during simulated riverbank filtration. *Science of the Total Environment*, 505, 615-622.
- Dansgaard, W. (1964). Stable isotopes in precipitation. *Tellus*, 16(4), 436-468..
- Dash, R. R., Mehrotra, I., Kumar, P., & Grischek, T. (2008). Lake bank filtration at Nainital, India: water-quality evaluation. *Hydrogeology Journal*, 16(6), 1089-1099.
- Dash, R. R., Mehrotra, I., Kumar, P., & Grischek, T. (2015). Study of water quality improvements at a riverbank filtration site along the upper course of the River Ganga, India. *Desalination and Water Treatment*, 54(9), 2422-2431.
- Dash, R. R., Prakash, E. B., Kumar, P., Mehrotra, I., Sandhu, C., & Grischek, T. (2010). River bank filtration in Haridwar, India: removal of turbidity, organics and bacteria. *Hydrogeology Journal*, 18(4), 973-983.
- Davenport, J. R., & Peryea, F. J. (1991). Phosphate fertilizers influence leaching of lead and arsenic in a soil contaminated with lead arsenate. *Water, Air, and Soil Pollution*, 57(1), 101-110.
- Davis, G.A., Darby, B.J., Yadong, Z., & Spell, T.L. (2002). Geometric and temporal evolution of an extensional detachment fault, Hohhot metamorphic core complex, Inner Mongolia, China. *Geology* 30:1003–1006.
- De Louw, P. G. B., Velde, Y., & Zee, S. V. D. (2011). Quantifying water and salt fluxes in a lowland polder catchment dominated by boil seepage: a probabilistic end-member mixing approach. *Hydrology and Earth System Sciences*, 15(7), 2101-2117.
- De Vet, W. W. J. M., Van Genuchten, C. C. A., Van Loosdrecht, M. C. M., & Van Dijk, J. C. (2010). Water quality and treatment of river bank filtrate. *Drinking Water Engineering and Science*, 3(1), 79-90.
- Demlie, M., Wohnlich, S., Wisotzky, F., & Gizaw, B. (2007). Groundwater recharge, flow and hydrogeochemical evolution in a complex volcanic aquifer system, central Ethiopia. *Hydrogeology Journal*, 15(6), 1169-1181.
- Department of Drainage and Irrigation Malaysia (DID) (2005) *Master Plan for the Management of the Langat River Basin*. Ministry of Natural Resources and Environment Malaysia, Kuala Lumpur. p237.
- Department of Environment, (DOE). (2005). Department of environment Malaysian; *Environmental Quality report* pp71

- Department of Environment, (DOE). (2012). Environmental Quality Report. Department of Environment, Malaysia: Putrajaya, Malaysia
- Department of Irrigation and Drainage Malaysia, (DID). (2010). Review of the National Water Resources Study (2000-2050) and Formulation of National Water Resources Policy.
- Department of Standards Malaysia, (DOSM). (2010). Malaysian Standard: Drinking water-quality requirements (MS 2320:2010). Department of Standard Malaysia, 19p.
- Department of Statistic Malaysia, (DOSM). (2010). *Population Distribution and Basic Demographic Characteristic Report*. Department of Statistic
- Department of Statistics Malaysia, (DOSM) (2016). Current Population Estimates, Malaysia, 2014-2016. 22 July 2016. Retrieved from <https://www.dosm.gov.my>.
- Derx, J., Blaschke, A. P., & Blöschl, G. (2010). Three-dimensional flow patterns at the river–aquifer interface—a case study at the Danube. *Advances in Water Resources*, 33(11), 1375-1387.
- Derx, J., Blaschke, A. P., Farnleitner, A. H., Pang, L., Blöschl, G., & Schijven, J. F. (2013). Effects of fluctuations in river water level on virus removal by bank filtration and aquifer passage—a scenario analysis. *Journal of contaminant hydrology*, 147, 34-44.
- Derx, J., Farnleitner, A. H., Blöschl, G., Vierheilig, J., & Blaschke, A. P. (2014). Effects of riverbank restoration on the removal of dissolved organic carbon by soil passage during floods—A scenario analysis. *Journal of hydrology*, 512, 195-205.
- Devlin, J.F. (2015). HydrogeoSieveXL: an Excel-based tool to estimate hydraulic conductivity from grain size analysis. *Hydrogeology Journal* 23(4),837-844.
- Diem, S., Cirpka, O. A., & Schirmer, M. (2013). Modeling the dynamics of oxygen consumption upon riverbank filtration by a stochastic–convective approach. *Journal of hydrology*, 505, 352-363.
- Diem, S., Von Rohr, M. R., Hering, J. G., Kohler, H. P. E., Schirmer, M., & Von Gunten, U. (2013). NOM degradation during river filtration: Effects of the climate variables temperature and discharge. *Water research*, 47(17), 6585-6595.
- Dillon, P. (2009). Ground water replenishment with recycled water—an Australian perspective. *Groundwater*, 47(4), 492-495.

- Dillon, P.J., Miller, M., Fallowfield, H. & Hutson, J. (2002). The potential of riverbank filtration for drinking water supplies in relation to microcystin removal in brackish aquifers. *Journal Hydrology* 266, 209–221.
- Doneen, L.D. (1964). Water quality for Agriculture, Department of Irrigation, University of California, Davis.
- Doussan, C., Ledoux, E., & Detay, M. (1998). River-groundwater exchanges, bank filtration, and groundwater quality: ammonium behavior. *Journal of environmental quality*, 27(6), 1418-1427.
- Doussan, C., Poitevin, G., Ledoux, E., & Detay, M. (1997). River bank filtration: modelling of the changes in water chemistry with emphasis on nitrogen species. *Journal of contaminant hydrology*, 25(1-2), 129-156.
- Drever, J.I. (1982). *The Geochemistry of Natural Waters*. Prentice-Hall, Inc., Englewood Cliffs, NJ.
- Drewes, J. E. (2009). Ground water replenishment with recycled water—water quality improvements during managed aquifer recharge. *Groundwater*, 47(4), 502-505.
- Drewes, J. E., Heberer, T., Rauch, T., & Reddersen, K. (2003). Fate of pharmaceuticals during ground water recharge. *Groundwater Monitoring & Remediation*, 23(3), 64-72.
- Drewes, J. E., Hoppe, C., & Jennings, T. (2006). Fate and transport of N-nitrosamines under conditions simulating full-scale groundwater recharge operations. *Water Environment Research*, 78(13), 2466-2473.
- Dusseldorp, J., 2013. The effect of pre-treatment with Reverse Osmosis on the biological stability in a drinking water treatment plant, MSc Thesis, Delft University of Technology
- Eaton, F. M. (1950). Significance of carbonates in irrigation waters. *Soil science*, 69(2), 123-134.
- Eckert, P., & Irmischer, R. (2006). Over 130 years of experience with riverbank filtration in Düsseldorf, Germany. *Journal of Water Supply: Research and Technology-AQUA*, 55(4), 283-291.
- Eckert, P., Lamberts, R., & Wagner, C. (2008). The impact of climate change on drinking water supply by riverbank filtration. *Water Science and Technology: Water Supply*, 8(3), 319-324.
- Eggleston, J., & Rojstaczer, S. (2001). The value of grain-size hydraulic conductivity estimates: Comparison with high resolution in-situ field hydraulic

- conductivity. *Geophysical research letters*, 28(22), 4255-4258.
- Emelko, M. B., Tufenkji, N., Stone, M., Rudolph, D. L., & Marsalek, J. (2010). Mitigation of urban stormwater and polluted river water impacts on water quality with riverbank filtration. *Effects of urbanization on groundwater: An engineering case-based approach for sustainable development*. NB. Chang (ed.). ASCE Publications, Reston, VA, 165-198.
- Engesgaard, P., Seifert, D., & Herrera, P. (2006). Bioclogging in porous media: tracer studies. In: Hubbs SA (eds) *Riverbank Filtration Hydrology—Impacts on System Capacity and Water Quality*. Springer, Dordrecht, pp. 93–118.
- EPA. (1999). Guidance manual for compliance with the interim enhanced surface water treatment rule: turbidity provisions, EPA 815-R99-010, Office of Water, 1999.
- Epule, T. E., Peng, C., Wase, M. M., & Mafany, N. M. (2011). Well water quality and public health implications: the case of four neighbourhoods of the City of Douala Cameroon. *Global Journal of Health Science*, 3(2), 75.
- Essl, L., Starkl, M., Kimothi, P. C., Sandhu, C., & Grischek, T. (2014). Riverbank filtration and managed aquifer recharge as alternative water supply technologies for India: strengths–weaknesses–opportunities–threats analysis. *Water Science and Technology: Water Supply*, 14(4), 690-697.
- Farizawati, S., Lim, Y.A., Ahmad, R.A., Fatimah, C.T., & Siti, N.Y. (2005). Contribution of cattle farms towards river contamination with Giardia cysts and Cryptosporidium oocysts in Sungai Langat Basin. *Tropical Biomedicine* 22(2): 89-98.
- Faulkner, B. R., Olivas, Y., Ware, M. W., Roberts, M. G., Groves, J. F., Bates, K. S., & McCarty, S. L. (2010). Removal efficiencies and attachment coefficients for Cryptosporidium in sandy alluvial riverbank sediment. *Water research*, 44(9), 2725-2734.
- Faure, G. (1998). Principles and Applications of Geochemistry. Prentice-Hall, Englewood Cliffs.
- Fausett, L. (1994). Fundamentals of neural networks. Prentice Hall, Englewood Cliffs.
- Fetter, C.W. (2001). Applied hydrogeology (4th ed.). Upper Saddle River, N.J.: Prentice Hall.
- Figura, S., Livingstone, D. M., & Kipfer, R. (2013). Competing controls on groundwater oxygen concentrations revealed in multidecadal time series from riverbank filtration sites. *Water Resources Research*, 49(11), 7411-

7426.

- Fischer, T., Day, K., Grischek, T. (2006). Sustainability of riverbank filtration in Dresden, Germany. In: UNESCO IHP-VI series on groundwater No. 13, Recharge systems for protecting and enhancing groundwater resources. *Proc Int Symp Management of Artificial Recharge*, 11–16 June 2005, Berlin, pp 23–28.
- Fisher, R. S., & Mullican III, W. F. (1997). Hydrochemical evolution of sodium-sulfate and sodium-chloride groundwater beneath the northern Chihuahuan Desert, Trans-Pecos, Texas, USA. *Hydrogeology journal*, 5(2), 4-16.
- Fox, G. A., DuChateau, P., & Dumford, D. S. (2002). Analytical model for aquifer response incorporating distributed stream leakage. *Groundwater*, 40(4), 378-384.
- Freeze, R.A., & Cherry, J.A. (1979). *Groundwater*. Prentice Hall, Englewood Cliffs, NJ, 604 pp.
- Fu, C., Zhang, W., Zhang, S., Su, X., & Lin, X. (2014). Identifying key hydrochemical processes in a confined aquifer of an arid basin using multivariate statistical analysis and inverse modeling. *Environmental earth sciences*, 72(1), 299-310.
- Gariglio, F. P., Tonina, D., & Luce, C. H. (2013). Spatiotemporal variability of hyporheic exchange through a pool-riffle-pool sequence. *Water Resources Research*, 49(11), 7185-7204.
- Genereux, D. P., Leahy, S., Mitasova, H., Kennedy, C. D., & Corbett, D. R. (2008). Spatial and temporal variability of streambed hydraulic conductivity in West Bear Creek, North Carolina, USA. *Journal of Hydrology*, 358(3-4), 332-353.
- Ghabayen, S. M., McKee, M., & Kemblowski, M. (2006). Ionic and isotopic ratios for identification of salinity sources and missing data in the Gaza aquifer. *Journal of hydrology*, 318(1-4), 360-373.
- Ghazali, M. F., Adlan, M. N., & Rashid, N. A. A. (2015). Riverbank filtration: evaluation of hydraulic properties and riverbank filtered water at Jenderam Hilir, Selangor. *Jurnal Teknologi*, 74(11), 33-41.
- Ghodeif, K. O. (2011). Removal of iron and manganese within the aquifer using enhanced riverbank filtration technique under arid conditions. In *Riverbank Filtration for Water Security in Desert Countries* Springer, Dordrecht. (pp. 235-253).
- Ghodeif, K., Grischek, T., Bartak, R., Wahaab, R., & Herlitzius, J. (2016).

- Potential of river bank filtration (RBF) in Egypt. *Environmental Earth Sciences*, 75(8), 671.
- Ghodeif, K., Paufler, S., Grischek, T., Wahaab, R., Souaya, E., Bakr, M., & Abogabal, A. (2018). Riverbank filtration in Cairo, Egypt—part I: installation of a new riverbank filtration site and first monitoring results. *Environmental Earth Sciences*, 77(7), 270.
- Ghosh, N. C., Khatania, S. K., Indwar, S. P., Sandhu, C. S., Jain, C. K., Mittal, S., & Goel, R. (2015). Performance evaluation of riverbank filtration scheme. *Current Science (00113891)*, 109(2).
- Ghosh, N.C., & Sharma, K.D. (2006). Groundwater modelling and management. Capital Publishing Company, Daryagan.
- Gibbs, R.J. (1970). Mechanisms controlling world water chemistry. *Science* 17:1088-1090.
- Glover, R. E., & Balmer, G. G. (1954). River depletion resulting from pumping a well near a river. *Eos, Transactions American Geophysical Union*, 35(3), 468-470.
- Gnanachandrasamy, G., Ramkumar, T., Venkatramanan, S., Anithamary, I., & Vasudevan, S. (2012). GIS based hydrogeochemical characteristics of groundwater quality in Nagapattinam district, Tamil Nadu, India. *Carpath J Earth Environ Sci*, 7(3), 205-210.
- Go'rski, J. (2010). Water on the Base of Poznan' City (Poland) Waterworks Experiences. *Riverbank filtration for water security in desert countries*. Springer, Dordrecht, pp 269
- Goldschneider, A. A., Haralampides, K. A., & MacQuarrie, K. T. (2007). River sediment and flow characteristics near a bank filtration water supply: Implications for riverbed clogging. *Journal of Hydrology*, 344(1-2), 55-69.
- Gollnitz, W. D., Clancy, J. L., McEwen, J. B., & Garner, S. C. (2005). Riverbank filtration for IESWTR compliance. *Journal American Water Works Association*, 97(12), 64-76.
- Gollnitz, W. D., Clancy, J. L., Whitteberry, B. L., & Vogt, J. A. (2003). RBF as a microbial treatment process. *Journal-American Water Works Association*, 95(12), 56-66.
- Gollnitz, W.D., Whitteberry, B.L., & Vogt, J.A. (2004). Riverbank filtration: induced filtration and groundwater quality. *Journal American Water Works Association* 96 (12), 98–110.

- Górski, J. (2011). Quality of Riverbank Filtrated Water on the Base of Poznań City (Poland) Waterworks Experiences. In *Riverbank Filtration for Water Security in Desert Countries* Springer, Dordrecht. (pp. 269-279).
- Government of Malaysia, (GOM) (2000). The National Water Resources Study 2000–2050, vol 1 (study undertaken by SMHB, Ranhill and Jurutera Perunding Zaaba), 1–78.
- Greskowiak, J., Prommer, H., Massmann, G., & Nützmann, G. (2006). Modeling seasonal redox dynamics and the corresponding fate of the pharmaceutical residue phenazone during artificial recharge of groundwater. *Environmental science & technology*, 40(21), 6615-6621.
- Grindley, J. (1969). The calculation of evaporation and soil moisture deficit over specified catchment area, Hydrological Memorandum 28. Meteorological Office, Bracknell 10.
- Grisczek, T., & Bartak, R. (2016). Riverbed clogging and sustainability of riverbank filtration. *Water*, 8(12), 604.
- Grisczek, T., & Paufler, S. (2017). Prediction of iron release during riverbank filtration. *Water*, 9(5), 317.
- Grisczek, T., & Ray, C. (2009). Bank filtration as managed surface-groundwater interaction. *International Journal of Water*, 5(2), 125-139.
- Grisczek, T., Hiscock, K. M., Metschies, T., Dennis, P. F., & Nestler, W. (1998). Factors affecting denitrification during filtration of river water into a sand and gravel aquifer in Saxony, Germany. *Water Research*, 32(2), 450-460.
- Grisczek, T., Nestler, W., Aplin, A., Macleod, G., & Clayton, R. (1995). Biogeochemical processes in the Torgau aquifer adjacent to the River Elbe. In: Kovar K, Krasny J (eds) Groundwater quality: remediation and protection. Proceedings of Prague conference. IAHS publication 225, 97–105.
- Grisczek, T., Schoenheinz, D., & Ray, C., (2002). Siting and Design Issues for Riverbank Filtration Schemes. *Riverbank Filtration: Improving Source Water Quality*. Springer, pp. 291–302.
- Groeschke, M., Frommen, T., Taute, T., & Schneider, M. (2017). The impact of sewage-contaminated river water on groundwater ammonium and arsenic concentrations at a riverbank filtration site in central Delhi, *Hydrogeology Journal*, 25(7), 2185-2197.
- Groeschke, M., Kumar, P., Winkler, A., Grützmacher, G., & Schneider, M. (2016). The role of agricultural activity for ammonium contamination at a riverbank filtration site in central Delhi (India). *Environmental Earth*

Sciences, 75(2), 129.

- Gross-Wittke, A., Gunkel, G., & Hoffmann, A. (2010). Temperature effects on bank filtration: redox conditions and physical-chemical parameters of pore water at Lake Tegel, Berlin, Germany. *Journal of Water and Climate Change*, 1(1), 55-66.
- Grünenheid, S., Amy, G., & Jekel, M. (2005). Removal of bulk dissolved organic carbon (DOC) and trace organic compounds by bank filtration and artificial recharge. *Water Research* 39(14), 3219-3228.
- Guglielmi, Y., Mudry, J., & Blavoux, B. (1998). Estimation of the water balance of alluvial aquifers in region of high isotopic contrast: an example from southeastern France. *Journal of Hydrology*. 210, 106–115. [https://doi.org/10.1016/S0022-1694\(98\)00178-4](https://doi.org/10.1016/S0022-1694(98)00178-4)
- Gupta, A., Ronghang, M., Kumar, P., Mehrotra, I., Kumar, S., Grischek, T., & Knoeller, K. (2015). Nitrate contamination of riverbank filtrate at Srinagar, Uttarakhand, India: A case of geogenic mineralization. *Journal of Hydrology*, 531, 626-637.
- Gupta, V., Johnson, W. P., Shafieian, P., Ryu, H., Alum, A., Abbaszadegan, M., Hubbs, S. A. & Rauch-Williams, T. (2009). Riverbank filtration: comparison of pilot scale transport with theory. *Environmental science & technology*, 43(3), 669-676.
- Gutiérrez, J. P., Halem, D. V., & Rietveld, L. (2017). Riverbank filtration for the treatment of highly turbid Colombian rivers. *Drinking Water Engineering and Science*, 10(1), 13-26.
- Hagen, M.T., Demceth H.B. & Beale, M.N. (1996). Neural network design. PWS, Boston.
- Hamdan, A. M., Sensoy, M. M., & Mansour, M. S. (2013). Evaluating the effectiveness of bank filtration process in new Aswan City, Egypt. *Arabian Journal of Geosciences*, 6(11), 4155-4165.
- Hamzah, U., Yaacup, R., Samsudin, A. R., & Ayub, M. S. (2006). Electrical imaging of the groundwater aquifer at Banting, Selangor, Malaysia. *Environmental Geology*, 49(8), 1156.
- Hancock, P. J. (2002). Human impacts on the stream–groundwater exchange zone. *Environmental management*, 29(6), 763-781.
- Hanson, B., Grattan, S.R., & Fulton, A. (1999). Agricultural Salinity and Drainage. University of California Irrigation Program, University of California, Davis.

- Hantush, M. S. (1965). Wells near streams with semipervious beds. *Journal of Geophysical Research*, 70(12), 2829-2838.
- Harvey, R., Metge, D., Sheets, R., & Jasperse, J. (2011). Fluorescent microspheres as surrogates in evaluating the efficacy of riverbank filtration for removing *Cryptosporidium parvum* oocysts and other pathogens. In *Riverbank filtration for water security in desert countries*. Springer, Dordrecht. pp. 81–96.
- Hashim, H., Hudzori, A., Yusop, Z., & Ho, W. S. (2013). Simulation based programming for optimization of large-scale rainwater harvesting system: Malaysia case study. *Resources, Conservation and Recycling*, 80, 1-9.
- Hashim, M. A., Mukhopadhyay, S., Sahu, J. N., & Sengupta, B. (2011). Remediation technologies for heavy metal contaminated groundwater. *Journal of environmental management*, 92(10), 2355-2388.
- Hassan, K. (1990). A summary of the Quaternary geology investigations in Seberang Prai, Pulau Pinang and Kuala Kurau. Geol. Soc. Malaysia, Bulletin 26, April 1990; pp. 47 – 53.
- Havelaar, A. H., Van Olphen, M., & Schijven, J. F. (1995). Removal and inactivation of viruses by drinking water treatment processes under full scale conditions. *Water Science and Technology*, 31(5-6), 55-62.
- Haykin, S. (1999). *Neural networks, a comprehensive foundation*, 2nd edn. Prentice Hall, Englewood Cliffs.
- Hazen, A. (1892). Some physical properties of sands and gravels, with special reference to their use in filtration. 24th annual report, Massachusetts State Board of Health, Springfield, MA, pp 539–556.
- Hazen, A. (1893). Some Physical Properties of Sand and Gravels, with Special Reference to Their Use in Filtration. Twenty Fourth Annual Report, State Board of Health of Massachusetts 541-556
- Hazen, A. (1911) Discussion of dams on sand foundations. *Trans Am Soc Civ Eng* 73:199–203
- Heberer, T., Massmann, G., Fanck, B., Taute, T., & Du'nbnier, U. (2008). Behaviour and redox sensitivity of antimicrobial residues during bank filtration. *Chemosphere* 73(4):451–460.
- Helena, B., Pardo, R., Vega, M., Barrado, E., Fernandez, J.M. & Fernandez, L. (2000). Temporal evaluation of groundwater composition in an alluvial aquifer (Pisuerga river, Spain) by principal component analysis. *Water Research* 34: 807–816.

- Hester, E.T., & Gooseff, M.N. (2010). Moving beyond the banks: hyporheic restoration is fundamental to restoring ecological services and functions of streams. *Environ Sci Technol* 44:1521-1525.
- Hinsby, K., Bjerg, P. L., Andersen, L. J., Skov, B., & Clausen, E. V. (1992). A mini slug test method for determination of a local hydraulic conductivity of an unconfined sandy aquifer. *Journal of Hydrology*, 136(1-4), 87-106.
- Hiscock, K.M, & Grischek, T., (2002). Attenuation of groundwater pollution by bank filtration. *Journal of Hydrology* 266:139–144.
- Hoefs, J. (2009). Stable Isotope Geochemistry 6th ed., 36–87, Available on(<http://www.springer.com>).
- Hoehn, E., & Meylan, B. (2009). Measures to protect drinking-water wells near rivers from hydraulic engineering operations in peri-alpine flood-plains. *Grundwasser*, 14(4), 255-263.
- Hoehn, E., & Von Gunten, H. R. (1989). Radon in groundwater: A tool to assess filtration from surface waters to aquifers. *Water Resources Research*, 25(8), 1795-1803.
- Hoehn, E., Von Gunten, H. R., Stauffer, F., & Dracos, T. (1992). Radon-222 as a groundwater tracer. A laboratory study. *Environmental science & technology*, 26(4), 734-738.
- Hoffmann, A., & Gunkel, G. (2011a). Carbon input, production and turnover in the interstices of a Lake Tegel bank filtration site, Berlin, Germany. *Limnologica*. 41:151-159.
- Hoffmann, A., & Gunkel, G. (2011b). Bank filtration in the sandy littoral zone of Lake Tegel (Berlin): Structure and dynamics of the biological active filter zone and clogging processes. *Limnologica*. 41:10-19.
- Holzbecher, E. (2006). Calculating the effect of natural attenuation during bank filtration. *Computers & geosciences*, 32(9), 1451-1460.
- Homonnay, Z. (2002). Use of bank filtration in Hungary, in: Ray, C. (Ed.), *Riverbank filtration: Understanding contaminant biogeochemistry and pathogen removal*. Kluwer Academic Publishers, Dordrecht, pp. 221- 228.
- Hoppe-Jones, C., Oldham, G., & Drewes, J. E. (2010). Attenuation of total organic carbon and unregulated trace organic chemicals in US riverbank filtration systems. *Water research*, 44(15), 4643-4659.
- Hornik, K., Stinchcombe, M. & White, M. (1989). Multilayer feed forward networks are universal approximators. *Neural Network* 2:359–366.

- Hu, B., Teng, Y., Zhai, Y., Zuo, R., Li, J., & Chen, H. (2016). Riverbank filtration in China: A review and perspective. *Journal of Hydrology*, 541, 914-927.
- Hubbs, S. A. (2006a). Changes in riverbed hydraulic conductivity and specific capacity at Louisville, in Proceedings of the NATO Advanced Research Workshop on Riverbank Filtration Hydrology: Impacts on System Capacity and Water Quality, edited by: Hubbs, S. A., Bratislava, Slovakia, 199–220
- Hubbs, S. A., Ball, K., & Caldwell, T. G. (2007). Riverbank filtration: an evaluation of RBF hydrology, AwwaRF Report 91141F
- Hubbs, S. A., Hunt, H. C., & Schubert, J. (2003). The costs and benefits of riverbank-filtration systems, in: The Second International Riverbank Filtration Conference, Riverbank Filtration: The Future is Now!, edited by: Melin, G., National Water Research Institute, Cincinnati, Ohio, USA, 16–19
- Hubbs, S., Ball, K., & Haas, D. (2011). Minimizing Security Risks Beyond the Fence-Line: Design Features of a Tunnel-Connected Riverbank Filtration System. In *Riverbank Filtration for Water Security in Desert Countries*. Springer, Dordrecht. pp. 223-234
- Hubbs, S.A. (2006a). Evaluating streambed forces impacting the capacity of riverbed filtration systems. In: Hubbs SA (ed) *Riverbank Filtration Hydrology– Impacts on System Capacity and Water Quality*. Springer, Dordrecht, pp. 21–42.
- Hubbs, S.A., (2006b). Changes in Riverbed Hydraulic Conductivity and Specific Capacity at Louisville. *Riverbank Filtration Hydrology*. Impact on System Capacity and Water Quality Nato Science Series IV (60). Springer, pp. 199–220.
- Huddard, P.A., Longstaffe, F.J., & Crowe, A.S. (1999). dD and d18O evidence for inputs to groundwater at a wetland coastal boundary in the southern Great Lakes region of Canada. *Journal of Hydrology*. 214:18–31 [https://doi.org/10.1016/S0022-1694\(98\)00226-1](https://doi.org/10.1016/S0022-1694(98)00226-1).
- Hunt, B. (1999). Unsteady stream depletion from ground water pumping. *Groundwater*, 37(1), 98-102.
- Hunt, B., Weir, J., & Clausen, B. (2001). A stream depletion field experiment. *Groundwater* 39 (2), 283–289.
- Hunt, H., Schubert, J., & Ray, C. (2002). Conceptual Design of Riverbank Filtration Systems. *Riverbank Filtration: Improving Source Water Quality*. Springer, pp. 19–27.
- Hunt, R. J., Haitjema, H. M., Krohelski, J. T., & Feinstein, D. T. (2003). Simulating

Ground Water-Lake Interactions: Approaches and Insights. *Groundwater*, 41(2), 227-237.

Hunt, R., Bullen, T.D., Krabbenhoft, D.P., & Kendall, C. (1998). Using stable isotopes of water and strontium to investigate the hydrology of a natural and a constructed wetland. *Groundwater* 36: 434-443. <https://doi.org/10.1111/j.1745-6584.1998.tb02814.x>

Hunt, R.J., Haitjema, H.M., & Krohelski, J.T. (2003). Simulating ground water-lake interactions: approaches and insights. *Groundwater*, 41 (2), 227-237.

Huntscha, S., Rodriguez Velosa, D. M., Schroth, M. H., & Hollender, J. (2013). Degradation of polar organic micropollutants during riverbank filtration: complementary results from spatiotemporal sampling and push-pull tests. *Environmental science & technology*, 47(20), 11512-11521.

Hutchison, W. R., & Hibbs, B. J. (2008). Ground water budget analysis and cross-formational leakage in an arid basin. *Groundwater*, 46(3), 384-395.

Hvorslev, M.J. (1951). Time lag and soil permeability in ground-water observations. US Army Corps of Engineers, Waterways Experiment Station Bulletin 36:1-50.

IAEA (International Atomic Energy Agency), (1983). Guidebook on Nuclear Techniques in Hydrology; IAEA Technical Reports Series No. 91; IAEA: Vienna, Austria; p. 439.

IAEA (International Atomic Energy Agency), (2011), Using isotopes effectively to support comprehensive groundwater management—NTR 2011 Supplement. 55th IAEA General Conference Documents.

Ibrahim, N., Aziz, H.A., & Yusoff, M.S., (2015). Heavy metals concentration in river and pumping well water for river bank filtration (RBF) system: case study in Sungai Kerian. *Jurnal Teknologi* 74 (11).

Im, H., Yeo, I., & Choi, H. (2016). Fate of veterinary antibiotics in riverine soils: evaluation of applicability in riverbank filtration. *Desalination and Water Treatment*, 57(43), 20457-20463.

Indelman, P., Moltyaner, G., & Dagan, G. (1999). Determining the Hydraulic Conductivity Spatial Structure at the Twin Lake Site by Grain-Size Distribution. *Groundwater*, 37(2), 223-227.

Irmscher, R., & Teermann, I. (2002). Riverbank filtration for drinking water supply—a proven method, perfect to face today's challenges. *Water Science and Technology: Water Supply*, 2(5-6), 1-8.

- Ismail, W. M. Z. W., Yusoff, I., & Rahim, B. E. E. (2013). Simulation of horizontal well performance using Visual MODFLOW. *Environmental earth sciences*, 68(4), 1119-1126.
- Jacobs, L.A., Van Funten, H.R., Keil, R., & Kuslys, M. (1988). Geochemical changes along a river-groundwater infiltration path; Glattfelden. Switzerland. *Geochim Cosmochim Acta* 52(11): 2693–2706.
- Jacobsen, O. H., Moldrup, P., Larsen, C., Konnerup, L., & Petersen, L. W. (1997). Particle transport in macropores of undisturbed soil columns. *Journal of Hydrology*, 196(1-4), 185-203.
- Jalali, M. (2010). Application of multivariate analysis to study water chemistry of groundwater in a semi-arid aquifer, Malayer, western Iran. *Desalination and Water Treatment*, 19(1-3), 307-317.
- Jalali, M. (2011a). Hydrogeochemistry of groundwater and its suitability for drinking and agricultural use in Nahavand, Western Iran. *Natural resources research*, 20(1), 65-73.
- Jalali, M. (2011b). Nitrate pollution of groundwater in Toyserkan, western Iran. *Environmental Earth Sciences*, 62(5), 907-913.
- Jaramillo, M. (2012). Riverbank filtration: an efficient and economical drinking-water treatment technology. *Dyna*, 79(171), 148-157.
- Jasechko, S., Kirchner, J.W., Welker, J.M. & McDonnell, J.J., (2016). Substantial proportion of global streamflow less than three months old. *Nature Geoscience*, 9(2), 126-129.
- Jiang, L., Yao, Z., Liu, Z., Wang, R., & Wu, S. (2015). Hydrochemistry and its controlling factors of rivers in the source region of the Yangtze River on the Tibetan Plateau. *Journal of Geochemical Exploration*. 155:76-83. <http://dx.doi.org/10.1016/j.gexplo.2015.04.009>.
- Jiang, X., Zhou, J., Zhu, M., He, W., & Yu, G. (2001). Charge characteristics on the clay surface with interacting electric double layers. *Soil science*, 166(4), 249-254.
- JICA and Minerals & Geosciences Department (MGD) (2002). The study on the sustainable groundwater resources and environmental for the Langat Basin in Malaysia, Vol 1-5, Japan International Cooperation Agency (JICA), Tokyo and Department of Minerals and Geoscience Malaysia, Kuala Lumpur.
- Johnson, R.A. & Wichern, D.W. (1992). *Applied multivariate statistical analysis*. 3rd ed. Prentice-Hall, Englewood Cliffs, New Jersey.

- Jones, C.R., Gobbett, D.J., & Kobayashi, T. (1966). Summary of fossil record in Malaya and Singapore 1900-1965. *Geology and Palaeontology of Southeast Asia*, Vol. II, pp., 309-359.
- Juahir, H., Zain, M.S., & Yusoff, M.K. (2010b). Spatial water quality assessment of Langat River Basin (Malaysia) using envirometric techniques. *Environment Monitoring Assess* 173: 625-641.
- Juahir, H., Zain, M.S., Aris, A.Z., Yusof, M.K., Samah, M.A.A., & Mokhtar (2010a). Hydrological trend Analysis Due to Land Use Changes at Langat River Basin. *Enviroment Asia*. 3: 20-21.
- Jüttner, F. (1995). Elimination of terpenoid odorous compounds by slow sand and river bank filtration of the Ruhr River, Germany. *Water Science and Technology*, 31(11), 211-217.
- Kaczmarek, P. M. (2017). Hydraulic conductivity changes in river valley sediments caused by river bank filtration—an analysis of specific well capacity. *Geologos*, 23(2), 123-129.
- Kalbus, E., Reinstorf, F., & Schirmer, M. (2006). Measuring methods for groundwater, surface water and their interactions: a review. *Hydrology Earth System and Sciences* 10, 873–887
- Kalbus, E., Schmidt, C., Molson, J. W., Reinstorf, F., & Schirmer, M. (2009). Influence of aquifer and streambed heterogeneity on the distribution of groundwater discharge. *Hydrology and Earth System Sciences*, 13(1), 69-77.
- Kamaludin, B.H. (1989). Palynology of the lowland Seberang Prai and Kuala Kurau Areas north-west Peninsular Malaysia. *Geol. Soc. M'sia Bulletin* 23, 199-215.
- Kamaludin, B.H. (1990). A summary of the Quaternary geology investigations in Seberang Prai, Pulau Pinang and Kuala Kurau. *Geol. Soc. Malaysia, Bulletin* 26, April 1990; pp. 47 – 53.
- Kannel, P.R., Lee, S., Kanel, S.R. & Khan S.P. (2007). Chemometric application in classification and assessment of monitoring locations of an urban river system. *Analytica Chimica Acta* 582: 390-399.
- Karanth, K. R. (1991). Impact of human activities on hydrogeological environment. *Journal of the Geological Society of India*, 38(2), 195-206.
- Kármán, K., Maloszewski, P., Deák, J., Fórizs, I., & Szabó, C. (2014). Transit time determination for a riverbank filtration system using oxygen isotope data and the lumped-parameter model. *Hydrological Sciences Journal*, 59(6), 1109-1116.

- Kasenow, M. (2002). Determination of hydraulic conductivity from grain size analysis. *Water Resources*, Littleton, Colorado Highlands Ranch, CO
- Kazak, E., Pozdniakov, S., & Muromec, N. (2011). Field study and iron reactive simulation in riverbank water supply well fields. *IAHS-AISH publication*, 419-422.
- Kelly, S. E., & Murdoch, L. C. (2003). Measuring the hydraulic conductivity of shallow submerged sediments. *Groundwater*, 41(4), 431-439.
- Kelly, W.P. (1963). Use of saline irrigation water. *Soil Sciences* 95:355-391.
- Kendall, C., & McDonnell, J.J. (1998). *Isotope Tracers in Catchment Hydrology*. Elsevier, 839
- Kendy, E., & Bredehoeft, J. (2007). Mitigating the Ecological Effects of Riverbank Filtration. *American Water Works Association. Journal*, 99(12), 26.
- Kennedy, C. D., Genereux, D. P., Corbett, D. R., & Mitasova, H. (2009). Spatial and temporal dynamics of coupled groundwater and nitrogen fluxes through a streambed in an agricultural watershed. *Water Resources Research*, 45(9).
- Khairuddin, M.I., & Abd Malek, A. (2002). *Program pencegahan pencemaran dan peningkatan kualiti air sungai Langat*. Proceeding Simposium Penyelidikan Lembangan Langat 2001. Mazlin, M., Shaharuddin, I., Ahmad Fariz, M., Abdul Hadi H.S., Sarah A.A.G.A. (Eds). Lestari, UKM, Bangi. 183-189.
- Khan, M. M. A., Umar, R., & Lateh, H. (2010). Study of trace elements in groundwater of Western Uttar Pradesh, India. *Scientific Research and Essays*, 5(20), 3175-3182.
- Kim, H. S., & Kim, J. Y. (2008). High-resolution profiling of alluvial aquifer in potential riverbank filtration site by use of combining CMP refraction and reflection seismic methods. *Journal of applied geophysics*, 66(1-2), 1-14.
- Kim, J. W., Choi, H., & Pachepsky, Y. A. (2010). Biofilm morphology as related to the porous media clogging. *Water Research*, 44(4), 1193-1201.
- Kim, J.O., & Mueller, C.W. (1987). *Introduction to factor analysis: What it is and how to do it. Quantitative applications in the social sciences series*. Newbury Park: Sage University Press.
- Kim, M-j., Oh, S-j., Choi, N-c., Park, C-y., & Ko, C-s. (2013). The assessment of water-quality and well yield for operation of riverbank filtration in field scale. In: EGU general assembly conference abstracts, p 3672.
- Kim, S. H., Ahn, K. H., & Ray, C. (2008). Distribution of discharge intensity along

- small-diameter collector well laterals in a model riverbed filtration. *Journal of irrigation and drainage engineering*, 134(4), 493-500.
- Kneisel, C. (2006). Assessment of subsurface lithology in mountain environments using 2D resistivity imaging. *Geomorphology* 80:32–44.
- Koh, D. C., Chae, G. T., Yoon, Y. Y., Kang, B. R., Koh, G. W., & Park, K. H. (2009). Baseline geochemical characteristics of groundwater in the mountainous area of Jeju Island, South Korea: Implications for degree of mineralization and nitrate contamination. *Journal of hydrology*, 376(1-2), 81-93.
- Kovačević, S., Radišić, M., Laušević, M., & Dimkić, M. (2017). Occurrence and behavior of selected pharmaceuticals during riverbank filtration in The Republic of Serbia. *Environmental Science and Pollution Research*, 24(2), 2075-2088.
- Kozeny, J. (1927). "Ueber kapillare Leitung des Wassers im Boden" Wien [On capillary conduction of water in the soil, Vienna]. *Akad Wiss* 13(2a):271.
- Kozeny, J. (1953). Das Wasser im Boden: Grundwasserbewegung (The water in the ground: groundwater flow). In: *Hydraulik: ihre Grundlagen und praktische Anwendung*. Springer, Heidelberg, Germany, pp 380–445.
- Krishnamurthy, R.V., & Bhattacharya, S.K. (1991). Stable oxygen and hydrogen isotope ratios in shallow groundwater from India and a study of the role of evapotranspiration in the Indian monsoon. In: Kumar D (2007) *Groundwater Management in India: Physical, Institutional and Policy Alternatives*, New Delhi: Sage Publications.
- Krüger, E. (1919). Die Grundwasserbewegung (Groundwater flow). *Int Mitt Bodenkd* 8:105–122.
- Krumbein, W.C., & Monk, G.D. (1942). Permeability as a function of the size parameters of unconsolidated sand. *Am Inst Mining Metall Eng Trans* 151:153–163.
- Kruseman, G.P., & De Ridder, N.A. (1991). Analysis and evaluation of pumping test data. International Institute for Land Reclamation and Improvement, The Netherlands, 377 pp.
- Kuhn, W. & Muller (2000). Riverbank filtration; an Overview. *Journal America Water Works Association* 92(12): 60-69.
- Kulakov, V.V., Fisher, N.K., Kondratjeva, L.M., & Grischek, T. (2011). Riverbank Filtration as an Alternative to Surface Water Abstraction for Safe Drinking Water Supply to the City of Khabarovsk, Russia. *Riverbank Filtration for*

Water Security in Desert Countries. Springer, pp. 281–298.

- Kumar, A., Tripathi, R. M., Rout, S., Mishra, M. K., Ravi, P. M., & Ghosh, A. K. (2014). Characterization of groundwater composition in Punjab state with special emphasis on uranium content, speciation and mobility. *Radiochimica Acta*, 102(3), 239-254.
- Kumar, C. P. (2006). Management of groundwater in salt water ingress coastal aquifers. *Groundwater Modelling and Management*, 540-560.
- Kumar, C., (2006). Management of Groundwater in Salt Water Ingress Coastal Aquifers. *Groundwater Modelling and Management*. Capital Publishing Company, New Delhi, pp. 540–560.
- Kumar, D. (2007). *Groundwater Management in India: Physical, Institutional and Policy Alternatives*, New Delhi: Sage Publications
- Kumar, M., Kumari, K., Ramanathan, A.L., & Saxena, R. (2007). A comparative evaluation of groundwater suitability for irrigation and drinking purposes in two intensively cultivated districts of Punjab, India. *Environmental Geology* 53:553–574.
- Kumar, M., Ramanathan, A. L., & Keshari, A. K. (2009). Understanding the extent of interactions between groundwater and surface water through major ion chemistry and multivariate statistical techniques. *Hydrological Processes*, 23(2), 297-310.
- Kumar, P. S., Elango, L., & James, E. J. (2014). Assessment of hydrochemistry and groundwater quality in the coastal area of South Chennai, India. *Arabian Journal of Geosciences*, 7(7), 2641-2653..
- Kumar, P., & Mehrotra, I. (2011). Pre-Treatment of Polluted River Water by Riverbank Filtration for Water Supply. In *World Environmental and Water Resources Congress 2011: Bearing Knowledge for Sustainability* , pp. 3560-3571.
- Kumar, P., Mehrotra, I., Gupta, A., & Kumari, S. (2018). Riverbank Filtration: A Sustainable Process to Attenuate Contaminants during Drinking Water Production. *Journal of Sustainable Development of Energy, Water and Environment Systems*, 6(1), 150-161.
- Kumar, P.J.S., Jegathambal, P., & James, E.J. (2011). Multivariate and geostatistical analysis of groundwater quality in Palar River Basin, *International Journal of Geology* 4 (5): 108-119.
- Kusin, F.M., Zahar, M.S.M., Muhammad, S.N., Mohamad, N.D., Md Zin, Z., & Mohd Sharif, S (2016). Hybrid off-river augmentation system as an alternative

- raw water resource: the hydrogeochemistry of abandoned mining ponds. *Environmental Earth Sciences*, 75(3): 230.
- Kyle, W., & Jeannie, R. (2007). Distinguishing Sources of Ground Water Recharge by Using 2H and 18O. *Ground Water*, 45(3), 294-308.
- Lallahem, S. & Mania J. (2003a). Evaluation and forecasting of daily groundwater outflow in a small chalky watershed. *Hydrological Processes* 17: 1561–1577.
- Lallahem, S. & Mania, J. (2003b). A nonlinear rainfall-runoff model using neural network technique: example in fractured porous media. *Mathematical and Computer Modelling* 37: 1047–1061.
- Lallahem, S., Mania, J., Hani, A., & Najjar, Y. (2005). On the use of neural networks to evaluate groundwater levels in fractured media. *Journal of Hydrology* 307: 92–111.
- Lalwani, S., Dogra, T. D., Bhardwaj, D. N., Sharma, R. K., Murty, O. P., & Vij, A. (2004). Study on arsenic level in ground water of Delhi using hydride generator accessory coupled with atomic absorption spectrophotometer. *Indian Journal of Clinical Biochemistry*, 19(2), 135.
- Landon, M. K., Rus, D. L., & Harvey, F. E. (2001). Comparison of instream methods for measuring hydraulic conductivity in sandy streambeds. *Groundwater*, 39(6), 870-885.
- Larblich, W., Neupauer, R. M., Colvin, D., Bauer, J., & Herman, J. (2014). Adjoint modeling of contaminant fate and transport in riverbank filtration systems. In *World Environmental and Water Resources Congress 2014* (pp. 235-242).
- Lautz, L. K., & Siegel, D. I. (2006). Modeling surface and ground water mixing in the hyporheic zone using MODFLOW and MT3D. *Advances in Water Resources*, 29(11), 1618-1633
- Lee, E., Hyun, Y., Lee, K. K., & Shin, J. (2012). Hydraulic analysis of a radial collector well for riverbank filtration near Nakdong River, South Korea. *Hydrogeology journal*, 20(3), 575-589.
- Lee, E., Shin, J., Hyun, Y., & Lee, K. K. (2011). Development of a numerical model for radial collector well hydraulics and its application to riverbank filtration. *Development*, 341, 190-195.
- Lee, J. H., Hamm, S. Y., Cheong, J. Y., Kim, H. S., Ko, E. J., Lee, K. S., & Lee, S. I. (2009). Characterizing riverbank-filtered water and river water qualities at a site in the lower Nakdong River basin, Republic of Korea. *Journal of hydrology*, 376(1-2), 209-220.

- Lee, K. F. (2009). A Background Study: Economic Benefits of the Muda Water Catchment. WWF Malaysia. 30 pages
- Lee, K. S., Wenner, D. B., & Lee, I. (1999). Using H-and O-isotopic data for estimating the relative contributions of rainy and dry season precipitation to groundwater: example from Cheju Island, Korea. *Journal of Hydrology*, 222(1-4), 65-74.
- Lee, K.S., & Lee, C.B. (1999). Oxygen and hydrogen isotopic composition of precipitation and river waters in South Korea. *J Geol Soc Korea* 35:73–84.
- Lee, S. I., & Lee, S. S. (2010). Development of site suitability analysis system for riverbank filtration. *Water Science and Engineering*, 3(1), 85-94.
- Lee, Y.H., Mokhtar, M., & Omar, S.R. (2006). Organochlorine Insecticides Level Detected in Water and Sediments from the Langat River and a Lake Near to a Golf Course at Bangi, Selangor, *Sains Malaysiana* 35(1): 1-6.
- Leek, R., Wu, J. Q., Wang, L., Hanrahan, T. P., Barber, M. E., & Qiu, H. (2009). Heterogeneous characteristics of streambed saturated hydraulic conductivity of the Touchet River, south eastern Washington, USA. *Hydrological Processes*, 23(8), 1236-1246.
- Levy, J., & Agnieszka, M. (2013). Investigation of Riverbed Dynamics and Hydraulic Conductivity at a Site of Induced Filtration. Miami Conservancy District Report, vol. 3, 38.
- Levy, J., Birck, M. D., Mutiti, S., Kilroy, K. C., Windeler, B., Idris, O., & Allen, L. N. (2011). The impact of storm events on a riverbed system and its hydraulic conductivity at a site of induced filtration. *Journal of environmental management*, 92(8), 1960-1971.
- Lewis Jr., W. M. (2008). Physical and chemical features of tropical flowing waters, in *Tropical Stream Ecology*, edited by: Dudgeon, D., Elsevier Inc., Academic Press, London, 1, 1–29
- Li, F., Pan, G., Tang, C., Zhang, Q., & Yu, J. (2008). Recharge source and hydrogeochemical evolution of shallow groundwater in a complex alluvial fan system, southwest of North China Plain. *Environmental Geology*, 55(5), 1109-1122.
- Li, H., Sheng, G., Teppen, B. J., Johnston, C. T., & Boyd, S. A. (2003). Sorption and desorption of pesticides by clay minerals and humic acid-clay complexes. *Soil Science Society of America Journal*, 67(1), 122-131.
- Liu, C. W., Lin, C. N., Jang, C. S., Ling, M. P., & Tsai, J. W. (2011). Assessing nitrate contamination and its potential health risk to Kinmen

- residents. *Environmental geochemistry and health*, 33(5), 503-514.
- Liu, C.F., & Wang, H.C. (1984) The basis of Environmental isotope in hydrogeology. Hydrological Geology Department-Wuhan College of Geology, 82.
- Liu, C.W., Lin, K.H., & Kuo, Y.M. (2003). Application of factor analysis in the assessment of groundwater quality in a Blackfoot disease area in Taiwan. *The Science of the Total Environment* 313: 77–89.
- Liu, J., Chen, Z., Wei, W., Zhang, Y., Li, Z., Liu, F., & Guo, H. (2014). Using chlorofluorocarbons (CFCs) and tritium (³H) to estimate groundwater age and flow velocity in Hohhot Basin, China. *Hydrological Processes*, 28(3), 1372-1382.
- Liu, P., Farré, M. J., Keller, J., & Gernjak, W. (2016). Reducing natural organic matter and disinfection by-product precursors by alternating oxic and anoxic conditions during engineered short residence time riverbank filtration: A laboratory-scale column study. *Science of the Total Environment*, 565, 616-625.
- Liza, S.A.C. (2010). *Assessment of water quality characteristics during base and storm flow events on Sungai Langat Basin*. Dissertation, Universiti Teknologi Malaysia, Faculty of Civil Engineering.
- Lohani, A.K., & Krishan, G. (2015). Groundwater Level Simulation Using Artificial Neural Network in Southeast, Punjab, India. *Journal of Geology & Geophysics* 4: 206. doi:10.4172/jgg.1000206
- Loke, M. (1999). Electrical imaging surveys for environmental and engineering studies. A practical guide to, 2.
- Loke, M. H. (2011). Electrical resistivity surveys and data interpretation. In *Encyclopedia of Solid Earth Geophysics*. Springer Netherlands., pp. 276–283.
- Loke, M. H., & Barker, R. D. (1996a). Practical techniques for 3D resistivity surveys and data inversion 1. *Geophysical prospecting*, 44(3), 499-523.
- Loke, M. H., & Barker, R. D. (1996b). Rapid least-squares inversion of apparent resistivity pseudosections by a quasi-Newton method 1. *Geophysical prospecting*, 44(1), 131-152.
- Loke, M. H., Acworth, I., & Dahlin, T. (2003). A comparison of smooth and blocky inversion methods in 2D electrical imaging surveys. *Exploration Geophysics*, 34(3), 182-187.

- Loke, M.H. (2014). Electrical Resistivity Surveys and Data Interpretation. *Encyclopedia of Solid Earth Geophysics*. Springer, pp. 276–283.
- Loke, M.H., & Barker, R.D. (1996). Rapid least squares inversion of apparent resistivity pseudosection using a quasi-Newton method. *Geophysical Prospecting* 44(3), 131–152.
- Lu, H. Y., Peng, T. R., Liu, T. K., Wang, C. H., & Huang, C. C. (2006). Study of stable isotopes for highly deformed aquifers in the Hsinchu-Miaoli area, Taiwan. *Environmental Geology*, 50(6), 885-898.
- Luo, Y., Guo, W., Ngo, H. H., Nghiem, L. D., Hai, F. I., Zhang, J., Liang, S., & Wang, X. C. (2014). A review on the occurrence of micropollutants in the aquatic environment and their fate and removal during wastewater treatment. *Science of the Total Environment*, 473, 619-641.
- Ma, J. Z., Huang, T. M., Ding, Z. Y., & Edmunds, W. M. (2007). Environmental isotopes as the indicators of the groundwater recharge in the south Badain Fijaran Desert. *Advances in Earth Science*, 22(9), 922-930.
- MacDonald, A. M., Bonsor, H. C., Dochartaigh, B. É. Ó., & Taylor, R. G. (2012). Quantitative maps of groundwater resources in Africa. *Environmental Research Letters*, 7(2), 024009.
- Macdonald, M.G., & Harbaugh, A.W. (1988). *A modular three-dimensional finite-difference groundwater flow model*. Techniques of Water resources Investigations 06-A1. United States Geological Survey, Reston.
- Macheleidt, W., Grischek, T., & Nestler, W. (2006). New Approaches for Estimating Streambed Filtration Rates. Impact on System Capacity and Water Quality. *Riverbank Filtration Hydrology*, Springer (Nato Science Series IV), 73–91. (60).
- Maduabuchi, C., Faye, S., & Maloszewski, P. (2006). Isotope evidence of paleorecharge and paleoclimate in the deep confined aquifers of the Chad Basin, NE Nigeria. *Science of the Total Environment*. 370, 467–479. <https://doi.org/10.1016/j.scitotenv.2006.08.015>
- Maeng, S. K., Sharma, S. K., Magic-Knezev, A., & Amy, G. (2008). Fate of effluent organic matter (EfOM) and natural organic matter (NOM) through riverbank filtration. *Water Science and Technology*, 57(12), 1999-2007.
- Maeng, S.K. (2010). Multiple Objective Treatment Aspects of Bank Filtration. Delft University of Technology, TU Delft.
- Maier, H. R., & Dandy, G. C. (2000). Neural networks for the prediction and forecasting of water resources variables: a review of modelling issues and

- applications. *Environmental modelling & software*, 15(1), 101-124.
- Maier, H.R. & Dandy, G.C. (1997). Determining inputs for neural network models of multivariate time series. *Microcomputers in Civil Engineering* 12:353–368.
- Malard, F., Tockner, K., DOLE-OLIVIER, M. J., & Ward, J. V. (2002). A landscape perspective of surface–subsurface hydrological exchanges in river corridors. *Freshwater Biology*, 47(4), 621-640.
- Maliva, R., & Missimer, T. (2012). *Arid lands Water Evaluation and Management*. Springer Science & Business Media.
- Mandal, A. K., Zhang, J., & Asai, K. (2011). Stable isotopic and geochemical data for inferring sources of recharge and groundwater flow on the volcanic island of Rishiri, Japan. *Applied geochemistry*, 26(9-10), 1741-1751.
- Maroney, C. L., & Rehmann, C. R. (2017). Stream depletion rate for a radial collector well in an unconfined aquifer near a fully penetrating river. *Journal of hydrology*, 547, 732-741.
- Massmann, G., Dünnbier, U., Heberer, T., & Taute, T. (2008). Behaviour and redox sensitivity of pharmaceutical residues during bank filtration– Investigation of residues of phenazone-type analgesics. *Chemosphere*, 71(8), 1476-1485.
- Massmann, G., Nogeitzig, A., Taute, T., & Pekdeger, A. (2008). Seasonal and spatial distribution of redox zones during lake bank filtration in Berlin, Germany. *Environmental Geology*, 54(1), 53-65.
- Massmann, G., Pekdeger, A., & Merz, C. (2004). Redox processes in the Oderbruch polder groundwater flow system in Germany. *Applied geochemistry*, 19(6), 863-886.
- Massmann, G., Tichomirowa, M., Merz, C., & Pekdeger, A. (2003). Sulfide oxidation and sulfate reduction in a shallow groundwater system (Oderbruch Aquifer, Germany). *Journal of Hydrology*, 278(1-4), 231-243.
- Masters, T. (1995). *Advanced algorithms for neural networks: a C++ source book*. Wiley, New York, p 431.
- Mauro, E., & Utari, A. (2011). Riverbank filtration project at cilandak as a solution of limited water supply in South Jakarta-Indonesia. *Water Practice and Technology*, 6(4), wpt20110073.
- McFarland, M., Lemon, R., & Stichler, C. (2002). *Irrigation Water Quality: Critical Salt Levels for Peanuts, Cotton, Corn and Grain Sorghum*, Texas Cooperative Extension, Texas.

- McIntosh, A.C. (2003). Asian water supplies: reaching the urban poor. *Asian Development Bank and International Water Association*, Manila.
- McNeil, V. H., Cox, M. E., & Preda, M. (2005). Assessment of chemical water types and their spatial variation using multi-stage cluster analysis, Queensland, Australia. *Journal of Hydrology*, 310(1-4), 181-200.
- Medema, G.J., Juhasz-Holterman, M.H.A., & Luitjen, J.A. (2000). Removal of microorganisms by bank filtration in a gravel-sand soil. In: Ju"lich W, Schubert J (eds) *Proceedings of international riverbank filtration conference*, International Association of the Rhine.
- Metge, D. W., Harvey, R. W., Aiken, G. R., Anders, R., Lincoln, G., & Jasperse, J. (2010). Influence of organic carbon loading, sediment associated metal oxide content and sediment grain size distributions upon *Cryptosporidium parvum* removal during riverbank filtration operations, Sonoma County, CA. *water research*, 44(4), 1126-1137.
- Metge, D. W., Harvey, R. W., Aiken, G. R., Anders, R., Lincoln, G., Jasperse, J., & Hill, M. C. (2011). Effects of sediment-associated extractable metals, degree of sediment grain sorting, and dissolved organic carbon upon *Cryptosporidium parvum* removal and transport within riverbank filtration sediments, Sonoma County, California. *Environmental science & technology*, 45(13), 5587-5595.
- Metge, D. W., Harvey, R. W., Anders, R., Rosenberry, D. O., Seymour, D., & Jasperse, J. (2007). Use of carboxylated microspheres to assess transport potential of *Cryptosporidium parvum* oocysts at the Russian River water supply facility, Sonoma County, California. *Geomicrobiology Journal*, 24(3-4), 231-245.
- Meybeck, M. (1987). Global chemical weathering of surficial rocks estimated from river dissolved loads. *American journal of science*, 287(5), 401-428.
- Miettinen, I. T., Martikainen, P. J., & Vartiainen, T. (1994). Humus transformation at the bank filtration water plant. *Water Science and Technology*, 30(10), 179-187.
- Milovanovic, M. (2007). Water quality assessment and determination of pollution sources along the Axios/Vardar River, Southeastern Europe. *Desalination*, 213(1-3), 159-173.
- Minerals and Geoscience Malaysia (MGD) (2006). *Laporan Penggerudian dan pembinaan Telaga Eksplorasi Di sepanjang Sungai Langat (Teluk Datok-Dengkil), Selangor*. Laporan tidak diterbitkan. Jabatan Mineral Dan Geosains Malaysia, Negeri Selangor dan Wilayah Persekutuan, 28p.

- Ministry of Health, (2005) Drinking Water Quality standard. [http://kmam.moh.gov.my/public user/drinking-water-quality-standard.html](http://kmam.moh.gov.my/public_user/drinking-water-quality-standard.html). Accessed 31 December 2013
- Mondal, N. C., Singh, V. S., Puranik, S. C., & Singh, V. P. (2010). Trace element concentration in groundwater of Pesarlanka Island, Krishna Delta, India. *Environmental monitoring and assessment*, 163(1-4), 215-227.
- Moon, J. P., Lee, S. H., Kwon, J. K., Kang, Y. K., Ryou, Y. S., & Lee, S. J. (2011). Greenhouse heating technology development by using riverbank filtration water. *Journal of the Korean Society of Agricultural Engineers*.
- Moore, R., Kelson, V., Wittman, J., & Rash, V. (2012). A modeling framework for the design of collector wells. *Groundwater*, 50(3), 355-366.
- Mucha, I., Hlavatý, Z., & Rodák, D. (2006). Impact of Riverbed Clogging—Colmatation—on Ground Water. In *Riverbank Filtration Hydrology* Springer, Dordrecht., 43–72.
- Mukherjee, A., Bhattacharya, P., Shi, F., Fryar, A. E., Mukherjee, A. B., Xie, Z. M., & Bundschuh, J. (2009). Chemical evolution in the high arsenic groundwater of the Huhhot basin (Inner Mongolia, PR China) and its difference from the western Bengal basin (India). *Applied geochemistry*, 24(10), 1835-1851.
- Mukherjee, A., Fryar, A. E., & Rowe, H. D. (2007). Regional-scale stable isotopic signatures of recharge and deep groundwater in the arsenic affected areas of West Bengal, India. *Journal of Hydrology*, 334(1-2), 151-161.
- Musche, F., Sandhu, C., Grischek, T., Patwal, P. S., Kimothi, P. C., & Heisler, A. (2018). A field study on the construction of a flood-proof riverbank filtration well in India—challenges and opportunities. *International Journal of Disaster Risk Reduction*
- Mustafa, S., Bahar, A., Aziz, Z. A., & Suratman, S. (2014). Review of the role of analytical modelling methods in riverbank filtration system. *Jurnal Teknologi (Sci. Eng.)*, 71(1), 59-69.
- Mustafa, S., Bahar, A., Aziz, Z. A., & Suratman, S. (2016). Modelling contaminant transport for pumping wells in riverbank filtration systems. *Journal of environmental management*, 165, 159-166.
- Mutiti, S., & Levy, J. (2010). Using temperature modeling to investigate the temporal variability of riverbed hydraulic conductivity during storm events. *Journal of Hydrology*, 388(3-4), 321-334.
- Nagaraju, A., Kumar, K. S., & Thejaswi, A. (2014). Assessment of groundwater

- quality for irrigation: a case study from Bandalamottu lead mining area, Guntur District, Andhra Pradesh, South India. *Applied Water Science*, 4(4), 385-396.
- National Water Research Institute (NWRI), 2nd Riverbank Filtration Conference, 2003, *Riverbank Filtration: The future is Now*, September 16-18, 2003, Hilton Cincinnati Netherlands Plaza, Cincinnati, Ohio USA.
- Nather Khan, I., & Firuza, M. B. (2010). Spatial and Temporal Variations of Silica in a Disturbed Tropical River Basin. *Sains Malaysiana*. 2010:189–198
- Newcomer, M. E., Hubbard, S. S., Fleckenstein, J. H., Maier, U., Schmidt, C., Thullner, M., Ulrich, C., Flipo, N., & Rubin, Y. (2016). Simulating bioclogging effects on dynamic riverbed permeability and filtration. *Water Resources Research*, 52(4), 2883-2900.
- Ngah, D.S. (1988). Groundwater investigation for determination of suitability using hand-pump at rural area of Kuala Langat District, Selangor Darul Ehsan, Report No. GPH1/1988. Department of Mineral and Geosciences Malaysia, Ministry of Natural Resources and Environment.
- Nickson, R. T., McArthur, J. M., Shrestha, B., Kyaw-Myint, T. O., & Lowry, D. (2005). Arsenic and other drinking water quality issues, Muzaffargarh District, Pakistan. *Applied Geochemistry*, 20(1), 55-68.
- Odong, J. (2007). Evaluation of Empirical Formulae for Determination of Hydraulic Conductivity based on Grain-Size Analysis. *Journal of American Science* 3(3), 54-60.
- Odong, J. (2013). Evaluation of empirical formulae for determination of hydraulic conductivity based on grain-size analysis. *Int J Agric Environ* 1:1–8.
- Ojha, C. S. P. (2011). Simulating turbidity removal at a river bank filtration site in India using SCS-CN approach. *Journal of Hydrologic Engineering*, 17(11), 1240-1244.
- Ojha, C. S. P., & Thakur, A. K. (2010). River bank filtration in North India. In *World Environmental and Water Resources Congress 2010: Challenges of Change* pp. 782-791).
- Onodera, S., Kitaoka, K., Hayashi, M., Shindo, S., & Kusakabe, M. (1995). Evaluation of the groundwater recharge process in a semiarid region of Tanzania, using dD and d18O. Application of Tracers in Arid Zone Hydrology (Proceedings of the Vienna Symposium August 1994). The International Association of Hydrological Sciences (IAHS) Publications 232:383–391.
- Onugba, A., Blavoux, B., & Dray, M. (1990). The environmental isotopes in

- monthly precipitation at Kano (Nigeria) from 1961–1973. In: *Proceedings of the 1st Biennial National Hydrology Symposium*, Maiduguri, UNESCO, 67–88 pp
- Osman, R., Saim, N., Juahir, H., & Abdullah, M. P. (2012). Chemometric application in identifying sources of organic contaminants in Langat river basin. *Environmental monitoring and assessment*, 184(2), 1001-1014.
- Othman, M.S., & Gasim M.B. (2005). Heavy Metals Concentrations in Water of Sungai Semenyih Watershed, Selangor. *Sains Malaysiana*. 34(2): 49-54.
- Othman, S.Z., Adlan, M.N., Selamat, M.R. (2015). A study on the potential of riverbank filtration for the removal of color, iron, turbidity and E. coli in Sungai Perak, Kota Lama Kiri, Kuala Kangsar, Perak, Malaysia. *Jurnal Teknologi* 74 (11).
- Packman, A. I., & MacKay, J. S. (2003). Interplay of stream-subsurface exchange, clay particle deposition, and streambed evolution. *Water Resources Research*, 39(4).
- Padmalal, D., Maya, K., Babu, K. N., Baiju, R. S., & Baburaj, B. (2012). Hydrochemical characterisation and water quality assessment of the coastal springs of southern Kerala, India. *Journal of Applied Geochemistry*, 14(4), 466-481.
- Palmer, P. C., Gannett, M. W., & Hinkle, S. R. (2007). Isotopic characterization of three groundwater recharge sources and inferences for selected aquifers in the upper Klamath Basin of Oregon and California, USA. *Journal of Hydrology*, 336(1-2), 17-29.
- Pan, W., Huang, Q., & Huang, G. (2018). Nitrogen and Organics Removal during Riverbank Filtration along a Reclaimed Water Restored River in Beijing, China. *Water*, 10(4), 491.
- Panda, U. C., Sundaray, S. K., Rath, P., Nayak, B. B., & Bhatta, D. (2006). Application of factor and cluster analysis for characterization of river and estuarine water systems—a case study: Mahanadi River (India). *Journal of hydrology*, 331(3-4), 434-445.
- Parkhurst, D.L., & Appelo, C.A.J. (1999). User's Guide to PHREEQC (Version 2)-A Computer Program for Speciation, Batch-Reaction, One-Dimensional Transport, and Inverse Geochemical Calculations. Denver: U. S. Geological Survey Earth Science Information Center.
- Paufler, S., Grischek, T., Bartak, R., Ghodeif, K., Wahaab, R., & Boernick, H. (2018). Riverbank filtration in Cairo, Egypt: part II—detailed investigation of a

- new riverbank filtration site with a focus on manganese. *Environmental Earth Sciences*, 77(8), 318.
- Peavy, H.S., Rowe, D.R., & Tchobanoglous, G. (1985). *Environmental Engineering*. McGraw-Hill, Inc., New York.
- Pholkern, K., Srisuk, K., Grischek, T., Soares, M., Schäfer, S., Archwichai, L., Saraphirom P., Pavelic, P., & Wirojanagud, W. (2015). Riverbed clogging experiments at potential river bank filtration sites along the Ping River, Chiang Mai, Thailand. *Environmental Earth Sciences*, 73(12), 7699-7709.
- Piper, A.M. (1944). A graphical procedure in the geochemical interpretation of water analysis. *Trans Am Geophys Union* 25: 914-928.
- Pollock, D.W. (1989). Documentation of computer program to compute and display pathlines using result from the US Geological Survey modular three dimensional finite-difference groundwater flow model. *US Geological Survey open File-Report*, Denver, pp 89–381
- Poulsen, T. G., Moldrup, P., Sørensen, K., & Hansen, J. A. (2002). Linking landfill hydrology and leachate chemical composition at a controlled municipal landfill (Kastrup, Denmark) using state-space analysis, *Waste Management Resources*, 20, 445–456, doi:10.1177/0734242X0202000508
- Price, M.L., Flugum, J., Jeane, P., & Tribbet-Peelen, L. (1999). Sonoma County finds groundwater under direct influence of surface water depends on river conditions. In: Proceedings of the international riverbank filtration conference, *National Water Research Institute*, Fountain Valley, CA, pp 25–27.
- Ragunath, H.M. (1987). *Groundwater*. Wiley Eastern Ltd., New Delhi.
- Raja Zainal Abidin, R.D.Z. (2004). Water resources management in Malaysia-the way forward. In: *Asia Water 2004*. 30 March - 2 April 2004, Kuala Lumpur, Malaysia.
- Rajmohan, N., & Elango, L. (2004). Identification and evolution of hydrogeochemical processes in the groundwater environment in an area of the Palar and Cheyyar River Basins, Southern India. *Environmental Geology*, 46(1), 47-61
- Raju, N. J., Shukla, U. K., & Ram, P. (2011). Hydrogeochemistry for the assessment of groundwater quality in Varanasi: a fast-urbanizing center in Uttar Pradesh, India. *Environmental monitoring and assessment*, 173(1-4), 279-300.
- Ramli, M. F., Aris, A. Z., Sulaiman, W. N. A., Kura, N. U., & Tukur, A. I. (2017). An overview assessment of the effectiveness and global popularity of some

- methods used in measuring riverbank filtration. *Journal of hydrology*, 550, 497-515.
- Rao, N. S. (2006). Seasonal variation of groundwater quality in a part of Guntur District, Andhra Pradesh, India. *Environmental Geology*, 49(3), 413-429.
- Rashid, N. A. A., Roslan, M. H., Rahim, N. A., Abustan, I., & Adlan, M. N. (2015). Artificial barrier for riverbank filtration as improvement of soil permeability and water quality. *Jurnal Teknologi*, 74(11).
- Rauch-Williams, T., Hoppe-Jones, C., & Drewes, J. E. (2010). The role of organic matter in the removal of emerging trace organic chemicals during managed aquifer recharge. *Water research*, 44(2), 449-460.
- Ray, C. & Jain, C. K. (Eds.), (2011). Drinking water treatment technology- Comparative analysis, in *Drinking Water Treatment, Strategies for Sustainability: Focusing on Appropriate Technology and Sustainability*, Springer, 9–36
- Ray, C. & Prommer, H. (2006). Clogging-induced flow and chemical transport simulation in riverbank filtration systems, in: *Proceedings of the NATO Advanced Research Workshop on Riverbank Filtration Hydrology: Impacts on System Capacity and Water Quality*, vol. 2, edited by: Hubbs, S. A., Bratislava, Slovakia, 155–177
- Ray, C. (2002). Conclusions and recommendations, in: *Proceedings of the NATO Advanced Research Workshop on Riverbank Filtration: Understanding Contaminant Biogeochemistry and Pathogen Removal*, edited by: Ray, C., Tihany, Hungary, 247–250
- Ray, C. (2004). Modeling RBF efficacy for mitigating chemical shock loads. *American Water Works Association Journal*, 96(5), 114-128.
- Ray, C. (2005). Drinking water supply in India and future potential for riverbank filtration. In: Ray C, Ojha CSP (2005) (eds) *Riverbank Filtration – Theory, Practice and Potential for India*. Proc. *Int. Workshop Riverbank Filtration*, 1–2 March 2004, Indian Institute of Technology Roorkee, India. Water Resources Research Center, University of Hawaii, Manoa, Cooperative Report CR-2005-01, 3–8.
- Ray, C. (2008). Worldwide potential of riverbank filtration. *Clean Technologies and Environmental Policy*, 10(3), 223-225.
- Ray, C. (2011). Riverbank Filtration Concepts and Applicability to Desert Environments. In *Riverbank Filtration for Water Security in Desert Countries*. Springer, pp. 1–4.

- Ray, C. (2012). *Riverbank Filtration: Understanding Contaminant Biogeochemistry and Pathogen Removal*. Springer Science & Business Media.
- Ray, C., & Jain, R. (2011a). *Drinking Water Treatment: Focusing on Appropriate Technology and Sustainability*. Springer Science & Business Media, pp. 1–8.
- Ray, C., & Jain, R., (2011b). *Drinking Water Treatment Technology: Comparative Analysis*. Springer Science & Business Media, pp. 9–35.
- Ray, C., (2011). *Riverbank Filtration Concepts and Applicability to Desert Environments*. *Riverbank Filtration for Water Security in Desert Countries*. Springer, pp. 1–4.
- Ray, C., (2017). Effect of biochemical, hydrogeological, and well construction factors on riverbank filtrate quality, in Proceedings of the NATO Advanced Research Workshop on Riverbank Filtration: *Drink. Water Eng. Sci.*, 10, 13–26
- Ray, C., Grischek, T., Hubbs, S., Drewes, J., Haas, D., & Darnault, C. (2008). Riverbank filtration for drinking water supply. *Encyclopedia of Hydrological Sciences*. *AWWA J.* 94 (4), 149–160.
- Ray, C., Grischek, T., Schubert, J., Wang, J. Z., & Speth, T. F. (2002b). A perspective of riverbank filtration. *American Water Works Association Journal*, 94(4), 149-160.
- Ray, C., Jasperse, J., & Grischek, T. (2011c). *Drinking Water Treatment: Bank Filtration as Natural Filtration*. Springer Science & Business Media.
- Ray, C., Melin, G., & Linsky, R.B. (2002a). *Riverbank Filtration: Improving Source-Water Quality*. Kluwer Academic Publisher, pp. 1–15, printed in the Netherlands.
- Ray, C., Prommer, H. (2006). Clogging-Induced Flow and Chemical Transport Simulation in Riverbank Filtration Systems. *In Riverbank Filtration Hydrology*. Springer, pp. 155–177.
- Ray, C., Soong, T. W., Lian, Y. Q., & Roadcap, G. S. (2002). Effect of flood-induced chemical load on filtrate quality at bank filtration sites. *Journal of Hydrology*, 266(3-4), 235-258.
- Ray, C., Zheng, W., D'Alessio, M., Lichwa, J., & Bartak, R. (2011d). Potential of riverbank filtration to remove explosive chemicals. *In Riverbank Filtration for Water Security in Desert Countries*. Springer, Dordrecht. (pp. 129-135)
- Razak, A., Firdaus, M., Said, M., Azlin, M., Yusoh, R., & Jasmi, R. (2016).

- Potential soil characteristics for riverbank filtration using 2-D ground resistivity in Kota Lama Kiri, Kuala Kangsar. *Water Science and Technology: Water Supply*, 16(6), 1477-1483.
- Razak, M.F.A., Said, M.A.M., & Yusoh, R. (2015). The development of a site suitability map for RBF location using remote sensing and GIS techniques. *Jurnal Teknologi* 74 (11).
- Reynolds, R.J. (1987). Hydrogeology of the surficial outwash aquifer at Cortland, Cortand County, N.Y. U.S. Geological Survey Water Resources Investigation Report 85-4090. 43 pp.
- Richards, L.A. (1954). Diagnosis and improvement of saline and alkali soil. Agriculture Handbook 60. USDA, Washington DC, p 160.
- Rina, K., Datta, P. S., Singh, C. K., & Mukherjee, S. (2013a). Isotopes and ion chemistry to identify salinization of coastal aquifers of Sabarmati River Basin. *Current Science*, 335-344.
- Rina, K., Singh, C. K., Datta, P. S., Singh, N., & Mukherjee, S. (2013b). Geochemical modelling, ionic ratio and GIS based mapping of groundwater salinity and assessment of governing processes in Northern Gujarat, India. *Environmental earth sciences*, 69(7), 2377-2391.
- Rocha, S. F., & Marques, E. A. G. (2016). Caracterização Hidrogeológica de um Sistema de Filtração em Margem de Lago. *Anuário do Instituto de Geociências*, 39(1), 133-141.
- Rosas, J., Lopez, O., Missimer, T.M., Coulibaly, K.M., Dehwah, A.H.A., Sesler, K., Lujan, L.R., & Mantilla, D. (2014). Determination of hydraulic conductivity from grain-size d
- Rumelhart, D.E., Hinton G.E., & Williams, R.J. (1986). Learning representations by back-propagating errors. *Nature* 323:533–536.
- Ryan, R. J., & Boufadel, M. C. (2007). Evaluation of streambed hydraulic conductivity heterogeneity in an urban watershed. *stochastic environmental research and risk assessment*, 21(4), 309-316.
- Samir, A.G. (2011). An assessment of recharge possibility to North-Western Sahara Aquifer System (NWSAS) using environmental isotopes. *Journal of Hydrology*. 398: 184-190. <https://doi.org/10.1016/j.jhydrol.2010.12.004>
- Sandhu, C., & Grischek, T. (2012). Riverbank filtration in India—using ecosystem services to safeguard human health. *Water Science and Technology: Water Supply*, 12(6), 783-790.

- Sandhu, C., Grischek, T., Kumar, P., & Ray, C. (2011a). Potential for riverbank filtration in India. *Clean Technologies and Environmental Policy*, 13(2), 295-316.
- Sandhu, C., Grischek, T., Schoenheinz, D., Prasad, T., & Thakur, A. K. (2011b). Evaluation of bank filtration for drinking water supply in Patna by the Ganga River, India. In *Riverbank Filtration for Water Security in Desert Countries* Springer, Dordrecht. pp. 203-222.
- Sarin, M. M., Krishnaswami, S., Dilli, K., Somayajulu, B. L. K., & Moore, W. S. (1989). Major ion chemistry of the Ganga-Brahmaputra river system: Weathering processes and fluxes to the Bay of Bengal. *Geochimica et cosmochimica acta*, 53(5), 997-1009.
- Schafer, D. C. (2006). Use of aquifer testing and groundwater modeling to evaluate aquifer/river hydraulics at Louisville Water Company, Louisville, Kentucky, USA. In *Riverbank filtration hydrology* Springer, Dordrecht. pp. 179-198.
- Scheurer, M., Storck, F. R., Graf, C., Brauch, H. J., Ruck, W., Lev, O., & Lange, F. T. (2011). Correlation of six anthropogenic markers in wastewater, surface water, bank filtrate, and soil aquifer treatment. *Journal of Environmental Monitoring*, 13(4), 966-973.
- Schijven, J. F., & Hassanizadeh, S. M. (2000). Removal of viruses by soil passage: Overview of modeling, processes, and parameters. *Critical reviews in environmental science and technology*, 30(1), 49-127.
- Schijven, J. F., & Rietveld, L. C. (1997). How do field observations compare with models of microbial removal? Under the Microscope—Examining Microbes in Groundwater. In *Proceedings of the groundwater foundation's 12th annual fall symposium, Boston, AWWA, Denver, CO* (pp. 105-113).
- Schijven, J.F., Berger, P.& Miettinen, I, (2002), Removal of pathogens, surrogates, indicators, and toxins using riverbank filtration. In: Ray C et al (eds) *Riverbank filtration: Improving source water quality*. Kluwer, Dordrecht, The Netherlands, pp 73–116.
- Schmidt, A., Gibson, J. J., Santos, I. R., Schubert, M., Tattrie, K., & Weiss, H. (2010). The contribution of groundwater discharge to the overall water budget of two typical Boreal lakes in Alberta/Canada estimated from a radon mass balance. *Hydrology and Earth System Sciences*, 14(1), 79.
- Schmidt, C. K., & Brauch, H. J. (2008). Benefits of riverbank filtration and artificial groundwater recharge: The German experience. *Groundwater management in large river basins*. IWA, London, 310-332.

- Schmidt, C. K., Lange, F. T., & Brauch, H.J., (2004). Assessing the impact of different redox conditions and residence times on the fate of organic micropollutants during riverbank filtration. *In 4th International Symposium on Pharmaceutically Active Compounds and Endocrine Disrupting Chemicals in Water*, Vol. 13, No. 15.10, p
- Schmidt, C. K., Lange, F. T., Brauch, H. J., & Kühn, W. (2003a). Experiences with riverbank filtration and filtration in Germany. *DVGW-Water Technology Center (TZW), Karlsruhe, Germany*, 17.
- Schmidt, C.K., Lange, F.T., Sacher, F., Baus, C., & Brauch, H.J. (2003b). Assessing the fate of organic micropollutants during riverbank filtration utilizing field studies and laboratory test systems. *Geophysical Research Abstract*, 5, 08595.
- Schoeller, H. (1977). Geochemistry of groundwater. In: *Groundwater studies—an international guide for research and practice*. UNESCO, Paris, 15:1–18.
- Schoenheinz, D., & Grischek, T. (2011). Behavior of Dissolved Organic Carbon During Bank Filtration Under Extreme Climate Conditions. *In Riverbank Filtration for Water Security in Desert Countries*. Springer, pp. 51–67.
- Schön, M. (2006). *Systematic Comparison of Riverbank Filtration Sites In Austria And India*. Master Thesis. Universität Innsbruck, Austria.
- Schubert, J. (2000). How does it work? Field studies on riverbank filtration. In: Julich W, Schubert J (eds) *Proceedings of the International Riverbank Filtration Conference*. IAWR, Dusseldorf, Germany, pp. 41 – 55.
- Schubert, J. (2002a). Hydraulic aspects of riverbank filtration-field studies. *Journal of Hydrology* 266, 145–161.
- Schubert, J. (2002b). Water-quality improvements with riverbank filtration at Düsseldorf waterworks in Germany. In: Ray C, Melin G, Linsky RB (eds) *Riverbank Filtration Improving Source-Water Quality*. Kluwer Academic Publishers, Dordrecht, pp. 267 – 277.
- Schubert, J. (2002c). German experience with riverbank filtration systems. In: Ray C, Melin G, Linsky R. (eds) *Riverbank Filtration Improving Source-Water Quality*. Kluwer Academic Publishers, Dordrecht, pp. 35 – 48.
- Schubert, J. (2003). Water quality improvements with riverbank filtration systems at Düsseldorf waterworks in Germany, *In Riverbank Filtration: Improving Source-Water Quality*, edited by: Ray, C., Melin, G., and Linsky, R. B., Kluwer Academic Publishers, New York, Boston, Dordrecht, London, Moscow, 267–277

- Schubert, J. (2006a). Significance of hydrologic aspects on RBF performance. In: Hubbs SA (ed) *Riverbank Filtration Hydrology – Impacts on System Capacity and Water Quality*. Springer, Dordrecht, pp. 1 – 20.
- Schubert, J. (2006b). Experience with riverbed clogging along the Rhine River. In: Hubbs SA (ed) *Riverbank Filtration Hydrology – Impacts on System Capacity and Water Quality*. Springer, Dordrecht, pp. 221 – 242.
- Schubert, J., (2006c). Significance of hydrologic aspects on RBF performance. In *Riverbank filtration hydrology*. Impact on System Capacity and Water Quality Nato science series IV (60) Springer, 1–20.
- Schwarzenbach, R. P., Giger, W., Hoehn, E., & Schneider, J. K. (1983). Behavior of organic compounds during filtration of river water to groundwater. Field studies. *Environmental science & technology*, 17(8), 472-479.
- Sear, D.A., Armitage, P.D., & Dawson, F.H. (1999) Groundwater dominated rivers. *Hydrological Processes*, 13(3), 255-276.
- Seifer, D., & Engesgaard, P. (2007). Use of tracer tests to investigate changes in flow and transport properties due to bioclogging in porous media. *Journal of Contaminant Hydrology*. 93, pp. 58 – 71.
- Selamat, R., Abustan, I., Arshad, M. R., & Kamal, N. H. M. (2017, October). Effect of low-frequency electromagnetic fields on the Escherichia coli growth for application in riverbank filtration. In *AIP Conference Proceedings* (Vol. 1892, No. 1, p. 040011). AIP Publishing.
- Selamat, R., Abustan, I., Arshad, M. R., & Kamal, N. H. M. (2018, April). Removal of Escherichia coli via low frequency electromagnetic field in riverbank filtration system. In *IOP Conference Series: Earth and Environmental Science* (Vol. 140, No. 1, p. 012011). IOP Publishing.
- Selvam, S., Manimaran, G., & Sivasubramanian, P. (2013). Hydrochemical characteristics and GIS-based assessment of groundwater quality in the coastal aquifers of Tuticorin corporation, Tamilnadu, India. *Applied Water Science*, 3(1), 145-159.
- Sestini, G. (1989). Nile Delta: a review of depositional environments and geological history Geological Society, London, Special Publications 41:99–127.
- Shammi, M., Karmakar, B., Rahman, M.M., Islam, M.S., Rahman, R., & Uddin, M.K. (2016). Assessment of salinity hazard of irrigation water quality in monsoon season of Batiaghata Upazila, Khulna District, Bangladesh and adaptation strategies. *Pollution* 2(2):183–197.

- Shamrukh, M., & Abdel-Wahab, A. (2008). Riverbank filtration for sustainable water supply: application to a large-scale facility on the Nile River. *Clean Technologies and Environmental Policy*, 10(4), 351-358.
- Shamrukh, M., & Abdel-Wahab, A. (2011a). Riverbank filtration for sustainable water supply: application to a large-scale facility on the Nile River. QNRS Reposit. 2011 (1).
- Shamrukh, M., & Abdel-Wahab, A., (2011b). Water Pollution and Riverbank Filtration for Water Supply Along River Nile, Egypt. *Riverbank Filtration for Water Security in Desert Countries*. Springer, pp. 5–28.
- Shamsuddin, M. K. N., Sulaiman, W. N. A., Suratman, S., Zakaria, M. P., & Samuding, K. (2014a). Groundwater and surface-water utilisation using a bank filtration technique in Malaysia. *Hydrogeology Journal*, 22(3), 543-564.
- Shamsuddin, M. K. N., Suratman, S., Zakaria, M. P., Aris, A. Z., & Sulaiman, W. N. A. (2014b). Particle tracking analysis of river–aquifer interaction via bank filtration techniques. *Environmental Earth Sciences*, 72(8), 3129-3142.
- Shamsuddin, M.K.N., Juahir, H., Sulaiman,W.N.A., & Normi, A. (2013). Determining the Interaction between Geostatistical and Geochemical Analysis of Rivers, Lakes and Groundwater at a Small Bank Filtration Study Site in Jenderam Hilir, Selangor. *In National Geoscience Conference*, Geological Society of Malaysia, p. 105.
- Shankar, V., Eckert, P., Ojha, C., & König, C. M. (2009). Transient three-dimensional modeling of riverbank filtration at Grind well field, Germany. *Hydrogeology Journal*, 17(2), 321-326.
- Shao, J.L., Xu, Y.X., Cui, Y.L., Yuan, C.M., & Wang, L.H. (2006) Study on groundwater change on the Aberrance condition in Hubao Plain, Inner Mongolia, China. *Geoscience* 20(3):480–485
- Shao, Y. S. (1989). Environmental isotope geochemistry of groundwater in Hohhot Basin, inner Mongolia. *Geotech Investig Surv*, 4, 41-43.
- Sharma, L., & Ray, C. (2011). A combined RBF and ASR system for providing drinking water in water scarce areas. In *Riverbank Filtration for Water Security in Desert Countries*(pp. 29-49). Springer, Dordrecht.pp. 29–49.
- Sharma, L., Greskowiak, J., Ray, C., Eckert, P., & Prommer, H. (2012). Elucidating temperature effects on seasonal variations of biogeochemical turnover rates during riverbank filtration. *Journal of hydrology*, 428, 104-115.
- Sharma, S. K., Chaweza, D., Bosuben, N., Holzbecher, E., & Amy, G. (2012). Framework for feasibility assessment and performance analysis of riverbank

- filtration systems for water treatment. *Journal of Water Supply: Research and Technology-AQUA*, 61(2), 73-81.
- Sharma, S., Amy, G., & Shaw, R. (2009). Bank filtration: a sustainable water treatment technology for developing countries. Water, sanitation and hygiene: sustainable development and multisectoral approaches. In: Proceedings of the 34th WEDC International Conference, United Nations Conference Centre, Addis Ababa, Ethiopia, 18–22 May 2009, Water, Engineering and Development Centre (WEDC) Loughborough University of Technology.
- Sheets, R.A., Darner, R.A., & Whitteberry, B.L. (2002). Lag times of bank filtration at a well field, Cincinnati, OH, USA. *Journal of Hydrology* 266, 162–174.
- Shepherd, R. G. (1989). Correlations of permeability and grain size. *Groundwater*, 27(5), 633-638.
- Shin, J., Kim, K. H., Lee, K. K., & Kim, H. S. (2010). Assessing temperature of riverbank filtrate water for geothermal energy utilization. *Energy*, 35(6), 2430-2439.
- Simpson, S. C., & Meixner, T. (2012). Modeling effects of floods on streambed hydraulic conductivity and groundwater-surface water interactions. *Water resources research*, 48(2).
- Singh, A.K., & Hasnain, S.I. (1999). Environmental geochemistry of Damodar River basin—east coast of India. *Environmental Geology* 37:124–136.
- Singh, K. P., Malik, A., Mohan, D., & Sinha, S. (2004). Multivariate statistical techniques for the evaluation of spatial and temporal variations in water quality of Gomti River (India)—a case study. *Water Research*, 38, 3980–3992.
- Singh, K. P., Malik, A., Singh, V. K., Mohan, D., & Sinha, S. (2005). Chemometric analysis of groundwater quality data of alluvial aquifer of Gangetic plain, North India. *Analytica Chimica Acta*, 550(1-2), 82-91.
- Singh, M., Kumar, S., Kumar, B., Singh, S., & Singh, I. B. (2013). Investigation on the hydrodynamics of Ganga Alluvial Plain using environmental isotopes: a case study of the Gomati River Basin, northern India. *Hydrogeology Journal*, 21(3), 687-700.
- Singh, P., Kumar, P., Mehrotra, I., & Grischek, T. (2010). Impact of riverbank filtration on treatment of polluted river water. *Journal of environmental management*, 91(5), 1055-1062.

- Slichter, C.S. (1898). Theoretical investigations of the motion of ground waters. 19th annual report, US Geological Survey, Reston, VA, pp 295–384.
- Smith, J. W. N., Bonell, M., Gibert, J., McDowell, W. H., Sudicky, E. A., Turner, J. V., & Harris, R. C. (2008). Groundwater–surface water interactions, nutrient fluxes and ecological response in river corridors: Translating science into effective environmental management. *Hydrological Processes*, 22(1), 151-157.
- Smith, J. W. N., Surridge, B. W., Haxton, T. H., & Lerner, D. N. (2009). Pollutant attenuation at the groundwater–surface water interface: A classification scheme and statistical analysis using national-scale nitrate data. *Journal of hydrology*, 369(3-4), 392-402.
- Smith, J.W.N. (2005). Groundwater–surfacewater interaction in the hyporheic zone. Environment Agency-Science Report SC030155/SR1, Bristol.
- Smith, L.I., (2002). A tutorial on principal components analysis, February 2002. URL http://www.cs.otago.ac.nz/cosc453/student_tutorials/principal_components.pdf. (URL accessed on November 27, 2002).
- Song, J., Chen, X., Cheng, C., Wang, D., Lackey, S., & Xu, Z. (2009). Feasibility of grain-size analysis methods for determination of vertical hydraulic conductivity of streambeds. *Journal of Hydrology*, 375(3-4), 428-437.
- Song, T., Chen, Y., Du, S., & Yang, F. (2017). Hydrogeochemical evolution and risk assessment of human health in a riverbank filtration site, northeastern China. *Human and Ecological Risk Assessment: An International Journal*, 23(4), 705-726.
- Sophocleous, M., Koussis, A., Martin, J.L., & Perkins, S.P. (1995). Evaluation of simplified river-aquifer depletion models for water rights administration. *Groundwater*. 33(4); 579-588.
- Spalding, C. P., & Khaleel, R. (1991). An evaluation of analytical solutions to estimate drawdowns and stream depletions by wells. *Water Resources Research*, 27(4), 597-609.
- Sprenger, C., Lorenzen, G., Grunert, A., Ronghang, M., Dizer, H., Selinka, H. C., Girones, R., Lopez-Pila, J. M., Mittal, A. K., & Szewzyk, R., (2014). Removal of indigenous coliphages and enteric viruses during riverbank filtration from highly polluted river water in Delhi (India). *Journal of water and health*, 12(2), 332-342.
- Sprenger, C., Lorenzen, G., Hülshoff, I., Grützmacher, G., Ronghang, M., &

- Pekdeger, A. (2011). Vulnerability of bank filtration systems to climate change. *Science of the Total Environment*, 409(4), 655-663.
- Springer, A. E., Petroustou, W. D., & Semmens, B. A. (1999). Spatial and temporal variability of hydraulic conductivity in active reattachment bars of the Colorado River, Grand Canyon. *Groundwater*, 37(3), 338-344.
- Srinivas, Y., Aghil, T. B., Oliver, D. H., Nair, C. N., & Chandrasekar, N. (2017). Hydrochemical characteristics and quality assessment of groundwater along the Manavalakurichi coast, Tamil Nadu, India. *Applied Water Science*, 7(3), 1429-1438.
- Srinivasamoorthy, K., Chidambaram, S., Prasanna, M.V., Vasanthavigar, M., John Peter, A., Anandhan, P. (2008). Identification of major sources controlling Groundwater Chemistry from a hard rock terrain—A case study from Mettur taluk, Salem district, Tamilnadu India. *Journal of Earth System Sciences* 117(1):49–58.
- Srinivasamoorthy, K., Vasanthavigar, M., Chidambaram, S., Anandhan, P., Manivannan, R., & Rajivgandhi, R. (2012). Hydrochemistry of groundwater from Sarabanga Minor Basin, Tamilnadu, India. *Proceedings of the International Academy of Ecology and Environmental Sciences*, 2(3), 193.
- Stallard, R. F., & Edmond, J. M. (1983). Geochemistry of the Amazon: 2. The influence of geology and weathering environment on the dissolved load. *Journal of Geophysical Research: Oceans*, 88(C14), 9671-9688.
- Stauder, S., Stevanovic, Z., Richter, C., Milanovic, S., Tucovic, A., & Petrovic, B. (2012). Evaluating bank filtration as an alternative to the current water supply from Deeper Aquifer: a case study from the Pannonian Basin, Serbia. *Water resources management*, 26(2), 581-594.
- Storck, F. R., Schmidt, C. K., Lange, F. T., Henson, J. W., & Hahn, K. (2012). Factors controlling micropollutant removal during riverbank filtration. *Journal-American Water Works Association*, 104(12), E643-E652.
- Storck, F. R., Schmidt, C. K., Wülser, R., & Brauch, H. J. (2012). Effects of boundary conditions on the cleaning efficiency of riverbank filtration and artificial groundwater recharge systems regarding bulk parameters and trace pollutants. *Water Science and Technology*, 66(1), 138-144.
- Storck, F., Schmidt, C., Lange, F. Thomas., & Brauch, H.J. (2013). Evaluation of important parameters determining organic micropollutant removal during riverbank filtration in the USA and in Germany. *Gas Wasserfach Wasser Abwasser*. 154. 208-215.

- Stuyfzand, P. J. (1998). Fate of pollutants during artificial recharge and bank filtration in the Netherlands. In *Artificial recharge of groundwater, Proc. 3rd Intern. Symp. on Artificial Recharge, Amsterdam the Netherlands, Balkema* (pp. 119-125).
- Stuyfzand, P. J. (2011). Hydrogeochemical processes during riverbank filtration and artificial recharge of polluted surface waters: zonation, identification, and quantification. In *Riverbank Filtration for Water Security in Desert Countries*. Springer, Dordrecht. 97–128.
- Stuyfzand, P.J., & Juhász-Holterman, M.H.A. (2006). Riverbank Filtration in the Netherlands: Well Fields, Clogging and Geochemical Reactions. *Riverbank Filtration Hydrology*. Springer, pp. 119–153.
- Stuyfzand, P.J., & Kooiman, J.W. (1996). Elimination of pollutants during artificial recharge and bank filtration: A comparison. In; Kivimaki A-L, Suokko T (eds) *Artificial recharge of groundwater*. Proc. Int. Symp., Helsinki, 3-5 June 1996, pp 223-231.
- Stuyfzand, P.J., Holterman, M.H.A.J. & Lange, W.J.D. (2004). Riverbank filtration in the Netherlands: well fields, clogging and geochemical reactions. NATO Advanced Research Workshop: *Clogging in Riverbank Filtration*. Bratislava, 7-10 Sept. 2004
- Stuyfzand, P.J., Juhász-Holterman, M.H.A., & De Lange, W.J. (2006). Riverbank filtration in the Netherlands: well fields, clogging and geochemical reactions. In: Hubbs SA (ed) *Riverbank Filtration Hydrology – Impacts on System Capacity and Water Quality*. Springer, Dordrecht, pp. 119 – 153.
- Stuyfzand, P.J., Leurs, F., & Reije, G.K., (1994). Geohydrochemical aspect of methane in groundwater in the Netherlands, H20 27 (in dutch), pp 500-510.
- Su, X., Lu, S., Gao, R., Su, D., Yuan, W., Dai, Z., & Papavasiliopoulos, E. N. (2017). Groundwater flow path determination during riverbank filtration affected by groundwater exploitation: a case study of Liao River, Northeast China. *Hydrological Sciences Journal*, 62(14), 2331-2347.
- Su, X., Lu, S., Yuan, W., Woo, N. C., Dai, Z., Dong, W., ... & Zhang, X. (2018). Redox zonation for different groundwater flow paths during bank filtration: a case study at Liao River, Shenyang, northeastern China. *Hydrogeology Journal*, 1-17.
- Su, X., Xu, W., & Du, S. (2014a). In situ filtration test using a reclaimed abandoned river bed: managed aquifer recharge in Shijiazhuang City, China. *Environmental earth sciences*, 71(12), 5017-5025.

- Su, X., Xu, W., & Du, S.H. (2014b). Responses of groundwater vulnerability to artificial recharge under extreme weather conditions in Shijiazhuang City, China. *Journal of Water Supply Research and Technology—Aqua* 63:224–238. doi: 10.2166/aqua.2013.132.
- Su, Xiaosi, Shuai Lu, Wenzhen Yuan, Nam Chil Woo, Zhenxue Dai, Weihong Dong, Shanghai Du, and Xinyue Zhang. "Redox zonation for different groundwater flow paths during bank filtration: a case study at Liao River, Shenyang, northeastern China." *Hydrogeology Journal* (2018): 1-17.
- Sudheer, K.P., Gosain, A.K., & Ramasastri, K.S. (2002). A data-driven algorithm for constructing artificial neural network rainfall-runoff models. *Hydrological Process* 16:1325–1330.
- Sujatha, D., & Reddy, B. R. (2003). Quality characterization of groundwater in the south-eastern part of the Ranga Reddy district, Andhra Pradesh, India. *Environmental Geology*, 44(5), 579-586.
- Suk, H., & Lee, K. K. (1999). Characterization of a ground water hydrochemical system through multivariate analysis: clustering into ground water zones. *Groundwater*, 37(3), 358-366.
- Sundaray, S. K. (2010). Application of multivariate statistical techniques in hydrogeochemical studies—a case study: Brahmani–Koel River (India). *Environmental monitoring and assessment*, 164(1-4), 297-310.
- Suntharalingam, T., & Teoh, L.H. (1985). Quaternary Geology of the Coastal Plain of Taiping, Perak. Geological Survey Malaysia Quaternary Geology Bulletin 1, 64 pp.
- Sutherland, I.W. (2001). Biofilms exopolysaccharides: a strong and sticky framework. *Microbiology*, 147, 3 – 9.
- Sutherland, K. (2008). Filtration overview: A closer look at depth filtration. *Filtration & Separation*, 45(8), 25-28.
- Tadza, M. Y. M., & Ling, A. T. Y. (2017). Treatment Efficiency of Riverbank Soil in Treatment of. *Journal of Engineering and Applied Sciences*, 12(7), 1800-1805.
- Tahir, H., & Abdul Hamid, I. (2003). The study of groundwater resource at Teluk Gong, Pelabuhan Kelang, Selangor Darul Ehsan. *Report No. JMG.SWP (HG) 03/2003*. Department of Mineral and Geosciences Malaysia, Ministry of Natural Resources and Environment
- Tamez-Meléndez, C., Hernández-Antonio, A., Gaona-Zanella, P. C., Ornelas-Soto, N., & Mahlknecht, J. (2016). Isotope signatures and hydrochemistry as

- tools in assessing groundwater occurrence and dynamics in a coastal arid aquifer. *Environmental Earth Sciences*, 75(9), 830.
- Tayfur, G., & Singh, V.P. (2006). ANN and fuzzy logic models for simulating event-based rainfall-runoff. *Journal of Hydraulic Engineering* 132:1321–1330.
- Tayfur, G., Swiatek, D., Wita, A., & Singh, V.P. (2005). Case study: finite element method and artificial neural network models for flow through Jeziorsko earth dam in Poland. *Journal of Hydraulic Engineering* 131: 431–440.
- Taylor, C. B., Wilson, D. D., Brown, L. J., Stewart, M. K., Burden, R. J., & Brailsford, G. W. (1989). Sources and flow of north Canterbury plains groundwater, New Zealand. *Journal of hydrology*, 106(3-4), 311-340.
- Terzaghi, K. (1925). *Principles of soil mechanics*. Eng News-Rec 95:832–836.
- Terzaghi, K., & Peck, R.B. (1964). *Soil mechanics in engineering practice*. Wiley, New York.
- Terzaghi, K., Peck, R.B., & Mesri, G. (1996). *Soil mechanics in engineering practice*, 3rd edn. Wiley, New York.
- Thamer, A.M., & Abdul, H.G. (2009). Evaluation of Yield And Groundwater Quality For Selected Wells in Malaysia. *Pertanika Journal of Science & Technology* 17: 33-42.
- The National Water Policy of Malaysia, Ministry of Natural Resource and Environment, (2012.) Retrieved from <http://www.nre.gov.my>.
- Theis, C. V. (1941). The effect of a well on the flow of a nearby stream. *Eos, Transactions American Geophysical Union*, 22(3), 734-738.
- Theis, C.V. (1935). The relation between the lowering of the peizometric surface and the rate duration of discharge of a well using groundwater storage. *Transactions of the American Society of Geophysics Union*. 16: 519-524.
- Thilagavathi, R., Chidambaram, S., Prasanna, M. V., Thivya, C., & Singaraja, C. (2012). A study on groundwater geochemistry and water quality in layered aquifers system of Pondicherry region, southeast India. *Applied water science*, 2(4), 253-269.
- Thirumalaiah, K., & Deo, M.C. (2000), Hydrological forecasting using neural networks. *Journal of Hydrology* 5(2):180–189.
- Thorp, A.M. (2013). *Applying Geochemistry to Investigate the Occurrence of Riverbank Inducement into a Shallow Aquifer in Southeastern Wisconsin*. University of Wisconsin-Milwaukee.

- Thyne, G., Güler, C., & Poeter, E. (2004). Sequential analysis of hydrochemical data for watershed characterization. *Groundwater*, 42(5), 711-723.
- Tiwari, R. N. (2011). Assessment of groundwater quality and pollution potential of Jawa block Rewa district, Madhya Pradesh, India. *Proceedings of the international academy of ecology and environmental sciences*, 1(3-4):202-212.
- Tlili-Zrelli, B., Gueddari, M., & Bouhlila, R. (2013). Geochemistry and quality assessment of groundwater using graphical and multivariate statistical methods. A case study: Grombalia phreatic aquifer (Northeastern Tunisia). *Arabian Journal of Geosciences*, 6(9), 3545-3561.
- Todd, D.K. (1980). *Groundwater hydrology*. Wiley, New York, pp 10-138.
- Todd, D.K., & Mays, L.W. (2005). *Groundwater hydrology*, 3rd edn. Wiley, New York.
- Tóth, J. (1999). Groundwater as a geologic agent: an overview of the causes, processes, and manifestations. *Hydrogeology journal*, 7(1), 1-14.
- Tufenkji, N., Joseph, N.R., & Menachem, E. (2002). The Promise of Bank Filtration – A simple technology may inexpensively clean up poor-quality raw surface water. *Environmental Science and Technology* 1:423-428.
- Tufenkji, N., Ryan, J. N., & Elimelech, M. (2002). Peer reviewed: the promise of bank filtration. *Environmental Science & Technology* . 36 (21), 422A-428A.
- Tyagi, S. K., Datta, P. S., & Pruthi, N. K. (2009). Hydrochemical appraisal of groundwater and its suitability in the intensive agricultural area of Muzaffarnagar district, Uttar Pradesh, India. *Environmental geology*, 56(5), 901-912.
- Tyagi, S., Dobhal, R., Kimothi, P. C., Adlakha, L. K., Singh, P., & Uniyal, D. P. (2013). Studies of river water quality using river bank filtration in Uttarakhand, India. *Water Quality, Exposure and Health*, 5(3), 139-148.
- Tyagi, S., Sharma, B., Singh, P., & Dobhal, R. (2013). Water quality assessment in terms of water quality index. *American Journal of Water Resources*, 1(3), 34-38.
- Ulrich, C., Hubbard, S. S., Florsheim, J., Rosenberry, D., Borglin, S., Trotta, M., & Seymour, D. (2015). Riverbed clogging associated with a California riverbank filtration system: an assessment of mechanisms and monitoring approaches. *Journal of hydrology*, 529, 1740-1753.
- Uma, K. O., Egboka, B. C. E., & Onuoha, K. M. (1989). New statistical grain-size

- method for evaluating the hydraulic conductivity of sandy aquifers. *Journal of Hydrology*, 108, 343-366.
- United Nations (UN) (2005). Good Practices on Strategic Planning and Management of Water Resources In Asia And The Pacific. Water Resources Series. No. 85,.ISSN: 0082-8130.
- United States Development Agency, (USDA) Natural Resources Conservation Service (2002) Soil Conservationists. Salinity Management Guide – Salt Management. Available at <http://www.launionsweb.org/salinity.htm>.
- United States Environmental Protection Agency (USEPA) (2005). Method 1623: Cryptosporidium and Giardia in Water by Filtration/IMS/FA. EPA 821-R-OI-025, Office of Water, Washington.
- United States Environmental Protection Agency, (USEPA) (2000) National Water Quality Inventory: 2000 Report to Congress. Office of Water EPA-841-R-02-001.
- Universiti Malaya Consultancy Unit (UPUM) (2002).Final report program Pencegahan dan Peningkatan Kualiti Air Sungai Langat. Kuala Lumpur.
- Unsal, B., Yagbasan, O., & Yazicigil, H. (2014). Assessing the impacts of climate change on sustainable management of coastal aquifers. *Environmental earth sciences*, 72(6), 2183-2193.
- Van Driezum, I. H., Chik, A. H., Jakwerth, S., Lindner, G., Farnleitner, A. H., Sommer, R., Blaschke, A.P., & Kirschner, A. K. (2018). Spatiotemporal analysis of bacterial biomass and activity to understand surface and groundwater interactions in a highly dynamic riverbank filtration system. *Science of the Total Environment*, 627, 450-461.
- Van Geldern, R., Kolb, A., Baier, A., & Barth, J. A. (2015). Stabile Isotope als Tracer zur Bestimmung der Abstandsgeschwindigkeit in Trinkwassergewinnungsbrunnen aus Uferfiltrat Determination of fluid velocities in drinking water supply wells using bank filtration by means of stable isotope tracers. *Grundwasser*, 20(3), 169-179.
- Vandenschrack, G., Van Wesemael, B., Frot, E., Pulido-Bosch, A., Molina, L., Stievenard, M., & Souchez, R. (2002). Using stable isotope analysis (δD – $\delta 18O$) to characterise the regional hydrology of the Sierra de Gador, south east Spain. *Journal of Hydrology*, 265(1-4), 43-55.
- Vandevivere, P., Baveye, P., Lozada, D. S., & DeLeo, P. (1995). Microbial clogging of saturated soils and aquifer materials: Evaluation of mathematical models. *Water Resources Research*, 31(9), 2173-2180.

- Vanek, V. (1997). Heterogeneity of groundwater-surface water ecotones. In: Gibert J, Mathieu J, Fournier F (eds) *Groundwater/Surface Water Ecotones: Biological and Hydrological Interactions and Management Options*. Cambridge University Press: New York; pp 151–161.
- Váradi, Z. (2016). A Laboratory Experiment to Analyze Hydraulic Losses during Riverbank Filtration. *Periodica Polytechnica Civil Engineering*, 60(3), 449-454.
- Vasanthavigar, M., Srinivasamoorthy, K., Ganthi, R. R., Vijayaraghavan, K., & Sarma, V. S. (2012). Characterisation and quality assessment of groundwater with a special emphasis on irrigation utility: Thirumanimuttar sub-basin, Tamil Nadu, *Arabian journal of Geosciences*, 5(2), 245-258.
- Vengosh, A., Heumann, K.G., Juraske, S., & Kasher, R. (1994). Boron isotope application for tracing sources of contamination in groundwater. *Environmental Science & Technology* 28:1968–1974.
- Venugopal, T., Giridharan, L., Jayaprakash, M., & Periakali, P. (2009a). Environmental impact assessment and seasonal variation study of the groundwater in the vicinity of River Adyar, Chennai, India. *Environmental monitoring and assessment*, 149(1-4), 81-97.
- Venugopal, T., Giridharan, L., Jayaprakash, M., & Velmurugan, P. M. (2009b). A comprehensive geochemical evaluation of the water quality of River Adyar, India. *Bulletin of environmental contamination and toxicology*, 82(2), 211-217.
- Verstraeten, I. M., Thurman, E. M., Lindsey, M. E., Lee, E. C., & Smith, R. D. (2002). Changes in concentrations of triazine and acetamide herbicides by bank filtration, ozonation, and chlorination in a public water supply. *Journal of Hydrology*, 266(3-4), 190-208.
- Verstraeten, I.M., Heberer, T., & S cheytt. T. (2002). Occurrence, characteristics, and transport and fate of pesticides, pharmaceutically active compounds, and industrial and personal care products at bank filtration sites. In C. Ray, G. Melin & R. B. Linksy (Eds.), *Riverbank filtration. Improving source-water quality* (pp. 175–277). Dordrecht: Kluwer Academic Press.
- Vigil, J., Warburton, S., Haynes, W., Kaiser, L.R. (1965). Nitrates in municipal water supply causing Methemoglobinemia in infants. *Public Health report*. 80(12), 119-1121
- Vogt, T., Schneider, P., Peter, S., Durisch-kaiser, E., Schirmer, M., & Cirpka, O. (2011). Assessing groundwater travel times and biogeochemical processes during riverbank filtration under the aspect of river restoration. *IAHS-AISH publication*, 401-404.

- Von Gunten, H.R., Karametaxas, G., Krähenbühl, U., Kuslys, M., Giovanoli, R., Hoehn E., Keil, R. (1991). Seasonal biogeochemical cycles in riverborne groundwater. *Geochim Cosmochim Acta*. 55(12):3597–3609.
- Von Gunten, U., & Zobrist, J. (1993). Biogeochemical changes in groundwater-filtration systems: column studies. *Geochim Cosmochim Acta* 57:3895–3906.
- Von Rohr, M. R., Hering, J. G., Kohler, H. P. E., & Von Gunten, U. (2014). Column studies to assess the effects of climate variables on redox processes during riverbank filtration. *Water research*, 61, 263-275.
- Vukovic, M., & Soro, A. (1992). Determination of hydraulic conductivity of porous media from grain-size composition. Miladinov, D., translator, Water Resources Publications, Littleton, Colorado, USA.
- Walton, W.C. (1970). Groundwater resources evaluation. McGrawHillBook Co., New York.
- Wanda, E. M., Gulula, L. C., & Phiri, A. (2013). Hydrochemical assessment of groundwater used for irrigation in Rumphi and Karonga districts, Northern Malawi. *Physics and Chemistry of the Earth, Parts A/B/C*, 66, 51-59.
- Wanda, E., Monjerezi, M., & Mwatseteza, J.F., (2011). Hydro-geochemical appraisal of groundwater quality from weathered basement aquifers in Northern Malawi. *Physics and Chemistry of the Earth, Parts A/B/C*36(14): 1197–1207.
- Wanda, E., Monjerezi, M., Mwatseteza, J. F., & Kazembe, L. N. (2011). Hydro-geochemical appraisal of groundwater quality from weathered basement aquifers in Northern Malawi. *Physics and Chemistry of the Earth, Parts A/B/C*, 36(14-15), 1197-1207.
- Wang, J. (2002). Bank filtration case study at Louisville, Kentucky. In C. Ray, G. Melin, & R. B. Linksy (Eds.), *Riverbank filtration. Improving source-water quality* (pp. 117–145). Dordrecht: Kluwer Academic Press.
- Wang, J. (2002). Riverbank filtration case study at Louisville, Kentucky. In: Ray C et al (eds) *Riverbank filtration: improving source water quality*. Kluwer, Dordrecht, The Netherlands, pp 117–146.
- Wang, J. (2003). Riverbank filtration case study at Louisville, Kentucky, *In Riverbank Filtration: Improving Source-Water Quality*, edited by: Ray, C., Melin, G., and Linksy, R. B., Kluwer Academic Publishers, New York, Boston, Dordrecht, London, Moscow, 117–145
- Wang, J., Smith, J. W. N., & Dooley, L. (1996). Evaluation of riverbank filtration as a process for removing particles and DBP precursors, in *Proceedings of*

the Water Quality Technology Conference, American Water Works Association, Denver, CO, USA, New Orleans, LA, USA

- Wang, J., Song, R., Hubbs, S. (2000). Particle removal through riverbank filtration process. In: Proceedings of water quality technology conference, American Water Works Association, Denver, Colorado.
- Wang, J.Z. (2005). American experience with riverbank filtration system—A detailed case study at Louisville Kentucky. *J Harbin Inst Technol (New Series)* 12:75–81.
- Wang, J.Z., Hubbs, S.A. & Song, R. (2002). Evaluation of Riverbank Filtration as a Drinking Water Treatment Process. *AWWA Research Foundation and American Water Works Association*, USA.
- Wang, P., Pozdniakov, S. P., & Shestakov, V. M. (2015). Optimum experimental design of a monitoring network for parameter identification at riverbank well fields. *Journal of Hydrology*, 523, 531-541.
- Wassenaar, L.I., Athanasopoulos, P., & Hendry, M.J. (2011) Isotope hydrology of precipitation, surface and groundwaters in the Okanagan valley, British Columbia, Canada. *Journal of Hydrology*. 411, 37–48. <https://doi.org/10.1016/j.jhydrol.2011.09.032>
- Water Resource Agency (WRA) (2005). Investigation of Groundwater Resource in Hualien Alluvial Valley; Ministry of Economic Affairs: Taipei, Taiwan; p. 395
- Water Resource Agency, (WRA) (1997). Investigation of Water Resource in Hualien; Ministry of Economic Affairs: Taipei, Taiwan; p. 265.
- Waterloo (2005). Visual MODFLOWv 4/1 User's Manual. Waterloo Hydrogeologic, Inc. Waterloo.
- Weight, D. (2008). Hydrogeology Field Manual, 2e. McGraw-Hill Publisher Professional.
- Weiss, W. J., Bouwer, E. J., Aboytes, R., LeChevallier, M. W., O'Melia, C. R., Le, B. T., & Schwab, K. J. (2005). Riverbank filtration for control of microorganisms: Results from field monitoring. *Water Research*, 39(10), 1990-2001.
- Weiss, W. J., Bouwer, E. J., Ball, W. P., O'Melia, C. R., Lechevallier, M. W., Arora, H., & Speth, T. F. (2003). Riverbank filtration—fate of DBP precursors and selected microorganisms. *Journal-American Water Works Association*, 95(10), 68-81.
- Weiss, W.J. (2005). Water quality improvements during riverbank filtration fate

of disinfection by-product precursors, pathogens, and potential surrogates. Dissertation, The Johns Hopkins University.

Weiss, W.J., Bouwer, E.J., Ball, W.P., O'Melia, C.R., Arora, H., & Speth, T.F. (2002). Reduction in disinfection byproduct precursors and pathogens during riverbank filtration at three Midwestern United States drinking-water utilities. In: Ray C et al (eds) *Riverbank filtration: improving source water quality*. Kluwer, Dordrecht, The Netherlands., pp 147–174.

Weiss.W.J., Bouwer, E.J., Ball, W.P., O'Melia, C.R., Le Chevallier, M.W., Arora, H., Aboytes, R., Speth, T.F. (2003). Study of water quality improvements during riverbank filtration at three midwestern United States drinking water utilities. *Geophysical Research Abstracts*. 5(04297).

Western Fertilizer Handbook, (1995) Produced by the Soil Improvement Committee of the California Fertilizer Association. Interstate Publishers, Inc., Sacramento, California,

Wett, B. (2006). Monitoring Clogging of a RBF-System at the River Enns, Austria. *Riverbank filtration hydrology*. Springer, pp. 259–280.

Wett, B., Jarosch, H., & Ingerle, K. (2002). Flood induced filtration affecting a bank filtrate well at the River Enns, Austria. *Journal of Hydrology* 266, 222–234.

WHO (World Health Organization), (2011) Guidelines For Drinking Water Quality 4th Edition. World Health Organization, Geneva.

WHO. (World Health Organization) (2008). Guidelines for drinking-water quality (electronic resource): incorporating 1st and 2nd addenda, Vol.1, Recommendations – 3rd ed. World Health Organization,

Wilcox, L.V. (1948). The quality of water for irrigation use. US Department of Agricultural Technical Bulletin 1962. US Department of Agriculture, Washington, DC..

Wilcox, L.V. (1955). Classification and use of irrigation waters, USDA, Washington, DC Circular 969.

Winter, T.C., Harvey, J.W., Franke, O.L. & Alley, W.M. (1998). Groundwater and surface water, in: *A single resources*, edited by; Survey, U.G. US government printing office, Denver, Colorado.

Winterwerp, J. C., & Van Kesteren, W. G. (2004). *Introduction to the physics of cohesive sediment dynamics in the marine environment* (Vol. 56). Elsevier.

Wojnar, A. J., Mutiti, S., & Levy, J. (2013). Assessment of geophysical surveys

- as a tool to estimate riverbed hydraulic conductivity. *Journal of hydrology*, 482, 40-56.
- Worch, E., Grischek, T., Börnick, H., & Eppinger, P. (2002). Laboratory tests for simulating attenuation processes of aromatic amines in riverbank filtration. *Journal of Hydrology*, 266(3-4), 259-268.
- Wu, J. L., Ho, C. R., Huang, C. C., Srivastav, A. L., Tzeng, J. H., & Lin, Y. T. (2014). Hyperspectral sensing for turbid water quality monitoring in freshwater rivers: Empirical relationship between reflectance and turbidity and total solids. *Sensors*, 14(12), 22670-22688.
- Wu, Y., Hui, L., Wang, H., Li, Y., & Zeng, R. (2007). Effectiveness of riverbank filtration for removal of nitrogen from heavily polluted rivers: a case study of Kuihe River, Xuzhou, Jiangsu, China. *Environmental geology*, 52(1), 19-25
- Xu, Z., Wu, Y., & Yu, F. (2012). A three-dimensional flow and transport modeling of an aquifer contaminated by perchloroethylene subject to multi-PRB remediation. *Transport in porous media*, 91(1), 319-337.
- Yang, L.P., Jiang, Z.J., Zhao, Y.T., & Zha, E.S. (2009). Recharge on changes and prediction of trend of the groundwater regime in Hohhot. *Hydrogeology Engineering Geology* 4:46–49.
- Yeh, H. F., Lee, C. H., & Hsu, K. C. (2011). Oxygen and hydrogen isotopes for the characteristics of groundwater recharge: a case study from the Chih-Pen Creek basin, Taiwan. *Environmental Earth Sciences*, 62(2), 393-402.
- Yeh, H.F., Chen, J.F., & Lee, C.H. (2004). Application of a water budget to evaluate rainfall recharge and slope stability. *Journal-Chinese Institute Of Environmental Engineering*, 14:1–10.
- Yeh, H.F., Lee, C.H., Hsu, K.C., Chang, P.H., & Wang, C.H. (2009). Using stable isotopes for assessing the hydrologic characteristics and sources of groundwater recharge. *Environmental Engineering and Management Journal*, 19(4):185–191.
- Young, R.G., Matthaie, C.D., & Townsend, C.R. (2008). Organic matter breakdown and ecosystem metabolism: functional indicators for assessing river ecosystem health. *Journal of the North American Benthological Society*, 27:605–625.
- Yuan, R.Q., Song, X.F., Zhang, Y.H., Han, D.M., Wang, S.Q., & Tang, C.Y. (2011). Using major ions and stable isotopes to characterize recharge regime of a fault-influenced aquifer in Beiyishui River Watershed, North China Plain. *Journal of Hydrology* 405: 512–521.

- Zakaria, M.P., & Mahat, A.A. (2006) Distribution of Polycyclic Aromatic Hydrocarbon (PAHs) in sediments in the Langat Estuary. *Journal Coastal Marine Science*, 30(1); 387-395.doi:13493000.
- Zakaria, N.A., Ab Ghani, A., Talib, S.A., Chan, N.W. & Desa, M.N.N. (2013). Urban Water Cycle Processes, Management, and Societal Interactions: Crossing From Crisis To Sustainability. *World Environmental and Water Resources Congress, Showcasing the Future, Cincinnati, ASCE, Ohio*, 1240-1246.
- Zamarin, J.A. (1928). Calculation of ground-water flow (in Russian). Trudey I.V.H, Taskeni.
- Zhang, G., Nie, Z., Xie, Y., Chen, Z., Cheng, X., Shen, J., & Wang, J. (2005). Isotopic characteristics of groundwater and its renewal in the plain area of western Gansu. *Geological Bulletin of China*, 24(2), 149-155.
- Zhang, J., Huang, W. W., Letolle, R., & Jusserand, C. (1995). Major element chemistry of the Huanghe (Yellow River), China-weathering processes and chemical fluxes. *Journal of Hydrology*, 168(1-4), 173-203.
- Zhang, Y., Hubbard, S., & Finsterle, S. (2011). Factors governing sustainable groundwater pumping near a river. *Groundwater*, 49(3), 432-444.
- Zhou, N., Matsumoto, T., Hosokawa, T., & Suekane, T. (2010). Pore-scale visualization of gas trapping in porous media by X-Ray CT Scanning. *Flow Measurement and Instrumentation*. 21 (3), 262–267.
- Zlotnik, V. A., & McGuire, V. L. (1998). Multi-level slug tests in highly permeable formations: 1. Modification of the Springer-Gelhar (SG) model. *Journal of Hydrology*, 204(1-4), 271-282.
- Zunker, F. (1930). Das Verhalten des Wassers zum Boden (The behavior of groundwater). *Zeitschr Pflanzenernäh Düng Bodenkd* A25(1):7.