

Optimized Kernel Extreme Learning Machine for Myoelectric Pattern Recognition

Khairul Anam¹, Adel Al-Jumaily²

¹Department of Electrical Engineering, University of Jember, Indonesia

²Department of Electrical Engineering, University of Technology, Sydney, Australia

Article Info

Article history:

Received Oct 22, 2017

Revised Jan 5, 2018

Accepted Jan 20, 2018

Keyword:

Classification

Electromyography

Extreme learning machine

Pattern recognition

Wavelet

ABSTRACT

Myoelectric pattern recognition (MPR) is used to detect user's intention to achieve a smooth interaction between human and machine. The performance of MPR is influenced by the features extracted and the classifier employed. A kernel extreme learning machine especially radial basis function extreme learning machine (RBF-ELM) has emerged as one of the potential classifiers for MPR. However, RBF-ELM should be optimized to work efficiently. This paper proposed an optimization of RBF-ELM parameters using hybridization of particle swarm optimization (PSO) and a wavelet function. These proposed systems are employed to classify finger movements on the amputees and able-bodied subjects using electromyography signals. The experimental results show that the accuracy of the optimized RBF-ELM is 95.71% and 94.27% in the healthy subjects and the amputees, respectively. Meanwhile, the optimization using PSO only attained the average accuracy of 95.53 %, and 92.55 %, on the healthy subjects and the amputees, respectively. The experimental results also show that SW-RBF-ELM achieved the accuracy that is better than other well-known classifiers such as support vector machine (SVM), linear discriminant analysis (LDA) and k-nearest neighbor (kNN).

Copyright © 2018 Institute of Advanced Engineering and Science.
All rights reserved.

Corresponding Author:

Khairul Anam,

Department of Electrical Engineering,

University of Jember,

Jl. Kalimantan 37 Jember 68121 Indonesia.

Email: khairul@unej.ac.id

1. INTRODUCTION

Extreme learning machine (ELM) is a kind of single layer feed-forward networks (SLFNs) that has fast training time [1]. ELM is a great improvement of feed-forward neural networks (FFNNs), which very considerably reduces the training time of FFNNs by omitting the iterative learning process. In ELM, the weights and biases of the hidden node are determined randomly, while the output weights are calculated analytically. Therefore, the training time is very short compared to the traditional neural networks.

The development of ELM is very fast and encompassing many applications. To improve the stability of ELM, Wang, et al. [2] proposed a method to find a high quality of feature mapping in the feature stage. Therefore, the output weight calculation using ridge regression can be optimized. On the other hand, the idea to construct a compact ELM was proposed by adding a new appropriate hidden neuron [3]. Likewise, the method to reduce of the size ELM was also proposed in [4], [5]. Many other developments of ELM have been proposed, such as ELM on online sequential data [6], [7], ensemble ELM [8], semi-supervised and unsupervised ELM [9], [10], ELM for imbalanced data [11], and incremental ELM [12].

ELM method has been used for a wide range of application [13]. The ELM has been applied to electromyography (EMG)-based pattern recognition [14], face recognition [15], character recognition [16],

[17]. Moreover, it has been implemented in protein structure prediction [18], cancer detection [19], electrical power system problem [20] and physical parameter estimation [21].

Nevertheless, the hidden node parameters, the input weights, and biases, which are determined arbitrarily, result in a non-optimal system. Therefore, some efforts dealing with the optimization problem in ELM have been made. Self-adaptive evolutionary ELM (SAE-ELM) [22], and particle swarm optimization ELM(PSO-ELM) [23] are some methods developed to optimize the hidden node parameters.

ELM is not merely working on the node style. A kernel form can be incorporated in ELM by replacing the node processing structure with a kernel function. This kernel ELM can be considered as a variance of least square support vector machine (LS-SVM) without the output bias [24]. Similar to the node-based ELM, the kernel ELM faces the optimization problem too. The efficacy of the kernel ELM greatly depends on the optimum combination of the kernel parameters [25]. The popular grid search algorithm that is simple was used to search the optimal kernel [14]. However, the exhaustive grid search on a large number of the parameter spaces may result in a very time-consuming process.

A popular particle swarm optimization (PSO) algorithm can be a promising solution for optimizing the kernel parameters in the kernel ELM. The PSO has been implemented in many areas such as medical [26], power system [27], and circuit design [28]. To the best of the author's knowledge, no one employs PSO to optimize the kernel ELM. In the practical application, Ling, et al. [29] found that sometimes, PSO is being trapped in the local optima. Therefore, they proposed PSO mutated by wavelet. The existence of the wavelet mutation in PSO depends on the mutation probability. The higher the mutation probability is, the greater the chance of the wavelet is updating the particles of PSO.

This paper introduces a swarm radial basis function extreme learning machine (SRBF-ELM), the radial basis function kernel ELM optimized by PSO. In addition, the paper proposes a swarm wavelet radial basis function extreme learning machine (SW-RBF-ELM), the optimization of radial basis function kernel ELM using combination PSO and wavelet. The wavelet differs SRBF-LEM and SW-RBF-ELM. The wavelet is implemented using a mutation probability. SRBF-ELM can be considered as SW-RBF-ELM with zero mutation probability. In this paper, SRBF-ELM and SW-RBF-ELM are applied to myoelectric pattern recognition (M-PR) to classify the individual and combined finger movements using two EMG channels.

The main contribution of this paper is on the optimization of kernel extreme learning machine PSO and wavelet. The second contribution is the implementation of the proposed system on myoelectric pattern recognition to improve the performance of MPR.

The structure of this paper is as follows. The second section will discuss the basic theory of PSO and the hybridization of wavelet and PSO. Then, the experimental setup is presented in the third section. Next, in the fourth section, the experimental results on the able-bodied subjects are discussed. Additional experiment on the amputee subjects is also provided. Finally, the fifth section ends the paper with the conclusion.

2. RESEARCH METHOD

2.1. Kernel Extreme Learning Machine

ELM is a learning algorithm for single layer feedforward networks (SLFNs). In classical SLFNs, network parameters are tuned iteratively while in ELM; most of these parameters are determined analytically. Hidden parameters can be independently calculated from the training data, and output parameters can be determined by the pseudo-inverse method. As a result, the learning of ELM can be carried out fast compared to the other learning algorithms [25].

As described in [25], the output of ELM is defined by:

$$f(x) = g(x)G^T \left(\frac{I}{C} + GG^T \right)^{-1} T \quad (1)$$

where $g(x)$ is the feature mapping in the hidden layer, T is the target and C is the regulation parameter of ELM. The feature mapping in the hidden layer of ELM can be replaced by a kernel function. Therefore, the formulation of the kernel based ELM is defined by:

$$f(x) = \begin{bmatrix} K(x, x_1) \\ \vdots \\ K(x, x_N) \end{bmatrix}^T \left(\frac{1}{C} + \Omega_{ELM} \right)^{-1} T \quad (2)$$

where

$$\Omega_{ELM} = \mathbf{G}\mathbf{G}^T: \Omega_{ELM} i, j = g(\mathbf{x}_i) \cdot g(\mathbf{x}_j) = K(\mathbf{x}_i, \mathbf{x}_j) \quad (3)$$

and K is a kernel function as shown in Equation (4) to Equation (6).

$$\text{Radial basis function: } K(x_i, x_j) = \exp(-\gamma \|x_i - x_j\|) \quad (4)$$

$$\text{Linear: } K(x_i, x_j) = x_i \cdot x_j \quad (5)$$

$$\text{Polynomial: } K(x_i, x_j) = (x_i \cdot x_j + a)^d \quad (6)$$

2.2. Particle Swarm Optimization (PSO)

Particle swarm optimization (PSO) is a population-based stochastic optimization algorithm that has been applied widely in many optimization areas [29-31]. PSO is inspired by the social behaviors of animals like fish schooling and bird flocking [29]. The particle swarm does not use selection. It means that all population members survive from the beginning until the end [32]. In the PSO, a swarm of interacting particles moves in an n -dimensional search space of the problem's possible solution. Four elements that are a position \vec{x}_i , a velocity \vec{v}_i , the best previous (local) position \vec{p}_i and the best global position \vec{g}_i represent a particle in the swarm. Some generations are generated to update the particle's positions and velocities. The particles explore the promising domain to find the best solutions, which spread throughout the swarm. The parameter adaptations are given by:

$$\vec{x}_i^q(t+1) = \vec{x}_i^q(t) + \vec{v}_i^q(t+1) \quad (7)$$

$$\vec{v}_i^q(t+1) = \varphi \vec{v}_i^q(t) + c_1 \cdot r_1 \cdot (\vec{p}_i^q(t) - \vec{x}_i^q(t)) + c_2 \cdot r_2 \cdot (\vec{g}_i^q(t) - \vec{x}_i^q(t)) \quad (8)$$

Where

$$\begin{aligned} \vec{p}_i^q &= [\vec{p}_1^q \quad \dots \quad \vec{p}_k^q] \\ \vec{g}_i^q &= [\vec{g}_1^q \quad \dots \quad \vec{g}_k^q] \\ i &= 1, \dots, k \\ q &= 1, \dots, d \end{aligned}$$

In the above equations, \vec{p}_i^q denotes the best previous (local) position and \vec{g}_i^q denotes the best global position. Moreover, t represents the generation, k denotes the number of the particles in the swarm, d denotes the number of dimensions, φ is inertia weight, and c_1 and c_2 are acceleration constants which are weighted by r_1 and r_2 .

2.3. PSO with Wavelet Mutation

PSO typically converges in the early stage of the searching process. This indicates that PSO tends to be trapped in the local optima. This shortcoming may influence the performance of the myoelectric finger classification. One of the solutions of the local optima is by injecting a wavelet function inside the PSO. The wavelet mutates the swarm particle in small probability to create a possibility for the swarm particle to get out from the local optima.

The wavelet mutation in PSO was proposed by Ling et al. [29]. A mutation chance is driven by a mutation probability $p_m \in [0, 1]$. If $x_i(t)$ is selected to be mutated then a new position is given by:

$$\vec{x}_i(t) = \begin{cases} \vec{x}_i(t) + \sigma (\text{par}_{max}^i - \vec{x}_i(t)) & \text{if } \sigma > 0 \\ \vec{x}_i(t) + \sigma (\vec{x}_i(t) - \text{par}_{min}^i) & \text{if } \sigma \leq 0 \end{cases} \quad (9)$$

where par_{max} and par_{min} are the maximum and minimum position, respectively. As for σ , it is the Morlet wavelet function defined by:

$$\sigma = \frac{1}{\sqrt{a}} e^{-(\frac{\alpha}{a})/2} \cos\left(5\left(\frac{\alpha}{a}\right)\right) \quad (10)$$

The variable "a" in the Morlet wavelet is determined by equation:

$$a = e^{-\ln(g)\left(1-\frac{t}{T}\right)^{\xi} + \ln(g)} \tag{11}$$

The objective of the optimization using the wavelet-PSO is to find the optimum parameters of the kernel ELM that minimize the classification error of the finger motion recognition. A 3-fold cross validation was employed to measure the error. Moreover, the fitness function of particle \vec{x} is defined by

$$f(\vec{x}) = \frac{1}{N_v} \sum_{n=1}^{N_v} E_n(\vec{x}) \tag{12}$$

where N_v is the number of cross validations, E_n is the error in each validation process.

The pseudo code of the wavelet mutation for optimizing the parameters of the kernel based ELM is presented in Figure 1.

```

Begin
  Load emg_features, classes
  t → 1 // iteration number
  Initialize x(t) // x(t) : position, a particle swarm
  Evaluate f(x) // f(x): fitness function Eq.(12)
  Initialize v // v : velocity
   $\vec{x} = x$  //  $\vec{x}$  : personal best position
   $\hat{x} = \vec{x}$  //  $\hat{x}$  : global best position
  While (condition satisfied) do
    i → i+1
    update position of particle x(i) // Eq. (7)
    update velocity v(i) // Eq. (8)
    if v(i) > vmax, v(i)=vmax end
    if v(i) < -vmax, v(i)=-vmax end

    update  $\vec{x}$  if new  $\vec{x}$  better than previous  $\vec{x}$ 
    update  $\hat{x}$  if new  $\hat{x}$  better than previous  $\hat{x}$ 

    perform wavelet mutation operation with  $p_m$ 
    Updating x(i) // Eq. (9)
    Evaluate f(x(i)) // f(x): fitness function Eq. (12)
  end
end
    
```

Figure 1. The pseudo code for PSO with wavelet mutation for optimizing the parameters of ELM

2.4. The Experimental Setup

Figure 2 shows the diagram block of the experiment conducted in this section. The EMG data was collected from eight able-bodied subjects, two females and six males aged 24-60 years old. Two EMG MyoScan™ T9503M sensors or electrodes were placed on the forearm of the subject to collect myoelectric signal from flexor pollicis longus (FPL) and flexor digitorum superficialis (FDS) muscles, as shown in Figure 3. The FlexComp Infiniti™ System from Thought Technology acquired the EMG signals with a sampling frequency of 2000 Hz and then amplified the signals with a total gain of 1000.

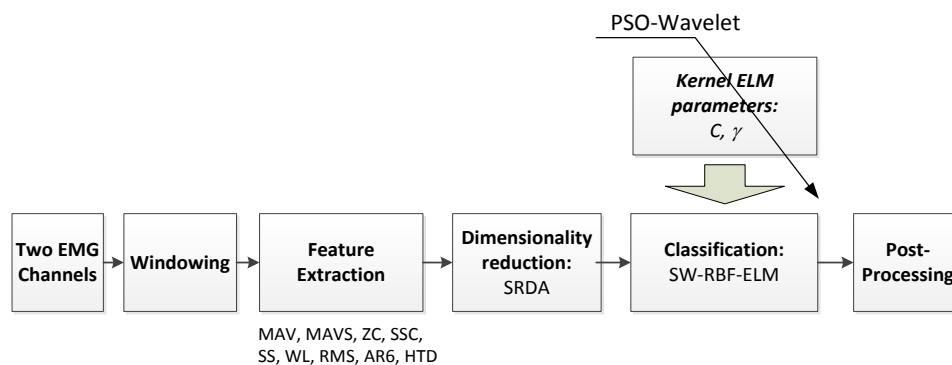


Figure 2. The experimental setup of the PSO-wavelet mutation for ELM parameters optimization



Figure 3. The placement of the electrodes

The data collection and the myoelectric pattern recognition process were conducted using the Matlab 2012b installed in the Intel Core i5 3.1 GHz desktop computer with 4 GB RAM running on Windows 7 operating system. Digitally, the EMG data is filtered using a band-pass filter which filters the signals in the frequency range between 20 and 500 Hz and a notch filter was used as well to remove the 50 Hz line interference. The collected data was down-sampled to 1000 Hz.

In this paper, the experiment considered ten classes of the individual and combined finger movements. The individual fingers consist of the flexion of thumb (T), index (I), middle (M), ring (R), and little (L) fingers, while the combined finger consists of the pinching of thumb and index fingers (T-I), thumb and middle fingers (T-M), thumb and ring fingers (T-R), thumb and little fingers (T-L), and closing the hand (HC). During the data collection, the subjects were asked to perform one finger movement for 5 s and then take a rest for 5 s. The subject repeated each movement six times. The data collected were divided into training data and testing data using 3-fold cross validation.

In the experiments, the myoelectric pattern recognition (M-PR) extracts features of waveform length (WL), slope sign changes (SSC), number of zero crossings (ZCC), sample skewness (SS), mean absolute value (MAV), mean absolute value slope (MAVS), root mean square (RMS), some parameters from Hjorth time domain parameters (HTD) and 6-order autoregressive (AR6) model parameters are included. Moreover, SRDA will project and reduce the dimension of the feature extracted. The experiment involved the steady state signal only and removed the transient state of the myoelectric signal. The majority vote with four previous states may be used to refine the classification performance.

As depicted in Figure 2, PSO mutated by wavelet is used to optimize the parameters of radial basis function extreme learning machine (RBF-ELM). This hybridization is called swarm-wavelet based RBF-ELM or SW-RBF-ELM. Some parameters should be determined at the beginning of the experiment. Two parameters of RBF-ELM are C and γ (see Equation (4)). They are in the range of $[2^{-7}, 2^{10}]$, and $[2^{-7}, 2^{10}]$ for C and γ , respectively. Then, the parameters of PSO (see Equation (7) and Equation (8)) are set as follows. Parameter c_1 and c_2 are set at 2.05, and φ is 0.9. Parameters r_1 and r_2 are random functions in the range of $[0-1]$. In addition, the optimization was done until 150 generations were completed with 30 particles in each generation. As for the parameter of the wavelet, the work in this section will vary the value of the wavelet parameters, as seen in Equation (9) and Equation (10) except for α ; it is determined randomly, according to [33]. To test the efficacy of the proposed system, some experiments will be conducted. They are:

- a. The experiment on the influence of the mutation probability p_m
- b. The experiment on the shape parameter ξ (Equation (11))
- c. The experiment on the parameter g (Equation (11))
- d. The experiment on the pattern recognition performance

3. RESULTS AND DISCUSSION

3.1. Experiment on the Able-bodied Subjects

3.1.1. Mutation Probability p_m

This section tested the influence of the mutation probability p_m to the SW-RBF-ELM performance. The p_m value is varied from 0 to 0.6. The parameter $p_m = 0$ means no wavelet mutation in the PSO. Besides, ξ is equal to 0.2 and g is equal to 10000. The experimental results are presented in Figure 4.

Figure 4 indicates that on the parameter $p_m = 0$, the fitness value of the PSO is larger than that with p_m more than 0, even when it is the largest value. The lower the fitness value, the better the system, so the PSO with wavelet mutation is better than without wavelet mutation. Therefore, the wavelet mutation can

enhance the optimization process. Moreover, in general, the figure also shows that the more the mutation probability, the less the fitness value. However, the $p_m = 0.5$ is the optimum value among the tested values.

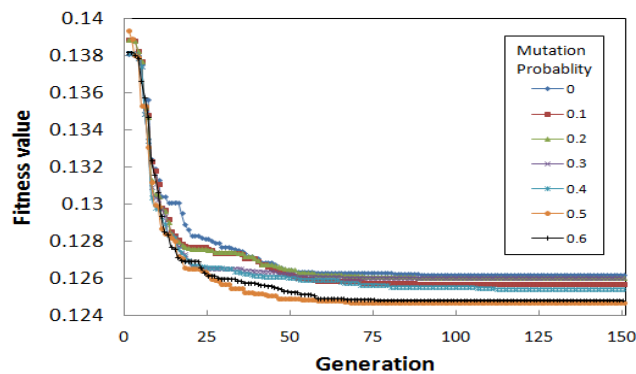


Figure 4. The fitness values for variable p_m when $\xi=0.2$ and $g=10000$ over eight subjects

Table 1 gives more information regarding the mutation probability p_m across different subjects. In Table 1, the underlined value indicates the minimum value for each subject. This table emphasizes the fact in Figure 4 that $p_m = 0.5$ is the most accurate PSO across seven subjects, out of eight. Although the accuracy of the parameter $p_m=0.6$ is the highest, it occurred in five subjects only. Another interesting fact is also found in the Table. The mutation wavelet does not provide a benefit to the optimization process on two subjects, S5 and S8 because the accuracy of the system with wavelet mutation and without is very similar. This fact shows that the wavelet mutation in the PSO does not fully ensure the improvement in the classification performance. However, there is a high probability that the optimization process will be improved. Finally, the parameter $p_m = 0.5$ is selected for the rest of the experiment.

Table 1. The accuracy of SW-RBF-ELM when $\xi=0.2$ and $g=10000$ using 3-fold cross validation

Subject	Mutation parameter (Accuracy in %)						
	0	0.1	0.2	0.3	0.4	0.5	0.6
S1	92.278	92.417	92.417	92.869	92.869	92.869	92.869
S2	98.098	98.098	98.028	98.028	98.028	<u>98.129</u>	98.098
S3	95.070	95.070	95.070	95.139	95.139	95.440	<u>95.546</u>
S4	93.240	93.238	93.238	<u>93.344</u>	<u>93.344</u>	<u>93.344</u>	93.310
S5	<u>96.731</u>	96.660	96.660	96.731	96.660	<u>96.731</u>	<u>96.731</u>
S6	97.088	97.215	97.215	97.215	97.215	<u>97.250</u>	<u>97.250</u>
S7	93.898	94.106	94.106	93.967	94.005	<u>94.038</u>	94.004
S8	<u>97.880</u>	<u>97.880</u>	<u>97.880</u>	<u>97.880</u>	<u>97.880</u>	<u>97.880</u>	<u>97.880</u>
Average	95.535	95.585	95.577	95.647	95.643	95.710	95.711

*The underlined value is the highest one

The higher value of the parameter p_m increases the searching space of the optimization in PSO. If the number of elements in a particle is small, it is preferable to increase the value of the parameter. Figure 4 implies that the higher value of p_m tends to give good optimization performance. This phenomena matches with the fact suggested by Ling et al. [29]. They recommended a higher value of p_m in between 0.5 – 0.8 for a small number of elements in a particle. In this research, the number of elements is two.

To examine the benefit of wavelet mutation statistically, an analysis of variance (ANOVA) test was conducted on the fitness value of the PSO without wavelet mutation and with wavelet mutation $p_m = 0.5$. The confidence level p is set at 0.05. ANOVA test produced $p = 3.69 \times 10^{-7}$. This result concludes that the enhancement produced by wavelet mutation is statistically significant.

3.1.2. Shape-parameter ξ

This section varied the value of shape parameter ξ in Equation (11). The shape parameter is varied among 0.1, 0.2, 0.3, 0.5, 2 and 5. The value of the parameter p_m is 0.5 following the result in section 0. Furthermore, g is equal to 10000. The experimental result is presented in Figure 5.

Figure 5 indicates that $\xi = 2$ converged earlier than the others did. The final fitness value of it is the second worst after $\xi = 5$. On the other hand, the small value of ξ gave a good optimization process. These facts imply that the high value of ξ is not a good option for optimization of SW-RBF-ELM. The best optimization process is shown when $\xi = 0.2$.

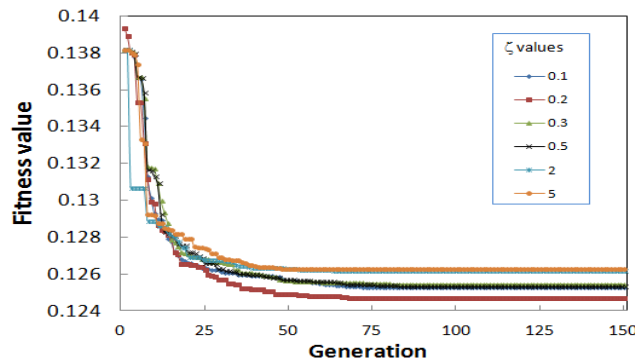


Figure 5. The fitness values for variable ξ when $p_m = 0.5$ and $g = 10000$ over eight subjects

Table 2 draws different finding from Figure 5. The table shows that SW-RBF-ELM with $\zeta = 0.1$ achieved the highest average accuracy, not $\zeta = 0.2$. Besides, it attains the highest accuracy across four subjects, which is similar to $\zeta = 0.2$. By considering the fitness value and the average accuracy performed, $\zeta = 0.2$ is selected as the optimal shape parameter.

Table 2. The accuracy of SW-RBF-ELM when $p_m=0.5$ and $g=10000$ using 3-fold cross validation

Subject	ζ (Accuracy in %)					
	0.1	0.2	0.3	0.5	2	5
S1	92.869	92.869	92.869	92.869	92.869	92.869
S2	98.028	<u>98.129</u>	98.028	98.098	98.028	98.028
S3	<u>95.893</u>	95.440	<u>95.893</u>	95.139	95.070	95.139
S4	93.310	<u>93.344</u>	93.310	<u>93.344</u>	93.240	93.309
S5	<u>96.731</u>	<u>96.731</u>	96.660	<u>96.731</u>	96.660	<u>96.731</u>
S6	<u>97.321</u>	97.250	97.250	97.250	97.215	97.123
S7	<u>94.106</u>	94.038	94.002	94.004	93.898	93.898
S8	97.845	<u>97.880</u>	<u>97.880</u>	97.845	97.845	97.845
Average	<u>95.763</u>	95.710	95.737	95.660	95.603	95.618

*The underlined value is the highest one

3.1.3. Parameter g

The previous two experiments have selected two optimum parameters, $p_m = 0.5$ and $\zeta = 0.2$. This section tries to get the optimum g parameter. The parameter g (Equation (11)) is varied from 100, 1000, 10000 and 100000. The experimental results are presented in Figure 6.

Figure 6 depicts the fitness values of four different g values. This figure indicates that the big number of g value give better accuracy than the small one. The $g = 10000$ exhibits the best performance. This fact is supported by the accuracy of SW-RBF-ELM in Table 3.

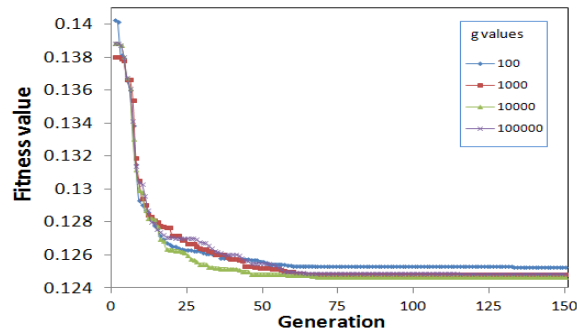


Figure 6. The fitness values for variation of the parameter g when $p_m=0.5$ and $\zeta=0.2$ over eight subjects

Although the accuracy of the parameter $g = 10000$ is the lowest one on average across eight subjects, it is the highest in the over half of the subjects, which is five out of eight. These results confirm the recommendation of Ling et al. [29]. They found that by setting the parameter g in the high value, the other parameter could be chosen by trial and error.

Table 3. The accuracy of SW-RBF-ELM when $p_m=0.5$ and $\zeta = 0.2$ using 3-fold cross validation

Subject	Parameter g (Accuracy in %)			
	100	1000	10000	100000
S1	<u>92.869</u>	<u>92.869</u>	92.834	92.800
S2	98.028	98.098	<u>98.129</u>	<u>98.129</u>
S3	95.732	<u>95.893</u>	95.440	95.546
S4	93.347	93.310	<u>93.344</u>	93.238
S5	<u>96.731</u>	96.660	<u>96.731</u>	96.731
S6	<u>97.250</u>	97.215	<u>97.250</u>	97.215
S7	94.038	94.004	94.038	<u>94.106</u>
S8	97.845	97.845	<u>97.880</u>	<u>97.880</u>
Average	95.730	95.737	95.706	95.706

*The underlined value is the highest one

3.1.4. Pattern Recognition Performance across Subjects

The previous sections conducted some experiments to determine the optimum parameters of the wavelet. They are $p_m=0.5$, $\zeta = 0.2$ and $g = 10000$. This section applied those values to SW-RBF-ELM and did analysis on the results especially on the comparison between PSO with wavelet mutation and without mutation. The result is shown in Figure 7.

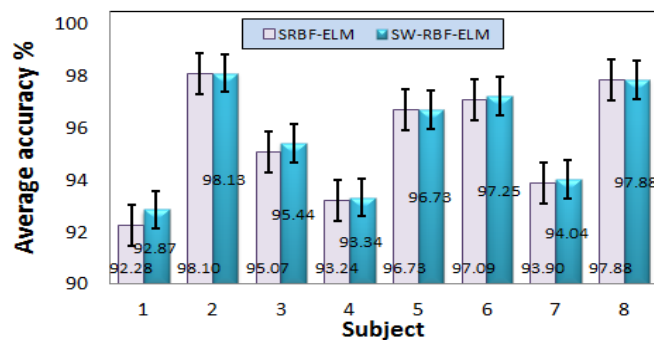


Figure 7. The accuracy of RBF-ELM with mutation and without mutation using 3-fold cross validation

Figure 7 depicts the average accuracy of radial basis function ELM (RBF-ELM) that is optimized by PSO with wavelet mutation (SW-RBF-ELM) and without mutation (SRBF-ELM). The figure indicates that SW-RBF-ELM achieves better accuracy than SRBF-ELM across seven subjects. SRBF-ELM is as accurate as SW-RBF-ELM in one subject only, which is subject S8. Therefore, the probability of the improvement of the performance using wavelet mutation is $7/8 \times 100 \% = 87.5 \%$. On average, SW-RBF-ELM attained an accuracy of 95.71 % while SRBF-ELM achieved the accuracy of 95.54 %.

3.1.5. Pattern Recognition Performance on the Movement

This section investigates the performance of both systems, SRBF-ELM and SW-RBF-ELM, in classifying finger movements. The myoelectric pattern recognition classifies ten finger movements. They include thumb (T), index (I), middle (M), ring (R), and little (L) finger movements. The other movements are thumb–index (TI), thumb–middle (TM), thumb–ring (TR), thumb–little (TL), and the hand close (HC) movements. Figure 8 presents the classification results of SRBF-ELM (without wavelet mutation) and SW-RBF-ELM (with wavelet mutation).

Figure 8 shows that SW-RBF-ELM is better than SRBF-ELM in classifying two individual finger movements (T, and M), and four combined movements (TI, TM, TR, and TL). On the other hand, SRBF-ELM is better than SW-RBF-ELM in two movements only: L and HC. As for finger movement I and R, both systems exhibited a similar performance. Overall, the SW-RBF-ELM is better than SRBF-ELM. In other words, the wavelet mutation in PSO enhances the classification performance of the pattern recognition system. However, the analysis of variance test (ANOVA) set $p = 0.05$ yields p is equal to 0.96. Therefore, the improvement is statistically not significant. This result confronts the ANOVA test result in Section 0 that proved the significance of the existence of the wavelet in PSO. These two results can be accommodated by saying that the enhancement of wavelet mutation in the optimization process is statistically significant, but it is not significant in the classification performance.

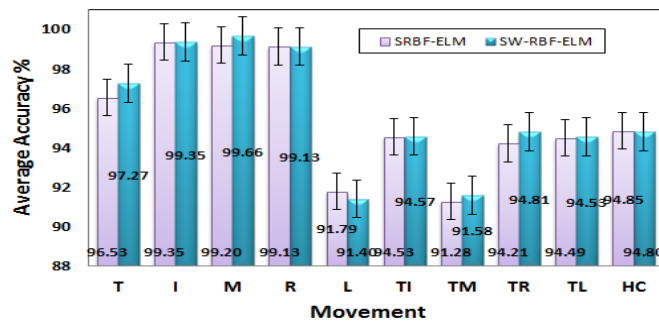


Figure 8. The accuracy of the finger movement classification across eight subjects using 3-fold cross validation

Table 4. The confusion matrix of the classification result of SW-RBF-ELM

		Classified									
		T	I	M	R	L	TI	TM	TR	TL	HC
Intended	T	97.27	0.00	0.04	0.00	0.52	0.65	0.00	0.61	0.00	0.91
	I	0.04	99.35	0.00	0.00	0.00	0.48	0.13	0.00	0.00	0.00
	M	0.00	0.00	99.66	0.00	0.00	0.00	0.34	0.00	0.00	0.00
	R	0.00	0.00	0.09	99.13	0.17	0.00	0.00	0.61	0.00	0.00
	L	0.00	1.19	0.00	1.84	91.40	2.19	0.79	0.53	1.89	0.18
	TI	0.56	1.91	0.04	0.00	1.48	94.57	1.00	0.13	0.30	0.00
	TM	0.00	0.74	0.22	0.26	1.48	4.30	91.58	1.22	0.22	0.00
	TR	1.27	0.17	0.00	0.17	0.38	0.55	1.44	94.81	0.55	0.68
	TL	0.30	0.00	0.22	0.13	2.65	1.13	0.00	1.04	94.53	0.00
	HC	0.75	0.35	0.00	0.00	1.27	0.17	1.96	0.70	0.00	94.80

Another fact found in Figure 8 is that SRBF-ELM and SW-RBF-ELM exhibit relatively bad performance in classifying all combined movements and little finger movement. The phenomena can be investigated through the confusion matrix in Table 4 and Figure 9. Table 4 shows that the SW-RBF-ELM mostly misclassified the little finger movement (L) to thumb-index motion (TI) with the accuracy of 2.19 %. Besides, the system also misclassifies L to movement R and TL. As for the combined movement, SW-RBF-ELM generally misclassified them to the individual movement they belong to. For instance, the movement

TL is mostly misclassified to the movement L by accuracy 2.65 %. Nevertheless, it did not occur in all combined movements. In addition to Table 4, Figure 9 helps the reader the get a visual graph of the confusion matrix.

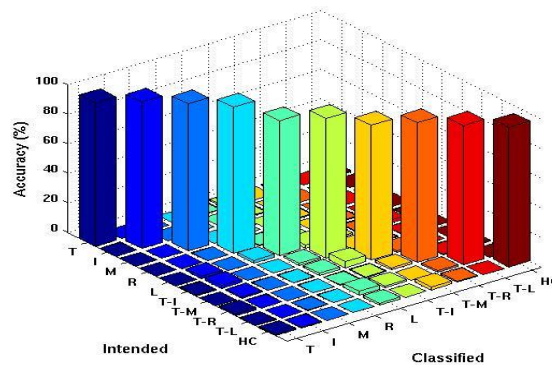


Figure 9. The confusion matrix plot of the classification result of SW-RBF-ELM

3.1.6. SW-RBF-ELM and other well-known Classifiers

In this experiment, the performance of SW-RBF-ELM is compared to other well-known classifiers such as original ELM using sigmoid activation function (Sig-ELM), SRBF-ELM, SVM, LDA, and kNN. The experimental results are depicted in Figure 10.

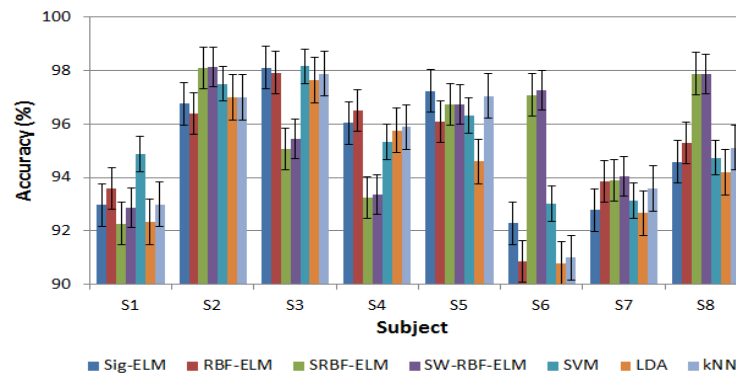


Figure 10. The accuracy of SW-RBF-ELM and other well-known classifiers for finger movement recognition using 3-fold cross validation

Figure 10 shows that SW-RBF-ELM is the most accurate classifier among seven different classifiers in recognizing ten finger movements using EMG channels across eight able-bodied subjects. This finding is supported by Table 5 that presents the average accuracy achieved by each classifier. SW-RBF-ELM achieved the accuracy of 95.71 %. Furthermore, SW-RBF-ELM achieved the highest accuracy on four subjects, while it attained the second lowest accuracy on the subject S3 and S4.

Table 5. The accuracy of various classifiers for the finger movement recognition using 3-fold cross validation

Classifier	Accuracy	
	Mean (%)	STD
Sig-ELM	95.10	2.25
RBF-ELM	95.06	2.21
SRBF-ELM	95.54	2.23
SW-RBF-ELM	95.71	2.09
SVM	95.39	1.86
LDA	94.37	2.38
kNN	95.06	2.37

The comparison of SW-RBF-ELM and the others can be made more obvious using the one-way ANOVA test, as described in Table 6. The table shows that the performance of SW-RBF-ELM and the other classifiers is not significantly different for the majority of subjects, except for subject S6. With this subject, most classifiers could not classify the ten finger movements as well as SW-RBF-ELM and SRBF-ELM. As for the subject S3, SW-RBF-ELM could not achieve a good accuracy, it is even worse than the other classifiers; more significantly it is worse than Sig-ELM, SVM, and LDA.

Table 6. P-values of the comparison of SW-RBF-ELM and the other classifiers

SW-RBF-ELM vs →	RBF-ELM	SRBF-ELM	Sig-ELM	SVM	LDA	kNN
S1	0.75	0.82	0.85	0.33	0.82	0.95
S2	0.37	0.98	0.29	0.75	0.61	0.51
S3	0.07	0.77	0.01	0.04	0.04	0.08
S4	0.34	0.98	0.38	0.55	0.47	0.45
S5	0.70	1.00	0.91	0.80	0.24	0.84
S6	0.00	0.86	0.00	0.01	0.00	0.00
S7	0.95	0.87	0.09	0.75	0.57	0.86
S8	0.31	1.00	0.03	0.14	0.15	0.17

3.2. Experiment on the Amputee Database

This section tested the performance of SW-RBF-ELM and SRBF-ELM to classify 12 finger movements on the EMG signals collected from the amputee subjects. The data collection is presented in [34]. The The finger motion classes consist of a thumb abduction (Ta), thumb flexion (Tf), index flexion (If), and middle flexion (Mf). Then ring flexion (Rf), and little flexion (Lf). Moreover, it involved thumb extension (Te), index extension (Ie), middle extension (Me), ring extension (Re), little extension (Le), little and ring flexion (LRf), index, middle and ring flexion (IMRf), and middle, ring and little flexion (IMRLf).

The myoelectric pattern recognition used in this experiments is the same as the system used in section 3 and Figure 2. For wavelet parameters, the values of the parameters are $p_m = 0.1$, $\zeta = 2$ and $g = 10000$, following the work of Anam and Al-Jumaily [35]. Figure 11 depicts the experimental results of SRBF-ELM and SW-RBF-ELM on five amputee subjects.

Figure 11 show that the SW-RBF-ELM achieved better performance than SRBF-ELM across five amputees except on amputee A5. On the amputee A5, SRBF-ELM is better than SW-RBF-ELM. Overall, SW-RBF-ELM outperformed SRBF-ELM. Probably, the optimization process in the PSO influences the superiority of SW-RBF-ELM over SRBF-ELM. Figure 12 gives clearer information about this assumption. It is shown in Figure 12 that after 30th generation, the PSO did not change the fitness value. Meanwhile, the wavelet mutation helped the PSO to avoid the local optima.

Furthermore, a statistical test on the accuracy using one-way ANOVA (p set at 0.05) was also done. The performance of the SW-RBF-ELM is significantly different from swarm ELM ($p = 0.036$). The SW-RBF-ELM achieved the average accuracy of 94.27 %, while SRBF-ELM produced the average accuracy of 92.55 %.

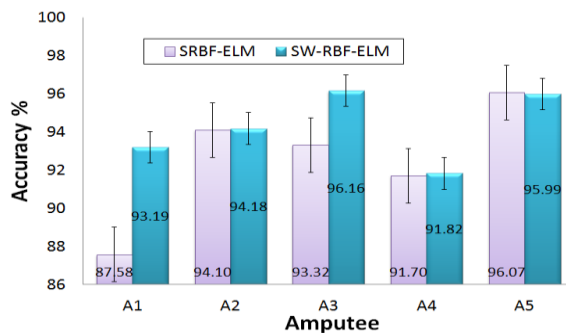


Figure 11. Average classification accuracy of three different ELM methods

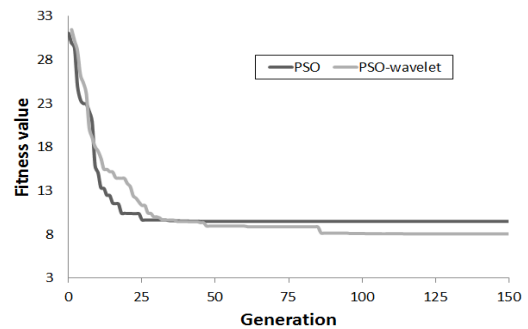


Figure 12. The fitness value of PSO and wavelet-PSO across five amputees

In addition, the classification performance in regards to the finger motion was observed. As shown in Figure 13, the SRBF-ELM was able to classify the flexion motions with the average accuracy more than

90%. In contrast, the extension motions were classified with the average accuracy less than 90%. Similarly, the SW-RBF-ELM recognized the flexion motions better than the extension motions, but with the average accuracy that is better than the SRBF-ELM.

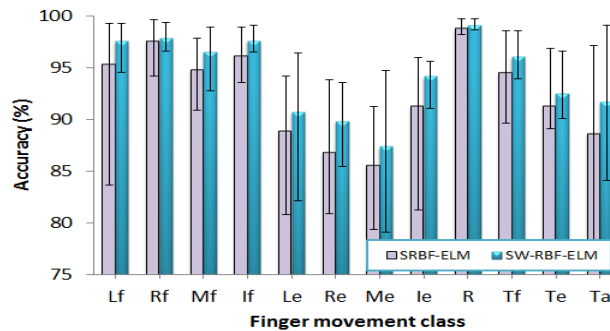


Figure 13. The accuracy of different finger motions across five amputees

The confusion matrix in Table 7 provides information about the misclassified finger motions. According to the Figure 13, SW-RBF-ELM poorly classified the Little extension (Le), Middle extension (Me), and Ring extension (Re). Me was mostly misclassified to Thumb abduction (Ta) and Middle flexion (Mf). Furthermore, the system mostly misclassified the little extension (Le) to Re and vice versa. Even though the misclassified motions were present, arguably the SW-RBF-ELM has succeeded in recognizing different finger motions on five amputee subjects with the accuracy of about 94%.

Table 7. The confusion matrix of the classification results of swarm-wavelet elm averaged for five amputees (Units: %)

Classified Task	Intended Task											
	Lf	Rf	Mf	If	Le	Re	Me	Ie	R	Tf	Te	Ta
Lf	98.2	0.5	0.1	0.0	0.0	0.0	0.1	0.3	0.0	0.4	0.0	0.3
Rf	0.8	98.4	0.6	0.0	0.0	0.0	0.1	0.0	0.0	0.0	0.0	0.0
Mf	0.2	0.7	95.8	0.3	0.3	0.8	0.9	0.6	0.0	0.0	0.3	0.2
If	0.2	0.1	0.1	97.7	0.3	0.3	0.2	0.1	0.0	0.7	0.1	0.3
Le	0.0	0.0	0.4	0.3	90.1	4.6	1.8	0.2	0.0	0.6	1.0	0.9
Re	0.1	0.0	0.7	0.2	3.8	89.8	2.1	0.2	0.0	0.6	0.7	1.7
Me	0.2	0.0	1.3	0.3	2.4	3.1	88.6	1.3	0.0	0.4	0.7	1.8
Ie	0.1	0.0	0.7	0.3	0.2	0.2	1.0	94.8	0.1	0.2	1.7	0.8
R	0.1	0.0	0.0	0.2	0.1	0.0	0.0	0.1	99.1	0.3	0.0	0.0
Tf	0.1	0.0	0.0	1.3	0.9	0.5	0.2	0.2	0.1	96.0	0.4	0.2
Te	0.0	0.1	0.3	0.1	1.2	0.9	0.7	2.0	0.0	0.7	92.8	1.1
Ta	0.0	0.0	0.3	0.4	1.2	2.3	1.1	0.3	0.0	0.2	1.2	93.0

To conclude, the proposed pattern-recognition system, which employs PSO mutated using a wavelet function to optimize the kernel based ELM (SW-RBF-ELM), was able to recognize eleven imagined finger motions on five trans-radial amputees with the high accuracy of 94.27 % even though it employed only two EMG channels. The proposed system performed better than standard PSO-ELM (SRBF-ELM).

4. DISCUSSION

The previous research [36] has shown that RBF-ELM is a promising classifier for myoelectric pattern recognition. However, the parameters of RBF-ELM should be selected properly. In this article, two kinds of PSO are employed to optimize the parameters of RBF-ELM, PSO and wavelet-PSO, that produce SRBF-ELM and SW-RBF-ELM, respectively. Both classifiers have been tested on the healthy and amputee subjects. In general, SW-RBF-ELM is better than SRBF-ELM and RBF-ELM. To show more general performance of SW-RBF-ELM, the comparison of the proposed methods and other well-knowns have been conducted, as shown in Figure 10 and Table 5. The results imply that the parameter optimization on RBF-ELM using wavelet-PSO can improve the performance of RBF-ELM. In addition, the results support the result in [22] and [23] that the optimization is needed in ELM to look for the optimized parameters for ELM.

However, these two publications optimized the number of the units in the hidden layer. Meanwhile, in this article, the optimization is conducted for radial basis function parameters.

5. CONCLUSION

This paper proposed the optimization of radial basis function extreme learning machine (RBF-ELM) using particle swarm optimization (PSO) and the hybridization of wavelet and PSO. The former is called SRBF-ELM and the later is named SW-RBF-ELM. The role of the wavelet in SW-RBF-ELM is to increase the searching space of the PSO in order to avoid the local optima that possibly occur in the PSO process. The experimental results show that the wavelet mutation improves the optimization process of the PSO. Consequently, the wavelet mutation in PSO also enhances the classification performance of the system. Both classifiers have been tested on the able-bodied subjects and amputees. On the able-bodied subjects, the accuracy of SW-RBF-ELM is 95.71 % while SRBF-ELM is 95.53 %. The improvement of wavelet mutation on the amputees is more significant than that on the able-bodied subjects. On the amputees, the SW-RBF-ELM achieved the average accuracy of 94.27 %, while SRBF-ELM produced the average accuracy of 92.55 %. The experimental results also show that SW-RBF-ELM achieved an accuracy that is better than well-known classifiers such as SVM, LDA, and kNN.

REFERENCES

- [1] G.-B. Huang, Q.-Y. Zhu, and C.-K. Siew, "Extreme learning machine: Theory and applications," *Neurocomputing*, vol. 70, pp. 489-501, 12// 2006.
- [2] Y. Wang, F. Cao, and Y. Yuan, "A study on effectiveness of extreme learning machine," *Neurocomputing*, vol. 74, pp. 2483-2490, 9// 2011.
- [3] G.-B. Huang and L. Chen, "Convex incremental extreme learning machine," *Neurocomputing*, vol. 70, pp. 3056-3062, 10// 2007.
- [4] Y. Miche, A. Sorjamaa, P. Bas, O. Simula, C. Jutten, and A. Lendasse, "OP-ELM: optimally pruned extreme learning machine," *IEEE Transactions on Neural Networks*, vol. 21, pp. 158-162, 2010.
- [5] Y. Yimin, W. Yaonan, and Y. Xiaofang, "Bidirectional Extreme Learning Machine for Regression Problem and Its Learning Effectiveness," *IEEE Transactions on Neural Networks and Learning Systems*, vol. 23, pp. 1498-1505, 2012.
- [6] J. Zhao, Z. Wang, and D. S. Park, "Online sequential extreme learning machine with forgetting mechanism," *Neurocomputing*, vol. 87, pp. 79-89, 2012.
- [7] K. Anam and A. Al-Jumaily, "A robust myoelectric pattern recognition using online sequential extreme learning machine for finger movement classification," in Engineering in Medicine and Biology Society (EMBC), 2015 37th Annual International Conference of the IEEE, 2015, pp. 7266-7269.
- [8] N. Liu and H. Wang, "Ensemble based extreme learning machine," *Signal Processing Letters, IEEE*, vol. 17, pp. 754-757, 2010.
- [9] G. Huang, S. Song, J. N. Gupta, and C. Wu, "Semi-supervised and unsupervised extreme learning machines," *IEEE Transactions on Cybernetics*, vol. 44, pp. 2405-2417, 2014.
- [10] K. Anam and A. Al-Jumaily, "A novel extreme learning machine for dimensionality reduction on finger movement classification using sEMG," in The 7th International IEEE/EMBS Conference on Neural Engineering (NER), Montpellier, France, 2015, pp. 824-827.
- [11] W. Zong, G.-B. Huang, and Y. Chen, "Weighted extreme learning machine for imbalance learning," *Neurocomputing*, vol. 101, pp. 229-242, 2/4/ 2013.
- [12] G.-B. Huang, M.-B. Li, L. Chen, and C.-K. Siew, "Incremental extreme learning machine with fully complex hidden nodes," *Neurocomputing*, vol. 71, pp. 576-583, 1// 2008.
- [13] J. Cao, Z. Lin, and G.-b. Huang, "Composite function wavelet neural networks with extreme learning machine," *Neurocomputing*, vol. 73, pp. 1405-1416, 2010.
- [14] K. Anam, R. Khushaba, and A. Al-Jumaily, "Two-channel surface electromyography for individual and combined finger movements," in Proceeding of the 35th Annual International IEEE Engineering Medicine and Biology Society Conference (EMBC), 2013, pp. 4961-4964.
- [15] A. A. Mohammed, R. Minhas, Q. Jonathan Wu, and M. A. Sid-Ahmed, "Human face recognition based on multidimensional PCA and extreme learning machine," *Pattern Recognition*, vol. 44, pp. 2588-2597, 2011.
- [16] B. P. Chacko, V. V. Krishnan, G. Raju, and P. B. Anto, "Handwritten character recognition using wavelet energy and extreme learning machine," *International Journal of Machine Learning and Cybernetics*, vol. 3, pp. 149-161, 2012.
- [17] W. Zheng, Y. Qian, and H. Lu, "Text categorization based on regularization extreme learning machine," *Neural Computing and Applications*, vol. 22, pp. 447-456, 2013/03/01 2013.
- [18] G. Wang, Y. Zhao, and D. Wang, "A protein secondary structure prediction framework based on the extreme learning machine," *Neurocomputing*, vol. 72, pp. 262-268, 2008.
- [19] S. Saraswathi, S. Sundaram, N. Sundararajan, M. Zimmermann, and M. Nilsen-Hamilton, "ICGA-PSO-ELM Approach for Accurate Multiclass Cancer Classification Resulting in Reduced Gene Sets in Which Genes Encoding

- Secreted Proteins Are Highly Represented," *IEEE/ACM Transactions on Computational Biology and Bioinformatics*, vol. 8, pp. 452-463, 2011.
- [20] A. H. Nizar, Z. Y. Dong, and Y. Wang, "Power Utility Nontechnical Loss Analysis With Extreme Learning Machine Method," *IEEE Transactions on Power Systems*, vol. 23, pp. 946-955, 2008.
- [21] K. Javed, R. Gouriveau, and N. Zerhouni, "SW-ELM: A summation wavelet extreme learning machine algorithm with a priori parameter initialization," *Neurocomputing*, vol. 123, pp. 299-307, 1/10/ 2014.
- [22] J. Cao, Z. Lin, and G.-B. Huang, "Self-adaptive evolutionary extreme learning machine," *Neural processing letters*, vol. 36, pp. 285-305, 2012.
- [23] Y. Xu and Y. Shu, "Evolutionary extreme learning machine-based on particle swarm optimization," in *Advances in Neural Networks-ISNN 2006*, ed: Springer, 2006, pp. 644-652.
- [24] W. Zong, H. Zhou, G.-B. Huang, and Z. Lin, "Face recognition based on kernelized extreme learning machine," in *Autonomous and Intelligent Systems*, ed: Springer, 2011, pp. 263-272.
- [25] G. B. Huang, H. Zhou, X. Ding, and R. Zhang, "Extreme learning machine for regression and multiclass classification," *IEEE Transactions on Systems, Man, and Cybernetics, Part B (Cybernetics)*, vol. 42, pp. 513-529., 2012.
- [26] S. Bhargava, K. N. M. U. Dr, A. Somkuwar, and Mani, "Evaluation of Noise Exclusion of Medical Images Using Hybridization of Particle Swarm Optimization and Bivariate Shrinkage Methods," *International Journal of Electrical and Computer Engineering (IJECE)*, vol. 5, pp. 421-428, 2015.
- [27] H. Shahinzadeh, T. Amirkabir University of, S. M. Nasr-Azadani, T. Amirkabir University of, N. Jannesari, and E. Sepahan Institute of Higher, "Applications of Particle Swarm Optimization Algorithm to Solving the Economic Load Dispatch of Units in Power Systems with ValvePoint Effects," *International Journal of Electrical and Computer Engineering (IJECE)*, vol. 4, pp. 858-867, 2014.
- [28] X. Yan, Q. Wu, and H. Liu, "Orthogonal particle swarm optimization algorithm and its application in circuit design," *Indonesian Journal of Electrical Engineering and Computer Science*, vol. 11, pp. 2926-2932, 2013.
- [29] S. H. Ling, H. H. Iu, K. Y. Chan, H. K. Lam, B. C. Yeung, and F. H. Leung, "Hybrid particle swarm optimization with wavelet mutation and its industrial applications," *IEEE Transactions on Systems, Man, and Cybernetics-PART B: Cybernetics*, vol. 38, pp. 743-763, 2008.
- [30] M. Dazahra, F. Elmariami, A. Belfqih, and J. Boukherouaa, "Optimal Location of SVC using Particle Swarm Optimization and Voltage Stability Indexes," *International Journal of Electrical and Computer Engineering*, vol. 6, p. 2581, 2016.
- [31] M. Sihem, B. Amar, and B. Hocine, "Optimal design of switched reluctance motor using PSO based FEM-EMC modeling," *International Journal of Electrical and Computer Engineering*, vol. 5, 2015.
- [32] J. Kennedy, "Particle swarm optimization," in *Encyclopedia of Machine Learning*, ed: Springer, 2010, pp. 760-766.
- [33] S. H. Ling, H. Iu, F. H.-F. Leung, and K. Y. Chan, "Improved hybrid particle swarm optimized wavelet neural network for modeling the development of fluid dispensing for electronic packaging," *IEEE Transactions on Industrial Electronics*, vol. 55, pp. 3447-3460, 2008.
- [34] A. H. Al-Timemy, G. Bugmann, J. Escudero, and N. Outram, "Classification of Finger Movements for the Dexterous Hand Prosthesis Control With Surface Electromyography," *IEEE Journal of Biomedical and Health Informatics*, vol. 17, pp. 608-618, 2013.
- [35] K. Anam and A. Al-Jumaily, "Swarm-wavelet based extreme learning machine for finger movement classification on transradial amputees," in *The 36th Annual International Conference of the IEEE Engineering in Medicine and Biology Society (EMBC)*, 2014, pp. 4192-4195.
- [36] K. Anam and A. Al-Jumaily, "Evaluation of extreme learning machine for classification of individual and combined finger movements using electromyography on amputees and non-amputees," *Neural Netw*, vol. 85, pp. 51-68, Jan 2017.

BIOGRAPHIES OF AUTHORS



Khairul Anam, PhD was born in Buleleng-Bali on 5th of April 1978. He received his B.Eng from Dept. of Electrical Engineering, Universitas Brawijaya in 2002, M.Eng from Institut Teknologi Sepuluh Nopember (ITS) Surabaya in 2008, and PhD from University of Technology, Sydney, Australia in 2016. He is currently a senior lecturer in Dept. Of Electrical Engineering, Universitas Jember, Indonesia. His main interest is artificial intelligence and its application in electrical engineering, biomedical engineering and other fields.



Dr Adel Al-Jumaily received his B.SC. (Eng.) in Electrical Engineering & Education, UT Bagdad and M.SC. in Engineering Management, UT-Bagdad and Ph.D. in Electrical Engineering, UTM Malaysia. Currently, he is an associate professor in the University of Technology Sydney. His research interest is in the fields of Computational Intelligence, Bio-Mechatronics Systems, Health Technology and Biomedical, Vision based cancer diagnosing, and Artificial Intelligent Systems.