



## Emission factors for PM<sub>10</sub> and PAHs from illegal burning of different types of municipal waste in households

András Hoffer<sup>1</sup>, Beatrix Jancsek-Turóczy<sup>2</sup>, Ádám Tóth<sup>2</sup>, Gyula Kiss<sup>1,2</sup>, Anca Naghiu<sup>3</sup>, Erika Andrea Levei<sup>3</sup>, Luminita Marmureanu<sup>4</sup>, Attila Machon<sup>5</sup>, András Gelencsér<sup>1,2</sup>

5

<sup>1</sup> MTA-PE Air Chemistry Research Group, 10 Egyetem Street, H-8200 Veszprém, Hungary

<sup>2</sup> Institute of Environmental Sciences, University of Pannonia, 10 Egyetem Street, H-8200 Veszprém, Hungary

<sup>3</sup> Research Institute for Analytical Instrumentation Subsidiary, National Institute for R&D for Optoelectronics, 67 Donath Str., RO-400293 Cluj-Napoca, Romania

10 <sup>4</sup> Remote Sensing Department, National Institute of R&D for Optoelectronics, 409 Atomistilor Str., Magurele, Ilfov, Romania

<sup>5</sup> Air Quality Reference Centre, Hungarian Meteorological Service, 39 Gilice Square, H-1181 Budapest, Hungary

*Correspondence to:* András Gelencsér (gelencs@almos.uni-pannon.hu)

15 **Abstract.** It is a common practice in the developing countries and in some regions of Europe that solid wastes generated in the households (e.g. plastic beverage packaging and other plastic wastes, textile wastes, fibreboards, furniture, tyres, and coloured paper waste) are burned in wood- or coal-fired stoves during the winter months. In Europe, the types and volume of municipal waste burned in households is virtually unknown because these activities are illegal and not recorded, with the exception of a few media reports or court cases. Even though  
20 particulate emissions from illegal waste burning pose an unprecedented hazard to human health due to the combination of excessive emission factors (EFs) and uncontrolled chemical composition, there is scarce information on the specific emission factors for PM<sub>10</sub> and polycyclic aromatic hydrocarbons (PAHs) in the scientific literature. In this work, controlled combustion tests were performed with 12 different types of municipal solid waste and particulate emissions were measured and collected for chemical analysis. Absolute  
25 emission factors for PM<sub>10</sub> and PAHs as well as the benzo(a)pyrene toxicity equivalent of the latter are reported for the first time for the indoor combustion of 12 common types of municipal solid waste that are frequently burned in households worldwide.

### 1 Introduction

30 In developing countries more than three billion people use solid fuels (wood, coal or agricultural waste) as the main source of household energy (Anenberg et al., 2013), the latter is extensively used in India (Saud et al., 2011). It is well known that fossil fuel combustion and biomass burning are the two most important sources of fine particulate matter in the atmosphere (Simoneit et al., 2002). Karagulian et al. (2015) estimated that domestic fuel burning (wood, coal and gas) might contribute up to 32 % of PM<sub>2.5</sub> emissions, and up to 45 % of PM<sub>10</sub> emissions in Central and Eastern Europe (globally 20 % and 15 %, respectively). In Europe solid fuels (primarily  
35 wood but in some countries also coal) are extensively used for home heating. Residential wood combustion was found to be the main emission source of fine particles all over Europe in winter (Tissari et al., 2008; Puxbaum et



al., 2007; Gelencsér et al., 2007; Marmureanu et al., 2020). Emissions from wood burning were estimated to contribute to about 30 % of the  $PM_{2.5}$  fraction in Portugal (Goncalves et al., 2012). In Lombardia somewhat lower contributions (5–25 % to  $PM_{10}$ ) were estimated (Pastorello et al., 2011), even in the city of Milan  
40 (Piazzalunga et al., 2011). Based on recent studies fine particles from wood combustion may cause severe health effects such as lung cancer, chronic lung and heart diseases (Rafael et al., 2015; Bai et al., 2015), contribute to visibility reduction (Pipal and Satsangi, 2015), and even modify synoptic conditions (Tiwari et al., 2015).  
On top of the significant emissions from the burning of solid fuels in households there is another existing yet largely unknown source of atmospheric pollution, the illegal burning of municipal solid waste in households in  
45 several countries of the world, even in Europe. In Hungary, two independent polls have recently revealed that 2–10 % of the population burn their wastes in stoves on a regular basis (Kantar Hoffman LTD., 2017; Századvég Foundation, 2018). The major types of waste burned were treated wood (furniture, OSB, hardboard, painted wood, plywood), clothes, plastics, tyres, and used oil. In many villages in Romania the burning of household waste is an everyday practice due to the lack of organised waste collection system. People who heat their homes  
50 with wood- or coal-fired stoves usually also burn plastics, tyres, clothes, treated wood, and virtually all types of combustible waste (Autogreen, 2010). Burning any type of waste poses excessive risks to the health of people living in those areas since a plethora of toxic, carcinogenic or mutagenic compounds are emitted in immense quantities compared to the burning of authorised solid fuels such as dry fuel wood or high-quality coal. Since burning any kinds of municipal waste in households is strictly prohibited all over Europe, understandably such  
55 emissions are neither specified nor regulated. Being an illegal activity, even its magnitude is mostly unknown apart from a few public reports of NGOs, media coverages, and documented court cases. More interestingly, there has been no single systematic study on the EFs for burning abundant types of solid waste in households in the scientific literature. There are only a small number of scientific papers on the burning of different types of (mostly plastic) waste with the specific focus of finding organic tracers for their tracking in atmospheric  
60 particulate matter. This is surprising in the light of the fact that in developing countries solid waste burning is a known and important source of particulate pollution. Among, there are only a handful of studies that report EFs of  $PM_{2.5}$  for the open burning of municipal mixed solid waste, in the order of  $10 \text{ g kg}^{-1}$  (Christian et al., 2010; Park et al., 2013; Jayarathne et al., 2018). Polycyclic aromatic hydrocarbons (PAHs) are among the most hazardous combustion products due to their carcinogenic and mutagenic nature. Among them 5-ring PAHs such  
65 as benzo(a)pyrene, benzofluoranthenes, dibenzo(a,h)anthracene are known as highly carcinogenic compounds. The EFs of PAHs may vary for different waste types, but such data are scarcely available in the scientific literature though absolute EFs would be essential to assess the impact of residential waste burning on air quality. To the best of our knowledge there has been only a single study reporting  $PM_{2.5}$  and PAHs emission factors for co-combustion of PE and PET waste with beech logs in a commercial boiler (Tomsej et al., 2018). In this study  
70 EFs for total PAH and  $PM_{10}$  were determined for 12 waste types and compared to those of wood burning

## 2 Material and methods

### 2.1 Waste samples for combustion tests

The types of solid waste specimens for the combustion tests were selected based on their abundance in households and available information on illegal waste burning practices in Hungary. Polyethylene terephthalate



75 (PET), Polystyrene (PS), Polypropylene (PP), Polyethylene (PE), Polyvinyl chloride (PVC) Polyurethane (PU), Acrylonitrile Butadiene Styrene (ABS), tyre (TR), Oriented Strand Board (OSB), laminated Melamine Low-Density Fibreboard (LDF), rag (RAG), paper (PAP), and firewood (WOOD) were selected for waste combustion tests (Figure 1).

80 **Figure 1 Solid waste specimens prepared for combustion tests.**

The PET waste samples were prepared from beverage plastic bottles (volume 1.5 and 2 L) without cap and label. The PS waste samples were hard cups/pots of dairy products (yoghurt and pudding) without aluminium foil cap, and pieces of expanded polystyrene (EPS) insulation board (80 mm × ~100 mm × ~100 mm). The hard and expanded PS waste sample specimens were burned separately. The PP waste sample specimens were the mixture  
85 of plastic cups/pots of dairy products (sour cream and pudding) without paper labels and aluminium foils and quartered plastic tray of meat. The PE waste specimens were prepared from the mixture of high and low density polyethylene (HDPE and LDPE). The HDPE and LDPE fractions consisted of plastic caps of beverage bottles and pieces of various foils and plastic bags, respectively. The PVC waste samples consisted of soft packaging, small pieces of vinyl flooring, and hard plastic water pipe. The PU waste samples consisted of pieces of packing  
90 sponge (average size: 120 mm × 100 mm × 15 mm). The ABS samples were shredded pieces of stands of computer monitors (average size: 40 mm × 40 mm × 20 mm). The OSB samples consisted of slices of OSB material of different brands (average size: 120 mm × 100 mm × 20 mm). The LDF (fibreboard) samples were pieces (average size: 130 mm × 100 mm × 20 mm) of different fibreboards including coloured laminated coating and plastic border. The tyre (TR) sample specimens consisted of pieces of a new and old tyre of a van and a  
95 passenger car, respectively (average size: 80 mm × 40 mm × 15 mm). The textile (RAG) samples consisted of a mixture of cotton, polyester, and polyamide fabrics from different clothes. Ball-shaped specimens (average weight: ~70 g) of two types of paper (PAP) samples (colourful glossy coated paper and uncoated paper from advertising flyers and newspaper) were burned separately. The fuel wood (WOOD) samples consisted of pieces  
100 of logs (average weight: ~130 g) of Turkey oak (*Quercus cerris*) and black locust (*Robinia pseudoacacia*). All sample specimens were weighted with an analytical balance before the combustion tests. Authorisation for conducting controlled waste burning tests was granted by the Department of Environmental Protection and Nature Conversation of Veszprém District.

**2.2 Experimental conditions of the combustion tests**

Combustion tests were carried out in a commercially available cast iron stove (type: Servant S114, heating  
105 power: 5 kW). The stove was heated up with smouldering charcoal for ~1 hour prior to the start of combustion tests which produced very low particulate emission baseline throughout the duration of the measurements. During each combustion test 1–10 aliquots of solid waste were burned depending on the emission characteristics of the given waste type. The mass of each sample aliquot was measured with an analytical balance and was  
110 recorded. The air supply ratio of the stove could be set to low or high. Each type of waste (except paper) was burned at high, combined and low excess of air supply ratios resulting in different temperatures and conditions inside the oven. The temperature of flue gas was measured before and after each measurement by a K-type thermocouple thermometer (maximum temperature 1000 °C; Testo 925) in the stack 11 cm above the exhaust opening of the stove, respectively. Between the different sample runs the stove and the stack were heated up to



115 above 700 °C for a minimum of 10 minutes to minimise cross-contamination between combustion tests with  
different waste types. The temperature of the flue gas served as an indicator for the experimental conditions of  
each combustion test run. The temperature values of the flue gas during the experiments were stable as the mean  
temperature values were 299 °C (SD: 11 °C) and 233 °C (SD: 10 °C) at high and low air supply ratio,  
respectively (see Fig. S1).

120 The mixing ratios of CO<sub>2</sub> and O<sub>2</sub> in the flue gas were measured with a CO<sub>2</sub>-O<sub>2</sub> analyser (Servomex) at the end of  
the stack. At the end of the stack a small amount of the flue gas was introduced through a brass tubing (ø 5 mm)  
into a dilution unit of a volume of 80 L and was diluted with ambient air. The concentration of CO<sub>2</sub> in the diluted  
flue gas was also monitored with a SensAir CO<sub>2</sub> analyser at the inlet of the filter sampling head. The dilution  
ratio was determined from the ratio of the measured concentrations of CO<sub>2</sub> at the end of the stack and in the  
125 dilution unit (taking into account the ambient CO<sub>2</sub> concentration as well). The mean dilution ratio was about 81.2  
(SD: 12) (see Fig. S2) which is independent of the air supply ratios but may depend on the progress of the  
burning process.

Figure 2 shows the variation of the CO<sub>2</sub> and O<sub>2</sub> mixing ratios at the end of the stack and the CO<sub>2</sub> mixing ratio in  
the diluted flue gas for a PS sample. Each peak corresponds to the burning of a single aliquot of the solid waste.  
The collections of each PM<sub>10</sub> aerosol sample were started after reaching stable baselines of CO<sub>2</sub> and O<sub>2</sub>  
130 concentration values and were finished after the return of stable baselines at the end of combustion of all aliquots  
of solid wastes.

**Figure 2 Example (PS-F9 sample) for the variations of the measured CO<sub>2</sub> and O<sub>2</sub> mixing ratios at the end of the stack  
and the CO<sub>2</sub> mixing ratio in the diluted flue gas during combustions tests.**

135 PM<sub>10</sub> aerosol samples were collected on quartz filters of 150 mm in diameter (Advantec QR-100 quartz fiber,  
binder free) with a high-volume aerosol sampler (flow rate 32 m<sup>3</sup> h<sup>-1</sup>; Kalman System Co., Hungary) at the  
dilution unit. Blank samples were also collected for each waste type. The quartz filters were conditioned at a  
temperature of 20 ± 1 °C and relative humidity (RH) of 45–50 % for three days and were weighed in an isolated  
weighing room before and after the aerosol samplings according to the European standard (MSZ EN 12341:  
140 2014). The parameters were measured and collected by a data acquisition system. The weighted filters were  
stored in glass petri dishes (preheated at 450 °C) prior to sampling, whereas the exposed filters were stored in the  
freezer in glass petri dishes wrapped into aluminium foil until conditioning and measurements.

Table S1 lists the key parameters of the combustion tests, including the type and mass of sample specimens, the  
air supply settings, the number of test burns (by air supply settings), and the measured blank corrected PM<sub>10</sub>  
145 mass on each filter. The mass of the waste sample specimens burned was optimised in preliminary tests to yield  
PM<sub>10</sub> concentrations of about the same magnitude in each combustion test. Since different waste types yielded  
vastly different particulate emissions upon burning (e.g. PS, PP, PE, PVC, PU, ABS, and TR were superemitters  
compared to PET, OSB, LDF, RAG, PAP and WOOD), this step was necessary to avoid massive overloading of  
the filters and the measuring instrumentation. Thus the measurements were comparable and the measured mass  
150 of PM<sub>10</sub> on filters was kept in the range of 5.4 mg and 37.2 mg for all combustion tests.

### 2.3 Analysis of polycyclic aromatic hydrocarbons in the filter samples

The amount of PAHs in the filter samples was determined by analysing a filter spot with a diameter of 1.4 cm.  
First PAHs were extracted with 4.5 mL hexane in an ultrasonic bath for 15 minutes then the extract was filtered



through ashless quantitative (Grade 44, Whatman, UK) filter paper and cleaned on 0.5 g Florisil adsorbent. The  
155 cleaned extract was gently evaporated to dryness and re-dissolved in 1.0 mL acetonitrile. The concentration of  
15 PAHs out of the 16 EPA priority pollutant PAHs was determined in the final aliquot by HPLC (200 Series,  
Perkin Elmer, Shelton, CT, USA) on a Inertsil ODS-P 5 $\mu$ m, 4,6x150mm (GL Sciences Inc. Tokyo, Japan)  
column by using water-acetonitrile binary gradient elution and time-programmed fluorescence detection.  
In the majority of the samples naphthalene, acenaphthene and fluorene were not detected as a consequence of  
160 their volatility and the elevated temperature of the sampling train. Therefore total PAH concentrations are given  
in this study for 12 PAHs starting from 3-ring phenanthrene to 6-ring indeno(1,2,3-cd) pyrene. The extraction  
efficiency was tested by sequential extraction of the same filter spots and it was found that >96 % of 3-6 ring  
PAHs were extracted in the first round by applying the method described above. Recovery of PAHs from the  
extract was also studied by performing the clean-up procedure on diluted PAH standard solutions. Average  
165 recovery of 98 % (SD=8.9 %) was obtained for the 12 PAHs investigated in this study. The analytical results  
were corrected for both extraction efficiency and recovery of the sample preparation.

### 3 Results and discussion

#### 3.1 Emission factors for PM<sub>10</sub> from waste burning

The PM<sub>10</sub> EFs of the fuel wood and different solid wastes were found to be highly variable (from ~2.1 to ~81.5  
170 mg g<sup>-1</sup>), the lowest values being representative for the wood burning. In the literature, the PM<sub>2.5</sub> EF of wood  
burning in traditional woodstoves varies between ~2.8 and ~13.3 mg g<sup>-1</sup>, whereas the PM<sub>10</sub> EF from a chimney-  
type (eco-labelled) woodstove is smaller (~1.1–2.9 mg g<sup>-1</sup>, Querol et al., 2016). Kistler et al., (2012) investigated  
the PM<sub>10</sub> EF of 12 Central European wood types from a chimney-type wood stove and found that it varied  
between 0.3 and 3.6 mg g<sup>-1</sup>. The values for turkey oak and black locust were 1.0 and 1.1 mg g<sup>-1</sup>, respectively.  
175 For the burning of oak logs in two different stoves Schmidl et al., (2011) reported PM<sub>10</sub> EF of 1.2–1.4 mg g<sup>-1</sup>. In  
our measurements the PM<sub>10</sub> EF from the burning of mixed turkey oak and black locust varied between 1.3 and  
3.2 (on average 2.2 mg g<sup>-1</sup>), indicating that the obtained EFs agree quite well with those reported in recent  
studies.

Compared to the EFs of burning plastics, the PM<sub>10</sub> EFs of burning wood-based materials were found to be  
180 largely similar to each other, though the burning of OSB and LDF (both contain glue, the LDF surface coating  
and edge tape as well) release twice as much PM<sub>10</sub> (~3.2 mg g<sup>-1</sup> for LDF, and 5.2 mg g<sup>-1</sup> for OSB) into the  
atmosphere as dry firewood under similar burning conditions (Fig. 3).

**Figure 3 PM<sub>10</sub> emission factors for burning of different waste types relative to the burning of dry fuel wood with a  
185 fixed experimental setup.**

The EF of burning rag is between the EF of PET and wood-based materials. This is not surprising as on average  
46 % of the weight of the burned textile was cotton and 43 % was PET-based material. The EF for PET (on  
average 11 mg g<sup>-1</sup>) is roughly five times higher than that of fuel wood. The only available EF reported for PET  
co-combustion in a boiler (though co-firing with beech log and in a different combustion unit of significantly  
190 higher nominal power) has been 5.8 ± 0.5 mg g<sup>-1</sup> (Tomsej et al., 2018), quite in agreement with our results. Our  
findings indicate that the burning of a given mass of PE and/or PU release on average 1 order of magnitude more  
PM<sub>10</sub> into the atmosphere than wood burning. The combustion of PP, tyre and PVC is even more polluting as 16



times more  $PM_{10}$  is released into the atmosphere when burned under similar conditions. Somewhat surprisingly, our results also agree well with the few available EFs (for  $PM_{2.5}$ ) for the open air burning of mixed (presumably  
195 mostly plastic) waste reported in the literature ( $10.5$  and  $7.37$   $mg\ g^{-1}$ ) (Christian et al., 2010 and Jayarathne et al., 2018, respectively). The tyres already contain soot which might contribute to the increased  $PM_{10}$  emission of burning. The styrene containing materials yielded the highest EF among the investigated components. The  $PM_{10}$  EF for the burning of polystyrene was on average  $53.1$   $mg\ g^{-1}$  and that of the expanded polystyrene was even higher ( $81.5$   $mg\ g^{-1}$ ). On average the highest  $PM_{10}$  EF was obtained for the copolymer of styrene with butadiene  
200 and acetonitrile (ABS). The absolute EFs for all waste types are summarised in Table 1.

**Table 1 The absolute emission factors for  $PM_{10}$  from waste burning (in the unit of  $mg\ g^{-1}$ ).**

### 3.2 Emission factors for total PAHs from waste burning

The EFs of total PAHs (sum of 12 EPA priority pollutant PAHs from 3-ring phenanthrene to 6-ring  
205 indeno(1,2,3-cd)pyrene) during the combustion of different waste types were determined (Table 2). Both wood and wood-based waste types were characterised by EFs below  $5$   $mg\ kg^{-1}$ . The lowest EF was obtained for wood followed by paper, LDF and OSB. At least an order of magnitude higher EFs were measured for the other waste types investigated in this study. The average values covered a wide range from  $15$   $mg\ kg^{-1}$  for rag to  $257$   $mg\ kg^{-1}$  for ABS. The average total PAH EFs were similar for rag, PE, tyre and PET while it was higher for PVC, PU and PP but remained under  $100$   $mg\ kg^{-1}$  for all of these waste types. Tomsej and co-workers (2018) reported  
210 EFs for PE and PET co-combustion in a wood-fired boiler as being  $4.5 \pm 0.7$   $mg\ kg^{-1}$  and  $10 \pm 2.4$   $mg\ kg^{-1}$ , respectively, which agree relatively well with our results ( $22$  and  $32$   $mg\ kg^{-1}$ , respectively). The highest EFs were measured during the combustion of PS and ABS exceeding  $100$   $mg\ kg^{-1}$ . The relatively high SD values are the consequence of varying conditions applied during the burning experiments as described in section 2.2.

**Table 2 Absolute emission factors of total PAHs for different waste types ( $mg\ PAHs\ kg^{-1}$  fuel).**

In Figure 4 the EFs for total PAHs are shown for different waste types relative to wood burning. It is clearly visible that even the combustion of wood-based waste types (paper, LDF, OSB) generated considerably more (by  
220 a factor of 3–8) PAHs than the burning of wood. The relative PAH emissions increased by more than a factor of 50 in case of burning rag, PE, tyre and PET, and were well over 100 for PVC, PU, PP, PS and ABS. These extreme emission factors underline the severe hazard associated with the illegal burning of solid wastes in households.

**Figure 4 Emission factors of total PAHs for different waste types relative to the burning of dry fuel wood with a fixed experimental setup.**

From the  $PM_{10}$  mass collected and the amount of total PAHs determined on the filter the PAH content of the  
225  $PM_{10}$  fraction generated from each combustion experiment was calculated. The lowest mean PAH content of the  $PM_{10}$  aerosol was obtained for wood burning ( $0.16$   $\mu g$  total PAH in  $1$   $mg\ PM_{10}$  aerosol) followed by the wood-based wastes OSB ( $0.52$   $\mu g\ mg^{-1}$ ), paper ( $0.53$   $\mu g\ mg^{-1}$ ) and LDF ( $0.53$   $\mu g\ mg^{-1}$ ). For the other waste types the mean PAH content increased from  $0.70$   $\mu g\ mg^{-1}$  (tyre) through  $1.0$   $\mu g\ mg^{-1}$  (PE),  $1.4$   $\mu g\ mg^{-1}$  (PVC),  $1.8$   $\mu g\ mg^{-1}$  (rag) to  $2.2$   $\mu g\ mg^{-1}$  (PS). The highest PAH content was observed when burning PET ( $3.0$   $\mu g\ mg^{-1}$ ), PU ( $3.0$   $\mu g\ mg^{-1}$ ), ABS ( $3.1$   $\mu g\ mg^{-1}$ ) and PP ( $3.2$   $\mu g\ mg^{-1}$ ). It is clearly visible that the reactive share of PAHs in



PM<sub>10</sub> emitted is typically an order of magnitude higher in plastic combustion as compared to wood burning. The relatively high PM<sub>10</sub> but low PAH emission factors of tyre combustion (as shown in Tables 1 and 2) can be explained by the presence of inorganic components in the material of tyres (e.g. inorganic fillers).

It is important to note that the toxicity of PAHs varies from compound to compound. Among the 16 EPA priority pollutant PAHs five-ring compounds such as benzo(a)pyrene, dibenzo(a,h)anthracene, benzo(a)fluoranthene, the 4-ring benzo(a)anthracene and the 6-ring indeno(1,2,3-cd)pyrene were found to be the most carcinogenic compounds. In order to compare the toxicity of different samples the toxic equivalency factors of PAHs are generally used. In this scale benzo(a)pyrene (BaP) has a value of 1 and the toxicity of the other 15 EPA priority pollutant PAHs varies from 0.001 to 1 (Nisbet and LaGoy, 1992). By applying these BaP toxicity equivalency factors the overall toxicity of the PAHs emitted during wood burning and the combustion of different wastes was compared (Table 3). The EFs of total PAHs as expressed in benzo(a)pyrene toxicity equivalent covered a very wide range of more than three orders of magnitude. The burning of 1 kg wood (oak) produced PAHs with total toxicity equivalent of 4.9 µg of BaP. The combustion of the same amount of wood-based wastes led to the emission of PAHs equivalent of about 30 times more BaP. The combustion of PE, rag, tyre, PET and PU resulted in the emission of PAHs 280–760 more toxic than the PAHs released from the burning of the same amount of wood. The toxicity equivalent EFs for PE and PET reported in Table 3 (1.4 and 2.4 mg kg<sup>-1</sup>, respectively) show surprisingly good agreement with the only values available in the literature (1.1 ± 0.2 mg kg<sup>-1</sup> and 1.8 ± 0.3 mg kg<sup>-1</sup>, respectively) (Tomsej et al., 2018). Toxic PAHs in the highest amount were emitted from the combustion of PVC, PS, PP and ABS. The emission factors of total PAHs expressed in BaP toxicity equivalent were more than 3 orders of magnitude (!) higher for the combustion of these plastic wastes than the value obtained for wood burning. The very high emission of toxic PAHs from the combustion of plastic wastes as compared to wood burning may follow from the synergic combination of three factors:

- 1) On a per mass basis significantly more PM<sub>10</sub> is emitted from the combustion of plastic waste than from the burning of dry fuel wood (see Figure 3, Table 2);
- 2) PM<sub>10</sub> released from plastic waste combustion contains more PAHs per unit mass than PM<sub>10</sub> generated from wood burning;
- 3) The distributions of PAHs emitted from plastic waste burning differ markedly from that produced in wood burning. The combustion of plastic wastes results in the formation of the significantly more carcinogenic 4–6-ring compounds.

**Table 3 Comparison of the toxicity of PAHs emitted from wood burning and residential waste burning.**

#### 4 Conclusion

The PM<sub>10</sub> emission factors (EFs), total PAH emission factors and benzo(a)pyrene toxicity equivalent total PAH emission factors were determined for waste burning under controlled combustion conditions for the first time. The EF values were established for combustion of wood, paper, LDF, OSB, rag, PET, PE, PU, PP, tyre, PVC, PS and ABS which are all abundant waste types frequently burned in households and open fires in the developing countries and even in Europe. The determined PM<sub>10</sub> EF for wood burning was about 2.1 mg g<sup>-1</sup> which shows good correlation with the results of recent studies. The PM<sub>10</sub> EFs from the burning of other wood-based materials (paper, LDF and OSB) were only slightly higher, while from the combustions of rag and PET were



about five times higher than the EF of wood burning. The EFs for combustions of PE and PU were about 18 mg g<sup>-1</sup> and 22 mg g<sup>-1</sup> indicating nearly tenfold PM<sub>10</sub> emission from burning of these waste types. Even higher PM<sub>10</sub> EFs were determined during the combustion of PP, TR and PVC which varied between 33 mg g<sup>-1</sup> and 35 mg g<sup>-1</sup>.  
275 Finally, the highest PM<sub>10</sub> EF values were established for the combustion of PS and ABS which may reach 53 mg g<sup>-1</sup> and 82 mg g<sup>-1</sup>, respectively.

The total PAH emission factors varied in an even wider range. Burning of oak resulted in mean total PAH emission factor of 0.3 mg kg<sup>-1</sup>, while wood based wastes (paper, LDF and OSB) produced mean total PAH emission factors from 1.1 to 2.7 mg kg<sup>-1</sup>. Much higher total PAH emission factors were obtained for rag, tyre and plastic wastes ranging from 15 to 257 mg kg<sup>-1</sup>. These high total PAH emission factors are the consequence of the higher PM<sub>10</sub> emission factors of plastic wastes as well as the higher total PAH content of unit mass of PM<sub>10</sub> released during combustion. To compare the hazard of residential waste combustion with wood burning the total PAH EFs were converted into benzo(a)pyrene equivalent emission factors. It was found that the toxicity of PAHs emitted during the combustion of wood-based wastes (paper, LDF and OSB) was about 30 times higher  
280 and 4050 as a consequence of the different composition of PAHs emitted during the combustion of different waste types.

These results clearly show that residential waste burning (especially combustion of tyres and plastics) poses a serious hazard on human health for numerous reasons: waste combustion may produce considerably more PM<sub>10</sub> particles than wood burning, the particles contain more PAHs, and the PAHs formed during waste combustion are more carcinogenic than those released from wood burning. These findings underline the importance of concerted efforts of municipalities, authorities and NGOs to phase out the illegal burning of solid wastes in households. This would help significantly improve local air quality and reduce the number of limit exceedances of PM<sub>10</sub>/PM<sub>2.5</sub>. But more importantly, the health risks associated with air pollution would be reduced  
290 disproportionately more than would follow from the reduction in PM<sub>10</sub>/PM<sub>2.5</sub> concentrations due to the extremely hazardous composition of particulate matter emitted during the combustion of wastes in households.

*Data availability.* Data used in this study are available from the first author upon request (hoffera@almos.uni-pannon.hu).  
300

*Author contributions.* AH, BJT and ÁT collected the aerosol samples. GYK, AN, EAL and AM performed and/or coordinated the analytical measurements. BJT, AH, GYK, LM and AG were involved in the scientific interpretation and discussion of the results as well as in manuscript preparation. All co-authors commented on the paper.  
305

*Competing interests.* The authors declare that they have no conflict of interest.

*Acknowledgements.* This work was supported by the “Analysing the effect of residential solid waste burning on ambient air quality in Central and Eastern Europe and potential mitigation measures” (No 07.027737/2018/788206/SER/ENV.C.3) and the GINOP-2.3.2-15-2016-00055 projects, and the János Bolyai Research Scholarship of the Hungarian Academy of Sciences.  
310





## References

- Anenberg, S.C., Balakrishnan, K., Jetter, J., Masera, O., Mehta, S., Moss, J., Ramanathan, V.: Cleaner cooking solutions to achieve health, climate, and economic cobenefits, *Environ. Sci. Technol.*, 47, 3944–3952, 315 <https://doi.org/10.1021/es304942e>, 2013.
- Autogreen: <https://www.autogreen.ro/mediu/poluare-la-sate/>, last access: 30 June 2020.
- Bai, Y., Brugha, R.E., Jacobs, L., Grigg, J., Nawrot, T.S., Nemery, B.: Carbon loading in airway macrophages as a biomarker for individual exposure to particulate matter air pollution—A critical review, *Environ. Int.*, 74C, 32–41, <https://doi.org/10.1016/j.envint.2014.09.010>, 2015.
- 320 Christian, T.J., Yokelson, R.J., Cárdenas, B., Molina, L.T., Engling, G., Hsu, S.C.: Trace gas and particle emissions from domestic and industrial biofuel use and garbage burning in central Mexico, *Atmos. Chem. Phys.*, 10 (2), 565–584, <https://doi.org/10.5194/acp-10-565-2010>, 2010.
- Gelencsér, A., May, B., Simpson, D., Sanchez-Ochoa, A., Kasper-Giebl, A., Puxbaum, H., Pio, C.A., Legrand, M.: Source apportionment of PM<sub>2.5</sub> organic aerosol over Europe: Primary/secondary, natural/anthropogenic, 325 and fossil/biogenic origin, *J. Geophys. Res. Atmos.*, 112, 23, doi: 10.1029/2006JD008094, 2007.
- Gonçalves, C., Alves, C., Pio, C.: Inventory of fine particulate organic compound emissions from residential wood combustion in Portugal, *Atmos. Environ.*, 50, 297–306, <https://doi.org/10.1016/j.atmosenv.2011.12.013>, 2012.
- Jayarathne, T., Stockwell, C.E., Bhave, P.V., Praveen, P.S., Rathnayake, C.M., Islam, M.R., Panday, A.K., 330 Adhikari, S., Maharjan, R., Goetz, J.D., DeCarlo, P.F., Saikawa, E., Yokelson, R.J., Stone, E.A.: Nepal Ambient Monitoring and Source Testing Experiment (NAMASTE): emissions of particulate matter from wood and dung-fueled cooking fires, garbage and crop residue burning, brick kilns, and other sources, *Atmos. Chem. Phys.*, 18, 2259–2286, <https://doi.org/10.5194/acp-18-2259-2018>, 2018.
- Han, Y., Chen, Y.J., Feng, Y.L., Song, W.H., Cao, F., Zhang, Y.L., Li, Q., Yang, X., Chen, J.M.: Different 335 formation mechanisms of PAH during wood and coal combustion under different temperatures, *Atmos. Environ.*, 222, 117084, <https://doi.org/10.1016/j.atmosenv.2019.117084>, 2019.
- Kantar Hoffmann Company:  
[https://www.levago.hu/sites/default/files/Kantar\\_Hoffmann\\_Levego\\_MCS\\_Hulladekegetes\\_2017dec.pdf](https://www.levago.hu/sites/default/files/Kantar_Hoffmann_Levego_MCS_Hulladekegetes_2017dec.pdf), last access: 2 July 2020.
- 340 Karagulian, F., Belis, C.A., Francisco, C., Dora, C., Prüss-Ustün, A.M., Bonjour, S., Rohani, H.A., Amann, M.: Contributions to cities' ambient particulate matter (PM): A systematic review of local source contributions at global level, *Atmos. Environ.*, 120, 475–483, <https://doi.org/10.1016/j.atmosenv.2015.08.087>, 2015.
- Kistler, M., Schmidl, C., Padouvas, E., Giebl, H., Lohninger, J., Ellinger, R., Bauer, H., Puxbaum, H.: Odor, gaseous and PM<sub>10</sub> emissions from small scale combustion of wood types indigenous to Central Europe, *Atmos. 345 Environ.*, 51, 86–93, <https://doi.org/10.1016/j.atmosenv.2012.01.044>, 2012.



- Mărmureanu, L., Vasilescu, J., Slowik, J., Prévôt, A.S.H., Marin, C.A., Antonescu, B., Vlachou, A., Nemuc, A., Dandocsi, A., Szidat, S.: Online Chemical Characterization and Source Identification of Summer and Winter Aerosols in Măgurele, Romania, *Atmosphere*, 11, 385, <https://doi.org/10.3390/atmos11040385>, 2020.
- Ministry of Human Capacities:  
350 <http://www.kormanyhivatal.hu/download/5/7d/14000/F%C5%B1ts%20okosan.pdf>, last access: 2 July 2020.
- Nisbet, I.C. and LaGoy, P.K.: Toxic Equivalency Factors (TEFs) for Polycyclic Aromatic Hydrocarbons (PAHs), *Regul. Toxicol. Pharmacol.*, 16(3), 290–300, [https://doi.org/10.1016/0273-2300\(92\)90009-X](https://doi.org/10.1016/0273-2300(92)90009-X), 1992.
- Ozgen, S., Caserini, S., Galante, S., Giugliano, M., Angelino, E., Marongiu, A., Hugony, F., Migliavacca, G., Morreale, C.: Emission factors from small scale appliances burning wood and pellets, *Atmos. Environ.*, 94,  
355 144–153, <https://doi.org/10.1016/j.atmosenv.2014.05.032>, 2014.
- Park, Y. K., Kim, W., Jo, Y. M.: Release of harmful air pollutants from open burning of domestic municipal solid wastes in a metropolitan area of Korea, *Aerosol Air Qual. Res.*, 13, 1365–1372, <https://doi.org/10.4209/aaqr.2012.10.0272>, 2013.
- Pastorello, C., Caserini, S., Galante, S., Dilara, P., Galletti, F.: Importance of activity data for improving the residential wood combustion emission inventory at regional level, *Atmos. Environ.*, 45, 2869–2876,  
360 <https://doi.org/10.1016/j.atmosenv.2011.02.070>, 2011.
- Piazzalunga A., Belis C., Bernardoni V., Cazzuli O., Fermo P., Valli G., Vecchi R. (2011) Estimates of wood burning contribution to PM by the macro-tracer method using tailored emission factors. *Atmospheric Environment* 45, 6642–6649.
- 365 Pipal, A.S., Gursumeeran Satsangi, P.: Study of carbonaceous species, morphology and sources of fine (PM<sub>2.5</sub>) and coarse (PM<sub>10</sub>) particles along with their climatic nature in India, *Atmos. Res.*, 154, 103–115, <https://doi.org/10.1016/j.atmosres.2014.11.007>, 2015.
- Puxbaum, H., Caseiro, A., Sánchez-Ochoa, A., Kasper-Giebl, A., Claeys, M., Gelencsér, A., Legrand, M., Preunkert, S., Pio, C.: Levoglucosan levels at background sites in Europe for assessing the impact of biomass  
370 combustion on the European aerosol background, *Journal Geophys. Res.*, 112, D008114, <https://doi.org/10.1029/2006JD008114>, 2007.
- Querol, X., Karanasiou, A., Amato, F., Vasconcelos, C., Alastuey, A., Viana, M., Moreno, T., Plana, F., Perez, N., Cabanas, M., Bartoli, R., Martinez, S., Sosa, M., Montfort, E., Celades, I., Escrig, A., Sanfelix, V., Gomar, S., Harrison, R., Holman, C., Beddows, D., Harding, M., Eleftheriadis, K., Diapouli, L., Vratolis, S., Gini, M., Bairaktari, E., Dalaina, S., Galifianakis, V., Lucarelli, F., Nava, S., Calzolari, G., Udusti, R., Becagli, S., Traversi, R., Severi, M., Borselli, S., Giannoni, M., Alves, C., Pio, C., Nunes, T., Tarelho, L., Duarte, M., Cerqueira, M., Vicente, E., Custódio, D., Pinto, H., Gianelle, V.L., Colombi, C.: Emission factors for biomass burning, *Airuse Life* 11 ENV/ES/584 Report 9, 2016.
- Rafael, S., Tarelho, L., Monteiro, A., Sá, E., Miranda, A.I., Borrego, C., Lopes, M.: Impact of forest biomass  
380 residues to the energy supply chain on regional air quality, *Sci. Total Environ.* 505C, 640–648, <https://doi.org/10.1016/j.scitotenv.2014.10.049>, 2015.



- Saud, T., Mandal, T.K., Gadi, R., Singh, D.P., Sharma, S.K., Saxena, M., Mukherjee, A.: Emission estimates of particulate matter (PM) and trace gases (SO<sub>2</sub>, NO and NO<sub>2</sub>) from biomass fuels used in rural sector of Indo-Gangetic Plain, India, *Atmos. Environ.*, 45, 5913–5923, <https://doi.org/10.1016/j.atmosenv.2011.06.031>, 2011.
- 385 Schmidl, C., Luisser, M., Padouvas, E., Lasselsberger, L., Rzaca, M., Ramirez-Santa Cruz, C., Handler, M., Peng, G., Bauer, H., Puxbaum, H.: Particulate and gaseous emissions from manually and automatically fired small scale combustion systems, *Atmos. Environ.*, 4, 7443–7454, <https://doi.org/10.1016/j.atmosenv.2011.05.006>, 2011.
- Simoneit, B.: Biomass burning—A review of organic tracers for smoke from incomplete combustion, *Appl. Geochem.*, 17, 129–162, [https://doi.org/10.1016/S0883-2927\(01\)00061-0](https://doi.org/10.1016/S0883-2927(01)00061-0), 2002.
- Survey on domestic heating and opinion on air pollution of the Hungarian population conducted by the Századvég Foundation on behalf of the Ministry of Agriculture, 2018.
- Tissari, J., Lyyränen, J., Hytönen, K., Sippula, O., Tapper, U., Frey, A., Saarnio, K., Pennanen, A.S., Hillamo, R., Salonen, R.O., Hirvonen, M.-R., Jokiniemi, J.: Fine particle and gaseous emissions from normal and smouldering wood combustion in a conventional masonry heater, *Atmos. Environ.*, 42, 7862–7873, <https://doi.org/10.1016/j.atmosenv.2008.07.019>, 2008.
- 395 Tiwari, S., Pandithurai, G., Attri, S.D., Srivastava, A.K., Soni, V.K., Bisht, D.S., Anil Kumar, V., Srivastava, M.K.: Aerosol optical properties and their relationship with meteorological parameters during wintertime in Delhi, India, *Atmos. Res.*, 153, 465–479, <https://doi.org/10.1016/j.atmosres.2014.10.003>, 2015.
- 400 Tomsej, T., Horak, J., Tomsejova, S., Krpec, K., Klanova, J., Dej, M., Hopan, F.: The impact of co-combustion of polyethylene plastics and wood in a small residential boiler on emissions of gaseous pollutants, particulate matter, PAHs and 1,3,5-triphenylbenzene, *Chemosphere*, 196, 18–24, <https://doi.org/10.1016/j.chemosphere.2017.12.127>, 2018.



405



Figure 1 Solid waste specimens prepared for combustion tests.

410


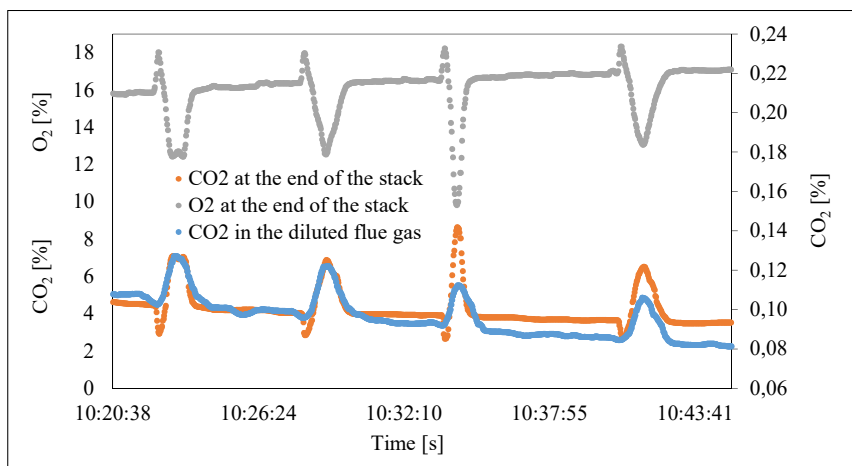


Figure 2 Example (PS-F9 sample) for the variations of the measured CO<sub>2</sub> and O<sub>2</sub> mixing ratios at the end of the stack and the CO<sub>2</sub> mixing ratio in the diluted flue gas during combustions tests.

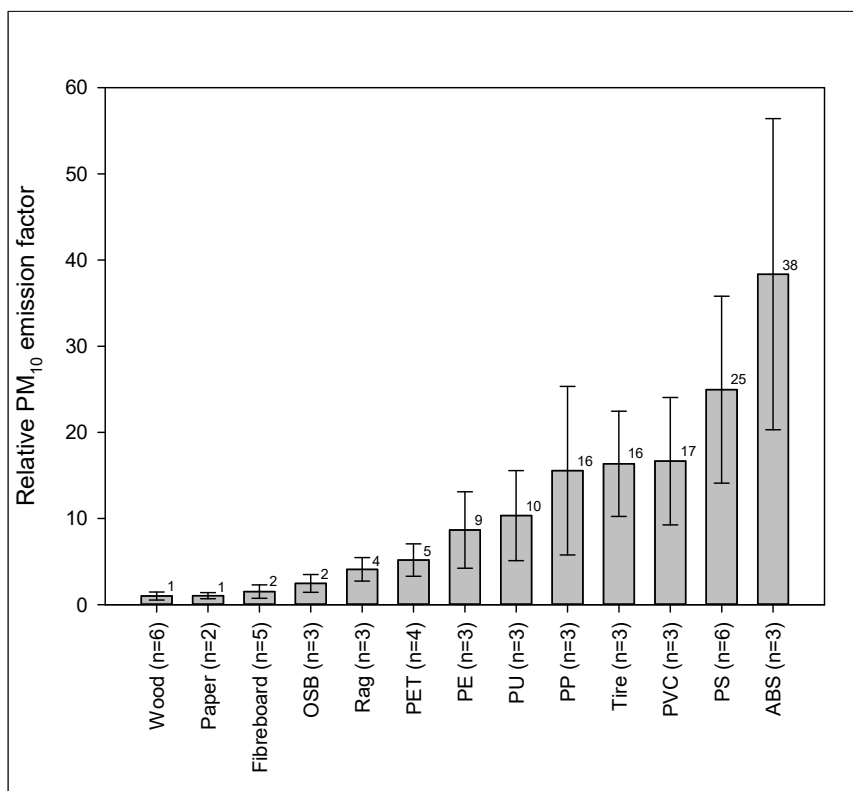

415

Figure 3 PM<sub>10</sub> emission factors for burning of different waste types relative to the burning of dry fuel wood with a fixed experimental setup.



**Table 1** The absolute emission factors for PM<sub>10</sub> from waste burning (in the unit of mg g<sup>-1</sup>).

Waste types	Mean	SD
WOOD	2.1	0.70
PAP	2.2	0.11
LDF	3.2	1.3
OSB	5.2	1.4
RAG	8.7	0.22
PET	11	1.6
PE	18	7.2
PU	22	8.4
PP	33	18
TR	35	6.0
PVC	35	10
PS	53	15
ABS	82	27


420



**Table 2 Absolute emission factors of total PAHs for different waste types (mg PAHs kg<sup>-1</sup> fuel).**

Waste types	Mean	SD
WOOD	0.34	0.19
PAP	1.2	0.83
LDF	1.7	1.2
OSB	2.7	1.4
RAG	15	17
PE	22	16
TR	25	9.1
PET	32	14
PVC	47	5.1
PU	63	27
PP	87	8.3
PS	113	60
ABS	257	103



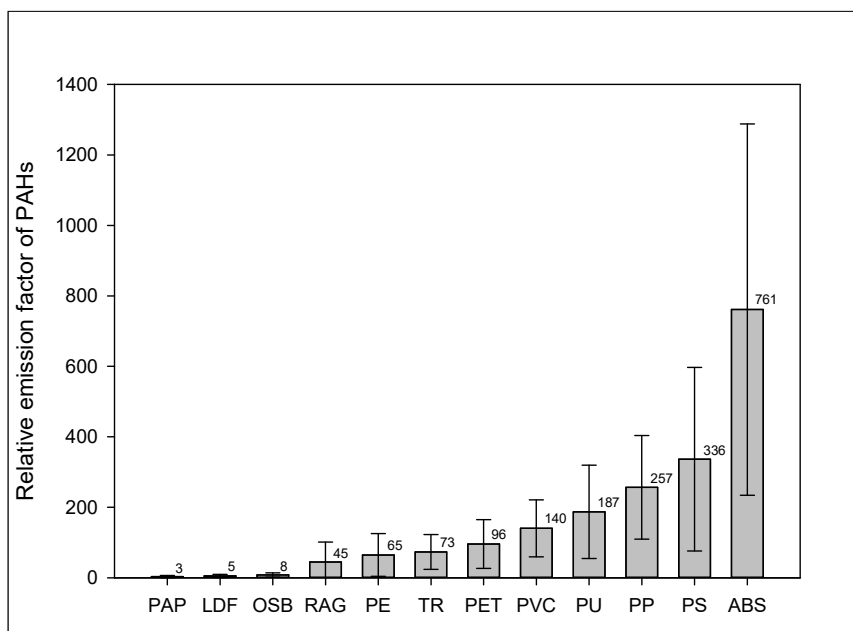

425

Figure 4 Emission factors of total PAHs for different waste types relative to the burning of dry fuel wood with a fixed experimental setup.



**Table 3 Comparison of the toxicity of PAHs emitted from wood burning and residential waste burning.**

Waste types	EF of Total PAHs expressed in BaP toxicity equivalent ( $\text{mg kg}^{-1}$ fuel)	SD ( $\text{mg kg}^{-1}$ fuel)	Relative to wood
WOOD	0.0049	0.0061	1
PAP	0.17	0.13	35
LDF	0.16	0.14	35
OSB	0.18	0.07	40
PE	1.4	1.2	280
RAG	2.1	2.1	420
TR	2.1	1.8	430
PET	2.4	1.4	490
PU	3.8	0.16	760
PVC	5.9	1.9	1200
PS	12	5.0	2300
PP	17	5.2	3400
ABS	20	12	4100

430