

# **IoT Pulse: Machine Learning-based Enterprise Health Information System to Predict Alcohol Addiction in Punjab (India) using IoT and Fog Computing**

Arwinder Dhillon<sup>1</sup>, Ashima Singh<sup>1</sup>, Harpreet Vohra<sup>2</sup>, Caroline Ellis<sup>3</sup>, Blesson Varghese<sup>4</sup> and Sukhpal Singh Gill<sup>5</sup>

<sup>1</sup>*Computer Science and Engineering Department, Thapar Institute of Engineering & Technology, Patiala, India*

<sup>2</sup>*Electronics and Communication Engineering Department, Thapar Institute of Engineering & Technology, Patiala, India*

<sup>3</sup>*Department of Anesthesia, Princess Alexandra Hospital NHS Trust, Hamstel Road, Harlow, Essex, UK*

<sup>4</sup>*School of Electronics, Electrical Engineering and Computer Science, Queen's University Belfast, UK*

<sup>5</sup>*School of Electronic Engineering and Computer Science, Queen Mary University of London, UK*

Corresponding author at: School of Electronic Engineering and Computer Science, Queen Mary University of London, London, E1 4NS, UK. Email: s.s.gill@qmul.ac.uk

# IoTPulse: Machine Learning-based Enterprise Health Information System to Predict Alcohol Addiction in Punjab (India) using IoT and Fog Computing

Arwinder Dhillon , Ashima Singh , Harpreet Vohra , Caroline Ellis , Blesson Varghese & Sukhpal Singh Gill

## Abstract

This paper proposes IoT-based an enterprise health information system called *IoTPulse* to predict alcohol addiction providing real-time data using machine-learning in fog computing environment. We used data from 300 alcohol addicts from Punjab (India) as a case study to train machine-learning models. The performance of IoTPulse is compared against existing work using various parameters including accuracy, sensitivity, specificity and precision which shows improvement of 7%, 4%, 12% and 12% respectively. Finally, IoTPulse is validated in FogBus-based real fog environment using QoS parameters including latency, network bandwidth, energy and response time which improves performance by 19.56%, 18.36%, 19.53% and 21.56% respectively.

**Keywords:** Enterprise Health Information System; Internet of Things; Alcohol Abuse; Healthcare; Machine Learning; Fog Computing; IoT; Information System

## 1. Introduction

The increasing trend of alcohol addiction is simply not a condition that affects the individual but can have huge repercussions on work culture in enterprises across the nations. The use and abuse of alcohol drugs has caused great concern as it has affected working human resources in diverse age groups, employed in different enterprises. According to the World Health Organization (WHO) informed the death of more than 3 million people due to damaging use of alcohol in 2016. It represented 1/20 deaths and approx. 5% of the global disease burden [1] [2]. Approximately, twenty six billion dollars was exhausted in 2015 in the US alone [51]. Alcohol addiction if detected well in time can be treated at early stage. However, the prolonged alcohol use could result in health hazards like abdominal disorders, leukemia, eye ailments, pancreatic cancer, chronic lung infections, dental infections, coronary heart and cardiovascular diseases [54]. Other harmful effects are related to the reproductive system, child bearing capacity, frequent miscarriages in women, and sudden infant

death syndrome [4]. Injurious health hazards and the damaging effects of alcohol are proportional to the amount of alcohol consumed with time. Moreover, excessive use of alcohol has badly affected the personal as well as professional lifestyles of working individuals in enterprises. Enterprise health information systems (EHIS) [56] are focused on exploring solutions to detect alcohol addiction with higher efficiency and accuracy at its early stage to avoid future problems and maintain a healthy work culture in enterprises [3].

Observations of alcohol consumption patterns and the correlation between the alcohol consumption and consumer's health features from real-time data, addiction in its early stages can be predicted [1] [2] [3] [4]. Early detection using such data may aid a physician's diagnosis or an expert system's judgement [5]. Although this is beneficial, the lack of frameworks that can continuously collect real-time personal data from user-devices and derive meaningful insight for accurately detecting alcohol addiction is a major challenge [71] [72]. The Internet of Things (IoT) in this context is beneficial [6] [7] [46], sensors, Radio-Frequency IDentification (RFID) chips, smart devices and microprocessors (integrated as a health monitoring device) are employed in an EHIS for collecting individual's health related data [39] [40]. The data can then be processed and used for detecting alcohol addiction using Machine Learning (ML) [8] [61]. This requires advanced connectivity of devices [75], and hence a number of health monitoring frameworks have been proposed to collect physiological information of a patient using EHIS [45] [50].

### **1.1. Motivation and Our Contributions**

Earlier, several EHIS have been proposed to utilize employees' health data/information held in EHIS to strategize employee health plans and policies in an enterprise system [71] [72] [73]. State of the art technologies like ML and IoT have not been exploited to its full potential in predicting the employees' health status [62] [63]. Moreover, the employee health data, real-time data collection and processing has not been fully addressed since it is challenging to continuously monitor an employee's health [64] [70]. Motivated by the successful applications of IoT [66] [68]

[69] in other fields of technological development integrated with the fortes of ML, an IoT based EHIS called *IoTpulse* has been proposed to predict the alcohol addiction using ML model with high accuracy. An alcohol consumer can be monitored using IoT enabled health monitoring devices. Fourteen healthcare monitoring devices such as Zig-Bee, Bluetooth etc. when equipped with IoT technologies are used to sense and pass on the employee health data to the EHIS. The collected data from health monitoring devices has been fed to ML models to predict whether the individual under study is an alcoholic or not. Further, IoTpulse is validated in a real fog environment using FogBus to test in terms of energy, latency, response time and network bandwidth as compared to existing techniques. Also, various open challenges as future directions have been highlighted that needs to be addressed while architecting IoT and ML based EHIS. The *main contributions* of this research work are:

- Propose an IoT based EHIS called *IoTpulse* for detecting alcohol addiction in employees of an enterprise.
- Implement well-known ML models such as Bayesian Network, Neural Networks and k-Nearest Neighbor (KNN) to effectively predict alcohol addiction.
- Performance of three ML models is evaluated based on various performance parameters such as recall or sensitivity, accuracy, specificity and precision.
- In our alcohol addiction case study, we classify the consumer as an addict or not based on training data collected from 300 individuals from Punjab (India).
- IoTpulse is validated in real fog environment using FogBus to test the performance in terms of QoS parameters such as energy, latency, response time and network bandwidth as compared to existing technique.

### ***1.1. Article Organization***

The remainder of the paper is organized as follows: Section 2 presents the related work. ML models are described in Section 3. Section 4 presents the IoTpulse, an EHIS. Section 5 presents prediction

mechanism for alcohol addiction. Section 6 discusses the performance evaluation of various machine-learning models. Section 7 presents the validation of IoTPulse on fog computing environment. Finally, Section 8 summarizes the paper and highlights promising future directions.

## **2. Related Works**

Alcohol is a toxic and psychoactive substance capable of producing addiction or dependence [1]. Alcoholic beverages have become a routine part of today's society [9]. The people who are employed in enterprises where alcohol frequently accompanies socialising fall prey to ill effects of alcohol consumption [11]. The list of alcoholic beverages is big and is controlled by the law of different nations [10]. Addiction is defined as a disorder, which affects the physical as well as the psychological health of a person. It is characterised by compulsive usage of toxic and psychoactive substances despite the known adverse consequences. WHO and other national health organisations conduct surveys periodically to study the behaviour of alcohol consumers and effects of alcohol on society. The epidemiologic studies have identified many different patterns and trends in alcohol consumption and its harmful effects on personal, professional and societal fronts [10]. These studies found that adolescence is the common age when addiction of alcohol or alcoholic beverages typically commences. It is a challenging task to study and find the exact and appropriate reason or cause of such addiction. By studying the behaviour of alcohol consumers at home and offices, affected areas, and relating the consequences on enterprise work culture and enterprise health policies, strategists can create effective enterprise health systems and models [12]. The advancement in artificial intelligent technologies and health informatics, various tools and techniques are adopted to examine the underlying patterns of alcohol consumption to enable a well in time prediction of alcohol addiction [34]. Early prediction is an extremely significant component in the EHISs as accuracy remains a prime aspect in assessing the overall performance of the EHISs [35]. The recent relevant studies in physiological health systems reported vitro models creating leveraging tools for predicting effects in drug discovery [13]. On the other hand, the vitro model suffers from misinformation, which mislead the prediction results [14] [15]. For example, Liver is

the most probable organ that may be damaged by the over-consumption of alcohol and researchers are exploring DILI (Drug-Induced Liver Injury) [16]. The authors work on mechanism-specific biomarkers to improve the physiological metrics [17]. Authors suggested using Neural Networks (NN) to discover DILI as their work performed with accuracy more than 85% on the data set of 198 drugs patients [18]. In other significant work, researchers were able to identify a drug addict using NN [19]. The data collection and availability of physiological data remains key concerns while working with ML models for EHIS. As the number of alcohol consumers are increasing day by day, so as the demand for alcohol addiction prediction has seen an uptrend. The researchers studying the behaviour of alcohol consumers in enterprise systems have also indicated genetics, environmental and social factors that can lead to alcohol addiction. The United Nations Research Institute for Social Development (UNRISD) survey showed that alcohol abuse correlated positively with the broken families than with poverty and scarcity of resources [20]. According to [21], urbanization and fast cultural changes are the key factors identified behind the increase in alcohol consumption. With the advancement of sensor technologies [55], IoT based devices have become a prominent solution to 24X7 health data collection. Sensors have revolutionised the real time healthcare systems [22]. RFID enabled devices integrated with medical devices can be employed to continuously screen patients and consequently can improve various e-health services deployed at hospitals or other enterprises in a cost effective manner [23]. Wireless Sensor Networks (WSN) can also be used in hospitals for real-time continuous monitoring of patients. Health and Insurance enterprises can deploy such systems for keeping a close watch on the patient and follow up for medications [24] [38].

The EHISs also use the multi-agent technology integrated with IoT environments that concentrates on using heterogeneous devices and further collaborates with multiple users [25]. A project named SAPHIRE, clinical decision support system has been developed capable of sending patients' data remotely [26]. These systems can mitigate the human-error risks [37]. Various applications of the IoT in healthcare are advantageous in remotely monitoring and analysing the health of the patient.

Researchers have developed an IoT enabled system having biomedical sensing devices with cloud storage of continuously generating data [27]. An IoT based real-time Electrocardiogram (ECG) monitoring system has also been developed to analysis the health of heart patients [28] [44]. The component architecture, implementation, component integration and various artificial intelligent algorithms are also considered in Cypress WICED IoT based technology [3]. Such architectures for healthcare-based systems has found its scope of application in smart cities and smart enterprises [28]. Another IoT based smart hospital-based framework has been proposed for remote data collection [29]. IoT based systems are used to monitor the effects of toxic and psychoactive substance on individual’s health. In [30], researchers proposed an IoT based drug interaction checker to explore hazardous consequence of alcohol. Information systems integrated with edge devices such as smartphones, laptops and tablets were utilised to explore the ill effects of overconsumption of psychoactive substance and their reactions. To improve the accuracy of such prediction systems for EHIS, researchers have implemented a distributed forecast movement approach for Healthcare applications using IoT [31]. Mario et al. [47] proposed Smartwatch Sensor Data based Prediction (SSDP) system that predicts blood alcohol content. Drunkenness of a person can be predicted using SSDP system which gathers sensor data, and NN based approach is applied to analyse the statistics. It is capable of finding the user’s intoxication level and suggesting the health consequences. With such real-life applications of IoT in enterprise health systems, IoT has come up as an excellent and realistic technology to be used for alcohol addiction prediction.

**Table 1.** Comparison of IoTPulse with existing research works

Work	EHIS	IoT	ML Model			Performance Parameters for ML Models				Fog	QoS Parameters			
			KNN	NN	BN	Accuracy	Precision	Sensitivity	Specificity		Energy	NB	Latency	Response Time
[17]			√			√								
[18]				√		√								
[19]				√	√	√	√							
[25]			√			√	√							
[27]		√			√	√	√							
[29]		√												
[31]		√			√	√								
[47]				√		√								
IoTPulse	√	√	√	√	√	√	√	√	√	√	√	√	√	√

**Abbreviations:** KNN: k-Nearest Neighbour, NN: Neural Networks and BN: Bayesian Network, EHIS: Enterprise Health Information System, IoT: Internet of Things and QoS: Quality of Service; NB: Network Bandwidth

### **2.1. Critical Analysis**

Table 1 shows the comparison of IoTPulse with previous research works. All the above-related works have presented alcohol prediction techniques using ML models without considering the computational component concurrently in a single framework, but it is very significant to incorporate computation model such as cloud or fog computing [53] to optimize the various QoS parameters in a controlled and holistic manner. None of the existing works validated against specificity and recall and only three frameworks [27] [29] [31] considered IoT devices for data collection at runtime. As per literature, there is a no existing EHIS, which considers IoT based data collection module, three important ML models (KNN, Neural Networks and Bayesian Network) simultaneously and fog computing to improve computation during predictions, which validates the proposed system IoTPulse using FogBus [41] i.e. real fog environment. The proposed EHIS, IoTPulse is validated against similar technique using four QoS parameters such as energy, latency, response time and network bandwidth. Due to this, the current alcohol prediction systems become inefficient to respond in these situations. Thus, IoTPulse uses an EHIS leveraging both ML models and integrated IoT and fog computing for optimum results.

## **3. Machine Learning Models**

Machine Learning aids to determine basic patterns and extract the required information from the large volume of data using computation and statistical process [58]. The use of machine learning models can be used for prediction of alcohol addiction to improve current EHIS [59] [60]. Further, these systems help to monitor and diagnose the other related disease using various IoT devices [28]. Based on anomaly detection, regression, clustering and classification, the existing ML techniques can categorized into four types and we used classification category in this paper to predict alcohol addiction. For classification process, three most effective ML algorithms including Bayesian Networks, KNN and Neural Networks are used [59].

### **3.1. Bayesian Networks**

A Bayesian network is a network of connections that uses statistical methods to describe



relationships of likelihood between different elements. This methodology is helpful in modelling an uncertain domain. Bayesian Networks indicates the likelihood of the occurrence of the event that arise from the previous event. e.g.  $e_1 \rightarrow e_2$  represents the likelihood of the occurrence of event  $e_2$  from event  $e_1$ . The equation for Bayesian networks is written as follows:

$$P\left(\frac{h}{e}\right) = \frac{P(h) \cdot P\left(\frac{e}{h}\right)}{P(e)} \quad (1)$$

Here,  $P\left(\frac{h}{e}\right)$  denotes the likelihood of occurrence of  $h$  given  $e$ ,  $P(h)$  is the prior probability of hypothesis.  $P\left(\frac{e}{h}\right)$  is the likelihood of occurrence of  $e$  given  $h$ .  $P(e)$  is the events prior probability.  $P(e)$  should not be equal to 0 and sometimes its value is fixed i.e.  $P(e) = 1$ . Events can recursively cause additional events in an IoT environments. A chain reaction of these events is formed in which their likelihood of occurrence depends on the event proceeding them and is given as follows:


$$e \rightarrow e_n \rightarrow (e_n - 1) \rightarrow (e_n - 2) \rightarrow \dots e_1 \rightarrow e' \quad (2)$$

The likelihood of such an occurrence can be determined by applying the Bayesian method as:

$$P\left(\frac{e_n}{e_{n-1}}\right) * P\left(\frac{e_{n-1}}{e_{n-2}}\right) * P\left(\frac{e_{n-2}}{e_{n-3}}\right) \dots P\left(\frac{e_n}{e_{n'}}\right) \quad (3)$$

### 3.2. Neural Networks

Neural Networks (NN) is an efficient machine-learning algorithm that operates on the theory of human brain structure. These structures help in performing some important operations like data mining, pattern recognition and classification [43]. Neural Networks are also known for their fast parallel distributed computations. Figure 1 shows the structure of neural network.

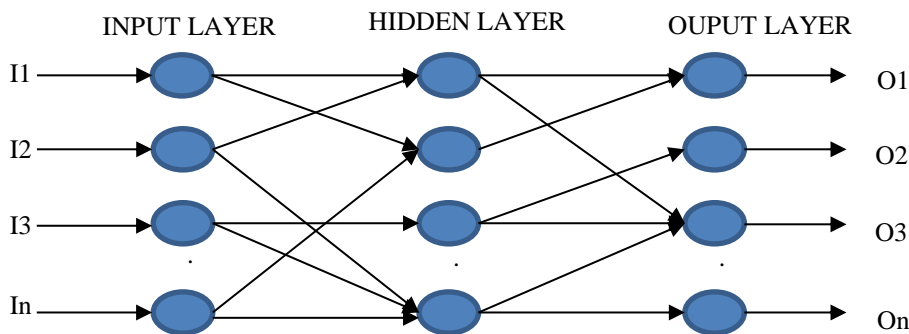

**Figure 1.** Multilayer Perceptron Neuron Network

For a training set,  $\{i_j, o_j | i_j \in \mathbb{R}^c, o_j \in \mathbb{R}^m\}_{j=1}^n$ , if  $n$  describes total observations,  $c$  specifies the covariates dimension,  $o_j$  denotes the target variable, then NN can be written as follows:

$$f_L(i) = \sum_{j=1}^L a(i, wt_j, b_j) t_j = hd(i)t \quad (4)$$

Here,  $a$  states activation function,  $wt_j$  describes weights provided to input nodes,  $b_j$  outlines the bias value,  $hd(i)$  describes hidden layers for input variable,  $t$  states the target variable [52]. Figure 1 shows the structure for neural network. Neural Network with hidden layers is defined as:

$$HD = \begin{bmatrix} hd_1 \\ hd_2 \\ \vdots \\ hd_n \end{bmatrix} = \begin{bmatrix} a(wt_1, b_1, i_1) \dots a(wt_L, b_L, i_1) \\ a(wt_1, b_1, i_2) \dots a(wt_L, b_L, i_2) \\ \vdots \\ a(wt_1, b_1, i_n) \dots a(wt_L, b_L, i_n) \end{bmatrix}_{(n \times *)} \quad (5)$$

The target matrix is specified by:

$$O = \begin{bmatrix} o_1^T \\ o_2^T \\ \vdots \\ o_n^T \end{bmatrix} = \begin{bmatrix} o_{11} \dots o_{1m} \\ o_{21} \dots o_{2m} \\ \vdots \\ o_{n1} \dots o_{nm} \end{bmatrix} \quad (6)$$

With the given equation, the output weights can be:

$$t = HD^o \left( \frac{I}{C} HDHD^o \right)^{-1} O \quad (7)$$

Where  $I$  denotes  $n \times m$  matrix.

For the prediction of alcohol addiction, neural networks play a significant character in unfolding the hidden layers which are probabilistic in nature. There are various forms of artificial neural network, we have focused on the Multi-Layer Perceptron (MLP) Neural Network Model in the present research. In ML the learning process is vital. Therefore, feed forward propagation learning method is used for building the model in the proposed work. This learning method works iteratively by feeding input with computed error and output [43]. The total number of neurons to be used in hidden layer are calculated by the given formula:

$$Number\ of\ Neurons = \frac{(attributes + classes)}{2} \quad (8)$$

### 3.3. K Nearest Neighbour (KNN)

KNN is a supervised classification algorithm, which works by finding the nearest possible class for the elements, and classify it based on a hypothesis that closer lying elements belong to the same class. KNN works by calculating the difference two instances using Euclidean distance function [33]. It works as follows:

For a given instance  $x_i$ ,  $y_i$  can be:

$$y_i = \operatorname{argmax} \sum E(y_n, c) \quad (9)$$

Here,  $c \in \{c_1, c_2, \dots, c_m\}$ ,  $y_i$  is the predicted class for  $x_i$  and  $n$  is the number of classes. Where  $E$  is the Euclidean distance  $d(x, y)$  between two points  $x$  and  $y$  and is given by following equation:

$$d(x, y) = \sqrt{\sum_{i=1}^n (a_i(x) - a_i(y))^2} \quad (10)$$

KNN Algorithm can be summarized below [Algorithm 1].

---

**Algorithm 1: KNN Pseudocode**

---

**Input:** Training Set  $(x_i, y_i)$ , where  $x_i$  are the instances,  $y_i$  is target value

**Output:** Class label

**Begin:**

1. For  $i = 1, 2, \dots, n$
2.     Compute Euclidean Distance  $D(x, y)$
3. End For
4. Obtain set  $s$  for all nearest values
5. Calculate  $y_i = \operatorname{argmax} \sum E(y_n, c)$
6. Return  $y_i$              // Class label

End


---

Various results are generated after the data has been processed. Based on those results, predictions are made to classify an individual into specific class

## 4. IoT Pulse: Enterprise Health Information System

IoT seeks to link different objects (IoT devices) across the networks. Connecting these heterogeneous devices for development of Enterprise Health Information (EHS) System and predicts the alcohol addiction using Service-oriented Architecture (SOA). Such an IoT-based EHS

architecture is flexible to allow devices dynamically communicate with items and exhibit real-time heterogeneous nature. Figure 2 shows the SOA-based EHS system for the prediction of alcohol addiction in an IoT-based environment comprising four different layers. The significance and functionalities of each layer has been discussed below:

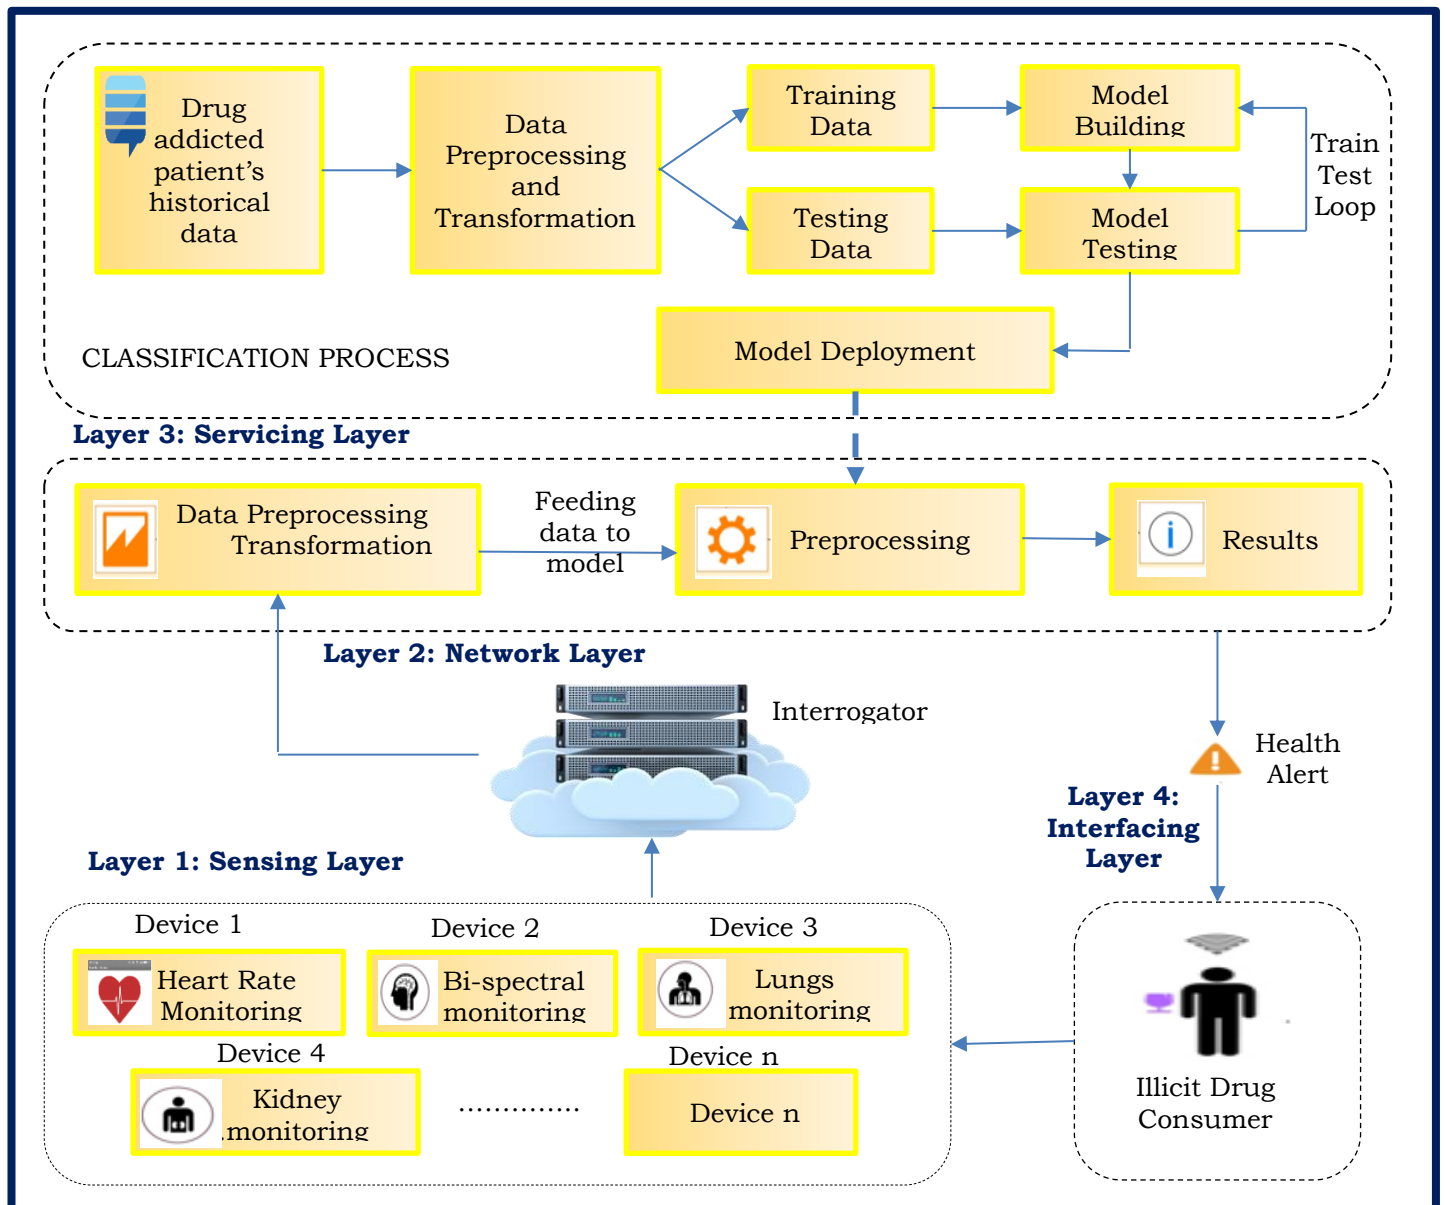

**Figure 2.** SOA based EHS for Alcohol Addiction Prediction

#### 4.1. Sensing Layer

IoT is intended to be a complex global network composed of various transmissible machines, which are proficient in exchanging information, detecting, storing information etc. The devices fitted with

the tags, sensors, etc. will automatically detect the environment in the Sensing layer, and communicate and pass information between various devices. In this paper, the solution to address the prediction of alcohol addiction is focused on opportunistic sensing. Health monitoring devices will be fitted out with RFID chips, cameras, smart devices or sensors to control and monitor the patient's health related measures for data collection in real-time. These sensors, cameras, and smart devices detect the several measures and alterations in the human body and scan for some specific variations or an actual time interval for occurrence of an event. While the use of such IoT-based technologies differs from one application to another and relies on a preference of user, the potential to observe and recognise objects in the world has vastly enriched with the technology innovation.

#### *4.1.1. Sensing Layer Hardware Components*

In this section, various health monitoring devices are discussed which can be used in IoT based health information system. Following are some of the main IoT devices that can be implemented in the present research for the prediction of alcohol addiction prediction:

- (1) *Bluetooth*: Bluetooth is a short-range wireless communication methodology that equipped with several smart devices including laptops, wearables, a smartphone etc. This technology is most appropriate for transfer of data among various devices.
- (2) *Ethernet*: Ethernet has been emerged in 1970's to satisfy the communication and networking needs. It is a wired technology that can relay high speed data, but security, synchronization and services would remain an essential part for the potential development of Ethernet.
- (3) *Wearables Devices*: Wearables like FastTrack reflex smart band will control and maintain tracks of your physical exercises such as jogging, cycling, workouts, running etc. These devices are lightweight and endorse wireless networking including Infrared waves and Bluetooth. Using these devices inside an IoT-based program may help in monitoring the patient's physical activity.

- (4) *Ultra-Wideband (UWB)*: UWB is a wireless system which requires small amounts of energy [67] and offers large data rates [48]. These technologies may be very useful for short distance wireless communication when implemented inside an IoT-based network.
- (5) *Smartphones*: Smartphones are very helpful in collecting data when implemented in an IoT based healthcare information system. In smartphones, a vast number of sensors as Global Positioning System (GPS) Tracking, Compass, accelerometer, Barometer or microphone are embedded to collect the data.
- (6) *RFID*: RFID is an advanced sensor-based system that uses a compact RFID chip and Reader to recognise and monitor products and people in the real-world environment. Healthcare monitoring systems are now switching to RFID chips due to their low expense, reliable input in real time and compact design, etc.
- (7) *Zigbee*: ZigBee is an industry-based wireless networking system of IEEE 802.15.4 specification which is used to connect WSN property to offer low data transfer speeds, scalability and efficiency. Many Healthcare monitoring devices are equipped with ZigBee for wireless transmission of data and Health monitoring services for patients.
- (8) *Wifi*: Wifi is one of the most common technologies, which can be easily implemented in any platform because to its various features such as durability, cost effectiveness, availability of components with IP addressability, durability, and scalability.
- (9) *Wi-Max*: “Worldwide Interoperability for Microwave Access (WI-Max) is a wireless broadband methodology, which can enhance the performance of IoT based system with the long-range wireless networking capabilities for both fixed and mobile connections.”

Table 2 gives the comparison of various IoT technologies discussing transmission speed, security, communication range.

**Table 2.** Comparison of various IoT based technologies

S. No.	IoT Technology	Transmission Speed	Security	Communication Range
1.	<b>Bluetooth</b>	1 Mbps	Less Secure	10m
2.	<b>Ethernet</b>	2 Mbps	Moderate	–
3.	<b>Wearables</b>	30-45 Mbps	Moderate	100m
4.	<b>UWB</b>	50 Mbps	Moderate	30m
5.	<b>Smartphones</b>	50 Mbps	Moderate	130m
6.	<b>RFID</b>	424 kbps	Less Secure	>50cm/3m
8.	<b>Zigbee</b>	256kbps/20kbps	Less Secure	10m
7.	<b>Wifi</b>	50-320 Mbps	Moderate	100m
9.	<b>Wi-Max</b>	70Mbps	More Secure	50km

#### 4.2. Networking Layer

The network layer in the SOA for prediction of alcohol consumer integrates both aspects and is essential for simple networking assistance such as data transfer over wired or unwired devices. Furthermore, the data originates from a large amount of IoT-based devices linked to a diverse network. This layer for such framework is often accountable for aggregating data from specific IT networks to assurance stable services to various customers. In the present work, several network technologies have been selected which can be implemented in an IoT based healthcare information system. Following are some of the significant innovations that can be used:

- (1) *Ad hoc Network*: While WSN is evolving, the medical ad-hoc sensor network is a real software and hardware that can be utilized in such an IoT-based system to capture alcohol data practically.
- (2) *Wireless Sensor Network (WSN)*: In the proposed work, lightweight, low-power and portable smart spatially dispersed medical sensors mounted devices such as pulse oximeters or accelerometers form a WSN. There are a range of WSN mechanisms which can be

utilized in such healthcare programs like MEDiSN and CodeBlue and can be used to map and control environmental and physical factors.

(3) *Mobile Network*: This network is a ubiquitous, reliable and efficient solution for an IoT environment. Nevertheless, the cell networks are built to control downstream data. A variety of models has been developed already for the integration of IoT environment with a mobile network.

(4) *Cloud Technologies*: Cloud computing is a paradigm for a centralized network of configurable computers that can be accessed on request. Compared with the technology accessible today, Cloud is the key aspect of IoT which delivers useful business-specific infrastructure in multiple real-time environments and device domains. The cloud-based intelligent system enabled by IoT will also track, capture and process data. Microsoft's research lab, IBM IoT, ThingSpeak, Oracle IoT Cloud, Ayla's web network and Arrayant link are some of the big cloud technologies.

(5) *Social Networks*: IoT with a social network or SIoT is acquiring popularity because of its broad service area and flexible rule setting. Parallel processing, centralized data management, load balancer are some of the key characteristics of SIoT.

#### **4.3. Servicing Layer**

Service layer is based on middleware technologies and is the primary instigator for IoT infrastructure and applications. The system's fundamental functions and operations are supported by the service layer. Within this layer, all the service-oriented tasks such as information sharing, knowledge retrieval, data collection, data integration, data pre-processing and data protection, are performed. Servicing layer plays a crucial function in the proposed solution. Data obtained from different devices like Bi-spectral [57] and Sphygmomanometer is deployed to estimate alcohol addiction.



### *4.3.1. Data Acquisition*

In this tier, the device network or body sensor network can be used to collect data from different aspects of the patient i.e. blood pressure or body temperature monitor. Such systems are focused on bodily parameters such as temperature, sound, current, light reflecting angle etc. to monitor the measurements or gain details from the human body with the aid of sensors, mobile systems, etc.

### *4.3.2. Data Collection and Transmission*

The data collection and transmission layer within the three-layered architecture addresses networking and data communication. This layer is able to gather data from different sensors that are then transferred through protocols and system devices such as Ethernet, Zigbee, Bluetooth etc. Improving the functionality and productivity of this kind of IoT-based network is a significant task which is the evolving IoT research field. The Algorithm 2 shows the basic process introduced in this research to gather and transfer patient data in real time using cloud technologies. As there are numerous devices for data collection, device failure may be possible. Monitoring of these devices for effective prediction and analysis of information is very critical as inaccurate or noisy results may cause severe health risks. In the conducted study, movement detection algorithm is proposed that can be used to track the performance of these health monitoring systems.

Movement in such a method is identified by transmitting a message within a fixed time period to the mobile sensor node and Received Signal Strength Indicator (RSSI) is calculated. Changes in health condition was determined on the basis of historical records. These changes are mainly the difference between the two cases. If the difference is significantly higher, then master node will consider it as a substantial change and send a signal to the nearest predicted master node.

It should be remembered that the NN notification will sense a difference depending on a combination of safety characteristics or health tracking readings and if the message's RSSI dropped below the level, the response will be transmitted in the form of hidden states. There is a significant chance that any physical activity or changes in environmental conditions may lead to a particular

characteristic. Using just one attribute will contribute to resource wastage and defective performance [65] [73]. Therefore, this range of health characteristics determines a threshold [68]. The nearest Master node will send the requests and acknowledgements recursively until the message about current and the next hidden state is not received by destination. These two current and next state values are bind in the message and are used to calculate the variation. The value is updated when the current applicant node decides the next hidden state by observing the HSTable containing details regarding the hidden states (previous and next), and about next observation etc. Eigenbackgrounds Prati Mediod, and Zivkovic AGMM are some other motion detection algorithms that can be used to enable the network, capture data and move data in such IoT based environment.

---

**Algorithm 2: Movement Management Algorithm**

---

1. Previous Master Node (PMN) tracks change in Mobile Sensor Node.
  2. PMN transmits Neural Networks messages to identified master node.
  3. Identified Master Node directs *Request* to the mobile sensor node
  4. **if** *Request* is received by Sensor node **then**
  5.     Sensor node transmits *Request* to the Identified Master Node *j*
  6.     Predicted Master Node *j* acknowledges the PMN by sending *NNACK* message.
  7.     **else**
  8.     Broadcasts *FindNode* message which contains ID's of both Predicted and Previous Master node.
  9.     Calculates RSSI if any static Node *j* receives the *FindNode* message from mobile sensor node
  10.    **if** calculated RSSI value is greater than threshold-value **then**
  11.     Send *Response* to the mobile sensor node
  12.     *j*:static node having maximum RSSI value responds by sending *NNACK* to PMN
  13.     PMN sends the current & previous hidden state to *j*
  14.    **endif**
  15. **endif**
- 

#### 4.3.3. Data Synchronization

One of the essential tasks is to develop consistency in the data before the actual processing starts. The number of IoT devices is consistently expanding. Since the different devices produce data with different speeds, data synchronization should be carried out to continuously monitor the patient's

health for the prediction of alcohol addiction. Data synchronization can be file synchronization, Mobile device synchronization, distributed file systems and version controlling. In the present research, mobile device synchronization is used.

#### 4.3.4. Data Pre-processing & Transformation

With such an IoT-based program, automation can be accomplished to some degree as the data is repeatedly obtained from the patient and inevitably transmitted for diagnosis of alcohol addiction. These results, still, can include noisy components, other missing values etc. Following are data pre-processing techniques:

- (1) *Data Cleaning*: Data is cleaned by processes such as replacing missed values using different methods like smoothing the noisy data, binning, filtering, outlier identification and correction of conflicting data.
- (2) *Data Integration*: In this, data is combined from various sources into a cohesive data repository, for example data centre.
- (3) *Data Transformation*: Data normalization, data generalization and data aggregation are some of the activities included in data transformation.
- (4) *Data Reduction*: In this, data size is reduced for building the model because actual data size will take more time to process.


Pre-processing of data is a vital activity before the final data analysis, because data may be inaccurate, noisy and could have certain missing values. The attribute's Most Probable Value (MPV) is used to treat missed values. i.e.

$$P(i) = \frac{n(i)}{n} \quad (11)$$

$$MPV = \text{Maximum} (P(i)) \quad (12)$$

where  $i$  denotes instance value. Figure 3 presents the processing of alcohol addiction data using ML. The processing of alcohol addiction divided into three components dedicated to a different set of functionality and services. We then used box plot and five-number overview to look at the data

distribution and outlier identification. The box plot for such an analysis gives  $O(n \log n)$  time complexity.

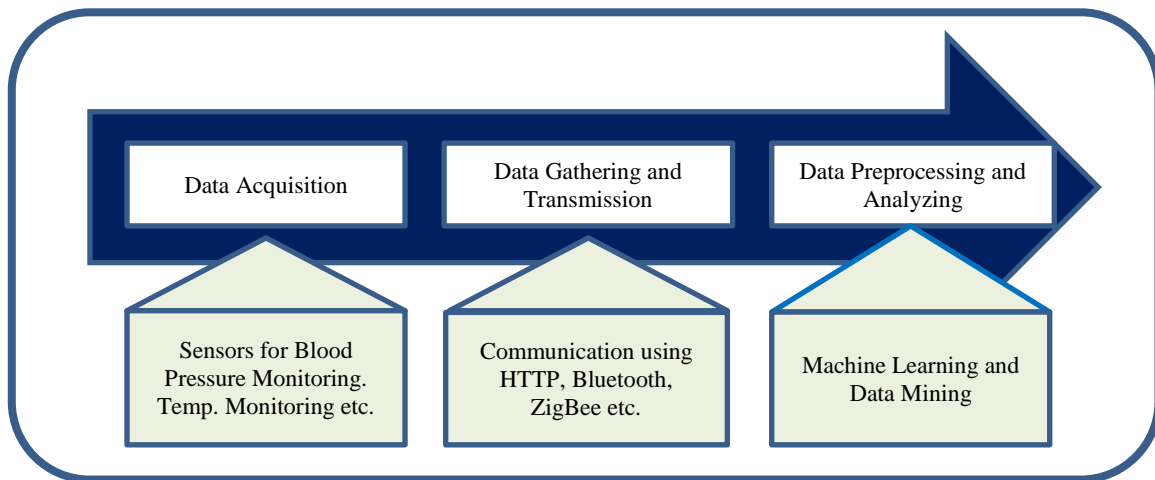

**Figure 3.** Processing of alcohol addiction data using ML

#### 4.3.5. Data analysis and Knowledge Extraction

One of the new fields for data mining and analysis is ML. A variety of ML techniques or algorithms can be used for prediction purpose. In the present research, Bayesian Networks, Neural Networks and KNN are used for the prediction of alcohol addiction.

#### 4.4. Interfacing Layer

An interface layer is a software specification that enables limited interference with the programs operating on the application layer. It offers the data abstraction so that the customer does not require to think about the system's internal details. The Interface layer includes four essential functionalities in the proposed architecture:

- (1) *Alert to patients:* The important alerts related to health are generated using different technologies like email, SMS, auto generated messages etc.
- (2) *Health Reports for Patient:* A short medical report on the patient's problems and various health issues and risks is prepared.
- (3) *Health Reports for the physician:* A comprehensive health details on the history of patients and current diagnosis for validation and consultation advice is prepared for the physician.

(4) *Data for research and surveys*: For medical research and survey, the patient data and outcome is used.

## 5. Alcohol Addict Prediction Mechanism

There is no other direct user interference needed to capture or produce data within the current enterprise health information network. The basic idea is that sensors are installed within the different health monitoring devices and can interact directly. Algorithm 3 shows the proposed working mechanism. The program may continue to search for data from different devices on a specific occurrence or timestamp. This will test if the device that sends the data is inaccurate or not. As the data demonstrates a critical character in these healthcare systems, corrupt or inaccurate computer data may have major implications. Time is one of the main factors which must be taken into concern while operating on such an EHIS. As with a predetermined time period, the program must obtain data from the patient again. Therefore, if the data is not obtained during a predetermined time period, then one of the associated devices would be considered defective.

Consumer fitness is measured using ML algorithms and if the estimated fitness is below a certain Margin-of-Safety (MOS) value then the device would be in normal condition. However, if the fitness value is lower than MOS value then user may be warned by sending alert message that he / she might be seriously affected by alcohol addiction. This should be remembered that the MOS value relies on all health tracking systems along with their weight.

### 5.1 Pre-processing of Dataset

The dataset obtained is in raw form and needs to be pre-processed to remove the missing and redundant values. In the present research, missing values are treated with MPV method as described in *Section 4.3.2*.

---

#### *Algorithm 3: Alcohol Prediction Mechanism*

---

**Input:** Set of health care devices: N

**Output:** Alert Consumer

---

**Begin:**

1. Set value of time = c\_t
2. Initially set value of j = 1
3. if (Device (d<sub>j</sub>) == Defective)
4.     Alert administration and technician
5.     Increment value of j i.e. j=j+1
6.     Go back to step 4
7. Else
8.     set device\_value = value of device j
9.     Pre-process device\_value
10.     Set d[j] = device\_value[j]
11.     if (j == N)
12.         Fetch consumer's historical data from storage (H<sub>j</sub>)
13.         Compute fitness value (d[], time, H) with the help of ML models
14.         if (Computed fitness value < MOS)
15.             Alert consumer
16.             Save the data to future reference for backup
17.             Else
18.             Go back to step 6
19.         end if
20.     end if
21. end if
22. Wait for an incident or time interval to happen
23. Go back to step 2

**End**

---

Then the normalization of dataset is performed with the help of z-score normalization. Further, feature selection is performed to choose the most relevant features.

## **5.2 Feature Selection**

For Feature selection, we have worked on forward selection technique. Forward selection is an iterative approach which works by adding features iteratively. Initially, we have an empty model. In each iteration, feature selection adds one feature at a time to the model. Features are added until all features have been included [32]. The performance of model is enhanced for each model and we get the efficient features. Algorithm for forward selection for 8 key features is given as Algorithm 4.

### 5.3 Machine Learning Models

In our proposed approach, we have used Bayesian networks, Neural network and KNN algorithms for the accurate prediction of alcohol addicted patients. The dataset is divided into 70:10:20 ratio for training, validation, and testing. First, the models are trained on the alcohol dataset which is then passed to validation test for tuning the parameters and then testing is performed in order to check the performance of trained model.

---

**Algorithm 4: Feature Selection**

---

Input: Set of Attributes [A1, A2, A3, ..... A14]

Output: [A1, A4, A5, A6, A8, A9, A10, A14]

Begin:

1. For each feature  $i$
2.     | Start with empty set such that,  $Y = \{\phi\}$
3.     | Select next best feature  $x_i = \text{argmax } [J(Y_i + k)]$
4.     | Update feature set  $Y_{i+1} = Y_i + x_i$
5. End for

End

---

### 6. Performance Evaluation

We used *R* language to implement various machine-learning models. 'bnlearn' package was used to implement Bayesian Networks in which person's probability of being an alcohol addict is calculated given the likelihood of an alcohol addict on a particular reading of health monitoring. To implement neural networks, "mlp" package is used on 13 attributes for prediction of alcohol addiction. The selection and collection of hyper parameters is therefore totally trivial. The usage of deep learning and Neural Network with many hidden layers can contribute to greater accuracy and substantially better performance. Also, the amount of time and the computational speed for such a method would be increased. The followings are the parameters after tuning based on the neural networks:

- Input layer size: 13 (the total number of attributes i.e. features selected as given in Section 5.2)
- Output layer size: 2 (Whether a patient is alcohol addict or not, i.e. binary classification)

- Total number of hidden layers: 5
- Learning parameter ( $\alpha$ ): 0.0001
- Activation Function used: ReLU

For KNN, the value of  $K$  used is 5 i.e. 5 clusters are made to predict the behaviour of an alcohol patient. To implement this, “knn” package is used. Table 3 describes the system configuration for experimental testing of proposed approach.

**Table 3.** Configuration Details

Sr. No.	Hardware/ Software	Minimum Requirements
1.	Processor	Intel® Core™ i7 9700k
2.	RAM	16 GB
3.	Hard Disk	256 GB SSD
4.	Operating System	Windows 10
5.	Programming Language	R (Rattle)
6.	Platform	R Studio

### 6.1. Dataset


In this tier, body sensors like blood pressure and blood temperature monitor are used to collect data from different areas of the body [36]. We have followed the standards and guidelines of public dataset named “Illicit Drug Use in Past Month [36]” to collect the data of 300 alcohol addicts from the province of Punjab (India). In the case study of alcohol addiction, we categorized the user based on the training data obtained from 300 alcohol addicts. A web service interface is used to collect user’s data. The records of the users are made private as mentioned by them. A total of 110 females and 190 male alcohol addicts with mean age of 34 years have been collected. Among these 300 users, there are 125 users who are strictly addicted to alcohol. A dataset is divided in 80 by 20 ratio with 80% of 300 users i.e. 220 are used as training dataset and remaining patients i.e. 80 are use as testing dataset. The statistical analysis of obtained data is shown in Table 4.

**Table 4.** Statistical Analysis of the selected attributes




Sr. No.	Features	Mean	Median	Standard Deviation	Minimum	Maximum
1.	Age in years	35	34	-	15	55
2.	Ratio of male with females (Gender ratio)	0.26	-	-	-	-
3.	Blood Pressure ( Lower limit)	86	86	8.04	70	100
4.	Blood Pressure (Upper limit)	136.5	130	31.14	75	200
5.	Heart Rate (times/min)	75.42	71	15.84	51	109
6.	Blood Glucose level (mg/dL)	113.1	110	9.86	70	158
7.	ETG Score (ng/mL)	30.16	32	13.10	18	88
8.	FAEE Hair Alcohol Conc.(pg/mg)	744.2	738	101	469	899
9.	Daily Consumption (times)	2.12	2	1.44	0	6
10.	Blood Alcohol Level	144.1	120	25.59	9	400
11.	Testosterone (ng/dL)	222.2	270.5	86.15	205	890
12.	Target	0.8	111	-	-	-


The distribution of the data collected is presented in Figure 4 to Figure 12.

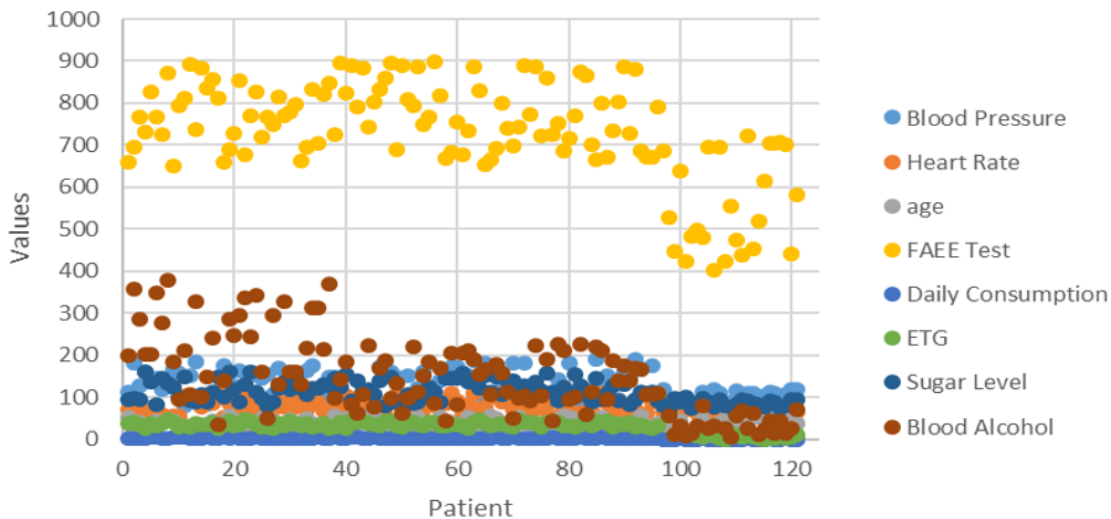


**Figure 4.** Distribution of various parameters selected.

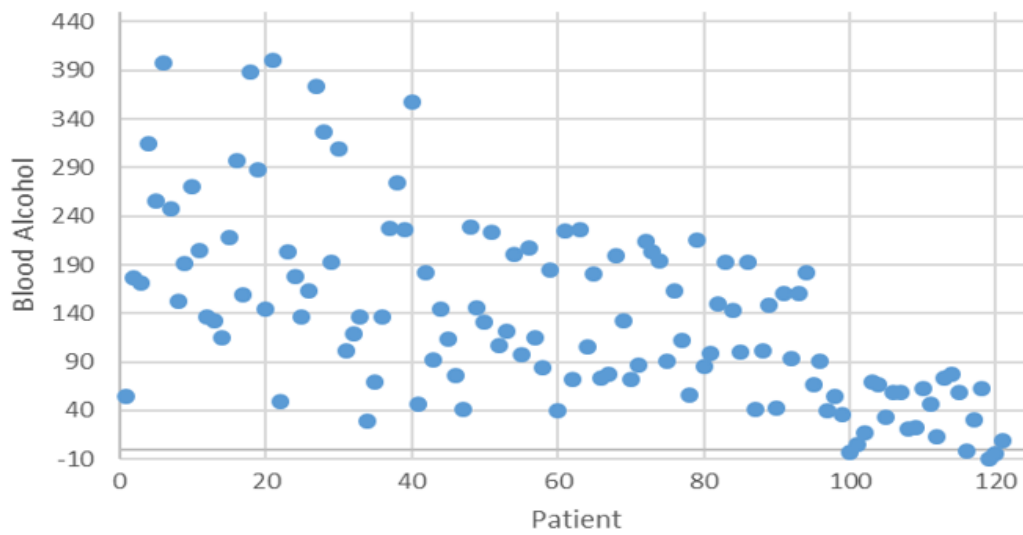


**Figure 5.** Blood Alcohol Distribution

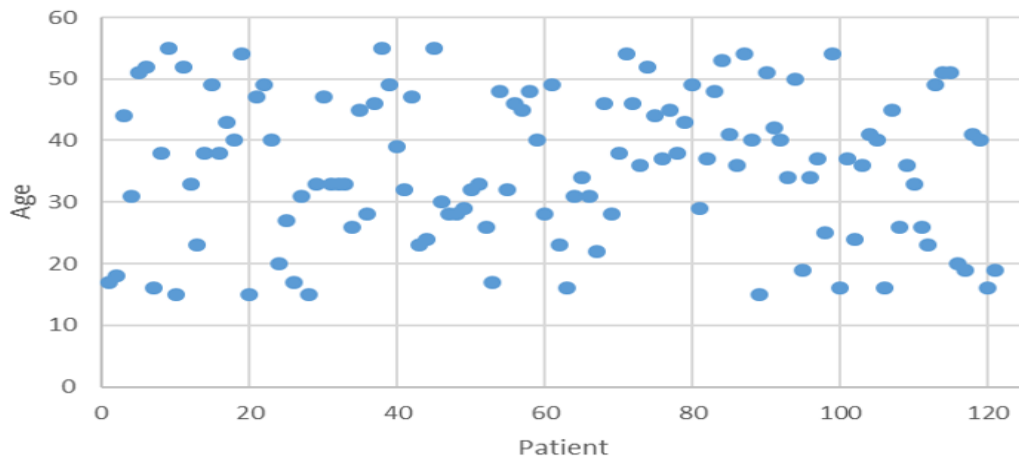


**Figure 6.** Age distribution

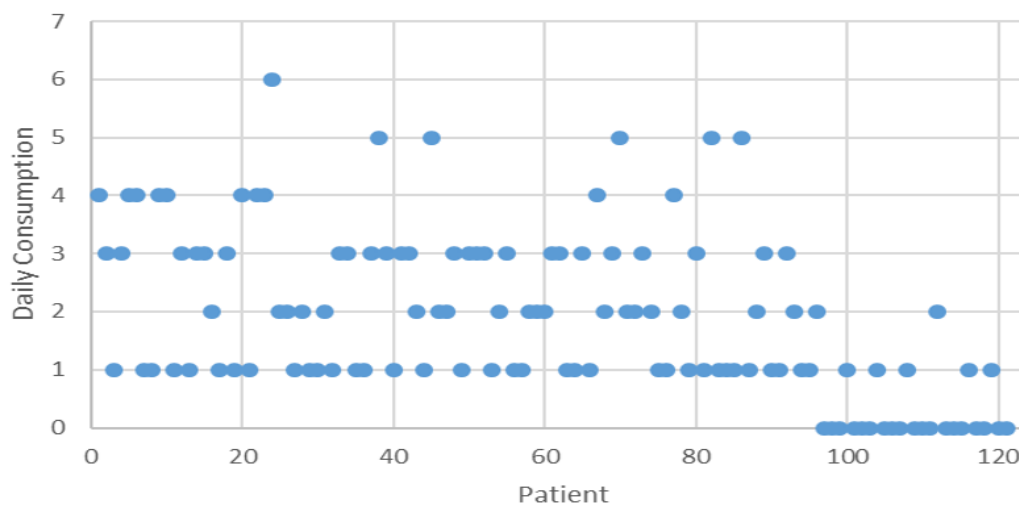


**Figure 7.** Daily Alcohol Consumption Distribution

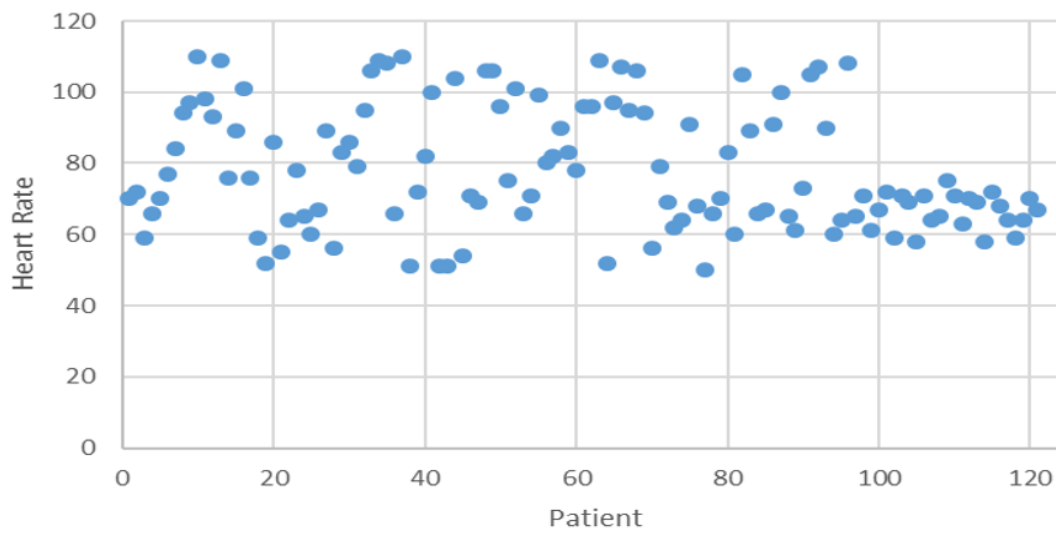


**Figure 8.** Heart Rate Distribution

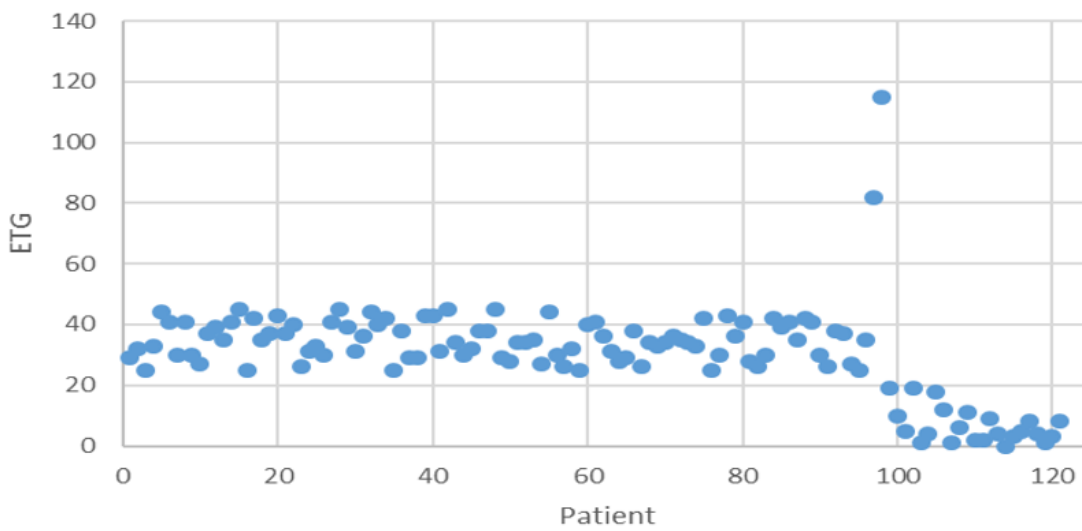


**Figure 9.** ETG Distribution

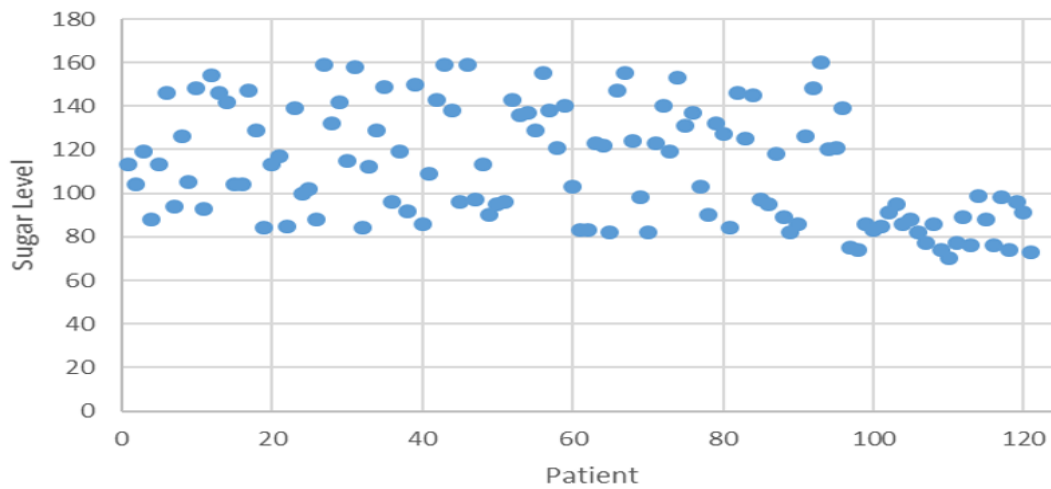

**Figure 10.** Blood Sugar Level Distribution

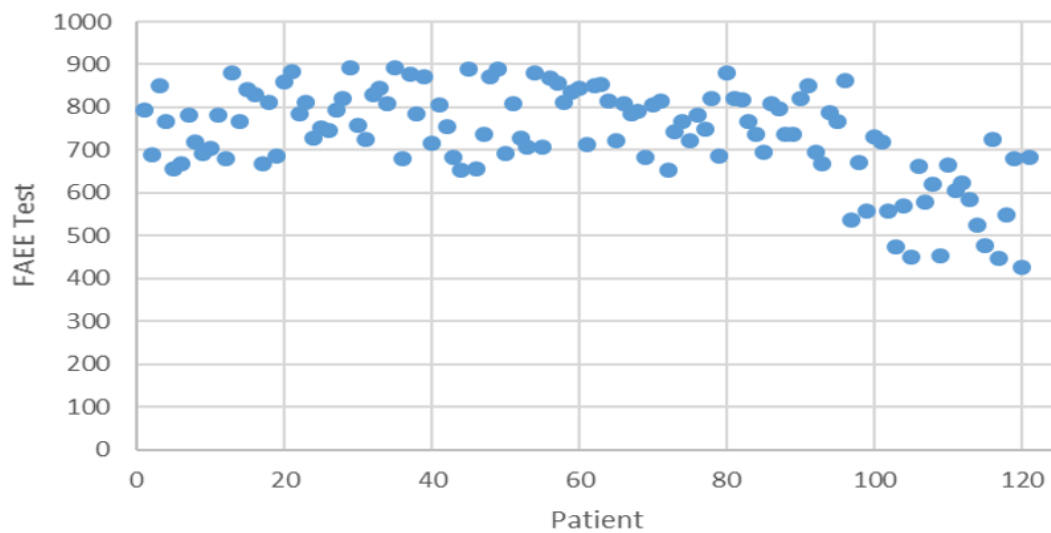

**Figure 11.** FAEE (Alcohol in Hair) Distribution

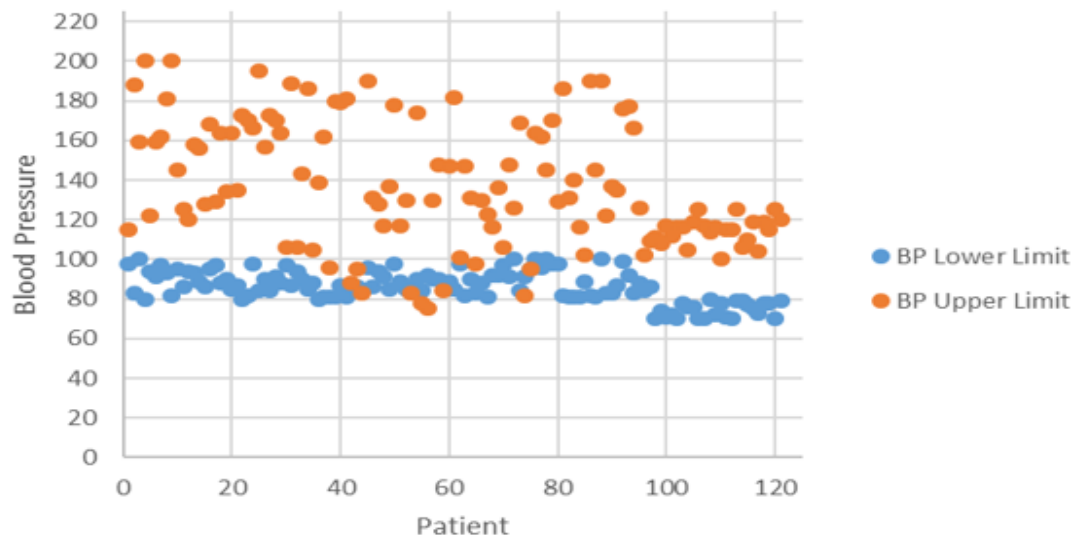

**Figure 12.** Lower and Upper Limit Blood Pressure Distribution

### 6.2. Baseline Technique

As per existing survey, there is a no current framework, which deliberates IoT based data collection module for EHISs, three important ML models (KNN, Neural Networks and Bayesian Network) simultaneously and fog computing to improve computation during predictions, which validates the proposed framework IoTPulse using FogBus [41] i.e. real fog environment. Due to this, the current alcohol prediction systems become inefficient to respond in these situations. We have selected most relevant and recent baseline technique from literature i.e. SSDP system [47] to validate IoTPulse in terms of energy, latency, network bandwidth and response time. SSDP predicts blood alcohol

content. SSDP system gathers data sensed by smartwatch to find the level of drunkenness using Neural Networks based approach. Further, it finds the user's intoxication level to find out the future consequences. SSDP system only uses Neural Networks and applied on stored data without collecting real time data using IoT sensors. There is no validation of proposed system against another ML algorithm. Further, there is no discussion about computing environment like fog or cloud to perform various computations at runtime for predictions, which causes latency.

### 6.3. Performance Parameters

We have considered four performance parameters to test the efficiency of the proposed framework as described below. All parameters are extracted from prior works [28] and [52].

#### 6.3.1. Sensitivity

The degree of total True Positive (TP) or positive cases that are predicted as true is known as sensitivity. It is also termed as recall and is given as:

$$\text{Sensitivity} = \frac{TP}{TP+FN} \quad (13)$$

where TP means patient having cancer is actually suffering from cancer and False Negative (FN) means person having no cancer are predicted as having cancer.

#### 6.3.2. Specificity

Specificity is defined as the degree of actual negative value and is predictive as negative i.e.

$$\text{Specificity} = \frac{TN}{TN+FP} \quad (14)$$

where True Negative (TN) means person not suffering from cancer has no cancer in actual. False Positive (FP) means the person predicted as having cancer has actual no cancer.

#### 6.3.3. Precision

The percentage of actual results that are true or significant is known as precision and is given as:

$$Precision = \frac{TP}{TP+FP} \quad (15)$$

#### 6.3.4. Accuracy

Accuracy is defined as the percentage of Predicted results which are predicted correctly with respect to actual values and is given by following.

$$Accuracy = \frac{TP+TN}{TP+TN+FP+FN} \quad (16)$$

### 6.4. Experimental Results


Following the experiments, different observations of the confusion matrix are noted. Table 5 shows the results of alcohol addicts. Smartwatch Sensor Data based Prediction (SSDP) system [47] predicts blood alcohol content which is used to study the performance of IoTPulse in terms of performance parameters such as accuracy, recall, precision, sensitivity and specificity. SSDP system gathers sensor data from a smartwatch to find the drunkenness in using ML model.

**Table 5.** Summary of Performance for IoTPulse and SSDP

Model	Sensitivity		Specificity		Precision		Accuracy	
	IoTPulse	SSDP	IoTPulse	SSDP	IoTPulse	SSDP	IoTPulse	SSDP
<i>Bayesian Networks</i>	95.3	91.6	100	88.65	100	88.65	83.02	81.10
<i>Neural Networks</i>	99.8	95.2	85.7	82.6	95.9	85.77	96.72	89.65
<i>KNN</i>	88	81.45	100	87.6	100	92.46	88.89	82.78

Figure 13 demonstrates the comparison between the different evaluation parameters with regard to predictive models.

Further, we have compared various ML models (Bayesian Networks, Neural Networks and KNN) based on different performance parameters and identified that Neural Networks classifier has achieved 96.72% accuracy on the collected dataset for prediction of alcohol addiction for IoTPulse. Figure 13 shows IoTPulse performs better than SSDP in different types of performance parameters.

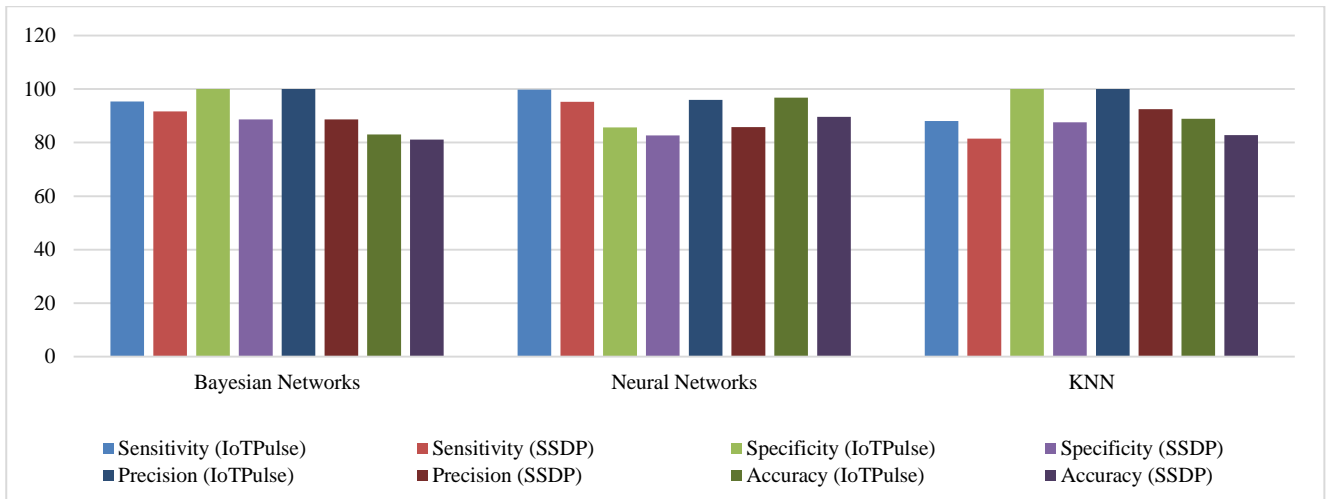

**Figure 13.** Performance comparison of various machine models for IoTPulse and SSDP

#### 6.4.1. Energy Efficiency

Power consumption is very important in IoT based environments. If the device's power or battery drops within a limited time period then it will not be an efficient system, because it would not be realistic to use. Therefore, the power consumed by various sensory devices in an IoT based environment is estimated and is shown in Table 6.

**Table 6.** Power Consumed by different devices

Sr. No.	Device Name	Power Used in Watts
i.	ETG Alcohol Test Dip Card	Not Accessible
ii.	Alco Screen 2 Saliva Alcohol Test	Not Accessible
iii.	Sphygmomanometer	2.5
iv.	Microcantilever sensor for liver monitoring	0.5
v.	Breath Alcohol Detector Test	2.5
vi.	Digital Breathalyzer AlcoMate Prestige (Sensor equipped)	3
vii.	FAEE Hair Alcohol Abuse Test	150
viii.	Blood Glucose level monitor	2.5
ix.	Heart Rate Monitoring Sensor	0.3
x.	Bi-spectral monitor	180

xi.	Body Temperature Monitor e.g. Infrared Thermometer	3
xii.	Chem-Phys patch	2
xiii.	Testosterone Monitor	150
xiv.	Electrocardiogram (E.C.G.)	2.5

The analysis indicates that the power usage of these systems differs considerably depending on the complexity of selected devices. It was also found that devices with wider screens use more power than smaller devices and the power usage depends on the sensor technologies used to gather data as well.

#### 6.4.2. Cost Evaluation

Table 7 shows the different cost estimations were made to determine the system's efficiency. It would be likely that systems with higher prices might provide additional functionality because we just used a simple system layout for cost evaluation.

**Table 7.** The estimation of cost for various devices considered in IoTPulse.

S. No.	Device Name	Price in INR
i.	Sphygmomanometer	4000
ii.	Alco Screen 2 DOT Approved Saliva Alcohol Test	210
iii.	EtG Alcohol Test Dip Card	350
iv.	Microcantilever sensor for liver monitoring	7000
v.	Breath Alcohol Detector	2000
vi.	Digital Breathalyzer AlcoMate Prestige (Sensor equipped)	9000
vii.	FAEE Hair Alcohol Abuse Test	20000
viii.	Blood Glucose level monitor	1500
ix.	Body Temperature Monitor e.g. Infrared Thermometer	1400
x.	Heart Rate Monitoring Sensor	2000
xi.	Bi-spectral monitor	23000



xii.	Electrocardiogram (E.C.G.) Machine	8000
xiii.	Chem-Phys patch	8000
xiv.	Testosterone Monitor	20000

## 7. Validation on Real Deployment using FogBus

FogBus [41] offers a mechanism to build and execute optimized Fog-Cloud systems with organized coordination and platform-independent application execution. FogBus links various sensors with gateway tools to transfer data and tasks to fog nodes that could involve edge devices or cloud servers. In the broker layer, the management of resources and initiation of tasks is performed on fog nodes. FogBus uses authentication blockchain, and encryption techniques to ensure privacy, data integrity, and protection which enhance the consistency, robustness and reliability of the fog system. FogBus uses HTTP RESTful APIs for collaboration, and uses Aneka tech framework to easily combine fog setup with Cloud [42].

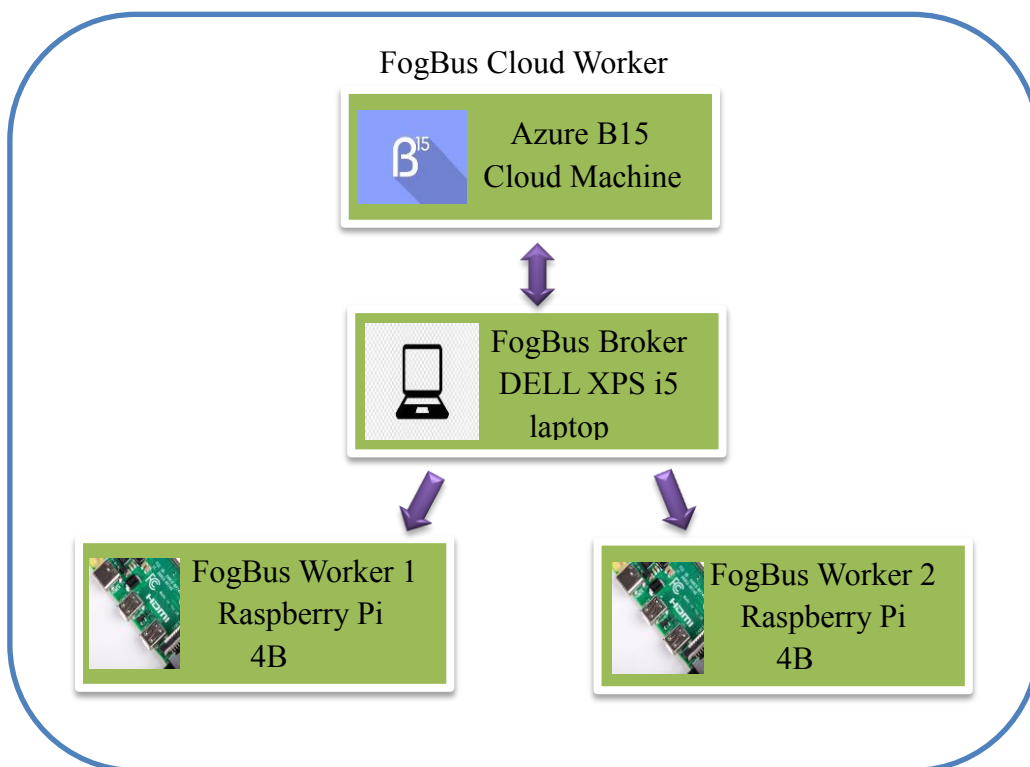


Figure 14. Evaluation Testbed

FogBus architecture enables service providers to increase the amount of active Fog nodes by system context. A computing node that is connected to the same Local Area Network (LAN) will actually become a computing node by making itself available to the appropriate master node. The broker nodes later install software components on the computing node to carry out the necessary operations. FogBus encourages multiple brokers coexistence in the broker layer such that gateway nodes may provide a range of choices for viewing the data streams for processing [43]. The workers are also shared among the brokers. In this situation, privacy and data confidentiality are not compromised, as each broker retains its own block chain and distinct employee database. Besides that, the software components working on the brokers allow Fog infrastructure to integrate simultaneously with multiple Cloud data centres. Furthermore, to allow practically deployable fault-tolerant solutions, FogBus can shift computing nodes to broker layer for managing other computing nodes in the vicinity.

In this work, we use FogBus for alcohol prediction by deploying the ML models on various brokers and manage the shared data on Blockchain platform as shown in Figure 14.

## ***7.2. Experimental Results***

IoTPulse is validated against baseline technique i.e. SSDP [47] (as discussed in Section 6.2) using four QoS parameters such as latency, response time, energy, and network bandwidth. Thus, IoTPulse uses a combined approach that leverages both ML models and integrated IoT and fog computing for optimum results. In our alcohol addiction framework, the consumer is classified on the basis of training data gathered from 300 alcohol addicts from Punjab Province (India). To effectively test the efficiency of IoTPulse and SSDP, we used the same Fog environment with FogBus [41] as mentioned above. All parameters are extracted from prior work [49] [74].

(1) **Network Bandwidth:** Figure 15 (a) demonstrates the average network bandwidth of 1741 B/s and 2859.5 B/s for IoTPulse and SSDP respectively. It is evident that IoTPulse uses 1741 B / s

on average, that is 18.36% lower than SSDP because at runtime, IoTPulse processes IoT device data efficiently while meeting the QoS requirements.

- (2) **Latency:** We analysed the latency of both IoTPulse and SSDP (i.e. the delay until the user requests for job processing are transferred). As the number of patient's increases, the latency value rises, which is presented in Figure 15(b). IoTPulse is found to have a lower latency in comparison to SSDP (as the number of patients rise). IoTPulse 's average latency value is 19.56% lower than SSDP. The explanation is that IoTPulse handles service requests on the Fog Data Server (FDS) instead of submitting job requests to the Cloud Data Server (CDS) which will contribute to a greater communication delay.
- (3) **Response Time:** Figure 15(c) indicates the time taken for a device to respond to a request from the customer. Response time rises as the number of users increases. IoTPulse's average response time value is 21.56% lower than SSDP. The explanation behind the lower response time is the request handling mechanism which provides assets for job requests before actual resource scheduling. In addition, state of all the resources for each point is monitored by IoTPulse, allowing it to make an optimum decision than SSDP.
- (4) **Energy Consumption:** That is the amount of energy absorbed by the CPU, switching devices, computing unit, network system and other elements such as fans, losses from conversion [41]. The energy consumption value increases as the patients increases as displayed in Figure 15(d). IoTPulse's total energy usage value is 19.53% greater than SSDP. The average benefit of effective resource scheduling decreases substantial amount of network traffic, contributing to a decrease in the idle resources (switching equipment, processor, network system, storage unit) that minimize energy wastage.

### 7.3. Discussions

We used popular machine learning models (Bayesian Network, Neural Networks and KNN) to predict the alcohol addiction using integrated IoT and fog computing environments. The performance of IoTPulse is compared against existing work i.e. SSDP system [47] using various

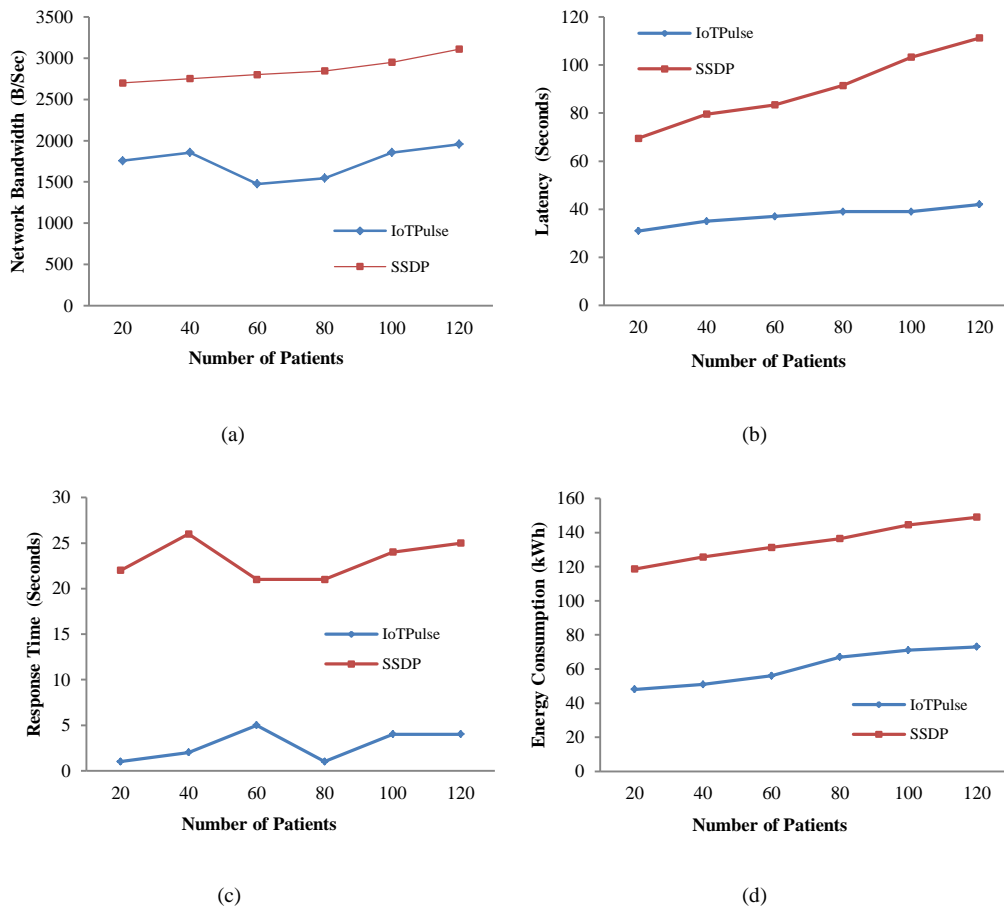


Figure 15. Evaluation results for IoTPulse and SSDP: (a) Network Bandwidth (b) Latency, (c) Response Time, (d) Energy Consumption.

performance parameters comprising accuracy, sensitivity, specificity and precision which shows an improvement of 7%, 4%, 12% and 12% respectively. Finally, IoTPulse is validated in FogBus-based real fog environment using QoS parameters including latency, network bandwidth, energy and response time which improves performance by 19.56%, 18.36%, 19.53% and 21.56% respectively.

## 8. Conclusions and Future Work

With scientific developments in enterprise healthcare systems, IoT based systems with Machine analytics as a service have surfaced as the most effective candidate approaches for alcohol addiction prediction. These technologies have revolutionised the current view of healthcare facilities in smart

cities and smart enterprises. In this research work, we have proposed an IoT based EHIS called IoTpulse for the prediction of alcohol addiction. Further, various ML models such as Bayesian Network, Neural Networks and k-Nearest Neighbour (KNN) have been implemented to predict alcohol addiction. The performance of three ML models is evaluated based on various performance parameters such as recall, accuracy, specificity and precision. In our alcohol addiction framework, the users are classified based on training dataset obtained from 300 alcohol consumers working in different enterprises in Punjab (India). Finally, IoTpulse is validated in real fog environment using FogBus to assess the performance of QoS parameters such as energy, response time, latency, and network bandwidth as compared to existing technique.

### **8.1 Future Work**

The proposed work can be extended in the following dimensions:

1. IoTpulse can be extended for prediction of any kind of illicit drug addiction, which has tremendous research and development opportunities. However, new threats will often arise with technical innovation. Real time dataset for illicit drug consumption can be collected using IoT enabled devices and can be deployed as machine analytics as a service for EHISs as a smart enterprise concept.
2. As part of the future work, we propose to extend IoTpulse to allow cost-optimal execution given different QoS characteristics and fog-cloud cost models.
3. This present study is confined to Punjab (India) only. However, to extend the outcomes of this study, an extensive research can be carried out in different areas of the country or world for the prediction of alcohol addiction.
4. More intelligent ensemble models can be deployed for further improving the accuracy, recall, specificity and precision.
5. Further, IoTpulse can be extended to incorporate other fog computing applications such as agriculture, healthcare, weather forecasting, traffic management and smart city.

6. IoTPulse can also be extended towards other important domains of healthcare such as diabetes, cancer and hepatitis for prediction, which can provide efficient services to corresponding patients.
7. Technologies like IoT and fog computing will surface as a foundation for effective alcohol addiction and its prediction for future studies.

### **Acknowledgements**

We would like to thank Dr. Abrar Gani (NHS, UK) for his valuable comments, useful suggestions and discussion to improve the quality of the paper. We are grateful to the editors, area editor and anonymous reviewers for their invaluable comments and suggestions for improving the paper, which have greatly helped us to improve the paper. We also thank the participating anonymous employees of various enterprises who responded to the survey questionnaire and contributed significantly to the research.

### **Disclosure statement**

No potential conflict of interest was reported by the authors.

### **References**

- [1] Global Status Report on Alcohol and Health. Available at [https://www.who.int/substance\\_abuse/publications/global\\_alcohol\\_report/en/](https://www.who.int/substance_abuse/publications/global_alcohol_report/en/) . Accessed on Jan 20,2020.
- [2] Lipari, R. N., S. L. Hedden, and A. Hughes. 2014. "Substance use and mental health estimates from the 2013 National Survey on Drug Use and Health: overview of findings." *In The CBHSQ Report. Substance Abuse and Mental Health Services Administration (US)*.
- [3] Armstrong, G. L. 2007. "Injection drug users in the United States, 1979-2002: an aging population." *Archives of internal medicine* 167(2): 166-173. doi:10.1001/archinte.167.2.166.
- [4] Chhabra, A., S. Hussain, and S. Rashid. 2019. "Recent trends of tobacco use in India." *Journal of Public Health*: 1-10. doi: 10.1007/s10389-019-01091-3.
- [5] Hong, L., M. Luo, R. Wang, P. Lu, W. Lu, and L. Lu. 2018. "Big data in health care: Applications and challenges." *Data and Information Management* 2(3): 175-197. doi: 10.3390/app10051705.

- [6] Chen, H., O. Engkvist, Y. Wang, M. Olivecrona, and T. Blaschke. "The rise of deep learning in drug discovery." *Drug discovery today* 23 (6): 1241-1250. doi:10.1016/j.drudis.2018.01.039.
- [7] Dumka, A., and A. Sah. 2019. "Smart ambulance system using concept of big data and internet of things." *In Healthcare Data Analytics and Management*: 155-176. Academic Press.
- [8] Baig, M., M., S. Afifi, H. GholamHosseini, and F. Mirza. 2019. "A Systematic Review of Wearable Sensors and IoT-Based Monitoring Applications for Older Adults—a Focus on Ageing Population and Independent Living." *Journal of medical systems* 43, (8): 233. doi: 10.1007/s10916-019-1365-7.
- [9] Poongodi, T., R. Krishnamurthi, R. Indrakumari, P. Suresh, and B. Balusamy. 2020. "Wearable Devices and IoT." *In A Handbook of Internet of Things in Biomedical and Cyber Physical System*: 245-273. Springer, Cham, 2020.
- [10] Fedorova, E. V., S. M. Schrage, L. F. Robinson, A. Cepeda, C. F. Wong, E. Iverson, and S. E. Lankenau. 2019. "Illicit drug use and prescription drug misuse among young adult medical cannabis patients and non-patient users in Los Angeles." *Drug and alcohol dependence* 198: 21-27. doi: 10.1016/j.drugalcdep.2019.01.026.
- [11] Zhao, F., P. Skums, A. Zelikovsky, E. L. Sevigny, M. H. Swahn, S. M. Strasser, and Y. Wu. 2019. "Detecting Illicit Drug Ads in Google+ Using Machine Learning." *In International Symposium on Bioinformatics Research and Applications*: 171-179. Springer, Cham.
- [12] Magno, M., B., K. L. Leite, M. M. Pithon, L. C. Maia, M. B. Magno, K. L. F. Leite, M. M. Pithon, and L. C. Maia. 2019. "Are traumatic dental injuries greater in alcohol or illicit drugs consumers? A systematic review and meta-analysis." *Drug and alcohol dependence*. doi: 10.1016/j.drugalcdep.2018.12.028.
- [13] Venkatakrishnan, K., L. L. v. Moltke, and D. J. Greenblatt. 2001. "Human drug metabolism and the cytochromes P450: application and relevance of in vitro models." *The Journal of Clinical Pharmacology* 41 (11): 1149-1179. doi: 10.1177/00912700122012724.
- [14] Terasaki, T., S. Ohtsuki, S. Hori, H. Takanaga, E. Nakashima, and K. Hosoya. 2003. "New approaches to in vitro models of blood–brain barrier drug transport." *Drug discovery today* 8 (20): 944-954. doi: 10.1016/S1359-6446(03)02858-7.
- [15] Venkatakrishnan, K., L. L. von Moltke, R. S. Obach, and D. J. Greenblatt. 2003. "Drug metabolism and drug interactions: application and clinical value of in vitro models." *Current drug metabolism* 4 (5): 423-459. doi: 10.2174/1389200033489361.
- [16] Andrade, R., J., M. I. Lucena, M. C. Fernández, G. Pelaez, K. Pachkoria, E. García-Ruiz, B. García-Muñoz et al. 2005. "Drug-induced liver injury: an analysis of 461 incidences

submitted to the Spanish registry over a 10-year period." *Gastroenterology* 129 (2): 512-521. doi: 10.1053/j.gastro.2005.05.006.

- [17] Lin, C., and S. R. Khetani. 2016. "Advances in engineered liver models for investigating drug-induced liver injury." *BioMed research international* 2016. doi: 10.1021/acs.jcim.5b00238.
- [18] Xu, Y., Z. Dai, F. Chen, S. Gao, J. Pei, and L. Lai. 2015. "Deep learning for drug-induced liver injury." *Journal of chemical information and modeling* 55 (10): 2085-2093. doi: 10.1021/acs.jcim.5b00238.
- [19] Zhang, L., H. Zhang, H. Ai, H. Hu, S. Li, J. Zhao, and H. Liu. 2018. "Applications of machine learning methods in drug toxicity prediction." *Current topics in medicinal chemistry* 18 (12): 987-997. doi: 10.2174/1568026618666180727152557.
- [20] Jerak, N. 2018. "Upcoming spring for reproductive rights and health in Tunisia and Egypt?: a comparative analysis of reproductive rights and health before and after the 2011 Arab Spring." *PhD diss.*
- [21] Saingam, D. 2018. "Substance abuse policy in Thailand: current challenges and future strategies".
- [22] Subramaniaswamy, V., G. Manogaran, R. Logesh, V. Vijayakumar, N. Chilamkurti, D. Malathi, and N. Senthilselvan. 2019. "An ontology-driven personalized food recommendation in IoT-based healthcare system." *The Journal of Supercomputing* 75(6): 3184-3216. doi: 10.1007/s11227-018-2331-8.
- [23] Mahmud, R., F. L. Koch, and R. Buyya. 2018. "Cloud-fog interoperability in IoT-enabled healthcare solutions." *In Proceedings of the 19th international conference on distributed computing and networking*: 32. ACM.
- [24] Farahani, B., F. Firouzi, V. Chang, M. Badaroglu, N. Constant, and K. Mankodiya. 2018. "Towards fog-driven IoT eHealth: Promises and challenges of IoT in medicine and healthcare." *Future Generation Computer Systems* 78: 659-676. doi: 10.1016/j.future.2017.04.036.
- [25] Mussavirizi, S. Ali, and A. Roudsari. 2017. "A Survey of Standard Information Models for Clinical Decision Support Systems." *Building Capacity for Health Informatics in the Future* 234: 249.
- [26] Hein, A., O. N., D. Willemsen, T. Scheffold, A. Dogac, and G. Laleci. 2006. "SAPHIRE-Intelligent Healthcare Monitoring based on Semantic Interoperability Platform-The Homecare Scenario." *In ECEH*: 191-202. doi: doi.org/10.1049/iet-com:20060699.
- [27] Wan, J., M. A. Al-awlaqi, M. Li, M. O'Grady, X. Gu, J. Wang, and N. Cao. 2018. "Wearable IoT enabled real-time health monitoring system." *EURASIP Journal on Wireless Communications and Networking*, 1: 298. doi: 10.1186/s13638-018-1308-x.



- [28] Tuli, S., N. Basumatary, S. S. Gill, M. Kahani, R. C. Arya, G. S. Wander, and R. Buyya. 2020. "HealthFog: An ensemble deep learning based Smart Healthcare System for Automatic Diagnosis of Heart Diseases in integrated IoT and fog computing environments." *Future Generation Computer Systems* 104:187-200. doi: 10.1016/j.future.2019.10.043.
- [29] Cáceres, C., J. M. Rosário, and D. Amaya. 2018. "Proposal of a smart hospital based on Internet of Things (IoT) concept." In *Sipaim–Miccai Biomedical Workshop*: 93-104. Springer, Cham. doi: 10.1007/978-3-030-13835-6\_11.
- [30] Jara, A. J., A. F. Alcolea, M. A. Zamora, A. F. G. Skarmeta, and M. Alsaedy. 2010. "Drugs interaction checker based on IoT." In *2010 Internet of Things (IOT)*: 1-8. IEEE. doi: 10.1109/IOT.2010.5678458.
- [31] Zamanifar, A., E. Nazemi, and M. Vahidi-Asl. 2017. "Dmp-iot: A distributed movement prediction scheme for iot health-care applications." *Computers & Electrical Engineering*, 58: 310-326. Doi: 10.1016/j.compeleceng.2016.09.015.
- [32] Sutter, J. M., and J. H. Kalivas. 1993. "Comparison of Forward Selection, Backward Elimination, and Generalized Simulated Annealing for Variable Selection." *Microchemical Journal*, 47(1-2): 60–66. doi: 10.1006/mchj.1993.1012.
- [33] Jiang, L., Z. Cai, D. Wang, and S. Jiang. 2007. "Survey of improving k-nearest-neighbor for classification." In *Fourth International Conference on Fuzzy Systems and Knowledge Discovery (FSKD 2007)*, 1: 679-683. IEEE. doi: 10.1109/FSKD.2007.552.
- [34] Dhillon. A. and A. Singh, 2019. "Machine Learning in Healthcare Data Analysis: A Survey", *Journal of Biology and Today's World*, 8(2). doi: 10.15412/J.JBTW.01070206.
- [35] Kaur, P., N. Sharma, A. Singh, and B. Gill. 2018. "CI-DPF: A Cloud IoT based Framework for Diabetes Prediction." In *2018 IEEE 9th Annual Information Technology, Electronics and Mobile Communication Conference (IEMCON)*: 654-660. IEEE, doi: 10.1109/IEMCON.2018.8614775.
- [36] Illicit Drug Use in Past Month, DATASET IN SUBSTANCE ABUSE AND MENTAL HEALTH SERVICES ORGANIZATION, <https://data.world/samhsa/illicit-drug-use-in-past-month>
- [37] Kaur, A., L., Kaur, and A. Singh. 2020. State-of-the-Art Segmentation Techniques and Future Directions for Multiple Sclerosis Brain Lesions. *Archives of Computational Methods in Engineering*: 1-27. doi: 10.1007/s11831-020-09403-7.
- [38] Singh G. and A. Singh. 2018. "Object Detection in Fog Degraded Images", *International Journal of Computer Science and Information Security*, 15 (8): 174-182
- [39] Sharma, N., A. Singh. 2019. "Diabetes Detection and Prediction Using Machine Learning/IoT: A Survey" In: *Advanced Informatics for Computing Research. ICAICR 2018*

*Communications in Computer and Information Science*, 955: 471- 479, (Springer). doi: 10.1007/978-981-13-3140-4\_42.

- [40] Singh, G., A. Singh. 2019. "Enhancement Methods for Low Visibility and Fog Degraded Images." *In: Advanced Informatics for Computing Research ICAICR 2018. Communications in Computer and Information Science*, 955:489-498. (Springer). doi: 10.1007/978-981-13-3140-4\_44.
- [41] Tuli, S., R. Mahmud, S. Tuli, and R. Buyya. 2019. "Fogbus: A blockchain-based lightweight framework for edge and fog computing." *Journal of Systems and Software*. doi: 10.1016/j.jss.2019.04.050.
- [42] Vecchiola, C., R. N. Calheiros, D. Karunamoorthy, and R. Buyya. 2012. "Deadline-driven provisioning of resources for scientific applications in hybrid clouds with Aneka." *Future Generation Computer Systems* 28(1): 58-65. doi: 10.1016/j.future.2011.05.008.
- [43] Mancini, R., S. Tuli, T. Cucinotta, and R. Buyya. 2019. "iGateLink: A Gateway Library for Linking IoT, Edge, Fog and Cloud Computing Environments." *arXiv preprint arXiv:1911.08413*.
- [44] Gill, S. S., S. Tuli, M. Xu, I. Singh, K.V. Singh, D. Lindsay, S. Tuli et al. 2019. "Transformative effects of IoT, Blockchain and artificial intelligence on cloud computing: evolution, vision, trends and open challenges". *Internet of Things* 8:100118. doi: 10.1016/j.iot.2019.100118.
- [45] Tuli, S., Tuli, S., Tuli, R. and Gill, S.S., 2020. Predicting the Growth and Trend of COVID-19 Pandemic using Machine Learning and Cloud Computing. *Internet of Things* 11:100222. doi:10.1016/j.iot.2020.100222
- [46] Varghese, B., N. Wang, S. Barbhuiya, P. Kilpatrick, and D. S. Nikolopoulos. 2016. "Challenges and opportunities in edge computing." *In 2016 IEEE International Conference on Smart Cloud (SmartCloud)*: 20-26. IEEE. doi: 10.1109/SmartCloud.2016.18.
- [47] Gutierrez, M.A., M. L. Fast, A.H. Ngu, and B. J. Gao. 2015. "Real-time prediction of blood alcohol content using smartwatch sensor data." *In ICSH*: 175-186. Springer, Cham.
- [48] Shojafar, M., Pooranian, Z., Sookhak, M. and Buyya, R., 2019. Recent advances in cloud data centers toward fog data centers. *Concurrency and Computation: Practice and Experience*, 31(8), p.e5164.
- [49] Naranjo, P.G.V., Pooranian, Z., Shojafar, M., Conti, M. and Buyya, R., 2019. "FOCAN: A Fog-supported smart city network architecture for management of applications in the Internet of Everything environments" *Journal of Parallel and Distributed Computing*, 132 (2019), pp.274-283.

- [50] Wang, J., H. Wang, C. Zhao, J. Li, and H. Gao. 2018. "Iteration acceleration for distributed learning systems." *Parallel Computing* 72 (2018): 29-41. doi: 10.1016/j.parco.2018.01.001.
- [51] The Federal Drug Control Budget: New Rhetoric, Same Failed Drug War. Available at: [https://www.drugpolicy.org/sites/default/files/DPA\\_Fact\\_sheet\\_Drug\\_War\\_Budget\\_Feb2015.pdf](https://www.drugpolicy.org/sites/default/files/DPA_Fact_sheet_Drug_War_Budget_Feb2015.pdf). Accessed on January 10,2020
- [52] Dhillon, A. and A. Singh. 2020. "eBreCaP: extreme learning-based model for breast cancer survival prediction". *IET Systems Biology* 14(3): 160-169. doi: 10.1049/iet-syb.2019.0087.
- [53] Bitam S., S. Zeadally and A. Mellouk. 2018. "Fog computing job scheduling optimization based on bees swarm", *Enterprise Information Systems* 12 (4): 373-397.
- [54] Tseng, K., L. Fu, L. Liu, D. Lee, C. W., L. Li and Y. Meng. 2018. "Human identification with electrocardiogram", *Enterprise Information Systems* 12 (7): 798-819. doi:10.1080/17517575.2018.1450526
- [55] Geng, T., and Y. Du. 2020. "The business model of intelligent manufacturing with Internet of Things and machine learning", *Enterprise Information Systems*. doi:10.1080/17517575.2020.1722253.
- [56] Shang, X., R. Zhang, X. Zhu and Q. Zhou. 2016. "Design theory, modelling and the application for the Internet of Things service", *Enterprise Information Systems* 10 (3): 249-267. doi: 10.1080/17517575.2015.1075592.
- [57] Zhang, Y., and H. Wang. 2020. "Building an information infrastructure of spectroscopic profiling data for food-drug quality and safety management", *Enterprise Information Systems* 14 (1): 133-155. doi: 10.1080/17517575.2019.1684567.
- [58] Bansal, K., Mittal, K., Ahuja, G., Singh, A. and Gill, S.S., 2020. DeepBus: Machine learning based real time pothole detection system for smart transportation using IoT. *Internet Technology Letters*, 3 (3):p.e156. doi: 10.1002/itl2.156
- [59] Tuli, S., Tuli, S., Wander, G., Wander, P., Gill, S.S., Dustdar, S., Sakellariou, R. and Rana, O., 2019. Next Generation Technologies for Smart Healthcare: Challenges, Vision, Model, Trends and Future Directions. *Internet Technology Letters*, 3 (2):p.e145. doi: 10.1002/itl2.145
- [60] Naranjo, P.G.V., Shojafar, M., Mostafaei, H., Pooranian, Z. and Baccarelli, E., 2017. P-SEP: A prolong stable election routing algorithm for energy-limited heterogeneous fog-supported wireless sensor networks. *The Journal of Supercomputing*, 73(2), pp.733-755. doi: 10.1007/s11227-016-1785-9
- [61] Souri, A., Ghafour, M.Y., Ahmed, A.M., Safara, F., Yamini, A. and Hoseyninezhad, M., 2020. A new machine learning-based healthcare monitoring model for student's condition

diagnosis in Internet of Things environment. *Soft Comput.* doi: 10.1007/s00500-020-05003-6

- [62] Hosseinzadeh, M., Tho, Q.T., Ali, S., Rahmani, A.M., Souri, A., Norouzi, M. and Huynh, B., 2020. A Hybrid Service Selection and Composition Model for Cloud-Edge Computing in the Internet of Things. *IEEE Access*, 8, pp.85939-85949. doi: 10.1109/ACCESS.2020.2992262
- [63] Chen, M.Y., Chiang, H.S., Lughofer, E. and Egrioglu, E., 2020. Deep learning: emerging trends, applications and research challenges. *Soft Comput* 24, 7835–7838 (2020). doi:10.1007/s00500-020-04939-z
- [64] Chen, M., Lughofer, E.D. & Polikar, R. 2018. Big Data and Situation-Aware Technology for Smarter Healthcare. *J. Med. Biol. Eng.* 38, 845–846. Doi: 10.1007/s40846-018-0452-4
- [65] Xu, M., and R. Buyya. 2019. “Brownout approach for adaptive management of resources and applications in cloud computing systems: A taxonomy and future directions”. *ACM Computing Surveys (CSUR)* 52(1): 1-27. doi: <https://doi.org/10.1145/3234151>.
- [66] Xu, M., and R. Buyya. 2017. “Energy efficient scheduling of application components via brownout and approximate Markov decision process”. In *International Conference on Service-Oriented Computing*: pp. 206-220. Springer. Cham.
- [67] Xu, M., and R. Buyya. 2019. “BrownoutCon: A software system based on brownout and containers for energy-efficient cloud computing”. *Journal of Systems and Software* 155: 91-103. doi: <https://doi.org/10.1016/j.jss.2019.05.031>.
- [68] Shukla, S., M.F. Hassan, L.T. Jung, A. Awang, and M.K. Khan 2019. “A 3-tier architecture for network latency reduction in healthcare internet-of-things using fog computing and machine learning.” In *8th International Conference on Software and Computer Applications*: pp. 522-528. doi: <https://doi.org/10.1145/3316615.3318222>.
- [69] Mutlag, A. A., M.K. Abd Ghani, N.A. Arunkumar, M.A. Mohammed and O. Mohammed. 2019. “Enabling technologies for fog computing in healthcare IoT systems”. *Future Generation Computer Systems* 90: 62-78. doi: <https://doi.org/10.1016/j.future.2018.07.049>.
- [70] Vijayakumar, V., D. Malathi, V. Subramaniaswamy, P. Saravanan, and R. Logesh. 2019. “Fog computing-based intelligent healthcare system for the detection and prevention of mosquito-borne diseases”. *Computers in Human Behavior* 100: 275-285. doi: <https://doi.org/10.1016/j.chb.2018.12.009>.
- [71] Chatrati, S. P., G. Hossain, A. Goyal, A. Bhan, S. Bhattacharya, D. Gaurav, and S.M. Tiwari. 2020. “Smart home health monitoring system for predicting type 2 diabetes and hypertension.” *Journal of King Saud University-Computer and Information Sciences*. doi: <https://doi.org/10.1016/j.jksuci.2020.01.010>.

- [72] Tang, V., K.L. Choy, G.T. Ho, H.Y. Lam, and Y.P. Tsang. 2019. "An IoMT-based geriatric care management system for achieving smart health in nursing homes." *Industrial Management & Data Systems* 119 (8). pp. 1819-1840
- [73] Tang, V., P.K.Y. Siu, K.L. Choy, H.Y. Lam, G.T.S. Ho, CK.M. Lee, and Y.P. Tsang. 2019. "An adaptive clinical decision support system for serving the elderly with chronic diseases in healthcare industry." *Expert Systems* 36(2): e12369. doi: <https://doi.org/10.1111/exsy.12369>.
- [74] Gill, S. S., P. Garraghan, and R. Buyya. 2019. "ROUTER: Fog enabled cloud based intelligent resource management approach for smart home IoT devices." *Journal of Systems and Software* 154: 125-138.
- [75] Hong, C., and B. Varghese. 2019. "Resource management in fog/edge computing: a survey on architectures, infrastructure, and algorithms." *ACM Computing Surveys (CSUR)* 52 (5): 1-37.