

INTEGRATION OF POINTS CLOUD DATA FROM AIRBORNE AND  
TERRESTRIAL LASER SCANNER.

NURUL ZAITUL SYEEMA BINTI BAHARUDDIN

A project report submitted in partial fulfilment of the  
requirement for the award of the degree of  
Master of Science (Geomatic Engineering).

Faculty of Geoinformation and Real Estate  
Universiti Teknologi Malaysia

DECEMBER 2016

## ACKNOWLEDGEMENT

First of all, syukur Alhamdulillah thank you Allah for all that happens and give me strength to complete this final project. Special thanks to the supervisors who give full of support, Dr. Mohd Farid b. Mohd Ariff and Assoc. Prof. Dr. Zulkepli b. Majid for the patience, knowledge, unwavering tutoring and amenities during the completing this final project.

Special thank you also dedicate to the Photogrammetry Laser Scanner team for the cooperation and guardians during the data collection, data processing until producing the final result, Dr. KhairulNizam b. Idris, , Mr. Lau Chong Luh, Mr. Ahmad Razali b. Yusoff, Mr. Hamdi b. Abdul Hamid, Mr. Anuar b Aspuri, Mr. Irfan Fikri, SR. Khairulazhar bin Zainuddin and other team members. Not forgotten, very important person, my husband also my classmate SR. Che Ku Ahmad Fuad who never stop supporting and encourage me to be an extraordinary person. The cooperation and guidance is priceless.

Thank you to my family, friend and other people either intentional or unintentional involve in this project. Allah blessed.

Thank you, it unable to repay.

## ABSTRACT

The purpose of this study is trying to solve the shortage of the data due to the limitations of the laser scanner instrument in data collection. The data integration between ALS with TLS are able to provide complete data for used by other applications such as 3D model of building, 3D model of forestry mapping, documentation of historical building, forensic and many more. The scope of this study focusing on the scanning the UTM Eco-Home building using ALS and TLS. The UTM Eco-Home building was chosen because it has a unique design and structure that can be test the capabilities of the laser scanner instruments. The ALS used to scan the roof top of the building and the TLS used to scan the façade of the building. The laser scanner instruments are used in data collection are to ensure that is no part of the building are missed to scan. After completing scanning the UTM Eco-Home building process, the dataset used for integration through registration method using man-made. The man-made is chosen because the characteristic of man-made can be seen in both dataset. The level of accuracy is assessed by comparison method with the conventional measurement using total station. The result from the integration is using for many purposes for example 3D city modelling, 3D forestry mapping, 3D topographic mapping, historical documentation and others.

## ABSTRAK

Kajian ini dijalankan adalah bertujuan untuk menangani masalah kekurangan data yang diperolehi disebabkan oleh alat laser yang terhad dalam pengumpulan data. Kerja integrasi data dari ALS dan TLS mampu memberikan data yang lengkap untuk digunakan oleh aplikasi yang lain seperti 3D model bangunan, 3D perhutanan, dokumentasi bangunan tinggalan sejarah, forensik dan banyak lagi. Skop kajian ini fokus kepada pengambilan data dari ALS dan TLS terhadap bangunan UTM Eco-Home. Bangunan UTM Eco-Home ini dipilih kerana ia mempunyai rekabentuk dan srtuktur yang unik yang mampu menguji tahap kebolehan alat ALS dan TLS dalam mengimbas permukaan bangunan. ALS digunakan untuk mengimbas bahagian atas bangunan atau atap bangunan manakala TLS digunakan untuk mengimbas bahagian permukaan bangunan. Dua alat digunakan dalam pengumpulan data adalah untuk memastikan tiada bahagian bangunan yang tidak diimbas. Setelah selesai proses pengimbasan bangunan UTM Eco-Home, kedua-dua data diintegrasikan dengan menggunakan kaedah registrasi menggunakan ciri-ciri buatan manusia yang dapat dilihat pada kedua-dua data tersebut. Tahap kejituan dinilai dengan membuat perbandingan dengan ukuran bangunan UTM Eco-Home yang diukur secara konvensional menggunakan alat total station. Hasil daripada integrasi ini boleh digunakan untuk pelbagai tujuan contohnya pemodelan 3D bandar, 3D pemetaan perhutanan, 3D pemetaan topografi, dokumentasi sejarah dan lain-lain.

## TABLE OF CONTENTS

CHAPTER	TITLE	PAGES
	DECLARATION	ii
	DEDICATION	iii
	ACKNOWLEDGEMENT	iv
	ABSTRACT	v
	ABSTRAK	vi
	TABLE OF CONTENTS	vii
	LIST OF TABLES	xi
	LIST OF FIGURES	xii
	LIST OF ABBREVIATIONS	xvi
	LIST OF APPENDICES	xix
1	INTRODUCTION	1
	1.1 Background of Study	1
	1.2 Problem Statement	3
	1.3 Objective	4
	1.4 Study Question	5

1.5	Scope	5
1.6	Significant	9
1.7	Structural of the Study	10
1.8	Methodology of the Study	13
1.9	Summary	15
<b>2</b>	<b>LITERATURE REVIEW</b>	<b>16</b>
2.1	Introduction	16
2.2	Airborne Laser Scanner	17
2.2.1	Airborne Laser Scanner System	18
2.2.2	Principles of Airborne Laser Scanner	20
2.2.3	Airborne Laser Scanner Data Acquisition	23
2.3	Terrestrial Laser Scanner	26
2.3.1	Types of Laser Scanner	26
2.3.1.1	Time of Flight (TOF)	27
2.3.1.2	Phase Based	29
2.3.1.3	Triangulation Based System	32
2.4	Data Integration	35
2.5	Registration	38
2.6	Summary	41
<b>3</b>	<b>METHODOLOGY</b>	<b>42</b>
3.1	Introduction	42
3.2	Research Methodology Phases	44
3.3	Phase I : Preliminary Study	45

3.4	Phase II : Data Acquisition	45
3.4.1	Airborne Laser Scanner	46
3.4.1.1	Aerial LiDAR Phoenix AL3-32	47
3.4.2	Terrestrial Laser Scanner	50
3.4.2.1	Terrestrial Laser Scanner Leica C10	51
3.4.2.2	Spherical Target	53
3.4.3	Field Survey	54
3.5	Phase III : Data Processing	56
3.5.1	Terrestrial Laser Scanner Data Registration	56
3.5.2	LAS Data Import	61
3.5.3	Data Integration	62
3.6	Summary	64
<b>4</b>	<b>RESULT AND ANALYSIS</b>	<b>65</b>
4.1	Introduction	65
4.2	Result of Data Integration	66
4.3	Analysis	69
4.3.1	Comparing Process	70
4.4	Accuracy Assessment	72
4.4.1	Root Mean Square Error (RMSE)	72
4.4.2	Hypothesis Test	79
4.5	Summary	86
<b>5</b>	<b>CONCLUSION AND RECOMMENDATION</b>	<b>87</b>
5.1	Introduction	87

5.2	Conclusion	88
5.3	Recommendation	91
	<b>REFERENCES</b>	<b>93 – 96</b>
	<b>APPENDIX</b>	<b>97 - 104</b>



## LIST OF TABLE

TABLE NO.	TITLE	PAGE
1.1	Study Design	12
3.1	The specification of Aerial LiDAR Phoenix AL3-32	49
3.2	The specification of Leica ScanStation C10	52
4.1	The comparison between integration point cloud with dimension survey	73
4.2	The table shows the residual value, mean of sample, standard deviation of sample, and variance of sample.	77
4.3	The table shows the categories of choosing the hypothesis test.	80
4.4	The data needed for hypothesis test.	84
4.5	The Harnett table about hypothesis test.	85

## LIST OF FIGURE

<b>FIGURE NO.</b>	<b>TITLE</b>	<b>PAGE</b>
1.1	The UTM Eco-Home Building	6
1.2	Aerial LiDAR AL3-32	7
1.3	Remote Control Helicopter	7
1.4	Leica ScanStation	8
1.5	The summary of methodology of the study	14
2.1	The concept of Airborne Laser Scanner in collecting data	20
2.2	The percentage of energy returned to the sensor	22
2.3	The point cloud data collecting from Airborne Laser Scanner. Only the rooftop visible in the data	24
2.4	The screenshot for the original LiDAR data in ASCII format	25
2.5	The concept of time of flight (TOF)	28
2.6	Commercially available time of flight laser scanner	29
2.7	The concept of phase based method of laser scanner	31

2.8	The laser scanner instrument that uses the phase based concept	32
2.9	The principle of triangulation	33
2.10	The triangulation technique for laser scanning	34
2.11	The instrument using triangulation based system, the Minolta VI-910 3D laser scanning system	34
2.12	The integration process from various data sources integrate to be one data	35
2.13	The result from the study where the top is aerial imagery, the middle is mobile laser scanner data and the bottom is integration result from aerial imagery and laser scanner	36
2.14	The study area, Ancient Ilida	37
2.15	The result of integration of point cloud and CCD camera video data	38
2.16	The spherical target for registration purpose	39
2.17	The example of registration using natural features	40
3.1	Flowchart of research methodology	43
3.2	The concept of Airborne Laser Scanner	47
3.3	Points cloud data collecting by Terrestrial Laser Scanner	51
3.4	Spherical target used in this study	53
3.5	Field work dimension survey	54
3.6	Drawing plan in AutoCAD from field work	55
3.7	Cyclone 7.3 software	56
3.8	Imported process to Cyclone 7.3 software	57

3.9	The registration process using spherical target	58
3.10	The registration process using spherical target from all four (4) scan station	59
3.11	The sphere target have done the registration process for all the 4 station and the data well unify	60
3.12	Accuracy of registration process. The result shows the Accuracy can achieve mm level	61
3.13	LAS format data successful imported in Cyclone 7.3 software	62
3.14	The integration process through registration using natural features for both dataset	63
3.15	The accuracy for integration process through registration method	64
4.1	Registration method using natural features is done for both dataset	66
4.2	The Constraint ID error below 0.04m	67
4.3	Point cloud integration close up show the blue point cloud is from Airborne Laser Scanner data and others is from Terrestrial Laser Scanner data blend well	67
4.4	Side view of UTM Eco-Home building after integration of points cloud process	68
4.5	Front view of UTM Eco-Home building after integration of points cloud process	68

4.6	Top view of UTM Eco-Home building after integration of points cloud process	69
4.7	A part of measurement used for the comparison purpose. i and ii are measure the dimension of floor while iii and iv are measure stairs and window size	70
4.8	Data from Field work dimension survey 2D drawing from AutoCAD is present in AutoCAD 2D drawing.	71
4.9	Blue line show the dimension of the building from points cloud integration and orange line show the dimension of the building from field work dataset	74
4.10	The Normal Distribution spread out more on the right	78
4.11	The result of t Stat,p-value and others	83

## LIST OF ABBREVIATION

$\Delta\Phi$	-	Transition
$\Delta t$	-	Resolution of time measurement
$\Delta R$	-	Range resolution
$\mu d$	-	The difference of mean of sample
$\mu 1$	-	The mean of observation from dataset 1
$\mu 2$	-	The mean of observation from dataset 2
3D	-	Three dimensional
AM	-	Amplitude Modulation
ASCII	-	American Standard Code for Information Interchange.
ATV	-	All terrain vehicle
BIM	-	Building Information Modelling.
$c$	-	Speed of light
$c(\tau_0)$ , etc	-	Point of samples.
CCD	-	Charge coupled device.

CEES	-	Centre of Electrical Energy System.
Dintegration	-	Dimension from point cloud integration dataset.
Dautocad	-	Dimension from field work survey (AutoCAD).
ETL	-	Extract process, transform and load.
FM	-	Frequency Modulation.
FOV	-	Field of view.
GLONASS	-	Global Navigation Satellite System.
GPS	-	Global Positioning System.
Ho	-	Null hypothesis.
Ha	-	Alternative hypothesis.
HDL	-	High Definition LiDAR.
ID	-	Identification.
IMU	-	Inertial Measuring Unit
ISIIC	-	Institute for Innovative Smart Infrastructure and Construction
KALAM	-	Centre for Built Environment Malay World
LAS	-	LASer.
LiDAR	-	Light Detection and Ranging.
LRF	-	Laser range finder.
m	-	Distance of the surface where pulse were reflected
n	-	Numbers of sampling
NASA	-	National Aeronautics and Space Administration.
Ppm	-	Parts per million.
R	-	Range Distance

RMSE	-	Root Mean Square Error
RGB	-	Red, green and blue
$s^2$	-	Variance of sample.
$t$	-	Time interval between sending / receiving the pulse.
TOF	-	Time of flight
UAV	-	Unmanned Aircraft Vehicles
USB	-	Universal Serial Bus
UTM	-	Universiti Teknologi Malaysia
UTM-CRC	-	UTM Construction Research Centre
WLAN	-	Wireless local area network
$x, y, z$	-	Coordinate value
$\bar{x}$	-	Mean of samples
$x_i$	-	The element of the sample.
$Z_0$	-	z score, the function of the observation value ( $\hat{p}$ ).



**LIST OF APPENDICES**

<b>APPENDICES</b>	<b>TITLE</b>	<b>PAGE</b>
A	Bowditch Adjustment Form	97
B	20 dimension of the UTM Eco-Home Building	98 - 104

## **CHAPTER 1**

### **INTRODUCTION**

#### **1.1 Background of Study**

In recent years, laser scanner technology widely used in field of measurement because of the easily and quickly data collection and provide an accurate of points cloud data. The laser scanning is non-contact technology to capture the physical object digitally using laser light line and the object of surface generate the points cloud data (Fröhlich & Mettenleiter, 2004). That means, the exact size and shape is able to capture accurately then can generated in the form of points cloud allows to be processed in a computer in three dimensional (3D) model. The abilities to measure accurately, 3D laser scanner technology was selected for use in this study because 3D laser scanner can scanning the surface including complex surface provide timely and accurate points cloud. Laser scanning have many types of method in collecting data and in this study will cover on Airborne Laser Scanner and Terrestrial Laser Scanner.

Airborne Laser Scanner is an active remote sensing technology that capable to collect the data for a wide area (Shan & Toth, 2008). Airborne Laser Scanner technology develop rapidly in recent years because its use so widespread in various fields. This makes the Airborne Laser Scanner applied with difference heights are introduced to achieve the maximum use of Airborne Laser Scanner technology. Airborne Laser Scanner technology is widely used in agriculture, city planning, 3D city models and many others (Mohammed, 2015).

Terrestrial Laser Scanner is a new technology used for measurement on field that allows data obtained quickly and generated in a form of points cloud (Staiger, 2003). The points cloud data provided the information such as x, y, z coordinate of the surface from the ground accurately, reflectance value and color of the surface after processing the points cloud using the specific software. The Terrestrial Laser Scanner have different type of resolution on collecting point cloud data such as low, medium and high where every type of resolution collecting points cloud data have a different dense of point clouds. High resolution with more density give more information of the object and vice versa.

Due to the accuracy of laser scanning technology, facilitate data collection and time consuming, the data from Airborne Laser Scanner and Terrestrial Laser Scanner are used in this study to integrate the points cloud of the unique design of Universiti Teknologi Malaysia (UTM) Eco-Home building. Both data from Airborne Laser Scanner and Terrestrial Laser Scanner are required to ensure that no surface is left to scan from façade of the building up to the top surface or rooftop of the building. This study exploring on how the Airborne Laser Scanner and Terrestrial Laser Scanner data integrated and finally checking the accuracy assessment.

## 1.2 Problem Statement

The urban areas has a unique and high trend building in this era because this type of areas usually have a high population density and if possible, the land use of this areas will be maximized. In modelling the high and unique building like this, it would be incomplete if the data collection process is done at the bottom or the top of the building only due to the limitation of the scanning instrument capability from Airborne Laser Scanner and Terrestrial Laser Scanner. The integration the two data from the Airborne Laser Scanner and Terrestrial Laser Scanner makes the whole building be covered from the building facade up to the rooftop and which can solve the problem.

The integration process either Aerial Photo with Terrestrial Laser Scanner or Airborne Laser Scanner with Terrestrial Laser Scanner are not new but massively applied in other fields such as forestry. The reason of forestry tend to use the integration data because the study of the forestry need to use data from the ground up to the top for the purpose of modelling the tree, from the base of the tree up to the canopy and suitable for mapping the large areas of the forest (Kankare *et al.*, 2015; Jones *et al.*, 2016). For 3D modelling of the building, completeness of data from building facade to the rooftop next to the interior of the building is emphasized because from the 3D model of the building will be apply for other uses such as as-built, building information modeling (BIM), documentation of historical building (Kedzierski *et al.*, 2015) 3D city modelling and others.

Modelling the object in 3D, scanning process from various perspectives have to be done to avoid missing important part especially for the as-built documentation work involving historical or under construction building (Arayici Y, 2007). Ensuring the all parts of the building scanned perfectly, Airborne Laser Scanner and Terrestrial Laser Scanner alone is not sufficient. The Terrestrial Laser Scanner technology is used to scan the building facade and the top structure above can be equipped with Airborne Laser

Scanner and the integration from both of these data can be done for the purpose of 3D modelling (Kedzierski *et al.*, 2015).

### 1.3 Objective

This study is motivated to achieve the completeness of data collection due to limitation of capability from the instruments, Terrestrial Laser Scanner and Airborne Laser Scanner are using to scan the comprehensive area. The concerned of this study is about the Airborne Laser Scanner and Terrestrial Laser Scanner points cloud data of UTM Eco-Home building to :

- i. Integrate the points cloud data from Airborne Laser Scanner and Terrestrial Laser Scanner in appropriate software according to the suitable method.
- ii. Determine the accuracy of the integration of points cloud data from Airborne Laser Scanner and Terrestrial Laser Scanner.

## **1.4 Study Questions**

In fulfilling the objective requirements of this study, several questions need to be answered :

- i. How to manage the scanning process efficiently using Airborne Laser Scanner and Terrestrial Laser Scanner equipment.
- ii. How to integrate the Airborne Laser Scanner data with Terrestrial Laser Scanner data.
- iii. How to determine the accuracy assessment to make sure the integration data can be used for other application.

## **1.5 Scope of Study**

This study is conducted in Universiti Teknologi Malaysia (UTM) Eco-Home building near the Equine Centre, Universiti Teknologi Malaysia, Skudai Johor since the UTM Eco-Home building has an unique design including the rooftop, show in figure 1.1. The UTM Eco-Home has been designed and built by a team of researchers and students of Universiti Teknologi Malaysia (UTM) led by Prof. Dr. Muhd Zaimi Abd Majdi and the research group involved from the Institute for Innovative Smart Infrastructure and Construction (ISIIC), UTM Construction Research Centre (UTM-CRC), Centre for Built Environment Malay World (KALAM) and Centre of Electrical Energy System (CEES).

UTM Eco-Home building was built using interlocking blocks and reinforced concrete. However, part of building structure was built using the research product such as Innovative Modular Pad Footing System and Eco-Crete. In addition, UTM Eco-Home building also uses Fast Track Wall System to reduce the construction time 50 percent and 10 to 15 percent of construction costs. Figure 1.1 below shows the UTM Eco-Home building ([www.news.utm.my](http://www.news.utm.my), 2016).



**Figure 1.1** : The UTM Eco-Home building.


Sources : ([www.news.utm.my](http://www.news.utm.my))

The instrument used in data collection process to scan the top of the building is Aerial LiDAR AL3-32 by Phoenix Aerial System, is a multi-platform high definition LiDAR mapping system, show in Figure 1.2. This tool is supported by various satellite constellations such as GPS, GLONASS, Galileo and others, and use the VELODYNE HDL-32 high definition LiDAR sensors that provide 700,000 scan points per second

([www.phoenix-aerial.com/](http://www.phoenix-aerial.com/), 2016). The Aerial LiDAR AL3-32 is used together with the appropriate platform called remote control helicopter, show in Figure 1.3. Besides that, the Terrestrial Laser Scanner is the other important instrument used in data collection process. Leica ScanStation C10 with high accuracy-long range scanning ([hds.leica-geosystems.com](http://hds.leica-geosystems.com), 2016) is choose to scan the facade of the UTM Eco-Home building, show in Figure 1.4.



**Figure 1.2** : Aerial LiDAR AL3-32

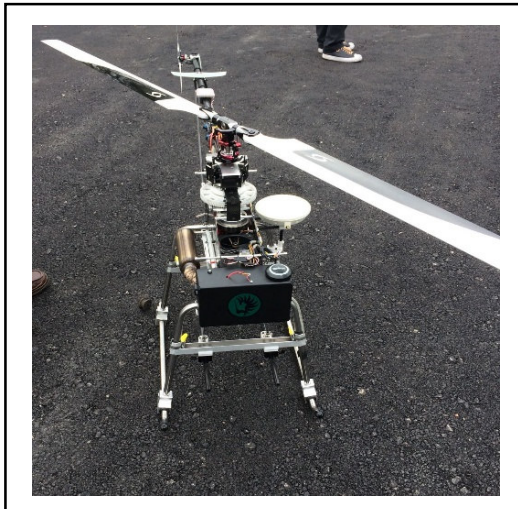

**Figure 1.3** : Remote Control  
Helicopter





**Figure 1.4** : Leica ScanStation C10.

Sources : [hds.leica-geosystems.com](https://hds.leica-geosystems.com).

The following phase after collecting data is processing stage. The Airborne Laser Scanner data was processed using Quick Terrain Modeler V8.0 software to prepare the data in LASer (LAS) format as a secondary data in this study. The LAS format enable users to process and analyze a compact dense of Airborne Laser Scanner data accurately in accordance with the study. While for Terrestrial Laser Scanner data, the software used for processing is Cyclone 7.3 software. The software provide the facilities to user to interpret the data from Leica ScanStation C10 laser scanner such as as-built and topographic survey ([hds.leica-geosystems.com](https://hds.leica-geosystems.com)).

## 1.6 Significant of the Study

The study was conducted after identifying the constraints and problems faced by the user carrying out the work of 3D modelling using point clouds data. Among the problems and constraints facing such as :

- i. The limitation of laser scanner instrument in collecting data. Airborne Laser Scanner is lack of capability to collect the data on the building facade and Terrestrial Laser Scanner is lack of capability to collect the data on the top of the building.
- ii. The integration data between Airborne Laser Scanner and Terrestrial Laser Scanner can cover the whole surface of UTM Eco-Home building to generate in 3D modelling for other purposes.
- iii. Scanning the entire building using Airborne Laser Scanner and Terrestrial Laser Scanner can avoid the important surface not to be scanned.
- iv. The integration data between Airborne Laser Scanner and Terrestrial Laser Scanner need to check the accuracy assessment to make sure the integration process acceptable for other application or vice versa.

## 1.7 Structural of the Study

This study consist five (5) chapters and can be summarized as below :

### Chapter 1 : Introduction

Definition and explanation about the introduction of the study including objective of the study, the problem statement causes the issue of the study, the scope, the significant and the outline of the study.

### Chapter 2 : Literature Review

Covering on reviews the methodologies on point clouds data of Airborne Laser Scanner and Terrestrial Laser Scanner with the integration process of two different format data. In this chapter also review the suitable software on how to carry out the integration process and check the accuracy assessment of the data. This chapter is also used for guideline for the whole study workflow.

### Chapter 3 : Methodologies

In this chapter consist explanation the method of the study on how data collection conducted with Airborne Laser Scanner and Terrestrial Laser Scanner instrument, how the registration process for Airborne Laser Scanner and Terrestrial Laser Scanner data and the accuracy assessment checking comparing with conventional method.

### Chapter 4 : Result and Analysis.

The result and analysis obtained from the studies conducted after completing chapter three (3). If there is any problem appear, in this chapter will be discussed further.

## Chapter 5 : Conclusion and Recommendation.

From the result and analysis, the conclusion made in this chapter and the recommendation for improvement in future should be state if necessary.


In the early stages, it is important to design the study that follows the course requirement. The design study is to determine the level and duration of the study is completed. Start with identifying the objectives of the study, the problem statement, scope of the study and literature review for references to the study. Next, the study was carried out by methodology which is organize using flowchart to produce the result and analyze the result to determine the accuracy of the study. Table 1.1 below shows the design of the study generally.

**Table 1.1** : Study design.

<b>Introduction</b>	Background, problem statement, objectives, research questions, scope of study, significant and study design.			
<b>Literature review</b>	Introduction of Airborne Laser Scanner and Terrestrial Laser Scanner.			
	Point Clouds	Concept – Represent x, y, z value, intensities, RGB		
		Application – 3D model, 3D mapping, others.		
	Data integration	Airborne Laser Scanner and Terrestrial Laser Scanner	Suitable software uses for Airborne Laser Scanner data and Terrestrial Laser Scanner data.	
			Common target uses for registration and integration.	
		Previous works	Limitation of the Airborne Laser Scanner and Terrestrial Laser Scanner coverage data collection.	
Data integration for other application for example forestry.				
<b>Methodology</b>	Field work data collection using Airborne Laser Scanner and Terrestrial Laser Scanner instruments.			
	Processing	Point clouds data integration using suitable software.		
		Registration (spherical target, man-made) and cropping process.		
	Summary			
<b>Result and Analysis</b>	Integration of point clouds from Airborne Laser Scanner and Terrestrial Laser Scanner.			
	Accuracy assessment between Airborne Laser Scanner and Terrestrial Laser Scanner data integration with field work dimension survey.			
<b>Conclusion and Recommendation</b>	Conclusion of the study and recommendation for improvement.			

## **1.8 Methodology of the Study**

The methodology of the study is an important aspect in implementing this study because in this section determine on how the study was conducted. The methodology of the study is shown in Figure 1.5 below briefly explain the work flow carried out in this study :

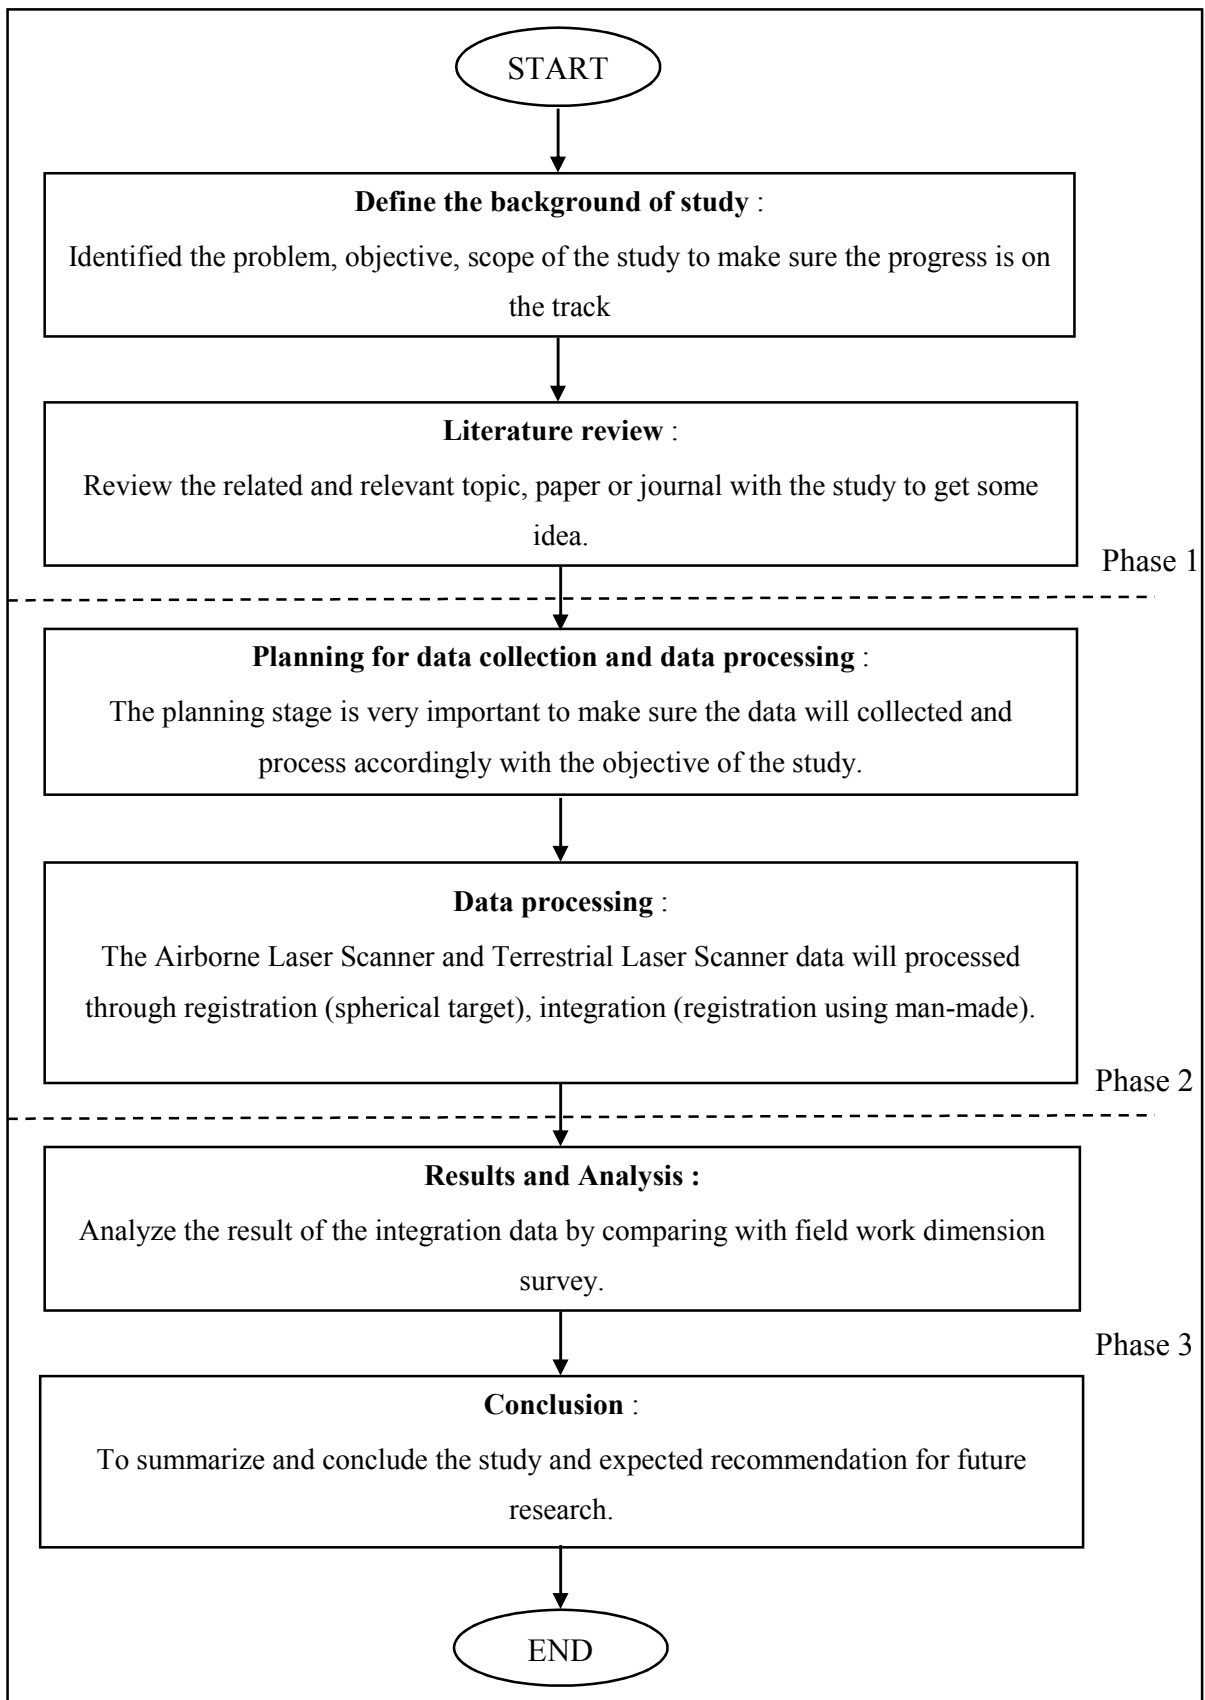

**Figure 1.5 :** The summary of methodology of the study.

## 1.9 Summary

The overall of the chapter 1, it can be summarize that the process of identifying the purpose of the study was doing in this chapter. From this chapter 1, the result can be expected from identify the work flow of methodology and analysis can be determine the accuracy of the study.

This chapter 1 plays an important role throughout the course of this study. It used as a benchmark for the next process until the result produce with analysis. After successfully producing the result and analyze it properly, chapter 1 again referred to determine whether the whole process of this study are followed the objectives as state in this chapter.



## REFERENCES

- Abbas, M. A., Setan, H., Z., Chong, A.K, Luh, L.C., Idris, K. M., & Ariff, M.F.M. (2015). Adaption Of Invariant Features In Image For Point Clouds Registration. *Jurnal Teknologi*, 75(10).
- Arayici, Y. (2007). An approach for real world data modelling with the 3D terrestrial laser scanner for built environment. *Automation in Construction*, 16(6), 816-829.
- Balis, V., Karamitsos, S., Kotsis, I., Liapakis, C., & Simpas, N. (2004). 3d-laser scanning: Integration of point cloud and ccd camera video data for the production of high resolution and precision rgb textured models: Archaeological monuments surveying application in ancient ilida. Paper presented at the Proceedings of FIG Working Week.
- Baltsavias, E. (2008). Introduction to airborne LIDAR and physical principles of LIDAR technology. Institute of Geodesy and Photogrammetry, ETH Zurich, Switzerland.
- Baltsavias, E. P. (1999). Airborne laser scanning: basic relations and formulas. *ISPRS Journal of photogrammetry and remote sensing*, 54(2), 199-214.
- Baltsavias, E. P. (1999). Airborne laser scanning: existing systems and firms and other resources. *ISPRS Journal of photogrammetry and remote sensing*, 54(2), 164-198.
- Bastonero, P., Donadio, E., Chiabrando, F., & Spanò, A. (2014). Fusion of 3D models derived from TLS and image-based techniques for CH enhanced documentation. *ISPRS Annals of the Photogrammetry, Remote Sensing and Spatial Information Sciences*, 2(5), 73.
- Chen, Q. (2007). Airborne lidar data processing and information extraction. *Photogrammetric engineering and remote sensing*, 73(2), 109.
- Chhatkuli, S., Satoh, T., & Tachibana, K. (2015). Multi Sensor Data Integration for AN Accurate 3d Model Generation. *The International Archives of Photogrammetry, Remote Sensing and Spatial Information Sciences*, 40(4), 103.
- Collis, R. (1966). Lidar: a new atmospheric probe. *Quarterly Journal of the Royal Meteorological Society*, 92(392), 220-230.

- Diez, David M; Barr, Christopher D; Cetinkaya-Rundel, Mine (2012). OpenIntro Statistics
- Fröhlich, C., and Mettenleiter, M. (2004). Terrestrial laser scanning—new perspectives in 3D surveying. *International archives of photogrammetry, remote sensing and spatial information sciences*, 36(Part 8), W2.
- Gruen, A., Huang, X., Qin, R., Du, T., Fang, W., Boavida, J., & Oliveira, A. (2013). Joint processing of UAV imagery and terrestrial mobile mapping system data for very high resolution city modeling. *Int. Arch. Photogramm. Remote Sens. Spat. Inf. Sci.*, 175-182.
- Heine, E., Reiner, H., & Taronger, J. (2007). 3D risk mapping: preparing learning material on the use of laser scanning for risk assessment of public infrastructure. Paper presented at the International Workshop on the application of terrestrial laser scanning for risk mapping.
- Jones, T., Marzen, L., & Chappelka, A. (2016). Mapping, Modeling, and Estimating Tree Measurements of Urban Tree Canopy Structure Using Terrestrial LiDAR Scanning. *Papers in Applied Geography*, 1-7.
- Kankare, V., Liang, X., Vastaranta, M., Yu, X., Holopainen, M., & Hyyppä, J. (2015). Diameter distribution estimation with laser scanning based multisource single tree inventory. *ISPRS Journal of photogrammetry and remote sensing*, 108, 161-171.
- Kedzierski, M., Fryskowska, A., Wierzbicki, D., Dabrowska, M., & Grochala, A. (2015). Impact of the method of registering Terrestrial Laser Scanning data on the quality of documenting cultural heritage structures. *The International Archives of Photogrammetry, Remote Sensing and Spatial Information Sciences*, 40(5), 245
- Keith, M (2007). LIDAR an introduction and overview. Portland State University.
- Lefsky, M. A., Cohen, W. B., Parker, G. G., & Harding, D. J. (2002). Lidar Remote Sensing for Ecosystem Studies Lidar, an emerging remote sensing technology that directly measures the three-dimensional distribution of plant canopies, can accurately estimate vegetation structural attributes and should be of particular interest to forest, landscape, and global ecologists. *BioScience*, 52(1), 19-30.

- Lerma, J., and García-San-Miguel, D. (2014). Self-calibration of terrestrial laser scanners: selection of the best geometric additional parameters. *ISPRS Annals of the Photogrammetry, Remote Sensing and Spatial Information Sciences*, 2(5), 219.
- Lichti, D., and Gordon, S. J. (2004). Error Propagation in Directly Georeferenced Terrestrial Laser Scanner Point Clouds for Cultural Heritage Recording, FIG Working Week 2004, Athens, Greece, May 22–27, 2004, WSA2 Modelling and Visualization. scholar. google. com/http. WSA2 Modelling and Visualization, Athens, Greece, 16.
- Lohani, B. (2008). Airborne altimetric LIDAR: Principle, data collection, processing and applications. URL: [http://home.iitk.ac.in/~blohani/LiDAR\\_Tutorial/Airborne\\_AltimetricLidar\\_Tutorial.htm](http://home.iitk.ac.in/~blohani/LiDAR_Tutorial/Airborne_AltimetricLidar_Tutorial.htm), accessed Feb.
- Majid, Z., Setan, H., & Chong, A. (2008). Integration of Stereophotogrammetry and Triangulation Based Laser Scanning System for Precise Mapping of Craniofacial Morphology. *The International Archives of the Photogrammetry, Remote Sensing and Spatial Information Sciences*, 37.
- Malhotra, A., Gupta, K., & Kant, K. (2011). Laser Triangulation for 3 D Profiling of Target. *International Journal of Computer Applications*, 35(8).
- Mathews, Paul G (2005). *Design of Experiment with MINITAB*
- Mitra, N. J., Gelfand, N., Pottmann, H., & Guibas, L. (2004). Registration of point cloud data from a geometric optimization perspective. Paper presented at the Proceedings of the 2004 Eurographics/ACM SIGGRAPH symposium on Geometry processing.
- Mohammed, H. (2015). *Fusion of Terrestrial and Airborne Laser Data for 3D Modeling Applications*. University of Calgary.
- Murphy, K. E. (2004). Light detection and ranging (LIDAR) mapping system: Google Patents.
- Pinkasovitch, A. (2009). Investopedia: Investopedia.
- Pödör, A. D. (2010). *Data acquisition and integration 7*.

- Pradhan, B., Kumar, S., Mansor, S., Ramli, A. R., & Shariff, A. R. M. (2006). Spatial data compression and denoising via wavelet transformation. *Appl GIS*, 2(1), 6.1-6.16.
- Remondino, F. Reality-based 3D modeling of heritage sites and objects. 2010
- Riveiro, B; Gonzalez-Jorge, H; Conde, B; Puente, I (2016). *Laser Scanning Technology: Fundamental, Principles and Application in Infrastructure*.
- Romsek, B. R. (2008). Terrestrial laser scanning: Comparison of time-of-flight and phase based measuring systems.
- Rönholm, P., and Haggrén, H. (2012). Registration of laser scanning point clouds and aerial images using either artificial or natural tie features. *ISPRS Ann. Photogramm. Remote Sens. Spatial Inf. Sci*, 1-3.
- Schulz, T. (2007). Calibration of a terrestrial laser scanner for engineering geodesy. Technical University of Berlin.
- Shan, J., and Toth, C. K. (2008). *Topographic laser ranging and scanning: principles and processing*: CRC press.
- Slawomir S. Piatek, Hamamatsu Corporation & New Jersey Institute of Technology. (2015). – Measuring distance with light.
- Specification, L. Version 1.4-R13.2013.
- Staiger, R. (2003). Terrestrial laser scanning technology, systems and applications. Paper presented at the 2nd FIG Regional Conference Marrakech, Morocco.
- Starek, Micheal J (2016). Light Detection and Ranging (LIDAR). *Encyclopedia of Estuaries*.
- Wehr, A., and Lohr, U. (1999). Airborne laser scanning—an introduction and overview. *ISPRS Journal of photogrammetry and remote sensing*, 54(2), 68-82.
- Wu, H., and Fan, H. (2016). Registration of Airborne LiDAR Point Clouds by Matching the Linear Plane Features of Building Roof Facets. *Remote Sensing*, 8(6), 447.
- Zhang, J. (2010). Multi-source remote sensing data fusion: status and trends. *International Journal of Image and Data Fusion*, 1(1), 5-24.
- Zitova, B., and Flusser, J. (2003). Image registration methods: a survey. *Image and vision computing*, 21(11), 977-1000.