

**UCC Library and UCC researchers have made this item openly available.
Please [let us know](#) how this has helped you. Thanks!**

Title	Graphene addition to digestion of thin stillage can alleviate acidic shock and improve biomethane production
Author(s)	Wu, Benteng; Lin, Richen; Kang, Xihui; Deng, Chen; Xia, Ao; Dobson, Alan D. W.; Murphy, Jerry D.
Publication date	2020-08-12
Original citation	Wu, B., Lin, R., Kang, X., Deng, C., Xia, A., Dobson, A. D. W. and Murphy, J. D. (2020) 'Graphene addition to digestion of thin stillage can alleviate acidic shock and improve biomethane production', ACS Sustainable Chemistry and Engineering, 8(35), pp. 13248-13260. doi: 10.1021/acssuschemeng.0c03484
Type of publication	Article (peer-reviewed)
Link to publisher's version	http://dx.doi.org/10.1021/acssuschemeng.0c03484 Access to the full text of the published version may require a subscription.
Rights	© 2020, American Chemical Society. This document is the Accepted Manuscript version of a Published Work that appeared in final form in ACS Sustainable Chemistry and Engineering after technical editing by the publisher. To access the final edited and published work see https://pubs.acs.org/doi/abs/10.1021/acssuschemeng.0c03484
Embargo information	Access to this article is restricted until 12 months after publication by request of the publisher.
Embargo lift date	2021-08-12
Item downloaded from	http://hdl.handle.net/10468/10547

Downloaded on 2021-11-27T11:27:40Z

Article

Graphene addition to digestion of thin stillage can alleviate acidic shock and improve biomethane production

Benteng Wu, Richen Lin, Xihui Kang, Chen Deng, Ao Xia, Alan D. W. Dobson, and Jerry D Murphy

ACS Sustainable Chem. Eng., **Just Accepted Manuscript** • DOI: 10.1021/
acssuschemeng.0c03484 • Publication Date (Web): 12 Aug 2020

Downloaded from pubs.acs.org on August 19, 2020

Just Accepted

“Just Accepted” manuscripts have been peer-reviewed and accepted for publication. They are posted online prior to technical editing, formatting for publication and author proofing. The American Chemical Society provides “Just Accepted” as a service to the research community to expedite the dissemination of scientific material as soon as possible after acceptance. “Just Accepted” manuscripts appear in full in PDF format accompanied by an HTML abstract. “Just Accepted” manuscripts have been fully peer reviewed, but should not be considered the official version of record. They are citable by the Digital Object Identifier (DOI®). “Just Accepted” is an optional service offered to authors. Therefore, the “Just Accepted” Web site may not include all articles that will be published in the journal. After a manuscript is technically edited and formatted, it will be removed from the “Just Accepted” Web site and published as an ASAP article. Note that technical editing may introduce minor changes to the manuscript text and/or graphics which could affect content, and all legal disclaimers and ethical guidelines that apply to the journal pertain. ACS cannot be held responsible for errors or consequences arising from the use of information contained in these “Just Accepted” manuscripts.

1
2
3 **Graphene addition to digestion of thin stillage can alleviate acidic shock and improve**
4 **biomethane production**
5
6
7
8

9 Benteng Wu ^{1,2}, Richen Lin ^{1,2,*}, Xihui Kang ^{1,2,3}, Chen Deng ^{1,2}, Ao Xia ⁴, Alan D.W. Dobson ⁵,
10
11 Jerry D. Murphy ^{1,2}
12

13 ¹ MaREI Centre, Environmental Research Institute, University College Cork, Cork T23 XE10, Ireland
14

15 ² School of Engineering, University College Cork, Cork T12 YN60, Ireland
16

17 ³ Guangzhou Institute of Energy Conversion, Chinese Academy of Sciences, Guangzhou 510640,
18
19 China
20

21 ⁴ Key Laboratory of Low-grade Energy Utilization Technologies and Systems, Chongqing University,
22
23 Ministry of Education, Chongqing 400044, China
24

25 ⁵ School of Microbiology, University College Cork, Cork T12 K8AF, Ireland
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54

55
56 * Corresponding author: Dr. Richen Lin, MaREI Centre, Environmental Research Institute, University
57
58 College Cork, Ireland. Tel.: +353 (0)21 490 1948. Email: richen.lin@ucc.ie
59
60

Abstract:

Production of biomethane from distillery by-products (such as stillage) in a circular economy system may facilitate a climate neutral alcohol industry. Anaerobic digestion (AD) of easily degradable substrates can lead to rapid acidification and accumulation of intermediate volatile fatty acids, reducing microbial activity and biomethane production.

Carbonaceous materials may function as an abiotic conductive conduit to stimulate microbial electron transfer and resist adverse impacts on AD. Herein, nanomaterial graphene and more cost-effective pyrochar were comparatively assessed in their ability to recover AD performance after acidic shock (pH 5.5). Results showed that graphene addition (1.0 g/L) could lead to a biomethane yield of 250 mL/g chemical oxygen demand; this is an 11.0% increase compared to that of the control. The recovered process was accompanied by faster propionate degradation ($\text{CH}_3\text{CH}_2\text{COO}^- + 2\text{H}_2\text{O} \rightarrow \text{CH}_3\text{COO}^- + \text{CO}_2 + 6\text{H}^+ + 6\text{e}^-$). The enhanced performance was possibly ascribed to the high electrical conductivity of graphene. In comparison, pyrochar addition (1.0 and 10.0 g/L) did not enhance biomethane yield, though it reduced digestion lag-phase time by 18.1% and 12.2% compared to the control, respectively.

Microbial taxonomy analysis suggested that *Methanosarcina* (81.5% in abundance) with diverse metabolic pathways and OTU in the order *DTU014* (6.4% in abundance) might participate in direct interspecies electron transfer contributing to an effective recovery from acidic shock.

Keywords: Anaerobic digestion; Biomethane; Conductive materials; Acidic shock; Thin stillage

Introduction

The transport sector is one of the largest and fastest increasing energy consumers. It is also the most challenging to produce climate friendly fuels for trucks, buses, ferries and planes; this sector is not readily suitable for electrification. The European Union recast Renewable Energy Directive (2018/2001) requires that the contribution of renewable energy in the transport sector is at least 14% by 2030, and that for advanced biofuels the contribution should reach 3.5%.¹ Advanced biofuels refer to fuels that do not require arable land for cultivation or use feedstocks that could be food. Typical feedstocks for advanced biofuels include animal manure, algae, crop residues and municipal solid waste.¹ Anaerobic digestion (AD) is an effective bioconversion technology which produces biomethane from wet organic material.^{2,3} Integration of AD with a sustainable waste management system can offer negative emission transport fuel.⁴

Conversion of grain to ethanol is a significant economic asset in many countries.^{5,6} For instance, whiskey production in Ireland has increased by 131% on a volume basis in the past 10 years.⁷ However, in a conventional ethanol production process, up to 20 L of stillage can be generated for every litre of ethanol, producing a considerable quantity of organic by-products.⁸ After solid/liquid separation of stillage, the liquid fraction (thin stillage) generally contains high concentrations of carbohydrates, proteins and other fermentation by-products; stillage displays a high chemical oxygen demand (COD) and low pH (3.5-4.5).⁶ Unlike the solid fraction, there is a significant energy input to produce wet distillers solubles (a source of animal fodders) through evaporation of water from stillage due to its high water content.⁹ Considering its high biodegradability, thin stillage can be used to produce biogas, which can in turn be used to satisfy some of the thermal and electrical energy demands of the distillery; this improves the sustainability of alcohol production and reduces reliance on fossil-based energy.⁷ A further use of the produced biogas is to upgrade to biomethane for use as a sustainable climate friendly transport fuel. Typically transport fuel has a higher exergy than heating and more revenues are available in substituting for transport fuel than for heat.

However, in practice, digestion of readily biodegradable feedstock can encounter instability, experience lower biomethane production, and sometimes even failure. These issues may be attributed

1
2
3 to the particularly lower pH within AD systems resulting from the accumulation of volatile fatty acids
4 (VFAs), and inhibition of subsequent methanogenesis.¹⁰ The inhibition on AD performance caused by
5 VFAs is due to their acidity rather than direct toxicity.¹¹ VFAs are not in of themselves toxic.
6
7 Generally, they are produced and consumed as food and nutrients by microbes in a well-operated
8 digester. Their inhibitory effects are indirect as they lower the pH to an undesirable level and
9 subsequently inhibit methanogenesis. In this context, some strategies have been adopted to enhance
10 the stability of AD systems.^{8, 12} Maintenance of a suitable pH within digesters maybe employed
11 through addition of alkaline chemicals.¹² However, once these chemicals are consumed, acidification
12 may occur again. Serious events which result in acidic suppression of microorganisms in AD, require
13 long periods of operation to recover.¹³ To maintain the stability of AD systems treating readily
14 degradable feedstock, especially after experiencing episodes of external stress, more sustainable and
15 effective methods should be considered.

16
17
18 Recently, carbonaceous conductive materials such as pyrochar, carbon cloth and graphene have
19 been reported as a means to enhance system stability and improve biomethane production
20 efficiency.¹⁴⁻¹⁶ Carbon cloth could enhance AD stability through mitigation of acidic inhibition (pH as
21 low as 5.0) and accelerate the recovery of the methanogenesis function due to the promoted direct
22 interspecies electron transfer (DIET) between microbes.¹³ Similar positive effects were observed
23 when using pyrochar and granular activated carbon (GAC) to alleviate ammonia ($\text{NH}_4^+\text{-N}$)
24 inhibition.^{17, 18} Florentino et al. found that under high ammonia concentration (2.8 g $\text{NH}_4^+\text{-N/L}$) the
25 biomethane yield increased by up to 53.4% through the addition of GAC, which enhanced syntrophic
26 metabolism by providing high electrical conductivity between microorganisms.¹⁸ Carbon-based
27 conductive materials have been shown to enhance the degradation of VFAs such as butyrate and
28 propionate, in turn leading to a high methanogenesis efficiency.¹⁹ In a typical syntrophic
29 methanogenesis process, the reaction occurs close to thermodynamic equilibrium; as such a minor
30 disturbance in intermediates or substrates can lead to a shift of the metabolic pathway.²⁰ Unlike
31 utilizing hydrogen or formate as the electron carrier, non-biological conductive materials are able to
32 serve as electron conduits to transfer electrons between bacteria and archaea without the requirement

1
2
3 of synthesizing electrically conductive pili (e-pili) or nanowires, which typically are the biological
4 electron shuttles to facilitate DIET.²¹ This unique cell-to-cell electron exchange metabolism offers
5 advantages to methane production from specific VFAs (such as propionic acid and butyric acid),
6 which are susceptible to interference from the traditional electron carrier H₂. The degradation and
7 methanogenesis process for model substrates of carbohydrates, proteins and alcohols (glucose, glycine
8 and ethanol respectively) were shown to be accelerated and stabilized due to the establishment of
9 DIET.^{16, 17, 22} Given the high content of carbohydrates, proteins and alcohols in thin stillage, it is
10 postulated that conductive materials can stimulate DIET in digestion of thin stillage. It is therefore
11 hypothesised that stimulating DIET via conductive materials can alleviate the acidification stress and
12 accumulation of VFAs, thus facilitating the recovery from severe acidic shock.

13
14
15
16
17
18
19
20
21
22
23
24 The innovation of this study is that it is the first investigation of the potential role of
25 carbonaceous materials in digestion of thin stillage with external stress (in this case acidic shock). The
26 objective of this study is to investigate the application of nanomaterial graphene and cost-effective
27 pyrochar in digestion to resist an acidic shock (pH 5.5). The mechanics of system recovery were
28 evaluated in terms of process stability (as measured by VFAs accumulation and pH change),
29 biomethane production and responses of microbial community. The thermodynamic advantage of
30 DIET was exemplified using propionate (a typical VFA observed in AD) as a model substrate.

31 32 33 34 35 36 37 38 39 40 41 **Materials and Methods**

42 43 **Inoculum, feedstock and material**

44
45 The inoculum for AD start-up was sourced from a lab-scale mesophilic (37 °C) reactor and has
46 digested a wide variety of feedstocks such as grass silage, cattle manure, seaweed, and food waste
47 over the years. Thin stillage, taken from an Irish whiskey distillery (Ireland), was used as feedstock.
48 The characteristics of the inoculum and thin stillage are shown in Table S1.

49
50
51
52
53
54
55
56
57
58
59
60
Graphene nanosheets (length less than 2 μm) were purchased from Sigma Aldrich and the
properties were detailed in our previous study.²² Pyrochar was obtained from a local pyrolysis plant
(Premier Green Energy, Ireland) pyrolyzing wood waste at 700 °C. The carbon content of pyrochar

1
2
3 was 87.8% on a total solid (TS) basis. Other characteristics of pyrochar such as the pH value of
4 suspension, scanning electron microscope images and X-ray diffraction pattern were shown in a
5 previous study.²³ Pyrochar samples were ground and sieved to obtain a practical size less than 150
6 μm . Prior to AD, graphene and pyrochar were dried at 105 °C to ensure the complete removal of
7 moisture content. To ensure a well-mixed graphene/pyrochar solution in the digestate/inoculum
8 suspension, different dosages of conductive materials were mixed in distilled water and added in the
9 glass fermenter, then the fermenter was shook vigorously in a horizontal direction until a
10 homogeneous black solution was formed, as illustrated in Figure S1.
11
12
13
14
15
16
17
18
19
20
21

22 **Experimental start-up**

23
24 Batch AD experiments were conducted using an Automatic Methane Potential Test System
25 (AMPTS II) (Bioprocess Control, Sweden).²² In each individual digester, 200 mL of inoculum, 53 mL
26 of thin stillage (replaced by distilled water in the blank group) and 147 mL of distilled water were
27 added to achieve an inoculum volatile solid (VS) to substrate chemical oxygen demand (COD) mass
28 ratio of 2:1. The experiments were divided into two phases: acidic shock phase and recovery phase. In
29 the acidic shock phase, the pH of each digester was adjusted to 5.5 by 6 M HCl to mimic acidic shock
30 for 2 days. In the recovery phase, the pH of all digesters was altered to 7.5 by 6 M NaOH to create a
31 neutral recovery condition.
32
33
34
35
36
37
38
39
40

41 The design of the experiment included for a Control (without addition of conductive materials),
42 Graphene (1.0 g graphene/L), Pyrochar (1.0 g pyrochar/L), and HPyrochar (10 g pyrochar/L). A group
43 with only inoculum and distilled water in the digester was adopted as the blank group to assess the
44 background performance (such as biomethane production, VFAs formation and COD concentration)
45 of the inoculum (Figure S2). The choice of these concentrations was based on our previous studies, in
46 which it was revealed that 1.0 g graphene/L showed the highest promotion effects on digestion of both
47 glycine and ethanol possibly through the establishment of DIET.^{16, 22} In this context, 1.0 g graphene/L
48 and 1.0 g pyrochar/L were chosen to compare their effects on digestion of thin stillage. Considering
49 the lower electrical conductivity of pyrochar, a high concentration of 10 g pyrochar/L was adopted.
50
51
52
53
54
55
56
57
58
59
60

1
2
3 Before the start of the batch experiments, all the digesters were purged by pure nitrogen to remove
4 oxygen in the headspace and sealed immediately. All the experiments were performed at 37 ± 1 °C in
5 a water bath. The biomethane volume during acidic shock was calculated by multiplying the
6 biomethane content by the total biogas volume, while biomethane volume in the recovery phase was
7 automatically counted by the AMPTS II system.
8
9
10
11
12

13 14 15 16 **Microbial profiling**

17
18 Five samples were collected for microbial community analysis, including the inoculum (before
19 the acidic shock phase) and suspended sludge samples from the other four groups; samples of the
20 latter were collected from one of the three parallel digesters from the sampling port on day 22. All
21 samples were frozen at -20 °C before further analysis (detailed in Supporting Information).
22 Significant differences in microbial community compositions between two samples based on Fisher's
23 exact test at 0.05 level and principal component analysis were analysed on the Majorbio Cloud
24 Platform (www.majorbio.com). The raw sequence data were deposited into NCBI Sequence Read
25 Archive under accession code SRP258370.
26
27
28
29
30
31
32
33
34
35
36

37 **Analytical methods**

38
39 TS and VS were determined according to methods outlined in a previous study.¹⁶ A gas
40 chromatograph (GC, Agilent 7890B, USA) equipped with a flame ionization detector and a DB-FFAP
41 column was used to quantify the compositions of biogas and VFAs (details in Supporting
42 Information).²⁴ Before GC analysis, the liquid samples were acidified with 12% orthophosphoric acid
43 (v/v). Soluble carbohydrate content was determined using the anthrone-sulfuric acid method with
44 glucose as standard.²⁵ The elemental composition of thin stillage was analysed using an elemental
45 analyser (Exeter Analytical, CE 440, USA). COD, total nitrogen (TN) and ammonia nitrogen (NH₃-N)
46 were measured using appropriate test kits (Hach, USA). The pH was measured by a pH meter (F20,
47 METTLER TOLEDO, Switzerland).
48
49
50
51
52
53
54
55
56
57
58
59
60

Experimental data evaluation

Thermodynamic calculation

The change in the Gibbs free energy ($\Delta G'$) of propionate oxidation was calculated according to Eq. (1).

$$\Delta G' = \Delta G^{0'} + RTLn \frac{[Acetate] \cdot pCO_2 \cdot pH_2^x}{[Propionate]} \quad (1)$$

Where $\Delta G^{0'}$ (kJ/mol) is the free energy change under the following conditions (T = 298.15 K, pH = 7, Pressure = 1 atm, and [Reactants] = 1 M); R is the universal gas constant (8.315 J/mol/K); T (K) is the absolute reaction temperature; $[Acetate]$ and $[Propionate]$ represent the respective concentration of acetate and propionate in the reaction (mol); pCO_2 is the concentration of carbon dioxide in the reaction (atm); pH_2 is the concentration of hydrogen in the reaction (atm); x represents number of molecules in the reaction. Thermodynamic calculation was conducted using values obtained from the graphene group on day 6, in which $[Acetate]$, $[Propionate]$ and pCO_2 was 5.1 mM, 9.4 mM and 0.44 atm, respectively.

CH₄ production modelling and statistical analysis

CH₄ production data in the recovery phase were fitted by the modified Gompertz model,¹⁶ as shown in equation Eq. (2). The parameters (P , maximum CH₄ yield potential, mL/g COD; R_{max} , maximum CH₄ production rate, mL/g COD/day; λ , lag time of CH₄ production, day; t , time, day) were analysed using the Origin software (8.5, Origin, USA). Significance analysis of experimental data was carried out as previously described.²⁶

$$M = P \cdot \exp\left\{-\exp\left[\frac{R_{max} \cdot e}{P}(\lambda - t) + 1\right]\right\} \quad (2)$$

Results and Discussion

Theoretical analysis of interspecies transfer via direct electron or indirect hydrogen

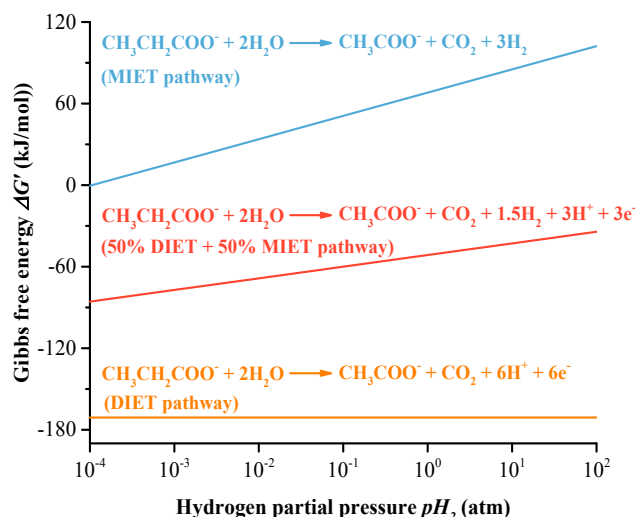


Figure 1. Thermodynamic comparison of propionate oxidation via mediated interspecies electron transfer (MIET) and direct interspecies electron transfer (DIET) (pH = 7, T = 298.15 K, [*Propionate*] = 9.4 mM, [*Acetate*] = 5.1 mM, pCO_2 = 0.44 atm).

Table 1 Reactions and changes in Gibbs free energy values of propionate conversion to methane in different pathways.

Process	Reaction	$\Delta G^{0,*}$ (kJ/mol)
Electron-generating reaction	MIET: $CH_3CH_2COO^- + 2H_2O \rightarrow CH_3COO^- + CO_2 + 3H_2$	+71.61
	DIET: $CH_3CH_2COO^- + 2H_2O \rightarrow CH_3COO^- + CO_2 + 6H^+ + 6e^-$	-167.37
Electron-accepting reaction	MIET: $3H_2 + 0.75CO_2 \rightarrow 0.75CH_4 + 1.5H_2O$	-98.02
	DIET: $6H^+ + 6e^- + 0.75CO_2 \rightarrow 0.75CH_4 + 1.5H_2O$	+140.96
Acetate conversion reaction	$CH_3COO^- + H^+ \rightarrow CH_4 + CO_2$	-35.91
Overall	$CH_3CH_2COO^- + H^+ + 0.5H_2O \rightarrow 1.75CH_4 + 1.25CO_2$	-62.32

* Values are computed under the conditions of T = 298.15 K, pH = 7, Pressure = 1 atm, and

[Reactants] = 1 M based on tabulated data by Madigan et al.²⁷

1
2
3 Propionate, a typical intermediate for carbon and electron flow in digestion of organic material
4 was chosen to investigate the syntrophic interactions in energy-limited methanogenic biosystems,^{28, 29}
5 and to compare mediated interspecies electron transfer (MIET) and direct interspecies electron
6 transfer (DIET). Complete degradation of propionate to CH₄ and CO₂ needs the well-established
7 connections between syntrophic acetogens and methanogens; these relationships determine the
8 efficiency of the electron transfer. Figure. 1 shows that overall propionate oxidation to acetate is
9 thermodynamically more favourable via DIET than via hydrogen transfer.
10
11
12
13
14
15
16
17

18 In the MIET pathway, acetogenic bacteria convert propionate into acetate and H₂ (Table 1).
19 Under the conditions specified (namely pH = 7, T = 298.15 K, [*Propionate*] = 9.4 mM, [*Acetate*] =
20 5.1 mM, *p*CO₂ = 0.44 atm; values are collected from experimental data), the reaction is
21 thermodynamically favourable only when the concentration of H₂ is below 1.0 × 10⁻⁴ atm, at which the
22 Gibbs free energy change equals to 0. This makes propionate oxidation to acetate more vulnerable as
23 an increase in hydrogen partial pressure would result in the increase in the Gibbs free energy change
24 to a level that makes the reaction unfavourable.
25
26
27
28
29
30
31
32

33 In the DIET pathway, the change in hydrogen partial pressure does not affect the Gibbs free
34 energy as it does not involve exchange of diffusible molecules among syntrophic partners. If both
35 MIET and DIET pathways take place, the Gibbs free energy change depends on the proportion of
36 electrons transferred through MIET or DIET. As an example, if only half of electrons produced from
37 propionate oxidation to acetate are transferred through DIET at a hydrogen partial pressure of 1.0 ×
38 10⁻⁴ atm, approximate 85 kJ/mol of energy advantage can be expected compared with that of
39 complete MIET (Figure 1). It should be noted that the overall change in Gibbs free energy values of
40 propionate conversion to methane between DIET and MIET pathways is theoretically the same.
41
42
43
44
45
46
47
48
49
50

51 The computed maximum electron carrier flux during propionate oxidation to methane
52 demonstrated the advantage of DIET as compared to MIET (hydrogen diffusion), indicating that the
53 theoretical difference between them was significant with a 10⁶ factor.²⁹ It is worth mentioning that the
54 calculations were based on numerous assumptions, several of which cannot be said to be 100%
55
56
57
58
59
60

precise. For example, neither the heat lost nor the energy demand for growth and maintenance of microorganisms was considered during computing. However, these numbers are small and as such the significant difference between two fluxes may still be said to be a distinct kinetic merit of DIET. Given the advantages of electron carrier flux and thermodynamics, DIET is preferable to MIET in terms of facilitating propionate oxidation among syntrophic partners in AD.

Performance of biomethane production from thin stillage with conductive materials amendment

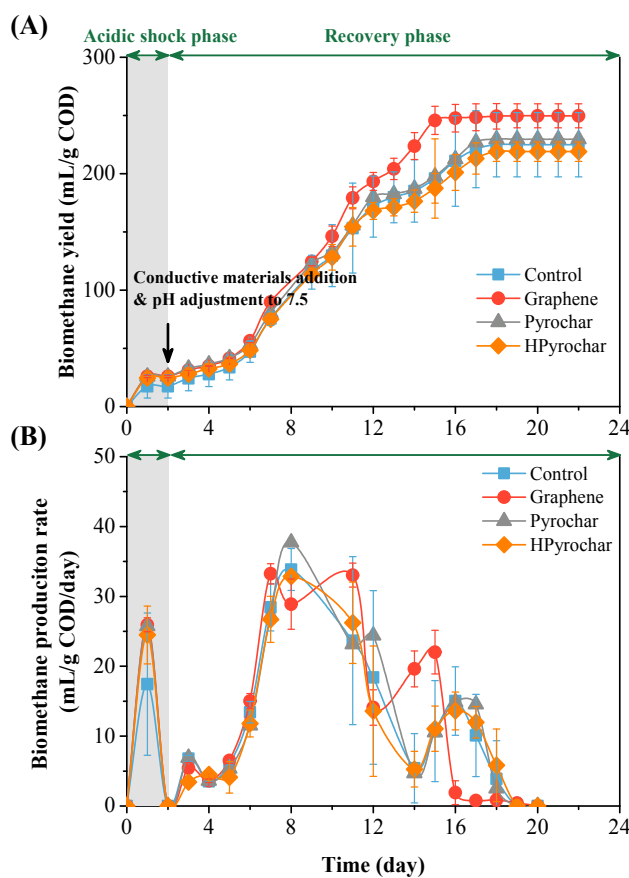


Figure 2. Effects of conductive materials amendment on the performance of (A) biomethane yield and (B) production rate during anaerobic digestion of thin stillage after acidic shock.

The effects of conductive materials addition on the performance of biomethane yield and production rate from thin stillage are illustrated in Figure 2. During the acidic shock phase, biomethane production increased slightly on day 1, and remained unchanged on day 2, indicating that the methanogenesis process was completely inhibited by acidic shock. In the recovery phase, the

1
2
3 biomethane yield of the control group reached 225 mL/g COD after 18 days of digestion. With the
4 introduction of graphene (1.0 g/L), biomethane yield increased to 250 mL/g COD, an increase of
5 11.0% compared with the control. Lin et al. revealed that 1.0 g graphene/L had the most positive
6 effect generating 13.8% higher levels of CH₄ production as compared to the control in digestion of
7 ethanol.²² Similar results were found in another work,¹⁶ where protein-derived amino acid was used as
8 the substrate. However, here the addition of pyrochar did not lead to any significant effects on
9 biomethane yield ($p > 0.05$), both at low and high dosages (1 g/L and 10 g/L), generating between 219
10 and 230 mL/g COD. Luo et al. applied pyrochar with different particle sizes to evaluate the effect on
11 AD facing various acidic stress levels.³⁰ Results indicated that compared to the control, pyrochar
12 adoption shortened the lag-phase for methanation in all cases, but it also brought negative impacts as
13 the total biomethane yield was reduced by between 2.5% and 17.5%.³⁰ Similarly, Wang et al.
14 demonstrated that 2 g/L to 15 g/L of pyrochar could reduce the lag time when treating a mixture of
15 dewatered activated sludge and food waste, but there was no increase in biomethane yield.³¹ These
16 findings are consistent with the results in this study, which showed that 1.0 g/L and 10 g/L of
17 pyrochar shortened the lag time by 18.1% and 12.2% (Table 2), respectively, while biomethane yield
18 was not obviously increased.

19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37 Without the introduction of conductive materials, the biomethane production rate peaked on day
38 8 at 33.85 mL/g COD/day, as shown in Figure 2B. Among all cases, the highest peak production rate
39 was obtained with a pyrochar introduction of 1.0 g/L, an 11.5% increase compared with that of the
40 control, reaching 37.73 mL/g COD/day on day 8. Despite the greatest promotion effects on the
41 cumulative biomethane yield, graphene only led to a highest peak production rate of 33.23 mL/g
42 COD/day on day 7, no significant difference compared with that of the control ($p > 0.05$). However,
43 during the latter recovery phase, the biomethane production rate with graphene addition still
44 maintained a relatively higher level compared with other groups. For instance, the corresponding
45 value of the graphene group was 22.03 mL/g COD/day on day 15, which was significantly higher than
46 that of other groups ($p < 0.05$) which had a level of approximately 10 mL/g COD/day.

Table 2 presents the simulated parameters of biomethane production using the modified Gompertz model. The potential biomethane yield of the graphene group increased by 11.5% whilst the peak biomethane production rate enhanced by 17.9% compared with the control. Comparatively, pyrochar addition shortened the lag time as described earlier but did not improve the total biomethane production. These results revealed that the amendment of graphene could resist acidic shock and thus stabilize and enhance the AD performance of thin stillage, but pyrochar had no evident effect in terms of recovering biomethane yield.

Table 2 Estimated parameters describing biomethane production using the modified Gompertz equation.

Group	$P_{measured}$ (mL/g COD)	P (mL/g COD)	R_m (mL/g COD/day)	λ (day)	T_m (day)	Adjusted R^2
Control	224.92	239.82	20.49	3.37	7.69	0.9916
Graphene	249.73	267.32	24.15	3.36	7.44	0.9878
Pyrochar	229.54	247.7	19.4	2.76	7.46	0.9911
HPyrochar	218.92	234.58	18.9	2.96	7.54	0.9908

Note: Control: no conductive materials added; Graphene: 1 g graphene/L; Pyrochar: 1 g pyrochar/L; HPyrochar: 10 g pyrochar/L; $P_{measured}$: experimental methane yield; P : maximum methane potential; R_m : maximum methane production rate; λ : lag-phase time; T_m : peak production time.

The proposed attribution of positive effects on biomethane production in the graphene group was that DIET was stimulated in the presence of highly conductive graphene, possibly acting as electron conduits between syntrophs and methanogens. In general, the electrical conductivity of pyrochar is in a range of several to ten siemens per centimetre (S/cm),^{32, 33} while the conductivity of graphene (generally tens to hundreds S/cm) is several orders of magnitude higher than that of pyrochar.^{34, 35} Compared with pyrochar, the significant higher conductivity of graphene might be more beneficial to establishing a strong syntrophic relationship and to triggering efficient DIET between

1
2
3 electron donating and accepting microbes, thus enhancing cumulative biomethane production. DIET
4 was reported to proceed via three possible pathways, namely; redox mediators, e-pili adhered with
5 cytochromes, and conductive materials.^{14,36} Redox mediators and e-pili are also called electron
6 shuttles. The properties of surface structure, surface chemistry and redox mediators of pyrochar have
7 been highlighted in other studies.³⁷ Yu et al. and Wang et al. proved that pyrochar played a critical
8 role in alleviating external inhibition caused by refractory compounds due to its surface redox-active
9 moieties that might favour DIET.^{32, 38} However, in this study, the role of pyrochar serving as an
10 electron shuttle mechanism might not be sufficient to trigger efficient DIET because the unique role
11 of electron conduits cannot be substituted by electron shuttles.³⁹ These findings lead to a plausible
12 conclusion that the promoted biomethane production resulted from the electron conduit function
13 transferring electrons between microbes rather than the electron shuttle. Meanwhile, surface
14 functional groups of pyrochar might play a positive effect on the recovery of AD systems with acidic
15 shock in the initial period, which shortened the lag time, but due to its low conductivity, pyrochar
16 failed to generate an efficient DIET process subsequently.

Variations of COD, VFAs and pH levels during digestion of thin stillage

17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
The VFAs formation and COD concentration over time are shown in Figure 3. VFAs accumulated rapidly in the initial period and peaked on day 4 in all groups.

For the control group, the total maximum VFAs concentration was 1724 mg/L, in which acetate, propionate and butyrate were dominant, making up 28.5%, 36.7% and 26.8% of the total VFAs, respectively. From day 9 to 14, the total amount of VFAs reduced from 842 to 650 mg/L and more than 90% of VFAs were in the form of propionic acid. By day 22 the VFAs had degraded to 20.3 mg/L.

The graphene group showed similar trends in the initial days (day 0 to 9), during which the amount of VFAs peaked at 1805 mg/L on day 4 and reduced to 815 mg/L by day 9. However, the subsequent degradation of VFAs in the graphene group significantly accelerated, decreasing to 373

mg/L on day 14, 42.6% lower compared than that of the control ($p < 0.05$). Meanwhile, propionic acid was the dominant VFA, accounting for 97.9% of total VFAs; the residual was isobutyric acid.

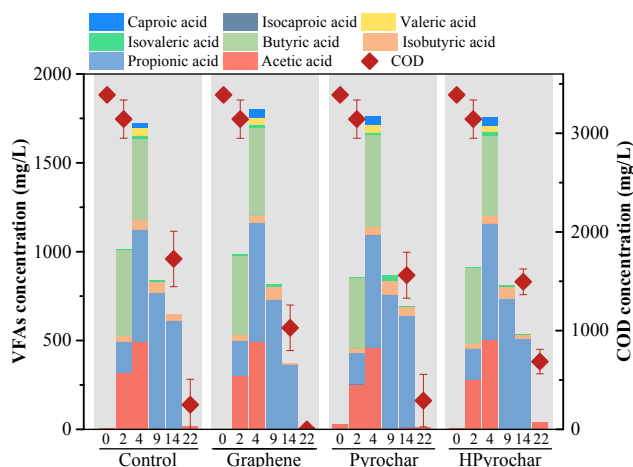


Figure 3. Effects of conductive materials amendment on the concentrations of volatile fatty acids (VFAs) and chemical oxygen demand (COD) during anaerobic digestion of thin stillage with acidic shock (0, 2, 4, 9, 14, and 22 represent the corresponding day).

Pyrochar amendment did not significantly alter the proportion of VFAs as compared with the control group regardless of the concentration; 1 g/L or 10 g/L. Similar to the control group, the total amount of VFAs in Pyrochar and HPyrochar groups on day 4 achieved the maximum value of 1763 and 1758 mg/L, respectively. Thereafter, these figures decreased to 696 and 532 mg/L on day 14, respectively. The results indicated that pyrochar amendment did not show a significant effect on the formation of VFAs during the digestion of thin stillage with acidic shock.

The COD concentration in different groups over time is presented in Figure 3. During the acidic shock phase, the amount of COD slightly reduced from 3388 mg/L on day 0 to 3143 mg/L on day 2; this is attributed to the consumption of easily degraded compounds. For the graphene group, the concentration of COD was 1029 mg/L on day 14, which is 40.4% lower than that of the control, and this figure reduced to 0 by day 22. On day 22, the addition of pyrochar presented no positive impact on the degradation of COD from thin stillage, since the amount of COD remained at 250 mg/L in the control group while this figure was 291 mg/L and 687 mg/L in Pyrochar and HPyrochar groups, respectively. The higher final COD concentration in HPyrochar group possibly resulted from the

1
2
3 strong absorption capacity of pyrochar, especially under high dosages.⁴⁰ The COD concentration over
4 time suggested a good agreement with the observed biomethane yield and VFA concentration during
5 the digestion of thin stillage.
6
7
8

9 To get further insights into VFAs degradation, the variation of butyric acid and propionic acid
10 during AD is shown in Figure 4A.
11
12

13 Butyric acid in the control group accumulated rapidly in the first day, reaching 478 mg/L.
14 Thereafter, it varied slightly during day 1 to 6 but was totally degraded on day 9. The addition of
15 graphene had no apparent effect on the formation and degradation of butyric acid, which showed a
16 similar trend to the control group.
17
18
19
20
21

22 Propionic acid climbed gradually and reached a peak level of 762 mg/L on day 9 in the control
23 group and of 747 mg/L on day 11 with the addition of graphene. The largest differentiation in terms of
24 the amount of propionic acid between the control and graphene groups was obtained on day 14,
25 during which propionic acid in the graphene group was 365 mg/L while this figure was 613 mg/L in
26 the control group. Thereafter, propionic acid was totally degraded by day 18 in both groups. The
27 results indicated that graphene amendment accelerated the degradation of propionic acid, which is
28 consistent with the expected outcome that propionate oxidation via DIET pathways is
29 thermodynamically more favourable than via hydrogen diffusion. However, the time requirement for
30 complete degradation of propionic acid was much higher than for butyric acid, which aligns with
31 similar observations by other studies.^{19, 41} One possible explanation for this based on thermodynamics,
32 is that the energy barrier of converting propionate to acetate ($\Delta G^{0'} = +71.61$ kJ/mol, Table 1) is much
33 higher than that of converting butyrate to acetate ($\Delta G^{0'} = +48.3$ kJ/mol).³¹ Therefore, the syntrophic
34 oxidation of propionate through the MIET pathway needs much lower hydrogen partial pressure than
35 for the butyrate oxidation.¹⁹ Due to thermodynamic fundamentals, butyrate degrades much faster than
36 propionate. Butyrate was consumed completely by day 9 in both groups without apparent
37 accumulation. Conversely, due to the higher energy barrier, apparent accumulation of propionate
38 occurred in both groups. However, the addition of graphene, which is capable of altering the
39 metabolic pathway to a DIET process and alleviating potential hydrogen partial pressure,⁴¹ enhanced
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60

the degradation of propionate. The results suggested that graphene addition had a significant effect on propionate degradation but no obvious effect on butyrate during digestion of thin stillage.

After the acidic shock, the pH of all groups was adjusted to 7.51 ± 0.03 and different conductive materials were introduced into corresponding groups. As can be seen from Figure 4B, the pH of all groups varied slightly with similar trends during the recovery phase. The pH value of the Control, Graphene, Pyrochar, and HPyrochar groups after AD was recorded as 7.25, 7.24, 7.27, and 7.20, respectively ($p > 0.05$). This indicated that pH did not govern the performance of thin stillage digestion with conductive materials amendment.

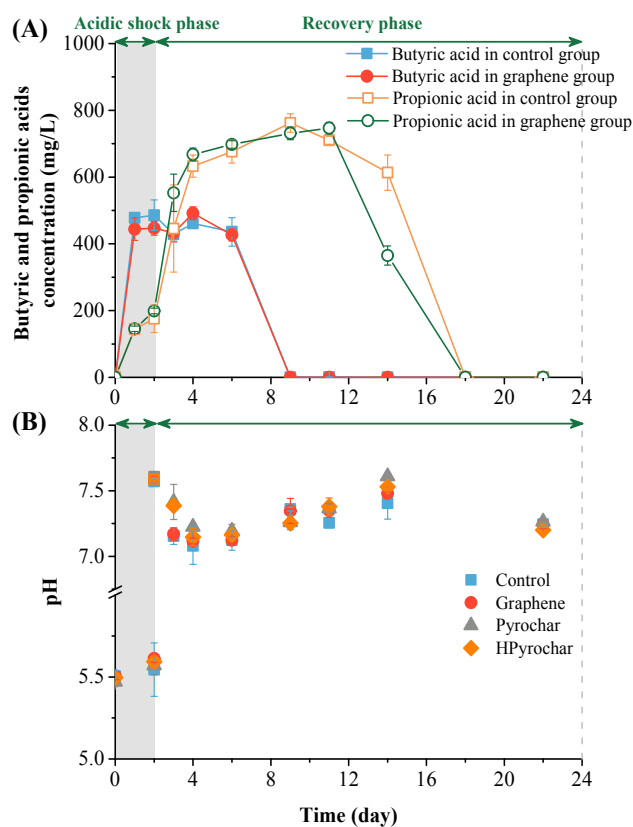


Figure 4. Variations of (A) butyric and propionic acids and (B) pH levels during anaerobic digestion of thin stillage with acidic shock.

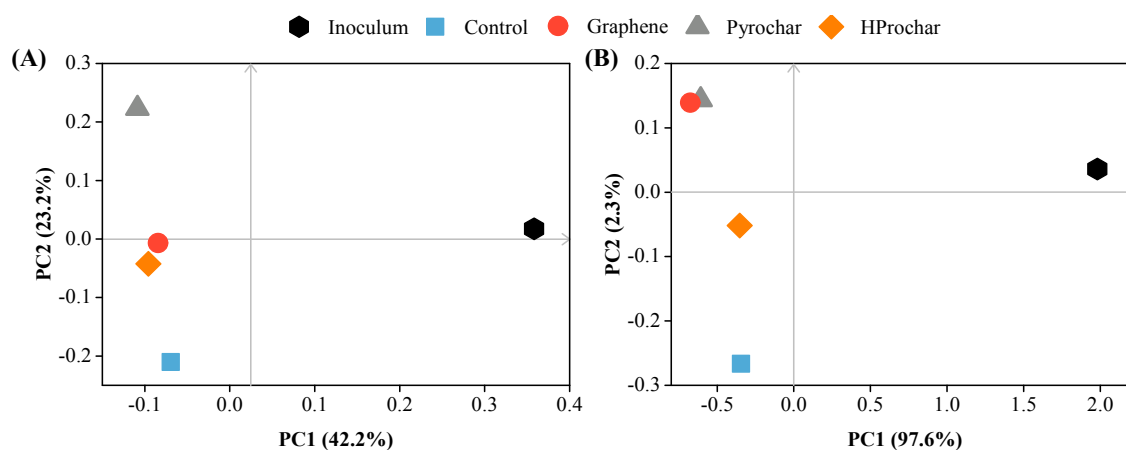
Response of microbial community structures to conductive materials amendment

Figure 5. Principal component analysis of (A) bacterial and (B) archaeal community based on the OTU (PC: principal component).

Microbial community analysis was conducted to provide some insights into the effect of conductive materials on digestion of thin stillage with acidic shock, by employing high-throughput sequencing. Principal component analysis (PCA) of the bacterial community was conducted to evaluate the microbial diversity based on operational taxonomic units (OTUs) (Figure 5). For bacteria, the first axis and second axis accounted for 42.2% and 23.2% of data variance, respectively (Figure 5A). PCA of the bacterial and archaeal community showed varying levels of separation following amendment with conductive materials (Figures 5A and B). Amendment with pyrochar (10 g/L) and graphene (1 g/L) resulted in bacterial populations displaying similar separation patterns, with pyrochar amendment (1 g/L) resulting in the strongest separation from the nonamended control group. PCA of the archaeal community revealed that pyrochar (1 g/L) and graphene (1 g/L) amendment led to the strongest similar separation patterns relative to the control group (Figure 5B). These results clearly indicated that pyrochar addition (1 g/L) resulted in the most marked changes in both bacterial and archaeal community structures relative to the nonamended control group, while graphene amendment appeared to only induce apparent modifications in the archaeal community. This may be as a result of the previously highlighted properties of pyrochar, such as surface functional groups and

1
2
3 rough surface structure, which may promote colonization and biofilm formation of microbes when
4 compared with graphene.^{37, 42}
5
6

7 Compared with the inoculum, the most significant increase in abundance in the control group
8 was obtained at genus *Fermentimonas*, which rose from 0.2% to 10.8%, indicating its unique role
9 during digestion of thin stillage (Figure 6A). *Fermentimonas* has been reported as the dominant genus
10 in digesting numerous complex substrates and shown to be associated with the hydrolysis and
11 acidogenesis of AD process.⁴³ Moreover, it can convert substrates containing polysaccharides and
12 proteins to easy-degraded VFAs, which are the main substrates for methanogens.⁴⁴ This is supported
13 by “*in silico*” analysis of the genome of the *Fermentimonas caenicola* strain which indicates that it
14 contains a large number of genes encoding carbohydrate-active enzymes potentially involved in
15 hydrolysis and it has also been shown to be involved in propionic acid fermentation and to contain
16 genes potentially encoding the acrylyl-CoA pathway also involved propionic acid fermentation.⁴⁵
17
18
19
20
21
22
23
24
25
26
27

28 Other genera such as *Aminobacterium* (3.89%), *Tepidanaerobacter* (4.8%) and an OTU in the
29 family *Lentimicrobiaceae* (5.4%) also became predominant over time in the control group when
30 compared with the inoculum. Members of the *Aminobacterium* genus are typically amino-acid-
31 degrading bacteria that can ferment various amino acids when co-cultured with hydrogenotrophic
32 methanogens.^{16, 46} They are also known to be particularly resilient, and increased *Aminobacterium*
33 levels have previously been reported following heat-shock treatments within the acidification stage of
34 a two-stage reactor system for AD and biomethanation of grass.⁴⁷ *Tepidanaerobacter* has been
35 revealed as the syntrophic acetate-oxidizing bacteria (SAOB) that generally cooperates with
36 hydrogen-utilizing methanogens such as *Methanosarcina*.⁴³ Microbial groups belonging to family
37 *Lentimicrobiaceae* are capable of the hydrolysis of complex polysaccharides such as food waste-
38 recycling wastewater⁴⁸ and high-strength starch-based wastewater.⁴⁹ These findings suggest that new
39 syntrophic relationships amongst the above-mentioned bacterial genera and potential methanogens are
40 likely to have been established to efficiently convert thin stillage to methane.
41
42
43
44
45
46
47
48
49
50
51
52
53
54

55 Significant variations were also observed in the archaeal community during the digestion of thin
56 stillage (Figure 6B). Compared with the inoculum, the most apparent modification observed from the
57
58
59
60

control group was in members of the genus *Methanosarcina*, which increased from 4.3% to 64.6% of the total relative abundance. *Methanosarcina* has been widely reported under mesophilic conditions in AD treating various feedstock.^{14, 50} Aside from the documented excellent tolerance to external pressures such as high pH or ammonia,⁵¹ members of this genus have metabolic pathway that can be both acetoclastic and hydrogenotrophic. Previous studies also suggested that *Methanosarcina* can directly receive electrons for CO₂ reduction to methane.⁵² These findings highlight the vital role of *Methanosarcina* in digesting thin stillage under condition of acidic shock.

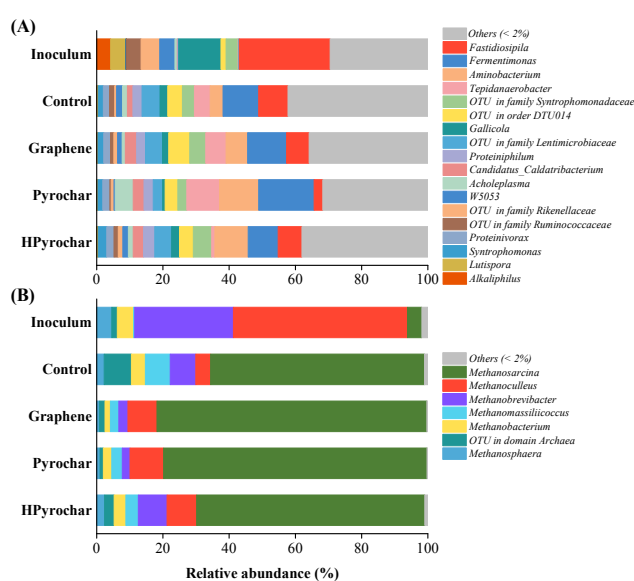


Figure 6. Taxonomic composition of Bacteria (A) and Archaea (B) at genus level. Genera with lower abundances than 2% are classified into “Others”.

With the addition of conductive materials, the overall bacterial and archaeal community structure varied depending on the operational strategy. Considering the enhancement in biomethane production, a detailed analysis of the differential between the control and graphene groups was performed to help provide insights into potential mechanisms (Figure 7). Following the amendment of graphene, the most significant modification in bacterial community structure was observed in the genus *Aminobacterium*, which increased from 3.9% to 6.5% in relative abundance (Figure 7A), indicating their potential role in accelerating the process of hydrolysis and acidogenesis during thin stillage

digestion.⁴⁶ There was also a significant increase in the relative abundance of an OTU in the order *DTU014* in the graphene group, which increased from 4.4% to 6.4% (Figure 7A). Members of this order have been identified as potential syntrophic bacteria that can establish magnetite-mediated DIET with methanogens such as *Methanosarcina*. They have been reported as the dominant bacteria in both propionate and butyrate treatments and suggested to be able to perform conductive materials-mediated DIET under stressful environments (such as with high levels of ammonia).⁵³

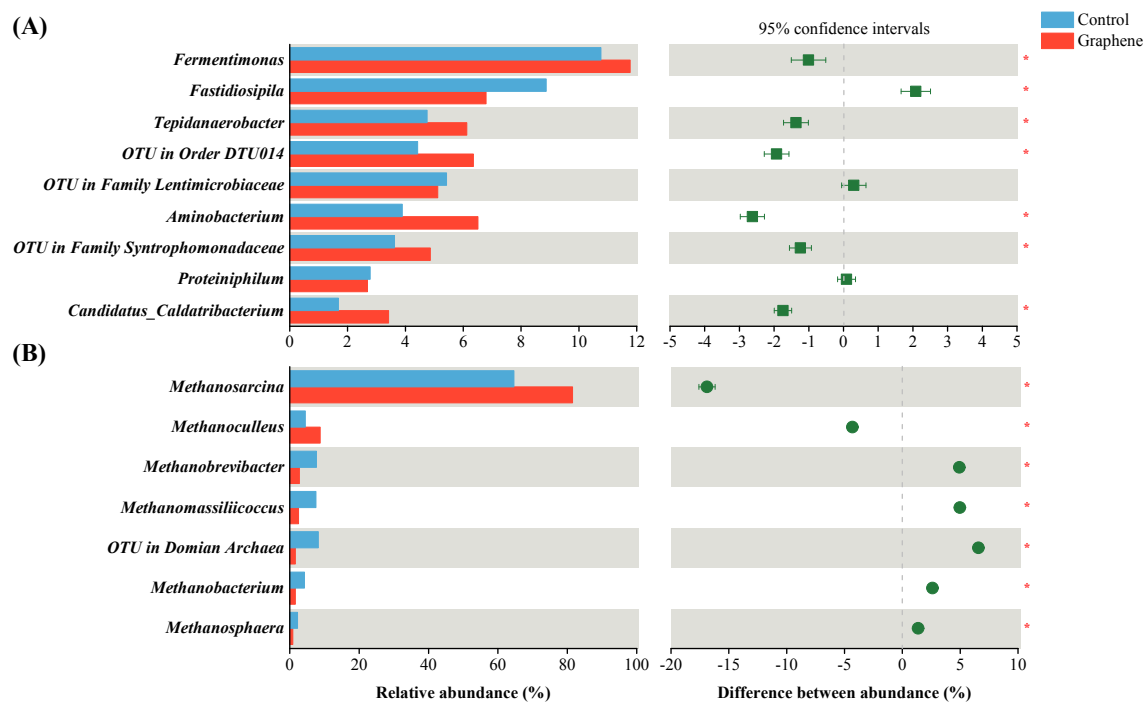


Figure 7. Significant difference between the control and graphene group on relative abundance from 16S rRNA gene sequencing result (* represents p-values less than 0.05).

The relative abundance of *Methanosarcina* also significantly increased from 64.6% in the control group to 81.5% in the graphene group (Figure 7B). *Methanosarcina* have been clearly demonstrated to be responsible for performing DIET following supplementation with conductive materials.^{36, 54} However, the capacity of most syntrophs and methanogens in functioning DIET still remains unclear. Microbes, which are enriched by conductive materials and gain prominence in AD systems are generally considered as the potential syntrophic bacteria involved in DIET.³⁶ However, the complexity of real organic wastes makes it difficult to find possible DIET partners in AD when compared to simple substrates. Among the genera where significantly increases were observed

1
2
3 (Figure 7), only the OTU in Order *DTU014* has previously been reported to function in DIET.⁵³ In
4 this context, given that the OTU in Order *DTU014* was dramatically enriched with graphene addition
5 when compared to the control, it seems likely that this genus is responsible for DIET functioning and
6 stimulation of the degradation of VFAs by cooperating with methanogens, namely *Methanosarcina*,
7 particularly in the degradation of propionic acid. However, the participation of MIET cannot be
8 completely ruled out since *Methanosarcina* are mixotrophic and are also able to accept electrons from
9 H₂. The increased relative abundance in the genus *Tepidanaerobacter*, which as previously mentioned
10 has the potential to serve as SAOB with *Methanosarcina*,⁵⁵ indicated the likelihood of enhanced
11 syntrophic connections via traditional MIET.
12
13

14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60

Clearly, graphene amendment attributed to the enhancement of biomethane production. Compared with the control, graphene addition resulted in changes in the microbial community which are likely to have promoted connections between syntrophs and methanogens via both MIET and DIET. Moreover, the high electrical conductivity property of graphene itself might also be a critical factor in accelerating electron transfer potentially through acting as an electron conduit rather than electron shuttle between order *DTU014* (VFA oxidizing bacteria) and the genus *Methanosarcina* (methanogens).

Table 3 Comparison of the effect of conductive materials amendment on anaerobic digestion facing external stress.

Conductive materials	Feedstock	Temperature (°C)	Operation mode	External stress	Methane production increase ^a	Highlighted microbes	Reference
Carbon cloth	Butanol	37	Semi-continuous	Acidic stress: pH decreased from 7.0 to 5.0 gradually	+59.0%	<i>Geobacter</i> , <i>Methanosaeata</i>	Zhao et al. ¹³
Pyrochar	Glucose	37	Batch	Acidic stress: 2–8 g glucose/L	-2.5% – -17.5%	<i>Syntrophomonas</i> , <i>Methanobacterium</i> , <i>Methanosarcina</i>	Luo et al. ³⁰
Magnetite	Acetate	37	Batch	Ammonia stress: 5 g NH ₄ ⁺ -N/L	+3.0%	<i>Geobacteraceae</i> , <i>Methanosarcinaceae</i> , <i>Methanobacteriaceae</i>	Zhuang et al. ⁵⁶
Pyrochar	Glucose	35	Batch	Ammonia stress: 7 g NH ₄ ⁺ -N/L & acidic stress: 6 g glucose/L	+1.7% – +12.1%	<i>Methanosaeta</i> , <i>Methanosarcina</i>	Lü et al. ¹⁷
GAC	Blackwater	35	Batch	Ammonia stress: 2.8 g NH ₄ ⁺ -N/L	+9.0% – +53.4%	<i>Geobacteraceae</i> , <i>Clostridiales</i> , <i>Methanosarcina</i>	Florentino et al. ¹⁸
Pyrochar	FW + SS	55	Semi-continuous	High OLRs: 1.6–5.4 g VS/L/d	+16.0% – +55.2% ^b	<i>Tepidimicrobium</i> , <i>Methanothermobacter</i>	Wang et al. ⁵⁷
Pyrochar	Poultry litter	37	Batch	High OLRs: total solid contents from 5% – 20% ^c	-4.7% – -14.0%	<i>Methanosaetaceae</i>	Indren et al. ¹⁵
Pyrochar	FW + WAS	55	Batch	High OLRs: feedstock/seed sludge (VS/VS) mass ratio of 1.5–3	-3.8% – -7.9%	<i>Methanosaeta</i> , <i>Methanosarcina</i>	Li et al. ⁵⁸
Graphene	Thin stillage	37	Batch	Acidic shock: pH = 5.5 for 2 days	+11.0%	OTU in order <i>DTU014</i> , <i>Methanosarcina</i>	This study
Pyrochar	Thin stillage	37	Batch	Acidic shock: pH = 5.5 for 2 days	-2.7% – +2.1%	<i>Methanosarcina</i>	This study

^a Compared with the control group; ^b the control digester was completely inhibited when the OLR was over 2.7 g VS/L/d; ^c adjusted by water

FW: food waste, SS: sewage sludge WAS: waste activated sludge, GAC: granular activated carbon, Blackwater: urine and feces, NA: not analysed, OLR: organic loading rate

Comparison of conductive materials amendment in anaerobic digestion

This study demonstrated that graphene addition could help resist acidic shock and stabilize biomethane production from thin stillage, whereas the effect of pyrochar amendment was not significant in increasing cumulative biomethane yield though it did aid in reducing the lag time. The addition of conductive materials has been suggested as a feasible strategy to enhance biomethane production through stimulating DIET, and has also been adopted to enhance the robustness of AD facing external stress, thereby leading to a more stable biomethane production performance.

Table 3 summarizes some conductive materials applied to enhance the DIET pathway under stressed AD conditions. Methane production was enhanced by 1.7% – 59% depending on the types of conductive materials and external stress levels (Table 3). However, some conductive materials also had a negative effect on AD performance with biomethane yield being reduced by 2.5% – 31.3% (Table 3). Zhao et al. showed the introduction of carbon cloth could stabilize the AD system under acidic stress by shifting the predominant working mode from traditional MIET to more efficient DIET.¹³ The primary microbial participants in DIET, namely *Geobacter* and *Methanosaeta*, were enriched in such environment.¹³ Conversely, Luo et al. observed a negative impact of pyrochar amendment on biomethane yield encountering acidic stress from high load of glucose.³⁰ Other traditional conductive materials (such as pyrochar, magnetite and GAC) have also been assessed with respect to their potential role in resisting ammonia inhibition during AD. Zhuang et al. and Florentino et al. reported that the performance of methanogenic digesters exposed to different levels of ammonia was improved with the addition of magnetite and GAC.^{18, 56} The potential syntrophs and methanogens (such as *Geobacteraceae* and *Methanosarcinaceae*) that could function in a DIET system were both highlighted in their studies.^{18, 56} Operational inhibition of the AD systems, such as high OLRs, was also investigated with the supplement of carbon-based materials.^{15, 58} Li et al. pointed out that pyrochar addition facilitated DIET in syntrophic oxidation of butyrate and acetate under high OLRs of food waste and waste activated sludge, whereas simultaneously it was observed to hamper biomethane production.⁵⁸ This might be attributed to the reduced bioavailability during digestion due to the non-selective absorption capacity of pyrochar.⁴⁰

1
2
3 In this study, pyrochar addition reduced lag phase time of AD, but did not apparently improve
4
5 biomethane production from thin stillage under both low and high dosages. Pyrochar, especially
6
7 produced through the valorisation of organic wastes such as digestate and wood waste, has the
8
9 potential to be applied as an additive in AD to boost microbial interactions and enhance AD
10
11 performance. However, the effects of pyrochar on AD highly depend on its properties.⁵⁸ Some studies
12
13 have reported that enhanced AD performance resulted from the highlighted properties of pyrochar,
14
15 such as surface functional groups, conductivity, buffer capacity, and surface area.^{32, 59} In this study,
16
17 pyrochar was produced from wood waste at a pyrolysis temperature of 700 °C, which has been
18
19 suggested as the threshold temperature for woody biomass-derived pyrochar to provide electron
20
21 transfer function from electron shuttles to electron conduits, resulting in a faster direct electron
22
23 transfer.⁶⁰ Cruz Viggi et al. added three different kinds of pyrochar to enhance the AD performance
24
25 of food waste; significant promotional effects on biomethane production rate were observed in all
26
27 pyrochar amended groups.⁶¹ Interestingly, results demonstrated a strong correlation between the
28
29 electron donating capacity related to their surface functional groups and the enhancement effect on
30
31 methanogenic activity.⁶¹ Graphitic carbon generally has high electrical conductivity.^{34, 35} The
32
33 importance of electrical conductivity in stimulating DIET has been widely recognized by other
34
35 studies.^{21, 62} Different types of conductive materials with different electrical conductivity can lead to
36
37 distinguishing influence on AD performance.⁶³ However, enhancement of AD was not always
38
39 observed.⁶² Possible explanations could be that a certain threshold of electrical conductivity needs to
40
41 be overcome to induce efficient DIET in methanogenic digesters.²¹ The significant difference in
42
43 electrical conductivity between pyrochar and graphene may be the critical factor influencing
44
45 biomethane yield from thin stillage with acidic shock. Surface complexation of pyrochar might play a
46
47 positive role on digestion of thin stillage in the initial period, but did not prove to have an obvious
48
49 impact on the digestion of thin stillage subsequently. It should be noted that it is difficult to draw
50
51 direct conclusions in terms of determining roles of conductive materials when different types of
52
53 materials are used in AD systems treating complex organic substrates. The same conductive materials
54
55 can show variable effects on digestion of different substrates. In this study, 1.0 g/L of graphene
56
57
58
59
60

1
2
3 amendment increased biomethane production by 11% from thin stillage. However, different impacts
4 of graphene on AD were observed in other studies; 1.0 g/L of graphene only increased biomethane
5 yield from protein-derived glycine by 4.2% but promoted peak biomethane production rate by
6
7 28.0%.¹⁶ Similarly, the effect of pyrochar can differ depending on the substrate. Chen et al. added
8
9 wood-derived pyrochar to digesters to assess its potential role in enhancing digestion of seaweed; the
10
11 optimal promotional effect on biomethane production from *L. digitata* (17%) was obtained with the
12
13 addition of 0.25 g biochar/g VS seaweed while a reduction of biomethane yield from *S. latissima*
14
15 (6%) was found using the same dosage of pyrochar.²³ These findings tend to conclude that not only
16
17 the added conductive materials but the properties of the substrates digested impact on the precise
18
19 change in AD performance with addition of conductive materials. Further work is needed to
20
21 investigate the correlations between the electrical conductivity of conductive materials and
22
23 performance during AD of thin stillage with acidic shock.
24
25
26
27

28
29 The target for advanced biofuels in the recast Renewable Energy Directive for 2030 in the
30
31 transport sector is only 3.5%, which highlights the lack of advanced biofuel technologies. AD
32
33 technology integrated with DIET offers a potential way to meet this target considering its stabilization
34
35 and promotion effects on biomethane production (ca. 11% increase achieved in this study).
36
37 Specifically, the addition of conductive materials may represent a reliable strategy to alleviate the
38
39 impact of external stress in AD systems, typically due to the establishment of DIET, which can
40
41 enhance the robustness of AD systems and ultimately promote biomethane production from various
42
43 wet organic feedstocks. The use of conductive materials such as graphene (typical cost €644/kg in the
44
45 form of nanosheets²³) may affect their practical application especially at industrial scale. However,
46
47 reuse through strategies such as the design of reactor configuration to retain conductive materials in
48
49 bioreactors may make the process economically feasible. Pyrochar (average price ca. €3/kg) has
50
51 potential as a cheap alternative to expensive conductive materials.²³ Pyrochar produced at different
52
53 temperatures from different raw feedstocks has a range of properties.⁶⁴ The addition of a suitable kind
54
55 of pyrochar in anaerobic digesters can shorten the lag time of digestion and promote biomethane
56
57 yield, thereby reducing the cost of the developed AD systems. Through the integration of pyrolysis
58
59
60

1
2
3 and AD technology in a circular cascading bio-based system, a slight increase in net gain energy and a
4 significant reduction in digestate mass flow can be achieved.²³ Considering AD is one of the most
5 effective renewable energy producing biotechnologies, with thousands of biogas plants worldwide, for
6 example, Germany has more than 10,000 biogas plants,⁶⁵ the results obtained in this study would
7 benefit the achievement of advanced biofuels production target.
8
9
10
11
12
13
14
15

16 **Conclusion**

17
18 This study demonstrated that the addition of graphene could help stabilize AD of thin stillage
19 after acidic shock, presumably due to direct interspecies electron transfer (DIET). Graphene
20 amendment (1.0 g/L) promoted biomethane yield by 11.0% compared with the control and accelerated
21 the degradation of propionic acid. Thermodynamic calculations indicated that if only half of electrons
22 produced from propionate oxidation are transferred through DIET, approximate 84 kJ/mol of an
23 energy advantage can be expected compared with that of indirect hydrogen transfer. In comparison,
24 pyrochar addition (1.0 g/L and 10 g/L) shortened lag time but failed to enhance biomethane yield.
25 Microbial analysis revealed that DIET responsible syntrophs (OTU in the order *DTU014*) and archaea
26 *Methanosarcina* were significantly enriched with graphene addition, suggesting a potentially
27 important role in stabilizing and improving biomethane production through functioning efficient
28 DIET.
29
30
31
32
33
34
35
36
37
38
39
40
41
42

43 **Supporting Information**

44
45 Method for microbial profiling; Method for biogas composition analysis; Method for soluble
46 COD concentrations of pyrochar and graphene; Schematic diagram of digesters for anaerobic
47 digestion of thin stillage with conductive materials amendment (Figure S1); The performance of (A)
48 biomethane yield and (B) VFAs formation and COD concentration of the blank group during
49 anaerobic digestion after acidic shock (Figure S2). Characteristics of thin stillage and inoculum (Table
50 S1); Soluble COD concentrations of pyrochar and graphene (Table S2).
51
52
53
54
55
56
57
58
59
60

Acknowledgement

This work is funded under the Ireland Environmental Protection Agency (EPA) Research Programme 2014-2020 (No. 2018-RE-MS-13), European Union's Horizon 2020 research and innovation programme under the Marie Skłodowska-Curie grant (No. 797259), Science Foundation Ireland (SFI) through the MaREI Centre for Energy, Climate and Marine under grant No. 12/RC/2302_P2 and 16/SP/3829, and Sustainable Energy Authority Ireland (No. RDD/00454). The EPA Research Programme is a Government of Ireland initiative funded by the Department of Communications, Climate Action and Environment. Dr Ao Xia acknowledges the support from the National Natural Science Foundation of China under Grant No. 51876016.

References:

- (1) European Union. Directive 2014/94/EU of the European Parliament and of the Council of 22 October 2014 on the deployment of alternative fuels infrastructure. Available from: <https://eur-lex.europa.eu/legal-content/en/TXT/?uri=CELEX%3A32014L0094>. Accessed 18 April 2020.
- (2) Lin, R.; Deng, C.; Ding, L.; Bose, A.; Murphy, J. D., Improving gaseous biofuel production from seaweed *Saccharina latissima*: The effect of hydrothermal pretreatment on energy efficiency. *Energy Convers. Manag.* **2019**, *196*, 1385-1394. <https://doi.org/10.1016/j.enconman.2019.06.044>
- (3) Voelklein, M. A.; Jacob, A.; O' Shea, R.; Murphy, J. D., Assessment of increasing loading rate on two-stage digestion of food waste. *Bioresour. Technol.* **2016**, *202*, 172-180. <https://doi.org/10.1016/j.biortech.2015.12.001>
- (4) Liebetrau, J.; Reinelt, T.; Agostini, A.; Linke, B., Methane emissions from biogas plants-Methods for measurement, results and effect on greenhouse gas balance of electricity produced. Murphy JD (Ed.) *IEA Bioenergy Task 37*, **2017**, *12*.
- (5) Eriksson, O.; Jonsson, D.; Hillman, K., Life cycle assessment of Swedish single malt whisky. *J. Clean. Prod.* **2016**, *112*, 229-237. <https://doi.org/10.1016/j.jclepro.2015.07.050>
- (6) Dereli, R. K.; van der Zee, F. P.; Heffernan, B.; Grelot, A.; van Lier, J. B., Effect of sludge retention time on the biological performance of anaerobic membrane bioreactors treating corn-to-

1
2
3 ethanol thin stillage with high lipid content. *Water Res.* **2014**, *49*, 453-464.

4
5 <https://doi.org/10.1016/j.watres.2013.10.035>

6
7 (7) Kang, X.; Lin, R.; O'Shea, R.; Deng, C.; Li, L.; Sun, Y.; Murphy, J. D., A perspective on
8
9 decarbonizing whiskey using renewable gaseous biofuel in a circular bioeconomy process. *J. Clean.*
10
11 *Prod.* **2020**, *255*, 120211. <https://doi.org/10.1016/j.jclepro.2020.120211>

12
13 (8) Sharma, D.; Espinosa-Solares, T.; Huber, D. H., Thermophilic anaerobic co-digestion of poultry
14
15 litter and thin stillage. *Bioresour. Technol.* **2013**, *136*, 251-256.

16
17 <https://doi.org/10.1016/j.biortech.2013.03.005>

18
19 (9) Murphy, J. D.; Power, N. M., How can we improve the energy balance of ethanol production from
20
21 wheat? *Fuel* **2008**, *87* (10), 1799-1806. <https://doi.org/10.1016/j.fuel.2007.12.011>

22
23 (10) Wang, D.; Ai, J.; Shen, F.; Yang, G.; Zhang, Y.; Deng, S.; Zhang, J.; Zeng, Y.; Song, C.,
24
25 Improving anaerobic digestion of easy-acidification substrates by promoting buffering capacity using
26
27 biochar derived from vermicompost. *Bioresour. Technol.* **2017**, *227*, 286-296.

28
29 <https://doi.org/10.1016/j.biortech.2016.12.060>

30
31 (11) Kwietniewska, E.; Tys, J., Process characteristics, inhibition factors and methane yields of
32
33 anaerobic digestion process, with particular focus on microalgal biomass fermentation. *Renew. Sust.*
34
35 *Energ. Rev.* **2014**, *34*, 491-500. <https://doi.org/10.1016/j.rser.2014.03.041>

36
37 (12) Yang, L.; Huang, Y.; Zhao, M.; Huang, Z.; Miao, H.; Xu, Z.; Ruan, W., Enhancing biogas
38
39 generation performance from food wastes by high-solids thermophilic anaerobic digestion: Effect of
40
41 pH adjustment. *Int. Biodeterior. Biodegrad.* **2015**, *105*, 153-159.

42
43 <https://doi.org/10.1016/j.ibiod.2015.09.005>

44
45 (13) Zhao, Z.; Zhang, Y.; Li, Y.; Dang, Y.; Zhu, T.; Quan, X., Potentially shifting from interspecies
46
47 hydrogen transfer to direct interspecies electron transfer for syntrophic metabolism to resist acidic
48
49 impact with conductive carbon cloth. *Chem. Eng. J.* **2017**, *313*, 10-18.

50
51 <https://doi.org/10.1016/j.cej.2016.11.149>

1
2
3 (14) Shao, L.; Li, S.; Cai, J.; He, P.; Lü, F., Ability of biochar to facilitate anaerobic digestion is
4 restricted to stressed surroundings. *J. Clean. Prod.* **2019**, *238*, 117959.

5
6
7 <https://doi.org/10.1016/j.jclepro.2019.117959>

8
9 (15) Indren, M.; Birzer, C. H.; Kidd, S. P.; Medwell, P. R., Effect of total solids content on anaerobic
10 digestion of poultry litter with biochar. *J. Environ. Manag.* **2020**, *255*, 109744.

11
12
13 <https://doi.org/10.1016/j.jenvman.2019.109744>

14
15 (16) Lin, R.; Deng, C.; Cheng, J.; Xia, A.; Lens, P. N. L.; Jackson, S. A.; Dobson, A. D. W.; Murphy,
16 J. D., Graphene facilitates biomethane production from protein-derived glycine in anaerobic digestion.
17
18 *iScience* **2018**, *10*, 158-170. <https://doi.org/10.1016/j.isci.2018.11.030>

19
20 (17) Lü, F.; Luo, C.; Shao, L.; He, P., Biochar alleviates combined stress of ammonium and acids by
21 firstly enriching Methanosaeta and then Methanosarcina. *Water Res.* **2016**, *90*, 34-43.

22
23
24 <https://doi.org/10.1016/j.watres.2015.12.029>

25
26 (18) Florentino, A. P.; Sharaf, A.; Zhang, L.; Liu, Y., Overcoming ammonia inhibition in anaerobic
27 blackwater treatment with granular activated carbon: the role of electroactive microorganisms.

28
29
30 *Environ. Sci. Water Res. Technol.* **2019**, *5* (2), 383-396. <https://doi.org/10.1039/c8ew00599k>

31
32 (19) Barua, S.; Zakaria, B. S.; Dhar, B. R., Enhanced methanogenic co-degradation of propionate and
33 butyrate by anaerobic microbiome enriched on conductive carbon fibers. *Bioresour. Technol.* **2018**,
34
35 *266*, 259-266. <https://doi.org/10.1016/j.biortech.2018.06.053>

36
37 (20) Leng, L.; Yang, P.; Singh, S.; Zhuang, H.; Xu, L.; Chen, W.-H.; Dolfing, J.; Li, D.; Zhang, Y.;
38
39 Zeng, H.; Chu, W.; Lee, P.-H., A review on the bioenergetics of anaerobic microbial metabolism
40 close to the thermodynamic limits and its implications for digestion applications. *Bioresour. Technol.*
41
42
43
44
45
46
47 **2018**, *247*, 1095-1106. <https://doi.org/10.1016/j.biortech.2017.09.103>

48
49 (21) Barua, S.; Dhar, B. R., Advances towards understanding and engineering direct interspecies
50 electron transfer in anaerobic digestion. *Bioresour. Technol.* **2017**, *244*, 698-707.

51
52
53 <https://doi.org/10.1016/j.biortech.2017.08.023>

- 1
2
3 (22) Lin, R.; Cheng, J.; Ding, L.; Murphy, J. D., Improved efficiency of anaerobic digestion through
4 direct interspecies electron transfer at mesophilic and thermophilic temperature ranges. *Chem. Eng. J.*
5 **2018**, *350*, 681-691. <https://doi.org/10.1016/j.cej.2018.05.173>
6
7
8
9 (23) Deng, C.; Lin, R.; Kang, X.; Wu, B.; O'Shea, R.; Murphy, J. D., Improving gaseous biofuel yield
10 from seaweed through a cascading circular bioenergy system integrating anaerobic digestion and
11
12
13
14
15
16 (24) Lin, R.; Deng, C.; Cheng, J.; Murphy, J. D., Low concentrations of furfural facilitate
17
18
19
20
21
22
23 (25) Qi, S.; Wang, Y.; Chu, X.; Wang, W.; Zhan, X.; Hu, Z.-H., Food waste fermentation for carbon
24
25
26
27
28
29
30
31
32
33
34
35
36
37 (26) Wu, B.; Wang, J.; Hu, Z.; Yuan, S.; Wang, W., Anaerobic biotransformation and potential
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54 (27) Madigan, M. T.; Martinko, J. M.; Bender, K. S.; Buckley, D. H.; Stahl, D. A., *Brock biology of*
55
56
57
58
59
60
microorganisms. 14 ed.; Pearson Education: 2014; Vol. 11, p 1032.

(28) Zamanzadeh, M.; Parker, W. J.; Verastegui, Y.; Neufeld, J. D., Biokinetics and bacterial
communities of propionate oxidizing bacteria in phased anaerobic sludge digestion systems. *Water*
Res. **2013**, *47* (4), 1558-1569. <https://doi.org/10.1016/j.watres.2012.12.015>

(29) Cruz Viggì, C.; Rossetti, S.; Fazi, S.; Paiano, P.; Majone, M.; Aulenta, F., Magnetite particles
triggering a faster and more robust syntrophic pathway of methanogenic propionate degradation.
Environ. Sci. Technol. **2014**, *48* (13), 7536-7543. <https://doi.org/10.1021/es5016789>

(30) Luo, C.; Lü, F.; Shao, L.; He, P., Application of eco-compatible biochar in anaerobic digestion to
relieve acid stress and promote the selective colonization of functional microbes. *Water Res.* **2015**, *68*,
710-718. <https://doi.org/10.1016/j.watres.2014.10.052>

- 1
2
3 (31) Wang, G.; Li, Q.; Gao, X.; Wang, X. C., Synergetic promotion of syntrophic methane production
4 from anaerobic digestion of complex organic wastes by biochar: Performance and associated
5 mechanisms. *Bioresour. Technol.* **2018**, *250*, 812-820. <https://doi.org/10.1016/j.biortech.2017.12.004>
6
7
8
9 (32) Yu, L.; Yuan, Y.; Tang, J.; Wang, Y.; Zhou, S., Biochar as an electron shuttle for reductive
10 dechlorination of pentachlorophenol by *Geobacter sulfurreducens*. *Sci. Rep.* **2015**, *5* (1), 16221.
11
12 <https://doi.org/10.1038/srep16221>
13
14 (33) Cheng, Q. W.; de los Reyes, F. L.; Call, D. F., Amending anaerobic bioreactors with pyrogenic
15 carbonaceous materials: the influence of material properties on methane generation. *Environ. Sci.*
16 *Water Res. Technol.* **2018**, *4* (11), 1794-1806. <https://doi.org/10.1039/c8ew00447a>
17
18
19 (34) Wu, Z. S.; Ren, W. C.; Gao, L. B.; Zhao, J. P.; Chen, Z. P.; Liu, B. L.; Tang, D. M.; Yu, B.;
20 Jiang, C. B.; Cheng, H. M., Synthesis of graphene sheets with high electrical conductivity and good
21 thermal stability by hydrogen arc discharge exfoliation. *ACS Nano* **2009**, *3* (2), 411-417.
22
23 <https://doi.org/10.1021/nn900020u>
24
25 (35) Du, J. H.; Zhao, L.; Zeng, Y.; Zhang, L. L.; Li, F.; Liu, P. F.; Liu, C., Comparison of electrical
26 properties between multi-walled carbon nanotube and graphene nanosheet/high density polyethylene
27 composites with a segregated network structure. *Carbon* **2011**, *49* (4), 1094-1100.
28
29 <https://doi.org/10.1016/j.carbon.2010.11.013>
30
31 (36) Yin, Q.; Wu, G., Advances in direct interspecies electron transfer and conductive materials:
32 Electron flux, organic degradation and microbial interaction. *Biotechnol. Adv.* **2019**, *37* (8), 107443.
33
34 <https://doi.org/10.1016/j.biotechadv.2019.107443>
35
36 (37) Masebinu, S. O.; Akinlabi, E. T.; Muzenda, E.; Aboyade, A. O., A review of biochar properties
37 and their roles in mitigating challenges with anaerobic digestion. *Renew. Sust. Energ. Rev.* **2019**, *103*,
38
39 291-307. <https://doi.org/10.1016/j.rser.2018.12.048>
40
41
42 (38) Wang, G.; Gao, X.; Li, Q.; Zhao, H.; Liu, Y.; Wang, X. C.; Chen, R., Redox-based electron
43 exchange capacity of biowaste-derived biochar accelerates syntrophic phenol oxidation for
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60

- 1
2
3 (39) Liu, F. H.; Rotaru, A. E.; Shrestha, P. M.; Malvankar, N. S.; Nevin, K. P.; Lovley, D. R.,
4 Promoting direct interspecies electron transfer with activated carbon. *Energy Environ. Sci.* **2012**, *5*
5 (10), 8982-8989. <https://doi.org/10.1039/c2ee22459c>
6
7
8 (40) Li, D.; Song, L.; Fang, H.; Li, P.; Teng, Y.; Li, Y.-Y.; Liu, R.; Niu, Q., Accelerated bio-methane
9 production rate in thermophilic digestion of cardboard with appropriate biochar: Dose-response
10 kinetic assays, hybrid synergistic mechanism, and microbial networks analysis. *Bioresour. Technol.*
11 **2019**, *290*, 121782. <https://doi.org/10.1016/j.biortech.2019.121782>
12
13
14 (41) Jing, Y.; Wan, J.; Angelidaki, I.; Zhang, S.; Luo, G., iTRAQ quantitative proteomic analysis
15 reveals the pathways for methanation of propionate facilitated by magnetite. *Water Res.* **2017**, *108*,
16 212-221. <https://doi.org/10.1016/j.watres.2016.10.077>
17
18
19 (42) Fagbohunbe, M. O.; Herbert, B. M. J.; Hurst, L.; Li, H.; Usmani, S. Q.; Semple, K. T., Impact
20 of biochar on the anaerobic digestion of citrus peel waste. *Bioresour. Technol.* **2016**, *216*, 142-149.
21
22 <https://doi.org/10.1016/j.biortech.2016.04.106>
23
24
25 (43) Bi, S.; Qiao, W.; Xiong, L.; Mahdy, A.; Wandera, S. M.; Yin, D.; Dong, R., Improved high solid
26 anaerobic digestion of chicken manure by moderate in situ ammonia stripping and its relation to
27 metabolic pathway. *Renew. Energ.* **2020**, *146*, 2380-2389.
28
29 <https://doi.org/10.1016/j.renene.2019.08.093>
30
31
32 (44) Im, S.; Petersen, S. O.; Lee, D.; Kim, D.-H., Effects of storage temperature on CH₄ emissions
33 from cattle manure and subsequent biogas production potential. *Waste Manag.* **2020**, *101*, 35-43.
34
35 <https://doi.org/10.1016/j.wasman.2019.09.036>
36
37
38 (45) Maus, I.; Bremges, A.; Stolze, Y.; Hahnke, S.; Cibis, K. G.; Koeck, D. E.; Kim, Y. S.; Kreubel,
39 J.; Hassa, J.; Wibberg, D.; Weimann, A.; Off, S.; Stantscheff, R.; Zverlov, V. V.; Schwarz, W. H.;
40 König, H.; Liebl, W.; Scherer, P.; McHardy, A. C.; Sczyrba, A.; Klocke, M.; Pühler, A.; Schlüter, A.,
41 Genomics and prevalence of bacterial and archaeal isolates from biogas-producing microbiomes.
42
43 *Biotechnol. Biofuels* **2017**, *10* (1), 264. <https://doi.org/10.1186/s13068-017-0947-1>
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60

- 1
2
3 (46) Venkiteshwaran, K.; Milferstedt, K.; Hamelin, J.; Fujimoto, M.; Johnson, M.; Zitomer, D. H.,
4 Correlating methane production to microbiota in anaerobic digesters fed synthetic wastewater. *Water*
5 *Res.* **2017**, *110*, 161-169. <https://doi.org/10.1016/j.watres.2016.12.010>
6
7
8 (47) Abendroth, C.; Hahnke, S.; Simeonov, C.; Klocke, M.; Casani-Miravalls, S.; Ramm, P.; Bürger,
9 C.; Luschnig, O.; Porcar, M., Microbial communities involved in biogas production exhibit high
10
11
12
13
14
15
16
17
18 (48) Kim, E.; Lee, J.; Han, G.; Hwang, S., Comprehensive analysis of microbial communities in full-
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
- (49) Sun, L.; Toyonaga, M.; Ohashi, A.; Tourlousse, D. M.; Matsuura, N.; Meng, X.-Y.; Tamaki, H.; Hanada, S.; Cruz, R.; Yamaguchi, T.; Sekiguchi, Y., *Lentimicrobium saccharophilum* gen. nov., sp. nov., a strictly anaerobic bacterium representing a new family in the phylum Bacteroidetes, and proposal of Lentimicrobiaceae fam. nov. *Int. J. Syst. Evol. Microbiol.* **2016**, *66* (7), 2635-2642. <https://doi.org/10.1099/ijsem.0.001103>
- (50) Zhao, Z. G.; Li, Y.; Quan, X.; Zhang, Y. B., New application of ethanol-type fermentation: stimulating methanogenic communities with ethanol to perform direct interspecies electron transfer. *ACS Sustain. Chem. Eng.* **2017**, *5* (10), 9441-9453. <https://doi.org/10.1021/acssuschemeng.7b02581>
- (51) De Vrieze, J.; Hennebel, T.; Boon, N.; Verstraete, W., Methanosarcina: The rediscovered methanogen for heavy duty biomethanation. *Bioresour. Technol.* **2012**, *112*, 1-9. <https://doi.org/10.1016/j.biortech.2012.02.079>
- (52) Yee, M. O.; Snoeyenbos-West, O. L.; Thamdrup, B.; Ottosen, L. D. M.; Rotaru, A.-E., Extracellular electron uptake by two Methanosarcina species. *Front. Energy Res.* **2019**, *7* (29). <https://doi.org/10.3389/fenrg.2019.00029>
- (53) Lee, J.; Koo, T.; Yulisa, A.; Hwang, S., Magnetite as an enhancer in methanogenic degradation of volatile fatty acids under ammonia-stressed condition. *J. Environ. Manag.* **2019**, *241*, 418-426. <https://doi.org/10.1016/j.jenvman.2019.04.038>

1
2
3 (54) Wang, T.; Zhang, D.; Dai, L.; Dong, B.; Dai, X., Magnetite triggering enhanced direct
4 interspecies electron transfer: a scavenger for the blockage of electron transfer in anaerobic digestion
5 of high-solids sewage sludge. *Environ. Sci. Technol.* **2018**, *52* (12), 7160-7169.

6
7
8
9 <https://doi.org/10.1021/acs.est.8b00891>

10
11 (55) Yamada, C.; Kato, S.; Ueno, Y.; Ishii, M.; Igarashi, Y., Conductive iron oxides accelerate
12 thermophilic methanogenesis from acetate and propionate. *J. Biosci. Bioeng.* **2015**, *119* (6), 678-682.

13
14
15 <https://doi.org/10.1016/j.jbiosc.2014.11.001>

16
17 (56) Zhuang, L.; Ma, J.; Yu, Z.; Wang, Y.; Tang, J., Magnetite accelerates syntrophic acetate
18 oxidation in methanogenic systems with high ammonia concentrations. *Microb. Biotechnol.* **2018**, *11*
19 (4), 710-720. <https://doi.org/10.1111/1751-7915.13286>

20
21 (57) Wang, G.; Li, Q.; Gao, X.; Wang, X. C., Sawdust-derived biochar much mitigates VFAs
22 accumulation and improves microbial activities to enhance methane production in thermophilic
23 anaerobic digestion. *ACS Sustain. Chem. Eng.* **2019**, *7* (2), 2141-2150.

24
25
26
27
28
29 <https://doi.org/10.1021/acssuschemeng.8b04789>

30
31 (58) Li, Q.; Xu, M.; Wang, G.; Chen, R.; Qiao, W.; Wang, X., Biochar assisted thermophilic co-
32 digestion of food waste and waste activated sludge under high feedstock to seed sludge ratio in batch
33 experiment. *Bioresour. Technol.* **2018**, *249*, 1009-1016.

34
35
36
37
38 <https://doi.org/10.1016/j.biortech.2017.11.002>

39
40 (59) Zhou, H.; Brown, R. C.; Wen, Z., Biochar as an additive in anaerobic digestion of municipal
41 sludge: Biochar Properties and Their Effects on the Digestion Performance. *ACS Sustain. Chem. Eng.*
42
43
44
45 **2020**, *8* (16), 6391-6401. <https://doi.org/10.1021/acssuschemeng.0c00571>

46
47 (60) Sun, T. R.; Levin, B. D. A.; Guzman, J. J. L.; Enders, A.; Muller, D. A.; Angenent, L. T.;
48
49
50
51
52
53 Lehmann, J., Rapid electron transfer by the carbon matrix in natural pyrogenic carbon. *Nat. Commun.*
54
55 **2017**, *8*. <https://doi.org/10.1038/ncomms14873>

56
57 (61) Cruz Viggi, C.; Simonetti, S.; Palma, E.; Pagliaccia, P.; Braguglia, C.; Fazi, S.; Baronti, S.;
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000

1
2
3 most effective type of biochar. *Biotechnol. Biofuels* **2017**, *10* (1), 303. [https://doi.org/10.1186/s13068-](https://doi.org/10.1186/s13068-017-0994-7)
4
5 [017-0994-7](https://doi.org/10.1186/s13068-017-0994-7)
6


7 (62) Zhao, Z.; Zhang, Y.; Woodard, T. L.; Nevin, K. P.; Lovley, D. R., Enhancing syntrophic
8 metabolism in up-flow anaerobic sludge blanket reactors with conductive carbon materials. *Bioresour.*
9
10
11
12 *Technol.* **2015**, *191*, 140-145. <https://doi.org/10.1016/j.biortech.2015.05.007>
13

14 (63) Dang, Y.; Sun, D.; Woodard, T. L.; Wang, L.-Y.; Nevin, K. P.; Holmes, D. E., Stimulation of the
15 anaerobic digestion of the dry organic fraction of municipal solid waste (OFMSW) with carbon-based
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
conductive materials. *Bioresour. Technol.* **2017**, *238*, 30-38.
<https://doi.org/10.1016/j.biortech.2017.04.021>

(64) Pecchi, M.; Baratieri, M., Coupling anaerobic digestion with gasification, pyrolysis or
hydrothermal carbonization: A review. *Renew. Sust. Energ. Rev.* **2019**, *105*, 462-475.
<https://doi.org/10.1016/j.rser.2019.02.003>

(65) IEA Bioenergy Task 37 Country Report Summaries 2019. Available from:
<http://task37.ieabioenergy.com/country-reports.html>. Accessed 18 April 2020.

For Table of Contents Use Only

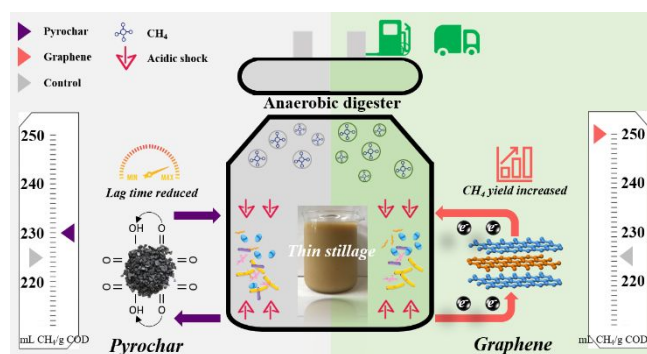

Synopsis: Graphene can alleviate acidic shock and improve biomethane production during digestion of thin stillage.