

**TR/6**

**February 1972**

**A METHOD FOR SOLVING MOVING  
BOUNDARY PROBLEMS IN HEAT FLOW  
PART I : USING CUBIC SPLINES.**

**by**

**John Crank and Radhey S. Gupta**

## **ABSTRACT**

A new approach to a heat-flow problem involving a moving boundary makes use of a grid system which moves with the boundary. The necessary interpolations are performed by using cubic splines. The method smooths out irregularities in the motion of the boundary which were evident in previous calculations based on a fixed grid system.

A Method for Solving Moving Boundary Problems in  
Heat Flow : Part I - Using Cubic Splines.

John Crank and Radhey S. Gupta.

1. Introduction.

Previous papers have described various ways of dealing with a moving boundary in heat flow or diffusion problems. Most of them refer to a boundary on which a change of physical state occurs with the absorption or liberation of latent heat. The present authors [1] have discussed a slightly different problem presented by the diffusion of oxygen in an absorbing medium and the counterpart in heat flow is clearly of interest. An early finite-difference method [2] proposed the use of a variable time step chosen so that the boundary always moves from one line of the space grid to the neighbouring one in a single time step. Another method [3] which maintains a fixed number of equal space intervals between the moving boundary and the surface of the medium, the size of interval being correspondingly adjusted, leads to a more complicated form of the heat flow equation. It contains a parameter which is the unknown velocity of the moving boundary and is analogous to the equation which results from the use of a transformed space variable expressed as a fraction of the space coordinate of the boundary which is time-dependent. The present authors [1] used finite-difference formulae for unequal intervals in the region of the moving boundary together with a Taylor's series expansion.

In the present paper, use is made of a uniform space-grid which moves with the velocity of the moving boundary. This has the effect of transferring the unequal interval from the neighbourhood of the moving boundary to the surface of the medium. An improvement in the degree of smoothness in the calculated motion of the boundary is effected. The method discussed makes use of interpolating cubic splines.

## 2. An Example.

We shall introduce the new method by referring to a practical problem which the authors described in detail in the earlier paper [1]. Expressed in non-dimensional terms we require the solution of the equation

$$\frac{\partial u}{\partial t} = \frac{\partial^2 u}{\partial x^2} - 1, \quad 0 \leq x \leq \delta(t), \quad (1)$$

with the boundary conditions

$$\frac{\partial u}{\partial x} = 0, \quad x = 0, \quad t \geq 0, \quad (2)$$

$$u = \frac{\partial u}{\partial x} = 0, \quad x = \delta(t), \quad t \geq 0, \quad (3)$$

and the initial condition

$$u = \frac{1}{2}(1-x)^2, \quad 0 \leq x \leq 1, \quad t = 0, \quad (4)$$

Where  $\delta(t)$  denotes the position of the moving boundary at time  $t$ .

## 3. A Moving Grid System.

Traditionally, we divide the region  $0 \leq x \leq 1$  into  $n$  intervals each of width  $\Delta x$  such that  $x_i = i \Delta x$ ,  $i = 0, 1, \dots, n$  and  $n \Delta x = 1$ . By some numerical procedure we advance the solution in finite time steps  $\Delta t$ , starting from the known solution at  $t = 0$ , given by (4).

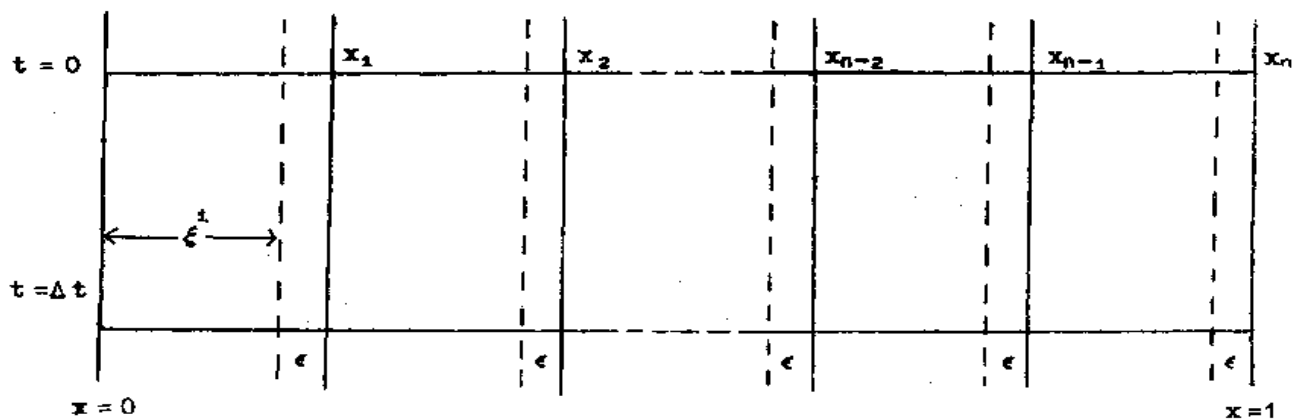


Fig. 1. Moving Grid.

We denote by  $U_i^j$  the values of  $u$  at  $(i \Delta x, j \Delta t)$ ,  $j = 0, 1, 2, \dots$ , so that in the first interval  $\Delta t$  we evaluate  $U_{n-1}^1$  and also the new position of the boundary which has moved from  $x = 1$  to  $x = 1 - \epsilon$ , say, as in Figure 1. We now move the whole grid a distance  $\epsilon$  to the left as indicated by the broken lines, and we wish to evaluate values of  $U^0$  and the second space derivatives at each of the points  $x_1 - \epsilon, x_2 - \epsilon, \dots, x_{n-1} - \epsilon, 1 - \epsilon$ . We describe below a method of doing this, using cubic splines for interpolating between the points  $x_0, x_1, x_2, \dots, x_{n-1}, 1$  at  $t = 0$ . We can then proceed in similar fashion to  $2 \Delta t$  and in general to  $j \Delta t$  ( $j = 3, 4, \dots$ ) provided we include a modification to allow for the unequal interval  $\xi^j$  at the  $j$ th time step near the surface  $x = 0$ .

#### 4 Forward-Difference Spline (F.D.S.) Method.

We base our interpolations in  $x_j < x < x_{j+1}$ ,  $i = 0, 2, 3, \dots, n - 1$ , on the cubic spline given by

$$s(x) = U_j + (x - x_j) \left\{ \frac{U_{i+1} - U_i}{x_{i+1} - x_i} - \frac{1}{6} (x_{i+1} - x_i) (2S''(x_i) + S''(x_{i+1})) \right. \\ \left. + \frac{1}{2} (x - x_i)^2 S''(x_i) + \frac{1}{6} (x - x_i)^3 \left\{ \frac{S''(x_{i+1}) - S''(x_i)}{x_{i+1} - x_i} \right\} \right\}, \quad (5)$$

where  $S''(x_j)$  denote the second derivatives at  $x_j$ , ( $i = 0, 1, 2, \dots, n - 1$ ).

These are determined from the following tridiagonal set of equations

$$(x_i - x_{i-1}) S''(x_{i-1}) + 2(x_{i+1} - x_{i-1}) S''(x_i) + (x_{i+1} - x_i) S''(x_{i+1}) \\ = 6 \left\{ \frac{U_{i+1} - U_i}{x_{i+1} - x_i} - \frac{U_i - U_{i-1}}{x_i - x_{i-1}} \right\}, \quad (6)$$

$$i = 1, 2, \dots, n-1.$$

The equations express the continuity of the first derivatives  $S'(x_L)$ . They form a set of only  $n-1$  equations while there are  $n + 1$  unknown function values to be evaluated. We derive two further relationships from the given boundary conditions.

Differentiating (5) with respect to  $x$  and using (2) we find

$$2S''(x_0) + S''(x_2) = \frac{6(U_1 - U_0)}{(x_1 - x_0)^2} = \frac{6(U_1 - U_0)}{\xi^2} . \quad (7)$$

Similarly at the moving boundary,  $\delta(t)$ , we can find a relation given by

$$S''(x_{n-1}) + 2 S''(x_n) = \frac{6U_{n-1}}{\Delta x^2} . \quad (8)$$

But we have also shown in [1] that

$$\frac{\partial^2 u}{\partial x^2} = 1, \quad \frac{\partial^3 u}{\partial x^3} = - \frac{d\delta}{dt}, \quad \frac{\partial^4 u}{\partial x^4} = \left( \frac{\partial \delta}{dt} \right)^2 \text{ etc. at } (9)$$

The moving boundary, giving  $S''(x_n) = 1$ .

Since we make use of (9) later on, to determine the position of the moving boundary, we prefer to include it rather than (8) in the solution of the tridiagonal set of equations given by (6). Having determined the second derivatives at the given points or knots, the values of  $u(x)$  at intermediate points can be found from (5). The second derivatives at the intermediate points are readily available, for a cubic spline, by linear interpolation between the knots.

Assuming the function values to be known' at any time  $j \Delta t$  when the distance of the moving boundary from the surface  $x = 0$  is  $\xi^j + r \Delta x$ , the method proceeds as follows. Obtain the second derivatives  $S''(x_i)$ ,  $i = 0, 1, \dots, (r + 1)$  by solving the tridiagonal set (6) together with (7) and (9). The value of  $U_r^{j+1}$  i.e. at

the point neighbouring the moving boundary, follows from the simple explicit relationship

$$\frac{U_r^{j+1} - U_r^j}{\Delta t} = S''(x_r^j) - 1, \quad (10)$$

where  $S''(x_r^j)$  denotes the value of the second derivative at  $x_r$  at  $t = j\Delta t$ .

The Taylor's series for  $U_r$  obtained by expanding about the moving point can be written as

$$U_r = U(\delta) \ell \left( \frac{\partial u}{\partial x} \right)_{x=\delta} + \frac{1}{2} \ell^2 \left( \frac{\partial^2 u}{\partial x^2} \right)_{x=\delta} - \frac{1}{6} \ell^3 \left( \frac{\partial^3 u}{\partial x^3} \right)_{x=\delta} + \dots,$$

where  $\ell$  ( $0 \leq \ell \leq \Delta x$ ) is the distance of the moving point from  $U_r$ .

Using (3) and (9) and assuming that the boundary is not moving too quickly, the above relation gives to a reasonable accuracy

$$\ell = \sqrt{(2U_r)}. \quad (11)$$

Therefore, once  $U_r^{j+1}$  is known from (10), we can find the position of the moving boundary from (11). Hence, the movement,  $\epsilon^{j+1}$ , of the boundary in time  $\Delta t$ , from  $j\Delta t$  to  $(j+1)\Delta t$  is given by

$$\epsilon^{j+1} = \Delta x - \ell^{j+1}. \quad (12)$$

Having got  $\epsilon$  from (12) we then interpolate the values of  $u(x)$  at  $t = j\Delta t$  at the points  $x_1 - \epsilon$ ,  $x_2 - \epsilon$ , ...,  $x_r - \epsilon$ ,  $\delta - \epsilon$

using (5) and the corresponding second derivatives from the linear relationship

$$\frac{S''(x_{i+1}^j) - S''(x)}{x_{i+1}^j - x} = \frac{S''(x_{i+1}^j) - S''(x_i^j)}{x_{i+1}^j - x_i^j}, \quad (13)$$

where  $x_i^j$  denotes the  $i$ th mesh point such that  $x_i^j = \xi^j + (i-1)\Delta x$  at time  $j\Delta t$ ;  $x_i^j \leq x \leq x_{i+1}^j$  and  $i = 0, 1, \dots, r$ .

The values of  $u(x)$  at  $x_1, x_2, \dots, x_r$ , at time  $(j+1)\Delta t$  follow at once from

$$\frac{U^{j+1}(x_i^{j+1}) - U^j(x_i^j - \epsilon^{j+1})}{\Delta t} = S''(x_i^j - \epsilon^{j+1}) - 1, \quad (14)$$

$$x_i^{j+1} = x_i^j - \epsilon^{j+1}, \quad i = 1, 2, \dots, r.$$

together with

$$\frac{U_0^{j+1} - U_0^j}{\Delta t} = S''(x_0^j) - 1, \quad \text{at the surface } x = 0. \quad (15)$$

We should remember that the space interval  $x_1 - x_0 = \xi$  is not fixed and varies from one time step to the next.

Proceeding in steps  $\Delta t$  in this way we eventually find that the points  $x_0$  and  $x_1$  come so close together that the values of  $u$  there are not significantly different, to the accuracy of working. We then replace  $\xi$  by  $\Delta x + \xi$  to get values at the next time step and proceed as before.



## 5. Results and Discussion.

In our previous paper [1], an analytical solution satisfactory for small times was obtained which is given by

$$u(x,t) \approx \frac{1}{2} (1-x)^2 - 2 \sqrt{\left(\frac{t}{\pi}\right)} \exp \left\{ -\left(\frac{x}{2\sqrt{t}}\right)^2 \right\} + \text{erfc} \left( \frac{x}{2\sqrt{t}} \right), \quad (16)$$

$$0 \leq x \leq 1 \text{ and } t \text{ small}$$

We start the present solution from the values taken from (16) at  $t = 0.025$  when the boundary  $\delta = 1$ , has not moved to an accuracy of six significant figures [1]. The positions of the moving boundary and the surface concentrations have been computed by the FDS method and are compared in Tables I and II respectively, with the corresponding values obtained from the previous method of [1] which from now on we call the Fixed Grid Lagrange (FG-L) method. The values show a reasonably good agreement between the two methods. We are not able to assess the accuracy of the results by a rigorous analysis so we have quoted results by the FGL method for  $\Delta x = 0.05$  as well as for  $\Delta x = 0.10$ . The surface values of  $u$  are in good agreement. The calculated positions of the moving boundary agree reasonably well until the concentrations are everywhere quite small.

Now let us consider the major problem of roughness in the positions of the moving boundary which is produced by the FGL method near the times when the process used to calculate the concentration in the neighbourhood of the moving point is transferred one space interval towards the surface  $x = 0$ . Table III gives the positions of the boundary at and around such times of shifting the interval in the FGL method, along

TABLE I

Comparison of  $10^4 \delta$  at different times. The numerical solutions start from the analytical solution at  $t = 0.025$ .

Time Method	0.040	0.060	0.100	0.120	0.140	0.160	0.180	0.185
FGL $\Delta x = 0.10$	9988	9905	9312	8747	7912	6756	4849	4014
FGL $\Delta x = 0.05$	9992	9918	9346	8781	7966	6799	4942	4178
FDS $\Delta x = 0.10$	9993	9920	9327	8739	7892	6664	4680	3917

TABLE II

Comparison of  $10^4 U$  at the surface  $x = 0$ , at different times. The numerical solutions start from the analytical solution at  $t = 0.025$ .

Time Method	0.040	0.060	0.100	0.120	0.140	0.160	0.180	0.185
FGL $\Delta x = 0.10$	2745	2238	1434	1094	781	490	220	156
FGL $\Delta x = 0.05$	2742	2234	1430	1089	777	486	216	151
FDS $\Delta x = 0.10$	2736	2277	1424	1083	771	481	210	145

TABLE III

Table showing the irregularities in the position of the moving boundary, calculated by the FGL method. Comparatively smooth figures are shown for the FDS method ( $\Delta x = 0.10$ )

Time	FGL Method			FDS Method		
	$10^4\delta$	$-\Delta$	$-\Delta^2$	$10^4\delta$	$-\Delta$	$-\Delta^2$
0.110	9099			9118		
	9070	29		9090	28	
	<u>9040</u>	30	1	9061	29	1
	9010	30	0	9031	30	1
	8984	26	4	9001	30	0
0.137	8141			8133		
	8089	52		8086	47	0
	<u>8034</u>	55	3	8039	47	1
	7994	40	-15	7991	48	1
	7954	40	0	7942	49	1
0.154	<u>7277</u>			7214		
	7204	73		7150	64	1
	<u>7124</u>	80	7	7085	65	2
	7037	87	7	7018	67	1
	6985	52	-35	6950	68	1
0.167	<u>6396</u>			6266		
	6306	90		6180	86	1
	<u>6203</u>	103	13	6093	87	3
	6045	158	55	6003	90	3
	5979	66	-92	5910	93	3
0.176	5499			5406		
	5393	106		5296	110	5
	<u>5268</u>	125	19	5181	115	3
	5020	248	123	5063	118	5
	4937	83	-165	4940	23	5
0.184	4652			4397		
	4538	114		4245	152	8
	<u>4406</u>	132	18	4085	160	8
	4014	392	260	3917	168	11
	3912	102	-290	3738	179	11

NOTE: The data are tabulated at an interval of time  $\Delta t = 0.001$ . The underlined values correspond to the times when the interpolation process near the moving boundary is transferred one step to the left.

TABLE IV

Table showing the smoothness of the surface concentrations calculated by the FDS method. Comparative figures are given for the FGL method ( $\Delta x = 0.10$ ).

Time	FGL Method		FDS Method	
	$10^4 U_o$	$-\Delta$	$10^4 U_o$	$-\Delta$
0.105	1371		1381	
	1353	18	1363	18
	<u>1336</u>	17	1346	17
	1318	18	1328	18
	1301	17	1311	17
0.136	862		872	
	847	15	856	16
	<u>832</u>	15	841	15
	816	16	826	15
	801	15	811	15
0.154	594		604	
	580	14	590	14
	<u>566</u>	14	575	15
	551	15	561	14
	537	14	547	14
0.167	411		421	
	398	13	407	14
	<u>384</u>	14	<u>393</u>	14
	370	14	380	13
	357	13	366	14
0.177	276		286	
	263	13	272	14
	<u>250</u>	13	<u>259</u>	13
	236	14	246	13
	223	13	233	13
0.184	184		194	
	171	13	181	13
	<u>158</u>	13	168	13
	145	13	155	13
	133	12	143	12

NOTE: The data are tabulated at an interval of time  $\Delta t = 0.001$ . The underlined values correspond to the times given in the first column, when the first space interval is increased by  $\Delta x$ .

with the corresponding figures from the FDS method. The irregularities produced in the former method are clearly visible, whereas their counterparts show a smooth behaviour throughout.

Table IV gives the surface concentrations computed from the present method at and around the times when the first space interval  $\xi$  is increased to  $\xi + \Delta x$  for the succeeding computations. It is interesting to note that the differences in the concentrations show no sign of irregularities. The comparative figures from the PGL method are also given in Table IV.

It has also been noted that the results obtained by using (8) instead of (9) are very close.

## 6 Generalisation

Let us consider a problem in heat flow in which a change of state occurs with latent heat on a moving boundary. In non-dimensional form the relevant equations are

$$\frac{\partial u}{\partial t} = \frac{\partial^2 u}{\partial x^2}, \quad 0 \leq x \leq \delta(t) \quad ; \quad (17)$$

$$\frac{\partial u}{\partial x} = -1, \quad x=0, \quad t > 0 \quad ; \quad (18)$$

$$u = 0, \quad x=\delta(t), \quad t \geq 0 \quad ; \quad (19)$$

$$\frac{\partial u}{\partial x} = -\frac{\partial \delta}{\partial t} = -\dot{\delta} \quad x = \delta(t) \quad ; \quad (20)$$

$$\delta = 0, \quad t = 0. \quad (21)$$

In order to get a solution of the tridiagonal set of equations (6) we need to know two more equations involving second derivatives at the grid points. We replace the surface condition (18) by an equation corresponding to (7) which is given by

$$2 S''(X_0) - S''(X_1) = \frac{6}{\xi^2} (U_1 - U_0) + \frac{6}{\xi} . \quad (22)$$

By differentiating (19) with respect to  $t$  and using (17) and (20) it is easy to show that

$$\left( \frac{\partial^2 c}{\partial x^2} \right)_{x=\delta} = \left( \frac{\partial \delta}{\partial t} \right)^2 = \dot{\delta}^2 , \quad (23)$$

giving  $S''(x_n) = \dot{\delta}^2$  where  $\delta$  is a function of time  $t$ . Let us assume that the values of  $U_0, U_1, \dots, U_r, U_{r+1}$  are known at the  $j$ th time level and the position of the moving boundary is also known at that time which is given by  $\delta^j = \xi^j + r \Delta x$ . The width of all the meshes is  $\Delta x$  except the first one which is  $\xi^j$ .

The Taylor's expansion for  $U_r$  about the moving boundary can be written as

$$U_r = (U)_{x=\delta} - \Delta x \left( \frac{\partial u}{\partial x} \right)_{x=\delta} + \frac{1}{2} \Delta x^2 \left( \frac{\partial^2 u}{\partial x^2} \right)_{x=\delta} \dots ,$$

which after substituting from (20) and (22) gives

$$\dot{\delta} = -1 + \sqrt{1+2U_r} . \quad (24)$$

By putting value of  $\delta$  from (24) in (23), we get

$$S''(x_{r+1}) = (-1 + \sqrt{1+2U_r})^2 \quad . \quad (25)$$

The tridiagonal set of equation (6) together with (22) and (25) can now be solved giving the second derivatives at  $x_0, x_1, \dots, x_r, \dots, x_r, x_{r+1}$  at time  $(j+1)\Delta t$  at time  $j\Delta t$ .

The relation (24) also gives the new value of  $\delta$  i.e.  $\delta^{j+1}$  at time  $(j+1)\Delta t$  after replacing  $\delta$  by a forward finite difference i.e.

$$\frac{\delta^{j+1} - \delta^j}{\Delta t} = -1 + \sqrt{1+2U_r^j} \quad . \quad (26)$$

The desired interpolation for the value of  $U$  and its second derivatives can then be carried out as described in section 4. It should, however, be mentioned here that the boundary  $\delta(t)$  is moving forward i.e. away from the surface  $x = 0$ . In this situation the first interval  $\xi$  is to be "broken into two when it becomes larger than  $\Delta x$ . The new interval near the surface will then be of width  $\xi - \Delta x$ . The value of  $u$ , at the new mesh point, has to be interpolated using (5).

Acknowledgment.

This work has been supported by a research studentship awarded to R. S. Gupta by the Science Research Council.

## REFERENCES

1. J. Crank and R.S. Gupta, "A Moving Boundary Problem Arising from the Diffusion of Oxygen in Absorbing Tissue". J. Inst. Maths. Applies. (To appear).
2. J. Douglas and T. M. Gallie, Duke Mathematical Journal 22, 557 (1958).
3. W.D. Murray and F. Landis, J. Heat Transfer 81, 106 (1959).