

A Dufort-Frankel Difference Scheme for Two-dimensional sine-Gordon Equation

Zongqi Liang^{a,*}, Yubin Yan^b, Guorong Cai^c

^a*School of Sciences, Jimei University, Xiamen 361021, China*

^b*Department of Mathematics, University of Chester, CH1 4BJ*

^c*School of Sciences, Jimei University, Xiamen 361021, China*

Abstract

A standard Crank-Nicolson finite-difference scheme and a Dufort-Frankel finite-difference scheme are introduced to solve two-dimensional damped and undamped sine-Gordon equations. The stability and convergence of the numerical methods are considered. To avoid solving the nonlinear system, the predictor-corrector techniques are applied in the numerical methods. Numerical examples are given to show that the numerical results are consistent with the theoretical results.

Keywords:

Nonlinear sine-Gordon equation; Dufort-Frankel finite-difference scheme; Crank-Nicolson finite-difference scheme; Convergence; Stability;

AMS Subject Classification: 35Q53, 65M06, 78M20, 65M20, 65Y10

1. Introduction

2. Introduction

The sine-Gordon equation arises in extended rectangular Josephson junctions, which consist of two layers of superconducting materials separated by an isolating barrier. A typical arrangement is a layer of lead and a layer of niobium separated by a layer of niobium oxide. A quantum particle has a nonzero significant probability of being able to penetrate in the other side of a potential barrier that would be impenetrable to the corresponding classical particle. Mathematical model of light bullets in Maxwell-Bloch system can also be described by the two-dimensional undamped sine-Gordon equation [30]. This equation is also applied in a large number of areas of physics, for example, crystal dislocation theory [2], self-induced transparency [2], laser physics [2] and particle physics [3], [4]. It is also a special case of the Baby Skyrme model which describes baryons in a nonlinear manner [7].

Like some well-known partial differential equations such as KdV, mKdV and nonlinear Schrödinger equations [15], the two-dimensional sine-Gordon equation possesses the various types of soliton solutions (such as line solitons, elliptic ring soliton and ring solitons etc.). For the undamped ($\rho = 0$) sine-Gordon equation in higher dimensions exact soliton solutions have been obtained in Hirota [19], in Zagrodzinsky [31] using Lamb's method, in Leibbrandt [22] by Bläcklund transformation and in Kaliappan and Lakshmanan [20] by Painlevé transcendents.

Numerical solutions for two-dimensional undamped sine-Gordon equation, have been given among others by Guo et al. [17] using two finite difference schemes, Xin [30] who studied sine-Gordon equation as an asymptotic reduction of the two level dissipation less Maxwell-Bloch system, Christiansen and Lomdahl [12]

*Corresponding author [copyright reserved]

Email addresses: zqliang@jmu.edu.cn (Zongqi Liang), y.yan@chester.ac.uk (Yubin Yan), zqliang@jmu.edu.cn (Guorong Cai)

using a generalized leapfrog method, Argyris et al. [1] using the finite element method. Sheng et al. [28] introduced a split cosine scheme, Bratsos [7] used a three-time level fourth-order explicit finite-difference scheme, Mirzaei and Dehghan [25] applied the continuous linear boundary elements method, Chen et al. [11] applied the multilevel augmentation method for solving the sine-Gordon equations, etc. Numerical approaches to the damped sine-Gordon equation can also be found in Nakajima et al. [27] who considered dimensionless loss factors and unitless normalized bias, Gorria et al. [16] who studied the nonlinear wave propagation in a planar wave guide consisting of two rectangular regions joined by a bent of constant curvature. Bratsos [8], Djidjeli et al. [14] used a two-step one-parameter leap-frog scheme, which is a generalization to that used by Christiansen and Lomdahl [12]. Dehghan and Shokri, etc [13] used the radial basis functions as a truly meshfree method, to solve the two-dimensional damped/undamped sine-Gordon equation.

Consider the two-dimensional sine-Gordon equation

$$\frac{\partial^2 u}{\partial t^2} + \rho \frac{\partial u}{\partial t} = \frac{\partial^2 u}{\partial x^2} + \frac{\partial^2 u}{\partial y^2} - \phi(x, y) \sin u, \quad (1.1)$$

with $u = u(x, y, t)$ in the region $\Omega = \{(x, y) \in [L_x^0, L_x^1] \times [L_y^0, L_y^1]\}$ for $t > 0$, the parameter ρ is the so-called dissipative term, which is assumed to be a real number with $\rho \geq 0$. When $\rho = 0$, equation (1.1) reduces to the undamped sine-Gordon equation in two space variables, while when $\rho > 0$ to the damped one. The function $\phi(x, y)$ can be explained as a Josephson current density.

Initial conditions associated with equation (1.1) will be assumed to be of the form

$$u(x, y, 0) = f(x, y), \quad (x, y) \in \Omega, \quad (1.2)$$

with initial velocity

$$\frac{\partial u}{\partial t}(x, y, 0) = g(x, y), \quad (x, y) \in \Omega. \quad (1.3)$$

In equations (1.2), (1.3), the functions $f(x, y)$ and $g(x, y)$ represent wave modes or kinks and velocity, respectively. Boundary conditions will be assumed to be of the form

$$\frac{\partial u}{\partial x}(L_x^0, y, t) = \frac{\partial u}{\partial x}(L_x^1, y, t) = p(L_x^1, y, t), \quad L_y^0 < y < L_y^1, t > 0, \quad (1.4)$$

and

$$\frac{\partial u}{\partial y}(x, L_y^0, t) = \frac{\partial u}{\partial y}(x, L_y^1, t) = q(x, L_y^1, t), \quad L_x^0 < x < L_x^1, t > 0, \quad (1.5)$$

where $p(x, y, t)$ and $q(x, y, t)$ are normal gradients along the boundary of the region Ω .

If partial differential equation contains the second order term $\frac{\partial^2 u}{\partial x^2}$, the equation is discretized by using the standard Crank-Nicolson scheme. However, it is verified that the scheme is unstable unconditionally for the heat equation $\frac{\partial u(x, t)}{\partial t} = \frac{\partial^2 u(x, t)}{\partial x^2}$ when it is discretized by the leap-frog scheme in time direction and the Crank-Nicolson scheme in space direction, see [32]. The Dufort-Frankel method is very similar to the leap-frog scheme but it has better numerical stability, and sometimes it will bring unpredicted effect (if Dufort-Frankel approximate scheme is applied in spatial direction, the heat equation is unconditionally stable [26]). Wu [29] applied the Dufort-Frankel scheme for solving the linear and nonlinear one-dimensional Schrödinger equations, and obtained a unconditionally stable scheme. Markowich et. al. [24] applied the Wigner-measure analysis for investigating the convergence of the Dufort-Frankel scheme for the Schrödinger equation in semi-classical regime. Lai et al. [21] used a simple Dufort-Frankel type scheme for solving the time-dependent Gross-Pitaevskii equation. In this paper, we will use the Dufort-Frankel scheme to solve two-dimensional sine-Gordon equation.

The organization of the paper is as follows: In Section 2, a Crank-Nicolson finite-difference (CNFD) scheme and a Dufort-Frankel finite-difference (DFFD) scheme for solving two-dimensional sine-Gordon equation are introduced. In Section 3, the stabilities of the two schemes are discussed. In Section 4,

the error estimates of CNFD and DFFD schemes are proved. To avoid solving non-linear equations, the predictor-corrector methods of the two schemes are proposed in Section 5. In Section 6, numerical results are investigated.

3. Numerical methods

2.1. The CNFD scheme and the DFFD scheme

For the numerical solution the region $\Omega \times [t > 0]$ with its boundary $\partial\Omega$ consisting of the lines and $t = 0$ is covered with a rectangular mesh, the points with coordinates $(x, y, t) = (x_k, y_m, t_n) = (L_x^0 + kh_x, L_y^0 + mh_y, n\tau)$, $\Omega_h = \{(x_k, y_m)\}$ with $k, m = 0, 1, \dots, N$ and $n = 0, 1, \dots$. The $h_x = (L_x^1 - L_x^0)/N$ and $h_y = (L_y^1 - L_y^0)/N$ represent the space steps along x direction and y direction, while τ represents the time step. The solution of an approximating difference scheme at the same point will be denoted by $u_{k,m}^n$ ($k, m = 0, 1, \dots, N$) for the purpose of analyzing stability, the numerical value actually obtained will be denoted by $\tilde{u}_{k,m}^n$.

The CNFD scheme of (1.1) is

$$\begin{aligned} & \frac{u_{k,m}^{n+1} - 2u_{k,m}^n + u_{k,m}^{n-1}}{\tau^2} + \rho \frac{u_{k,m}^{n+1} - u_{k,m}^{n-1}}{2\tau} = \frac{u_{k+1,m}^n - 2u_{k,m}^n + u_{k-1,m}^n}{h_x^2} \\ & + \frac{u_{k,m+1}^n - 2u_{k,m}^n + u_{k,m-1}^n}{h_y^2} - \frac{1}{4}\phi_{k,m}(\sin u_{k,m}^{n+1} + 2\sin u_{k,m}^n + \sin u_{k,m}^{n-1}), \end{aligned} \quad (2.1)$$

where $\phi_{k,m} = \phi(x_k, y_m)$, $k, m = 0, 1, \dots, N$.

The DFFD scheme for the equation (2.1) is obtained by replacing the term $2u_{k,m}^n$ by $u_{k,m}^{n+1} + u_{k,m}^{n-1}$ in the CNFD scheme in the discretizations of $\frac{\partial u(t,x,y)}{\partial x^2}$ and $\frac{\partial u(t,x,y)}{\partial y^2}$, that is

$$\begin{aligned} & \frac{u_{k,m}^{n+1} - 2u_{k,m}^n + u_{k,m}^{n-1}}{\tau^2} + \rho \frac{u_{k,m}^{n+1} - u_{k,m}^{n-1}}{2\tau} = \frac{u_{k+1,m}^n - (u_{k,m}^{n+1} + u_{k,m}^{n-1}) + u_{k-1,m}^n}{h_x^2} \\ & + \frac{u_{k,m+1}^n - (u_{k,m}^{n+1} + u_{k,m}^{n-1}) + u_{k,m-1}^n}{h_y^2} - \frac{1}{4}\phi_{k,m}(\sin u_{k,m}^{n+1} + 2\sin u_{k,m}^n + \sin u_{k,m}^{n-1}). \end{aligned}$$

Note that

$$\begin{aligned} & \frac{u_{k+1,m}^n - (u_{k,m}^{n+1} + u_{k,m}^{n-1}) + u_{k-1,m}^n}{h_x^2} \\ & = \frac{u_{k+1,m}^n - 2u_{k,m}^n + u_{k-1,m}^n}{h_x^2} - \mu_x \frac{u_{k,m}^{n+1} - 2u_{k,m}^n + u_{k,m}^{n-1}}{\tau^2}, \end{aligned}$$

where $\mu_x = \tau/h_x$. The DFFD scheme can be expressed as the following, with $\mu_y = \tau/h_y$,

$$\begin{aligned} & (1 + \mu_x^2 + \mu_y^2)(u_{k,m}^{n+1} - 2u_{k,m}^n + u_{k,m}^{n-1}) + \frac{\rho\tau}{2}(u_{k,m}^{n+1} - u_{k,m}^{n-1}) = \mu_x^2(u_{k+1,m}^n - 2u_{k,m}^n + u_{k-1,m}^n) \\ & + \mu_y^2(u_{k,m+1}^n - 2u_{k,m}^n + u_{k,m-1}^n) - \frac{\tau^2}{4}\phi_{k,m}(\sin u_{k,m}^{n+1} + 2\sin u_{k,m}^n + \sin u_{k,m}^{n-1}) = 0. \end{aligned} \quad (2.2)$$

2.2. Local truncation error

By Taylor expansion, it can be easily obtained that for the smooth function $u(x, y, t)$, the principal part of the local truncation error of the DFFD (2.2) is

$$\begin{aligned}
& (1 + \mu_x^2 + \mu_y^2) \frac{u(x_k, y_m, t_{n+1}) - 2u(x_k, y_m, t_n) + u(x_k, y_m, t_{n-1}))}{\tau^2} \\
& + \rho \frac{u(x_k, y_m, t_{n+1}) - u(x_k, y_m, t_{n-1}))}{2\tau} \\
& - \frac{u(x_{k+1}, y_m, t_n) - 2u(x_k, y_m, t_n) + u(x_{k-1}, y_m, t_n)}{h_x^2} \\
& - \frac{u(x_k, y_{m+1}, t_n) - 2u(x_k, y_m, t_n) + u(x_k, y_{m-1}, t_n)}{h_y^2} \\
& = \frac{\partial^2 u}{\partial t^2}(x_k, y_m, t_n) + \rho \frac{\partial u}{\partial t}(x_k, y_m, t_n) - \frac{\partial^2 u}{\partial x^2}(x_k, y_m, t_n) - \frac{\partial^2 u}{\partial y^2}(x_k, y_m, t_n) \\
& + \mathcal{O}(\tau^2 + h_x^2 + h_y^2 + (\tau/h_x)^2 + (\tau/h_y)^2). \tag{2.3}
\end{aligned}$$

To make (2.2) be consistent, it is known from (2.3) that the step sizes τ, h_x, h_y have to be limited such that when $\tau \rightarrow 0$, $h_x \rightarrow 0$ and $h_y \rightarrow 0$, we have $\tau/h_x, \tau/h_y \rightarrow 0$. Let $\tau = \mathcal{O}(h_x^2)$, the above requirement holds automatically.

Similarly, it is easily obtained that the truncation error of the CNFD scheme is $\mathcal{O}(\tau^2 + h_x^2 + h_y^2)$.

Remark 2.1. In terms of the compatibility conditions, the constraint of time and space steps in the DFFD scheme is more demanding than that of the CNFD scheme, but it is easy for the time step to satisfy it, which is a usual method. In the following discussion of convergence, it is found that the time and space steps in the CNFD scheme have to satisfy the constraint, however the DFFD scheme is unconditional.

Remark 2.2. The DFFD is a scheme in which a term $\mu_x + \mu_y$ is added to the leading coefficient of DNFD. This extra term enhances the stability of it and greatly reduces the restriction on time step.

4. Stability analysis of CNFD and DFFD

In this section, the stabilities of the two schemes are discussed. Following the Fourier method of analyzing stability a small error of the following form is considered

$$Q_{k,m}^n = u_{k,m}^n - \tilde{u}_{k,m}^n, \tag{3.1}$$

with

$$Q_{k,m}^n = \lambda^n e^{i(\beta k h_x + \gamma m h_y)}, \quad i = \sqrt{-1}, \tag{3.2}$$

where λ is a complex number and β, γ are real. Due to von Neumann criterion for stability, the condition $|\lambda| \leq 1$ has to be satisfied

3.1. Stability analysis for the DFFD

Using (3.1)-(3.2) and Maclaurin's expansion

$$\sin u_{k,m}^n = \sum_{j=0}^{+\infty} (-1)^j (u_{k,m}^n)^{2j+1} / (2j+1)!,$$

the equation (2.3) can be written as

$$\begin{aligned}
& (1 + \mu_x^2 + \mu_y^2 + \frac{\rho\tau}{2})Q_{k,m}^{n+1} + \frac{\tau^2}{4}\phi_{k,m}S_{k,m}^{n+1}Q_{k,m}^{n+1} - 2(1 - 2\mu_x^2 \sin^2 \frac{\beta h_x}{2} - 2\mu_y^2 \sin^2 \frac{\gamma h_y}{2})Q_{k,m}^n \\
& + \frac{\tau^2}{2}\phi_{k,m}S_{k,m}^n Q_{k,m}^n + (1 + \mu_x^2 + \mu_y^2 - \frac{\rho\tau}{2})Q_{k,m}^{n-1} + \frac{\tau^2}{4}\phi_{k,m}S_{k,m}^{n-1}Q_{k,m}^{n-1} = 0, \tag{3.3}
\end{aligned}$$

where

$$\begin{aligned} S_{k,m}^n &= \sum_{j=0}^{+\infty} \frac{(-1)^j}{(2j+1)!} [(u_{k,m}^n)^{2j} + (u_{k,m}^n)^{2j-1} \tilde{u}_{k,m}^n + \dots + (\tilde{u}_{k,m}^n)^{2j}] \\ &\approx \sum_{j=0}^{+\infty} \frac{(-1)^j}{(2j)!} (u_s)^{2j} = \cos u_s. \end{aligned} \quad (3.4)$$

Here we linearize the term in square brackets and $u_s = \max_{k,m=0,1,\dots,N-1} u_{k,m}^0$. Using (3.4) and $Q_{k,m}^n = \lambda^n e^{i(\beta k h_x + \gamma m h_y)}$, we get the following stability equation

$$A\lambda^2 - 2B\lambda + C = 0, \quad (3.5)$$

where

$$\begin{aligned} A &= 1 + \mu_x^2 + \mu_y^2 + \frac{\tau^2}{4} \phi_{k,m} \cos u_s + \frac{\rho\tau}{2}, \\ B &= 1 - 2\mu_x^2 \sin^2 \frac{\beta h_x}{2} - 2\mu_y^2 \sin^2 \frac{\gamma h_y}{2} - \frac{\tau^2}{4} \phi_{k,m} \cos u_s, \\ C &= 1 + \mu_x^2 + \mu_y^2 + \frac{\tau^2}{4} \phi_{k,m} \cos u_s - \frac{\rho\tau}{2}. \end{aligned}$$

Assume that $\cos u_s > 0$, if $\rho = 0$, $A > 0, C > 0$, then $B^2 - AC \leq 0$ holds for any μ_x, μ_y . Hence $|\lambda| \leq 1$ holds. Through von Neumann criterion the DFFD scheme is unconditionally stable.

Assume that $\rho > 0$, $1 - \rho\tau/2 > 0$, and $A > 0, C > 0$ and $A > C$. Note that $B^2 - AC \leq 0$ always holds. Hence the solutions

$$\lambda_{\pm} = (B \pm \sqrt{B^2 - AC})/A, \quad (3.6)$$

of equation (3.5) satisfy $|\lambda_{\pm}| \leq 1$, which implies that if $\rho > 0$, $\tau < \frac{2}{\rho}$, the scheme is stable.

3.2 Stability analysis for the CNFD

Similarly, the stability equation of CNFD (2.1) is

$$\check{A}\lambda^2 - 2\check{B}\lambda + \check{C} = 0, \quad (3.7)$$

where

$$\begin{aligned} \check{A} &= 1 + \frac{\tau^2}{4} \phi_{k,m} \cos u_s + \frac{\rho\tau}{2}, \\ \check{B} &= 1 - 2\mu_x^2 \sin^2 \frac{\beta h_x}{2} - 2\mu_y^2 \sin^2 \frac{\gamma h_y}{2} - \frac{\tau^2}{4} \phi_{k,m} \cos u_s, \\ \check{C} &= 1 + \frac{\tau^2}{4} \phi_{k,m} \cos u_s - \frac{\rho\tau}{2}. \end{aligned}$$

To guarantee $|\lambda| \leq 1$, we need $|\check{B}| \leq \check{C}$ or

$$-\check{C} \leq \check{B} \leq \check{C}, \quad (3.8)$$

The left-hand side of (3.8) has the form

$$\left(\frac{1}{h_x^2} \sin^2 \frac{\beta h_x}{2} + \frac{1}{h_y^2} \sin^2 \frac{\gamma h_y}{2} \right) \tau^2 + \frac{\rho}{4} \tau - 1 \leq 0, \quad (3.9)$$

which is true if

$$\left(\frac{1}{h_x^2} + \frac{1}{h_y^2} \right) \tau^2 + \frac{\rho}{4} \tau - 1 \leq 0. \quad (3.10)$$

Let $\tilde{\tau}_1, \tilde{\tau}_2$ be the roots of (3.10). Let $H = 1/h_x^2 + 1/h_y^2$. Note that $\tilde{\tau}_1\tilde{\tau}_2 = -1/H < 0$, the roots are real and distinct. Let the positive root $\tilde{\tau}_2 = (\sqrt{\rho^2 + 64H} - \rho)/8H$, we then have $\tau \leq \tilde{\tau}_2$.

The right-hand side of (3.8) gives

$$\tau^2 \left(\phi_{k,m} \cos u_s + 4 \left(\frac{1}{h_x^2} \sin^2 \frac{\beta h_x}{2} + \frac{1}{h_y^2} \sin^2 \frac{\gamma h_y}{2} \right) \right) \geq \tau \rho, \quad (3.11)$$

if $\rho = 0$, then (3.11) is always satisfied, while when $\rho > 0$, τ must satisfy the restriction condition

$$\tau \geq \rho [\tilde{\phi} + 4(h_x^{-2} + h_y^{-2})]^{-1}. \quad (3.12)$$

Thus, the time step τ needs to satisfy the stability conditions (3.10) and (3.12).

5. Convergence and error estimates for DFFD and CNFD

We define a discrete inner product and its associated norm by

$$(u^n, v^n) = h_x h_y \sum_{k=0}^N \sum_{m=0}^N u_{k,m}^n v_{k,m}^n, \|u^n\|^2 = (u^n, u), \|u^n\|_\infty = \max_{\Omega_h} |u_{k,m}^n|.$$

Conveniently, we note

$$\begin{aligned} \delta_t u_{k,m}^n &= \frac{u_{k,m}^{n+1} - u_{k,m}^n}{\tau}, \delta_{\tilde{t}} u_{k,m}^n = \frac{u_{k,m}^n - u_{k,m}^{n-1}}{\tau}, \delta_{\tilde{t}} u_{k,m}^n = \frac{u_{k,m}^{n+1} - u_{k,m}^{n-1}}{\tau}, \\ \delta_t^2 u_{k,m}^n &= \frac{\delta_t u_{k,m}^n - \delta_{\tilde{t}} u_{k,m}^n}{\tau}, \delta_x u_{k,m}^n = \frac{u_{k+1,m}^n - u_{k,m}^n}{h_x}, \delta_y u_{k,m}^n = \frac{u_{k,m+1}^n - u_{k,m}^n}{h_y}, \\ \delta_x^2 u_{k,m}^n &= \frac{u_{k+1,m}^n - 2u_{k,m}^n + u_{k-1,m}^n}{h_x^2}, \delta_y^2 u_{k,m}^n = \frac{u_{k,m+1}^n - 2u_{k,m}^n + u_{k,m-1}^n}{h_y^2}, \\ \delta_x^p u_{k,m}^n &= \frac{\delta_x^{p-1} u_{k+1,m}^n - \delta_x^{p-1} u_{k,m}^n}{h_x} \quad (1 \leq p \leq +\infty). \end{aligned}$$

The difference scheme DFFD (2.2) can be written in the following form

$$(1 + \mu_x^2 + \mu_y^2) \delta_t^2 u_{k,m}^n + \rho \delta_{\tilde{t}} u_{k,m}^n = \delta_x^2 u_{k,m}^n + \delta_y^2 u_{k,m}^n - \frac{1}{4} \phi_{k,m} (\sin u_{k,m}^{n+1} + 2 \sin u_{k,m}^n + \sin u_{k,m}^{n-1}). \quad (4.1)$$

We have the following Lemmas.

Lemma 4.1.

$$(\delta_t^2 u^n, \delta_{\tilde{t}} u^n) = \frac{1}{2} \delta_{\tilde{t}} (\|\delta_t u^n\|^2).$$

Lemma 4.2.

$$(\delta_x^2 u^n, \delta_{\tilde{t}} u^n) = -\frac{1}{2} \delta_{\tilde{t}} (\|\delta_x u^n\|^2) + \frac{\tau^2}{4} \delta_{\tilde{t}} (\|\delta_x \delta_t u^n\|^2).$$

Lemma 4.3. Let $p \geq p' + 1$, for arbitrary $\varepsilon > 0$, we have, for $\forall u^n \in \Omega_h$,

$$\frac{\tau^2}{2} \|\delta_x^p \delta_t u^n\|^2 \leq \varepsilon (\|\delta_x^p u^n\|^2 + \|\delta_x^{p'} u^{n+1}\|^2) + \frac{\tau^2}{8\varepsilon} \left(\frac{4}{h_x^2}\right)^{p'} \|\delta_x^{p-p'} \delta_t u^n\|^2.$$

Proof: By ε inequality,

$$\frac{\tau^2}{2} \|\delta_x^p \delta_t u^n\|^2 \leq \frac{\varepsilon \tau^2}{2} \|\delta_x^p \delta_t u^n\|^2 + \frac{\tau^2}{8\varepsilon} \|\delta_x^p \delta_t u^n\|^2, \quad (4.2)$$

the definition of the difference quotient implies

$$\frac{\varepsilon\tau^2}{2}\|\delta_x^p\delta_t u^n\|^2 \leq \varepsilon(\|\delta_x^p u^n\|^2 + \|\delta_x^p u^{n+1}\|^2). \quad (4.3)$$

By using the definition of norm, we get

$$\frac{\tau^2}{8\varepsilon}\|\delta_x^p\delta_t u^n\|^2 \leq \frac{\tau^2}{8\varepsilon}\frac{4}{h_x^2}\|\delta_x^{p-1}\delta_t u^n\|^2 \leq \frac{\tau^2}{8\varepsilon}\left(\frac{4}{h_x^2}\right)^2\|\delta_x^{p-2}\delta_t u^n\|^2 \leq \frac{\tau^2}{8\varepsilon}\left(\frac{4}{h_x^2}\right)^{p'}\|\delta_x^{p-p'}\delta_t u^n\|^2.$$

Formulas (4.2)-(4.3) implies that Lemma 4.3 holds. In particular,

$$\begin{aligned} \frac{\tau^2}{2}(\|\delta_x\delta_t u^n\|^2 + \|\delta_y\delta_t u^n\|^2) &\leq \varepsilon(\|\delta_x u^{n+1}\|^2 + \|\delta_x u^n\|^2) \\ &+ \|\delta_y u^{n+1}\|^2 + \|\delta_y u^n\|^2 + \frac{1}{2\varepsilon}(\mu_x^2 + \mu_y^2)\|\delta_t u^n\|^2. \end{aligned} \quad (4.4)$$

The proof of Lemma 4.3 is complete.

Next we consider the convergence of the DFFD (2.2). Suppose $e_{k,m}^n = u(x_k, y_m, t_n) - u_{k,m}^n$, we define the following weak form, for $\forall \varphi \in H^1(\Omega)$

$$\begin{aligned} &(1 + \mu_x^2 + \mu_y^2)(\delta_t^2 u^n, \varphi) + \rho(\delta_{\bar{t}} u^n, \varphi) \\ &= -(\delta_x u^n, \delta_x \varphi) - (\delta_y u^n, \delta_y \varphi) - \frac{1}{4}(\phi(\sin u^{n+1} + 2\sin u^n + \sin^{n-1}), \varphi), \end{aligned} \quad (4.5)$$

Subtracting (2.2) from (4.1), we have,

$$\begin{aligned} &(1 + \mu_x^2 + \mu_y^2)(\delta_t^2 e^n, \varphi) + \rho(\delta_{\bar{t}} e^n, \varphi) + (e^n, \varphi) + (\delta_x e^n, \delta_x \varphi) + (\delta_y e^n, \delta_y \varphi) \\ &= (e^n, \varphi) - \frac{1}{4}(q(u(t_n)) - q(u^n), \varphi) + (r^n, \varphi), \end{aligned} \quad (4.6)$$

where

$$\begin{aligned} &q(u(t_n)) - q(u^n) \\ &= \phi[\sin u(t_{n+1}) - \sin u^{n+1}) + 2(\sin u(t_n) - \sin u^n) + (\sin u(t_{n-1}) - \sin u_{n-1})], \\ &r^n = \mathcal{O}(\tau^2 + h_x^2 + h_y^2 + (\tau/h_x)^2 + (\tau/h_y)^2). \end{aligned} \quad (2)$$

In (4.6), let $\varphi = \delta_{\bar{t}} e^n$,

$$\begin{aligned} &(1 + \mu_x^2 + \mu_y^2)(\delta_t^2 e^n, \delta_{\bar{t}} e^n) + \rho(\delta_{\bar{t}} e^n, \delta_{\bar{t}} e^n) + (e^n, \delta_{\bar{t}} e^n)(\delta_x e^n, \delta_{\bar{t}} \delta_x e^n) + (\delta_y e^n, \delta_{\bar{t}} \delta_y e^n) \\ &= (e^n, \delta_{\bar{t}} e^n) - \frac{1}{4}(q(u(t_n)) - q(u^n), \delta_{\bar{t}} e^n) + (r^n, \delta_{\bar{t}} e^n). \end{aligned} \quad (4.7)$$

Applying Lemma 4.1, Lemma 4.2, we have

$$\begin{aligned} &\frac{1}{2}(1 + \mu_x^2 + \mu_y^2)\delta_{\bar{t}}(\|\delta_t e^n\|^2) + \rho\|\delta_{\bar{t}} e^n\|^2 + \frac{1}{2}\delta_{\bar{t}}(\|e^n\|^2) - \frac{\tau^2}{4}\delta_{\bar{t}}(\|\delta_t e^n\|^2) \\ &+ \frac{1}{2}\delta_{\bar{t}}(\|\delta_x e^n\|^2) - \frac{\tau^2}{4}\delta_{\bar{t}}(\|\delta_x \delta_t e^n\|^2) + \frac{1}{2}\delta_{\bar{t}}(\|\delta_y e^n\|^2) - \frac{\tau^2}{4}\delta_{\bar{t}}(\|\delta_y \delta_t e^n\|^2) \\ &= (r^n, \delta_{\bar{t}} e^n) - (q(u(t_n)) - q(u^n), \delta_{\bar{t}} e^n) + (e^n, \delta_{\bar{t}} e^n). \end{aligned} \quad (4.8)$$

Summing up for n from 1 to M and multiplying 2τ , we get

$$\begin{aligned}
& \Theta^M + 2\rho\tau \sum_{n=1}^M \|\delta_{\bar{t}}e^n\|^2 \\
&= \Theta^0 + 2\tau \sum_{n=1}^M [(r^n, \delta_{\bar{t}}e^n) - (q(u(t_n)) - q(u^n), \delta_{\bar{t}}e^n) + (e^n, \delta_{\bar{t}}e^n)] \\
&= \Theta^0 + 2\tau \sum_{n=1}^M [I_1 + I_2 + I_3] \tag{4.9}
\end{aligned}$$

where

$$\begin{aligned}
\Theta^M &= (1 + \mu_x^2 + \mu_y^2)\|\delta_t e^M\|^2 + \frac{1}{2}(\|e^M\|^2 + \|e^{M+1}\|^2) - \frac{\tau^2}{2}\|\delta_t e^M\|^2 + \frac{1}{2}(\|\delta_x e^M\| \\
&+ \|\delta_x e^{M+1}\|^2) + \frac{1}{2}(\|\delta_y e^M\|^2 + \|\delta_y e^{M+1}\|^2) - \frac{\tau^2}{2}(\|\delta_t \delta_x e^M\|^2 + \|\delta_t \delta_y e^M\|^2), \tag{4.10}
\end{aligned}$$

$$\begin{aligned}
\Theta^0 &= (1 + \mu_x^2 + \mu_y^2)\|\delta_t e^0\|^2 + \frac{1}{2}(\|e^0\|^2 + \|e^1\|^2) - \frac{\tau^2}{2}\|\delta_t e^0\|^2 + \frac{1}{2}(\|\delta_x e^0\| \\
&+ \|\delta_x e^1\|^2) + \frac{1}{2}(\|\delta_y e^0\|^2 + \|\delta_y e^1\|^2) - \frac{\tau^2}{2}(\|\delta_x \delta_t e^0\|^2 + \|\delta_y \delta_t e^0\|^2). \tag{4.11}
\end{aligned}$$

Note that

$$\begin{aligned}
I_1 &= (r^n, \delta_{\bar{t}}e^n) \leq C\|\tau^2 + h_x^2 + h_y^2 + (\tau/h_x)^2 + (\tau/h_y)^2\| \|\delta_{\bar{t}}e^n\| \\
&\leq C(\tau^4 + h_x^4 + h_y^4 + (\tau/h_x)^4 + (\tau/h_y)^4 + \|\delta_t e^{n-1}\|^2 + \|\delta_t e^n\|^2), \tag{4.12}
\end{aligned}$$

which follows from

$$\begin{aligned}
& |(\phi(\sin u(t_{n+1}) - \sin u^{n+1}), \delta_{\bar{t}}e^n)| \leq C\|u(t_{n+1}) - u^{n+1}\| \|\delta_{\bar{t}}e^n\| \\
&\leq C\|e^{n+1}\| \|\delta_{\bar{t}}e^n\| \leq \frac{1}{4}\|e^{n+1}\|^2 + C(\|\delta_t e^{n-1}\|^2 + \|\delta_t e^n\|^2),
\end{aligned}$$

$$\begin{aligned}
& |(\phi[2(\sin u(t_n) - \sin u^n) + (\sin u(t_{n-1}) - \sin u^{n-1})], \delta_{\bar{t}}e^n)| \\
&\leq C(\|e^n\|^2 + \|e^{n-1}\|^2 + \|\delta_t e^{n-1}\|^2 + \|\delta_t e^n\|^2).
\end{aligned}$$

Similarly

$$\begin{aligned}
I_2 &= (q(u(t_n)) - q(u^n), \delta_{\bar{t}}e^n) \\
&\leq \frac{1}{4}\|e^{n+1}\|^2 + C(\|e^n\|^2 + \|e^{n-1}\|^2 + \|\delta_t e^{n-1}\|^2 + \|\delta_t e^n\|^2), \tag{4.13}
\end{aligned}$$

and

$$I_3 = (e^n, \delta_{\bar{t}}e^n) \leq C(\|e^n\|^2 + \|\delta_t e^{n-1}\|^2 + \|\delta_t e^n\|^2). \tag{4.14}$$

From (4.12), (4.13), (4.14), we obtain

$$\Theta^M \leq \Theta^0 + 2C\tau \sum_{n=1}^M (\tau^4 + h_x^4 + h_y^4 + (\tau/h_x)^4 + (\tau/h_y)^4 + \|e^n\|^2 + \|\delta_t e^n\|^2). \tag{4.15}$$

By Lemma 4.3, we have

$$\begin{aligned}
\Theta^M &\geq [1 + \mu_x^2 + \mu_y^2 - \frac{\tau^2}{2} - \frac{\varepsilon}{4}(\mu_x^2 + \mu_y^2)]\|\delta_t e^n\|^2 + \frac{1}{2}(\|e^{M+1}\|^2 + \|e^M\|^2) \\
&+ \frac{1}{2}(1 - \frac{1}{4\varepsilon})(\|\delta_x e^{M+1}\|^2 + \|\delta_x e^M\|^2 + \|\delta_y e^{M+1}\|^2 + \|\delta_y e^M\|^2), \tag{4.16}
\end{aligned}$$

$$\Theta^0 \leq \|\delta_t e^0\|^2 + \frac{1}{2}(\|e^1\|^2 + \|e^0\|^2) + \frac{1}{2}(\|\delta_x e^0\|^2 + \|\delta_x e^1\|^2 + \|\delta_y e^1\|^2 + \|\delta_y e^0\|^2), \quad (4.17)$$

in the last formula, we need to choose suitable ε to satisfy $1 - \frac{1}{4\varepsilon} > 0$. If the time step satisfies $\tau < \sqrt{2}$, then we will make all coefficients bigger than 0 and obtain

$$\begin{aligned} & \|e^M\|^2 + \|\delta_x e^M\|^2 + \|\delta_y e^M\|^2 + \|\delta_t e^M\|^2 \\ & \leq C\tau \sum_{n=1}^M (\tau^4 + h_x^4 + h_y^4 + (\tau^2/h_x)^4 + (\tau^2/h_y)^4 \\ & \quad + \|e^n\|^2 + \|\delta_x e^n\|^2 + \|\delta_y e^n\|^2 + \|\delta_t e^n\|^2). \end{aligned} \quad (4.18)$$

By Gronwall's inequality, we have, for all M ,

$$\|e^M\| + \|\delta_x e^M\| + \|\delta_y e^M\| + \|\delta_t e^M\| \leq C(\tau^2 + h_x^2 + h_y^2 + (\tau/h_x)^2 + (\tau/h_y)^2). \quad (4.19)$$

Remark 4.1. The convergence analyses for the CNFD scheme is the same as for the DFFD scheme. The difference is that there is no $\mu_x^2 + \mu_y^2$ in the first term of CNFD scheme (2.1), so in (4.16), the convergence of the CNFD scheme needs satisfying both $1 - \frac{\tau^2}{2} - \frac{\varepsilon}{4}(\mu_x^2 + \mu_y^2) \geq \sigma > 0$ and $1 - \frac{1}{4\varepsilon} > 0$ for ε . We choose $\varepsilon = \frac{1}{2}$, the convergence of CDFD needs satisfying the constraint condition

$$\tau \leq \left(\frac{1}{2} + \frac{1}{8} \left(\frac{1}{h_x^2} + \frac{1}{h_y^2} \right) \right)^{-1/2}. \quad (4.20)$$

6. The Predictor-Corrector scheme

To avoid solving the nonlinear system arising from system (2.1) and (2.2), the following predictor-corrector (P-C) scheme is used.

5.1. The Predictor of DFFD

Using an analogous scheme as in [15], [19], the predictor value $\hat{u}_{k,m}^{n+1}$ was evaluated from the following three-time level explicit scheme of DFFD (2.2)

$$\begin{aligned} (1 + \mu_x^2 + \mu_y^2)\hat{u}_{k,m}^{n+1} &= 2(1 + \mu_x^2 + \mu_y^2)u_{k,m}^n - (1 + \mu_x^2 + \mu_y^2)u_{k,m}^{n-1} + \mu_x^2(u_{k+1,m}^n \\ & \quad - 2u_{k,m}^n + u_{k-1,m}^n) + \mu_y^2(u_{k,m+1}^n - 2u_{k,m}^n + u_{k,m-1}^n) - \tau^2 \phi_{k,m} \sin u_{k,m}^n. \end{aligned} \quad (5.1)$$

for $k, m = 0, 1, \dots, N$.

Following a similar approach for the stability analysis of the nonlinear scheme as in Section 3.1, it can be proved that the characteristic equation of the predictor is given by

$$\begin{aligned} (1 + \mu_x^2 + \mu_y^2)\lambda^2 - 2\left(1 - 2(\mu_x^2 \sin^2 \frac{\beta k h_x}{2} + \mu_y^2 \sin^2 \frac{\gamma m h_y}{2}) - \frac{1}{2}\phi_{k,m} \cos u_s\right)\lambda \\ + 1 + \mu_x^2 + \mu_y^2 = 0, \end{aligned} \quad (5.2)$$

and the scheme (5.1) is therefore unconditionally stable.

5.2. The Predictor of CNFD

The predictor of CNFD satisfies

$$\begin{aligned} \hat{u}_{k,m}^{n+1} &= 2u_{k,m}^n - u_{k,m}^{n-1} + \mu_x^2(u_{k+1,m}^n - 2u_{k,m}^n + u_{k-1,m}^n) \\ & \quad + \mu_y^2(u_{k,m+1}^n - 2u_{k,m}^n + u_{k,m-1}^n) - \tau^2 \phi_{k,m} \sin u_{k,m}^n. \end{aligned} \quad (5.3)$$

Following the discussion in Section 3.2, the characteristic equation of (5.3) is

$$\lambda^2 - 2\left(1 - 2(\mu_x^2 \sin^2 \frac{\beta k h_x}{2} + \mu_y^2 \sin^2 \frac{\gamma m h_y}{2}) - \frac{1}{2}\phi_{k,m} \cos u_s\right)\lambda + 1 = 0. \quad (5.4)$$

Denote $B^* = 1 - 2(\mu_x^2 \sin^2 \frac{\beta k h_x}{2} + \mu_y^2 \sin^2 \frac{\gamma m h_y}{2}) - \frac{1}{2} \phi_{k,m} \cos u_s$, the roots of (5.4) are

$$\lambda_{\pm} = B^* \pm \sqrt{(B^*)^2 - 1}. \quad (5.5)$$

Let $\tilde{\phi} = \sup_{(x,y) \in [L_x^0, L_x^1] \times [L_y^0, L_y^1]} |\phi(x,y)|$ with $|\phi(x,y)| < +\infty$. To ensure $|\lambda_{\pm}| \leq 1$, we require $|B^*| \leq 1$, that is,

$$\tau \leq \left(\frac{1}{4} \tilde{\phi} + \frac{1}{h_x^2} + \frac{1}{h_y^2} \right)^{-1/2}. \quad (5.6)$$

5.3. The predictor algorithm implementation for the DFFD scheme

The predictor of the DFFD scheme is a three-time level explicit scheme, in order to obtain the same second order accuracy, we deal with the initial value of the DFFD scheme, that is, at $n = 0$ the equation (5.1) has the following form

$$\begin{aligned} \hat{u}_{k,m}^1 &= 2u_{k,m}^0 - u_{k,m}^{-1} + \mu_x^2(u_{k+1,m}^0 - 2u_{k,m}^0 + u_{k-1,m}^0) + \mu_y^2(u_{k,m+1}^0 - 2u_{k,m}^0 \\ &\quad + u_{k,m-1}^0) - \tau^2 \phi_{k,m} \sin u_{k,m}^0 \quad (k, m = 1, 2, \dots, N), \end{aligned} \quad (5.7)$$

to approximate $u^{-1}(x,y)$ in the internal points the initial velocity is used, for this we discretize the initial velocity as

$$\frac{u^1(x_k, y_m) - u^{-1}(x_k, y_m)}{2\Delta t} = g(x_k, y_m). \quad (5.8)$$

Combining (5.7) with (5.8), we have

$$\begin{aligned} \hat{u}_{k,m}^1 &= u_{k,m}^0 + 2\tau g(x_k, y_m) + \frac{\mu_x^2}{2}(u_{k+1,m}^0 - 2u_{k,m}^0 + u_{k-1,m}^0) + \frac{\mu_y^2}{2}(u_{k,m+1}^0 \\ &\quad - 2u_{k,m}^0 + u_{k,m-1}^0) - \frac{\tau^2}{2} \phi_{k,m} \sin u_{k,m}^0, \quad k, m = 1, 2, \dots, N-1. \end{aligned} \quad (5.9)$$

Thus (5.1) becomes, applying the boundary conditions for $\forall n$ and $m = 1, 2, \dots, N$,

$$\begin{aligned} \hat{u}_{0,m}^{n+1} &= 2u_{0,m}^n - u_{0,m}^{n-1} + \mu_x^2(u_{1,m}^n - 2u_{0,m}^n + u_{-1,m}^n) \\ &\quad + \mu_y^2(u_{0,m+1}^n - 2u_{0,m}^n + u_{0,m-1}^n) - \tau^2 \phi_{0,m} \sin u_{0,m}^n, \end{aligned} \quad (5.10)$$

$$\begin{aligned} \hat{u}_{N,m}^{n+1} &= 2u_{N,m}^n - u_{N,m}^{n-1} + \mu_x^2(u_{N+1,m}^n - 2u_{N,m}^n + u_{N-1,m}^n) \\ &\quad + \mu_y^2(u_{N,m+1}^n - 2u_{N,m}^n + u_{N,m-1}^n) - \tau^2 \phi_{N,m} \sin u_{N,m}^n. \end{aligned} \quad (5.11)$$

The second order discretization form of the boundary condition $\frac{\partial u(x,y,t)}{\partial x} = p(x,y,t)$ is

$$\frac{u_{1,m}^n - u_{-1,m}^n}{2h_x} = p(x_0, y_m, n\tau), \quad \frac{u_{N+1,m}^n - u_{N-1,m}^n}{2h_x} = p(x_N, y_m, n\tau). \quad (5.12)$$

Substituting (5.12) into (5.10) and (5.11), we have

$$\begin{aligned} \hat{u}_{0,m}^{n+1} &= 2u_{0,m}^n - u_{0,m}^{n-1} + 2\mu_x^2(u_{1,m}^n - h_x p(x_0, y_m, n\tau) - u_{0,m}^n) \\ &\quad + \mu_y^2(u_{0,m+1}^n - 2u_{0,m}^n + u_{0,m-1}^n) - \tau^2 \phi_{0,m} \sin u_{0,m}^n, \end{aligned} \quad (5.13)$$

$$\begin{aligned} \hat{u}_{N,m}^{n+1} &= 2u_{N,m}^n - u_{N,m}^{n-1} + 2\mu_x^2(u_{N-1,m}^n + h_x p(x_N, y_m, n\tau) - u_{N,m}^n) \\ &\quad + \mu_y^2(u_{N,m+1}^n - 2u_{N,m}^n + u_{N,m-1}^n) - \tau^2 \phi_{N,m} \sin u_{N,m}^n. \end{aligned} \quad (5.14)$$

Similarly, for $\forall n$ and $k = 1, 2, \dots, N$,

$$\begin{aligned} \hat{u}_{k,0}^{n+1} &= 2u_{k,0}^n - u_{k,0}^{n-1} + \mu_x^2(u_{k+1,0}^n - 2u_{k,0}^n + u_{k-1,0}^n) \\ &\quad + 2\mu_y^2(u_{k,1}^n - h_y q(x_k, y_0, n\tau) - u_{k,0}^n) - \tau^2 \phi_{k,0} \sin u_{k,0}^n, \end{aligned} \quad (5.15)$$

$$\begin{aligned}\widehat{u}_{k,N}^{n+1} &= 2u_{k,N}^n - u_{k,N}^n + \mu_x^2(u_{k,N}^n - 2u_{k,N}^n + u_{k-1,N}^n) \\ &+ 2\mu_y^2(u_{k,N-1}^n + h_y q(x_k, y_N, n\tau) - u_{k,N}^n) - \tau^2 \phi_{k,N} \sin u_{k,N}^n.\end{aligned}\quad (5.16)$$

5.4 The Correctors of DFFD and CNFD

The corrector of DFFD can be proposed as

$$\begin{aligned}(1 + \mu_x^2 + \mu_y^2 + \frac{\rho\tau}{2})u_{k,m}^{n+1} &= -\frac{1}{4}\phi_{k,m} \sin \widehat{u}_{k,m}^{n+1} + 2u_{k,m}^n - \frac{1}{2}\phi_{k,m} \sin u_{k,m}^n \\ &- (1 + \mu_x^2 + \mu_y^2 - \frac{\rho\tau}{2})u_{k,m}^{n-1} - \frac{1}{4}\phi_{k,m} \sin u_{k,m}^{n-1},\end{aligned}\quad (5.17)$$

for $k, m = 0, 1, \dots, N$.

The corrector of CNFD can be proposed as

$$\begin{aligned}(1 + \frac{\rho\tau}{2})u_{k,m}^{n+1} &= -\frac{1}{4}\phi_{k,m} \sin \widehat{u}_{k,m}^{n+1} + 2u_{k,m}^n - \frac{1}{2}\phi_{k,m} \sin u_{k,m}^n \\ &- (1 - \frac{\rho\tau}{2})u_{k,m}^{n-1} - \frac{1}{4}\phi_{k,m} \sin u_{k,m}^{n-1},\end{aligned}\quad (5.18)$$

for $k, m = 0, 1, \dots, N$.

In (5.17) and (5.18) the corrected values $u_{k,m}^{n+1}$ instead of the predicted $\widehat{u}_{k,m}^{n+1}$ were also used, the stability analysis of the corrector is analogous to that developed in Section 3.1 and Section 3.2. The initial value problem and boundary problem are solved in the same way as in Section 5.3.

7. Numerical results

In this section we present some numerical results of two schemes for the two-dimensional sine-Gordon equation.

Example 1

To observe the behavior of the numerical method, let $\phi(x, y) = 1$ in (1.2), it is tested on the following problem

$$\frac{\partial^2 u}{\partial t^2} + \rho \frac{\partial u}{\partial t} = \frac{\partial^2 u}{\partial x^2} + \frac{\partial^2 u}{\partial y^2} - \sin u, \quad -7 \leq x, y \leq 7, t > 0. \quad (6.1)$$

with initial conditions

$$u(x, y, 0) = 4 \tan^{-1}(\exp(x + y)), \quad -7 \leq x, y \leq 7, t > 0, \quad (6.2)$$

$$\frac{\partial u(x, y, 0)}{\partial t} = -\frac{4 \exp(x + y)}{1 + \exp(2x + 2y)}, \quad -7 \leq x, y \leq 7, t > 0, \quad (6.3)$$

and boundary conditions

$$\frac{\partial u}{\partial x} = \frac{4 \exp(x + y + t)}{\exp(2t) + \exp(2x + 2y)}, \quad \text{for } x = -7 \text{ and } x = 7, -7 \leq y \leq 7, t > 0, \quad (6.4)$$

$$\frac{\partial u}{\partial y} = \frac{4 \exp(x + y + t)}{\exp(2t) + \exp(2x + 2y)}, \quad \text{for } y = -7 \text{ and } y = 7, -7 \leq x \leq 7, t > 0. \quad (6.5)$$

The theoretical solution of this problem, in which the parameter $\rho = 0$ is given by

$$u(x, y, t) = 4 \tan^{-1}(\exp(x + y - t)). \quad (6.6)$$

As mentioned in Section 2, the truncation error of the DFFD scheme is $O(\tau^2 + h_x^2 + h_y^2 + (\tau/h_x)^2 + (\tau/h_y)^2)$. One can easily see that if we choose the time step $\tau = h_x^2 = h_y^2$, for DFFD scheme and CNFD scheme, they are second-order convergence. Respectively by the PC-DFFD scheme and the PC-CNFD scheme we take the same space step and work out equation (6.1), where the initial conditions (6.2) and (6.3), and the boundary

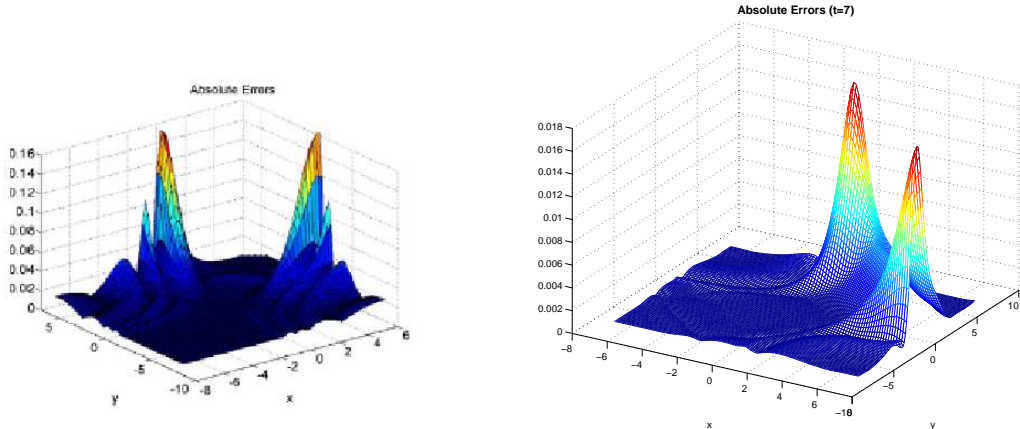


Figure 1: (left) Absolute error of the solution of RBF method [22], (right) absolute error of the solution of the PC-DFFD scheme in $t = 7$ for test problem 6.1.

conditions (6.4) and (6.5) are employed. The error is measured by the $\|u_E - u_N\|_{L^2}, \|u_E - u_N\|_{L^\infty}$ of the difference between the exact solution u_E given by (6.6) and the numerical solution u_N , the time is $T = 7.0$. Table 1 shows that it needs a sufficiently small space and time step to keep the stability of PC-CNFD scheme while the PC-DFFD scheme is unconditionally stable, which are in consistent with the theoretical results.

Table 1. Two different errors for $\|u_E - u_N\|_{L^2}$ and $\|u_E - u_N\|_{L^\infty}$ at $T = 7$.

| $h_x = h_y$ | τ | PC-DFFD | | PC-CNFD | |
|----------------|------------------|-----------------------|----------------------------|-----------------------|----------------------------|
| | | $\ u_E - u_N\ _{L^2}$ | $\ u_E - u_N\ _{L^\infty}$ | $\ u_E - u_N\ _{L^2}$ | $\ u_E - u_N\ _{L^\infty}$ |
| $\frac{1}{10}$ | $\frac{1}{100}$ | 0.722164e-01 | 0.3503924e-02 | unstable | unstable |
| $\frac{1}{20}$ | $\frac{1}{400}$ | 0.787769e-02 | 0.2436561e-03 | unstable | unstable |
| $\frac{1}{40}$ | $\frac{1}{1600}$ | 0.653123e-04 | 0.1643035e-05 | 0.249841e-03 | 0.404723e-04 |

Take the same step length $h_x = h_y = 0.25, \tau = 0.01$ as in [13], we apply the PC-DFFD scheme to computing the solution to equation (6.1), the absolute errors are given at times $t = 4, 7, 10, 20, 25$. Figure 1 shows that when the space and time step are the same, compared with the absolute error at $t = 7$ in [13], the accuracy of the PC-DFFD scheme is much better than the method in [13] and the absolute error becomes about 0.1 times smaller than RBF method in [13]. Compared with [1], [8], [9], [10], [27], [16], [14], [13], PC-DFFD scheme is much better than the numerical algorithms presented in these articles. Figure 2 shows that the PC-DFFD scheme better keeps longer stability at $t = 25$ or much longer time, where the absolute error is nearly the same as that at $t = 4$. Compared with the scheme proposed in [1], [8], [9], [10], [27], [16], [14], [13], the PC-DFFD scheme maintains its simplicity and better stabilities. The accumulation of absolute errors can not lead to infinite increases of them, hence, the scheme can be applied in long-time numerical simulations.

In the numerical calculations that follow, various cases involving line and ring solitons for the solution of (2.1) are reported. In all the following experiments, by the PC-DFFD scheme, we choose $\tau = 0.001, h_x = h_y = 0.1$, the boundary conditions are taken to be

$$\frac{\partial u}{\partial x} = 0, \frac{\partial u}{\partial y} = 0. \quad (6.7)$$

Example 2 (Circular ring solitons)

Bogolyubskii and Makhankov [5], Bogolyubskii [6] and Christiansen and Lomdahl [12] have investigated numerically the behavior of a circular ring quasi-soliton or pulson arising from the two-dimensional sine-

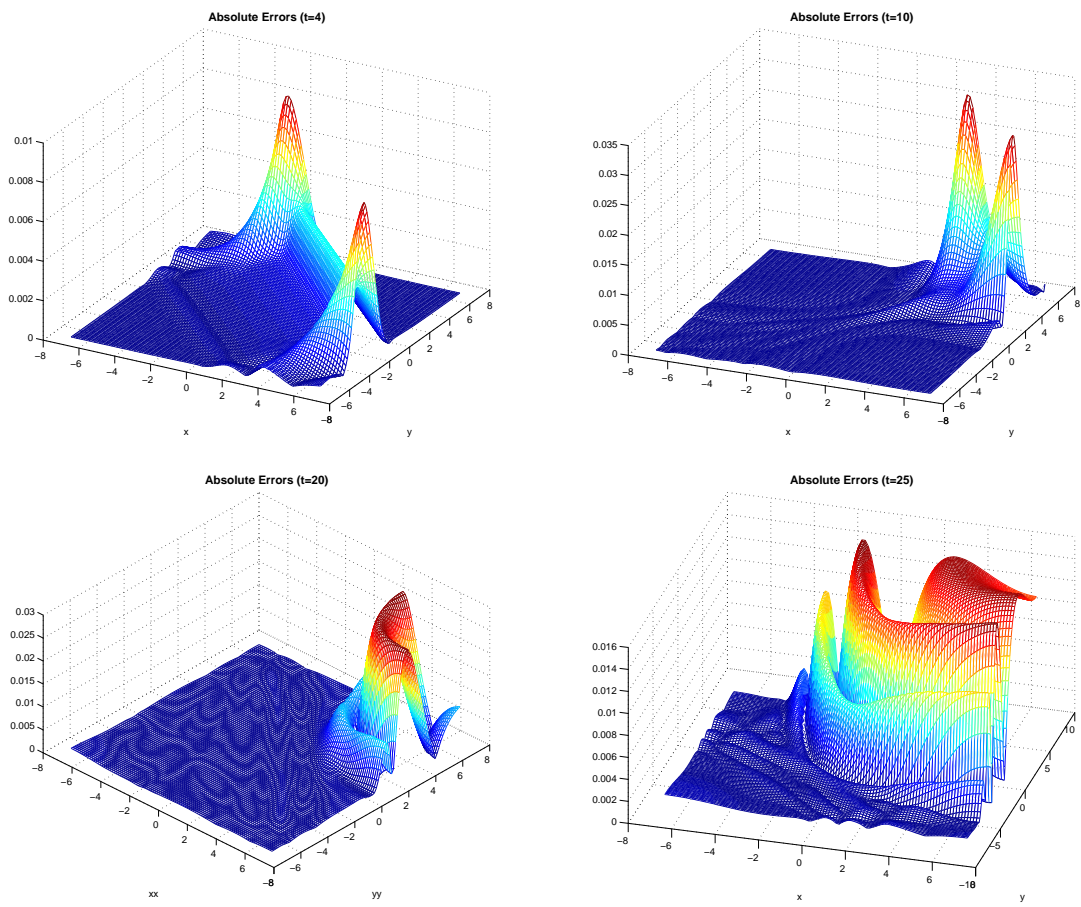


Figure 2: Absolute error of the solution of the PC-DFFD scheme in $t = 4, 10, 20, 25$ for test problem 6.1.

Gordon equation. Circular ring solitons are found for the case $\phi(x, y) = 1$ and initial conditions [28], [12]

$$f(x, y) = 4 \tan^{-1} \exp(3 - \sqrt{x^2 + y^2}), g(x, y) = 0, -7 \leq x, y \leq 7. \quad (6.8)$$

In Figure 3, the numerical solutions of circular ring solitons for the $\rho = 0$ at $t = 2.8, 5.6, 8.4, 11.2, 15, 18, 20$ are shown in terms of $\sin(u/2)$ for three-dimensional picture. The soliton from its initial position, where it appears as two homocentric ring solitons, is shrinking until $t = 2.8$ appears as a single-ring soliton. From $t = 5.6$, which could be considered as the beginning of the expansion phase, a radiation appears. This expansion continues until $t = 11.2$, where the soliton is almost reformed. These results are in agreement with the published ones in [1], [8], [9], [10], [27], [16], [14], [13], [25]. For different $\rho = 0.05, 0.5$, in Figure 4, with solution changes of a smaller $\rho = 0.05$ (left) and a larger $\rho = 0.5$ (right), the results are the same as [13]. As ρ increases, the initial shrunk ring soliton was found to be changing more slowly from its initial position as time increases, the dissipative term is slowing down the evolution of the line soliton as time increases.

Example 3 (Collision of two circular solitons)

The collision of two expanding circular ring solitons is considered with $\phi(x, y) = 1$ and initial conditions

$$f(x, y) = 4 \tan^{-1} \exp\left(\frac{4 - \sqrt{(x+3)^2 + (y+7)^2}}{0.436}\right), -30 \leq x \leq 10, -21 \leq y \leq 7$$

$$g(x, y) = 4.13 \sinh\left(\frac{4 - \sqrt{(x+3)^2 + (y+7)^2}}{0.436}\right), -30 \leq x \leq 10, -21 \leq y \leq 7.$$

Numerical simulation presented in Figure 10 is for $\sin(u/2)$ at levels $t=0, 2, 4, 6, 8, 10, 12, 14, 16, 18$ and 20 with $\rho = 0$, respectively. The solution shown includes the extension across $x = -10$ and $y = -7$ by symmetry properties of the problem [28], [14], [13]. Figure 5 demonstrates the collision between two expanding circular ring solitons in which two smaller ring solitons bounding an annular region emerge into a large ring soliton, The simulated solution is again precisely consistent to existing results, contour maps are given to show more clearly the movement of solitons. Though minor disturbances can be observed in middle of the numerical solution, probably due to the transactions following the symmetry features in computations, the overall simulation results match well those described in [12], [28], [14], [13], [25] with satisfaction. Simultaneously, it is found that after $t = 16$, the originally formed large ring soliton is to split into two line solitons to the boundary extension.

8. Conclusion.

In this paper, two numerical methods, CNFD and DFFD, are constructed for solving the two-dimensional sine-Gordon equation. The stability, convergence and error estimats, are discussed. The DFFD scheme is unconditionally stable and convergent, while the CNFD scheme requires more critical space and time step constraints, in order to guarantee its stability and convergence. We establish two explicit PC-CNFD scheme and PC-DFFD scheme, whose stabilities are discussed. The PC-DFFD scheme is unconditionally stable. The numerical experiments indicate that the PC-DFFD scheme has better stability in comparison with the methods in [1], [1], [8], [9], [10], [27], [16], [14], [13] and is proper to the long-time computation.

Acknowledgments. The research is supported by Fujian National Science Foundation of China (Grant No. 2012J01013), Fujian Higher College Special Project of Scientific Research of China (Grant No. JK2012025) and the National Natural Science of China (Grant No. 11201178). The authors would like to thank Prof. Chuanju Xu for insightful discussions regarding the two-dimensional sine-Gordon equation.

References

- [1] J. Argyris, M. Haase and J.C. Heinrich, *Finite element approximation to two-dimensional sine-Gordon solitons*, *Comput. Methods Appl. Mech. Eng.* 86 (1991), 1-26.
- [2] L. Bergé, *Wave collapse in physics: principles and applications to light and plasma waves*, *Physica Reports* 303(5-6)(1998), 259-372.









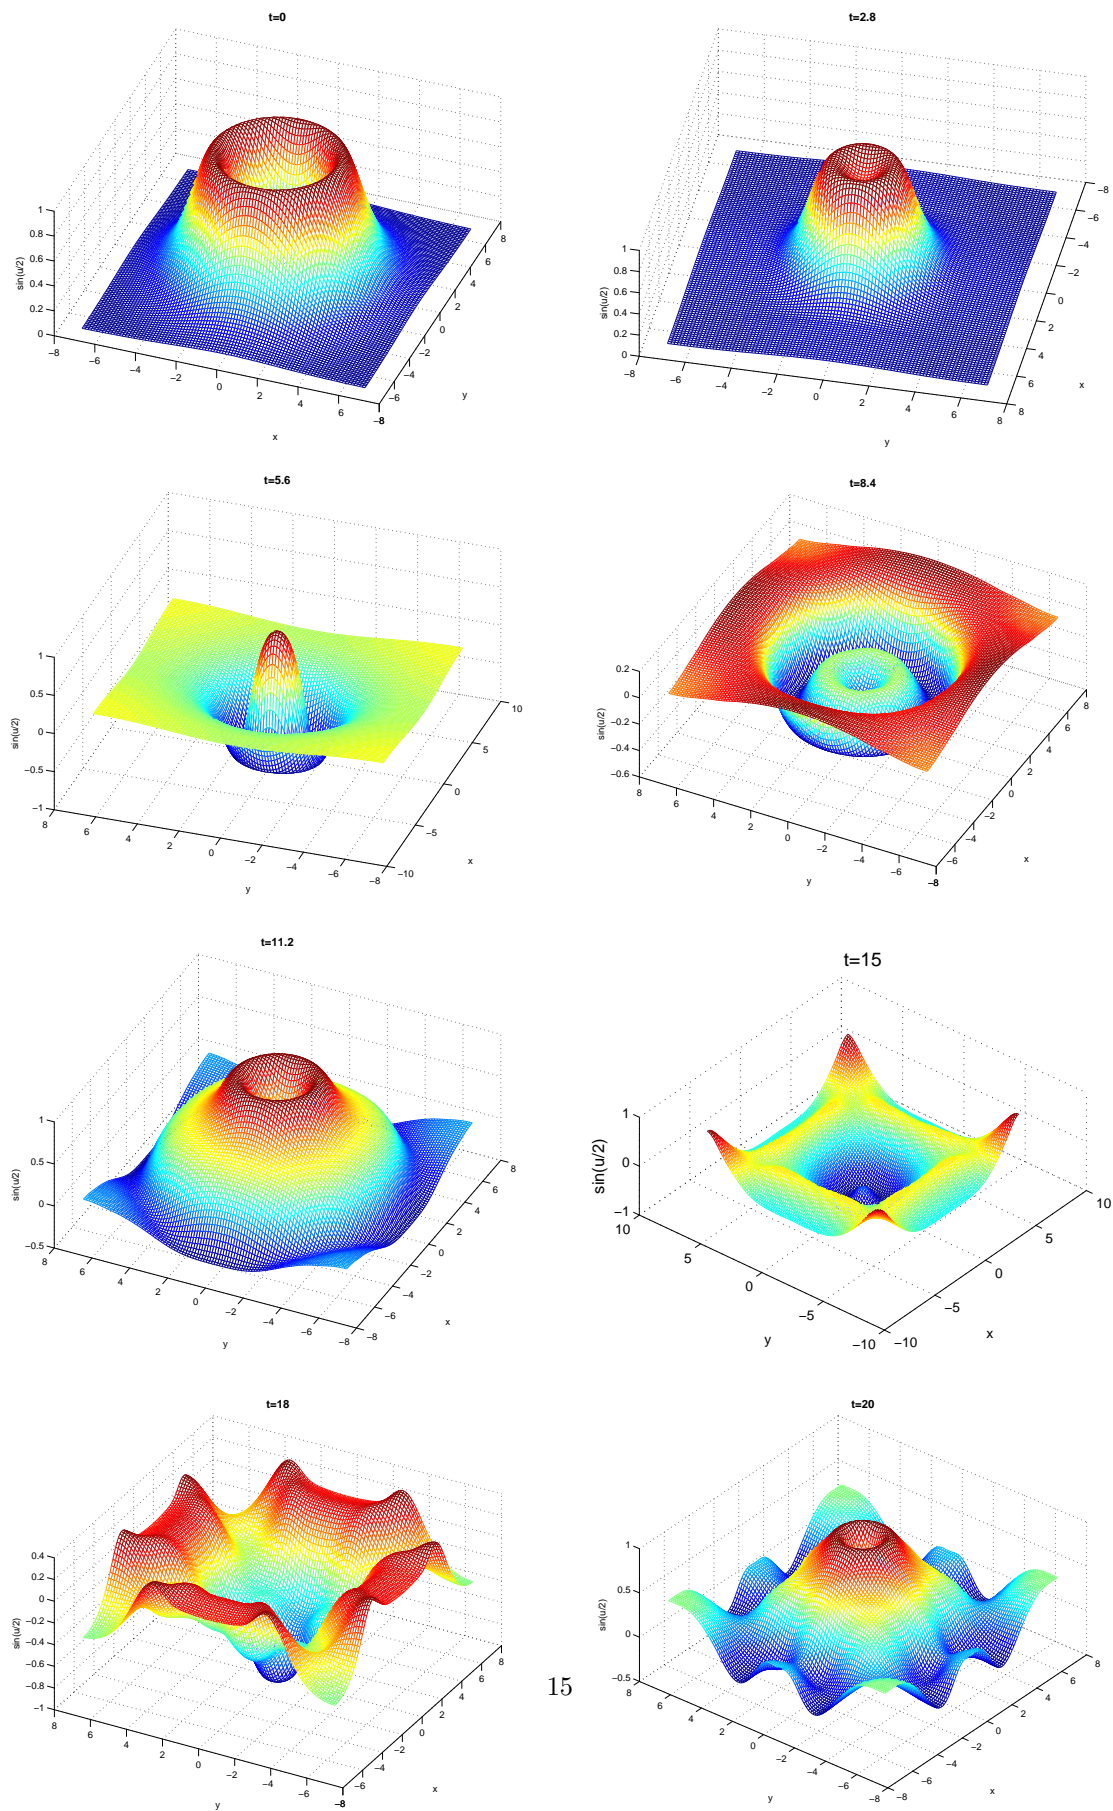


Figure 3: Circular ring solitons: solution at $t=0, 2.8, 5.6, 8.4, 11.2, 15, 18, 20$ with $\rho = 0$.

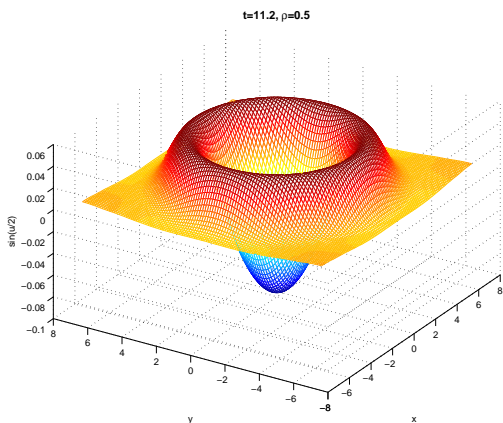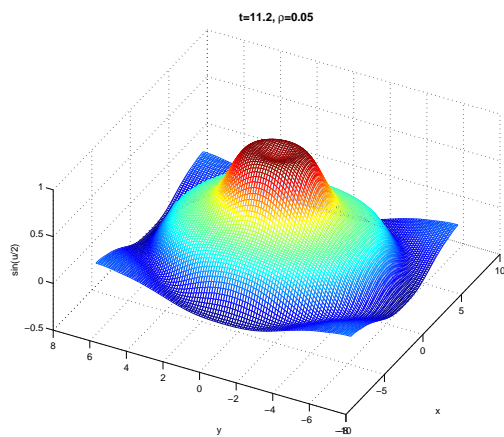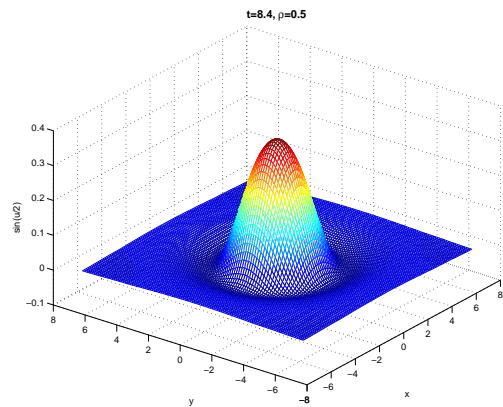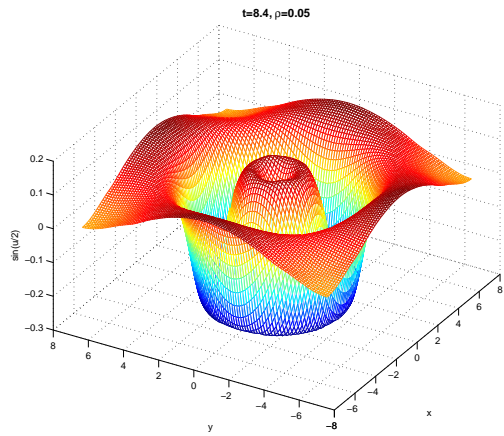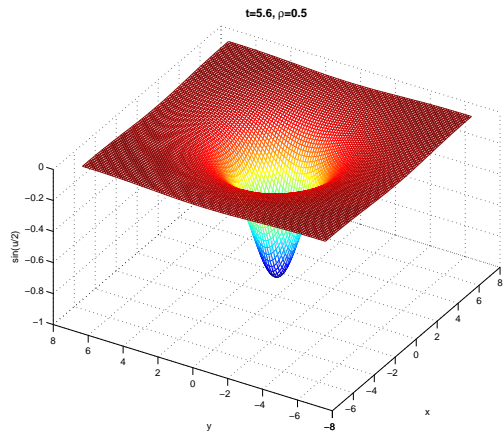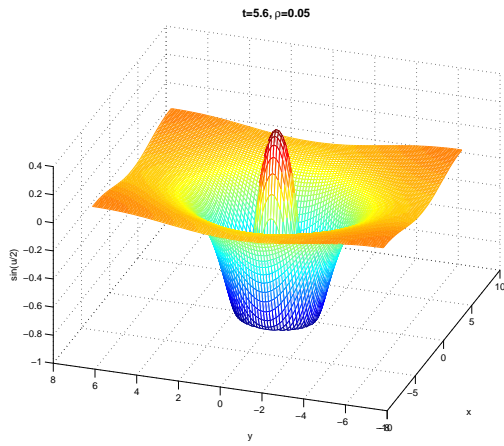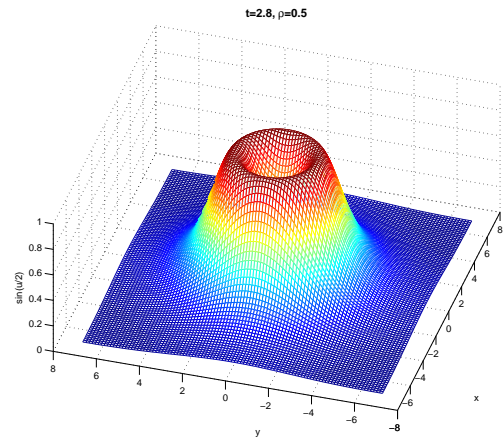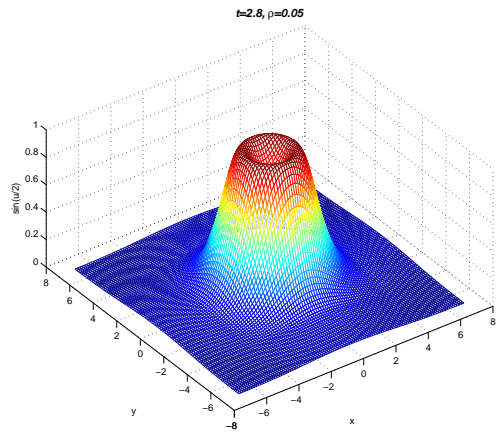

$t=15, \rho=0.05$

$t=15, \rho=0.5$

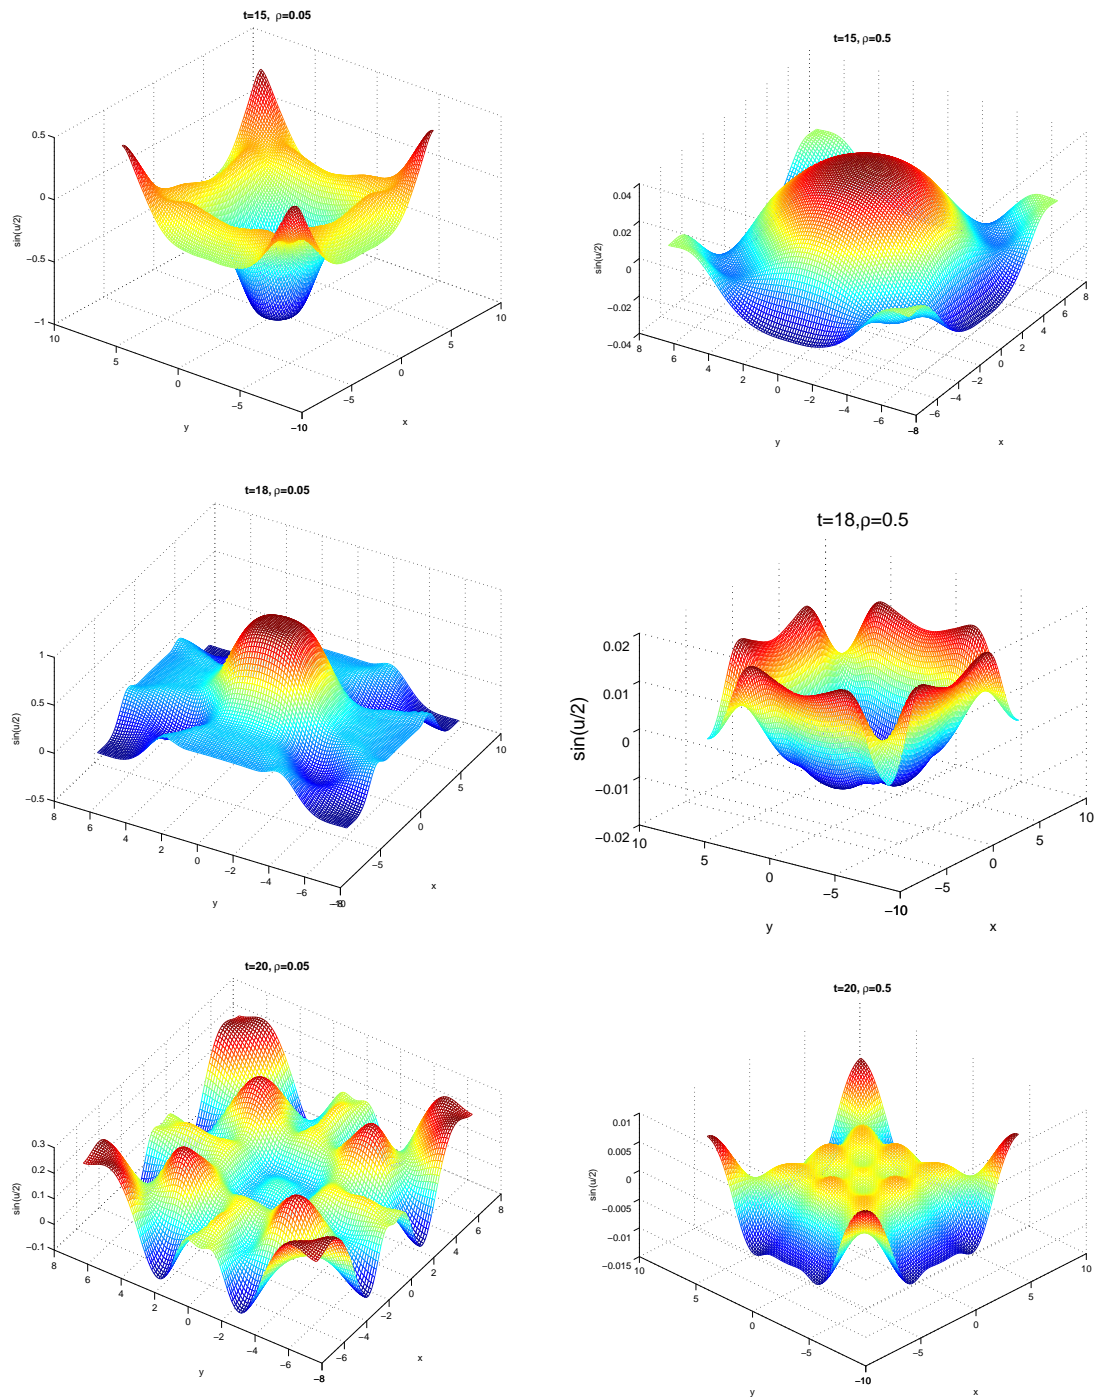
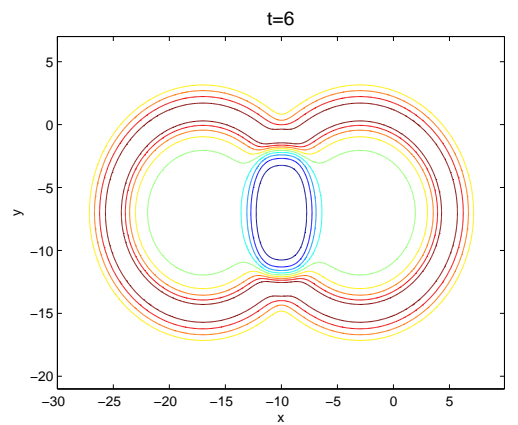
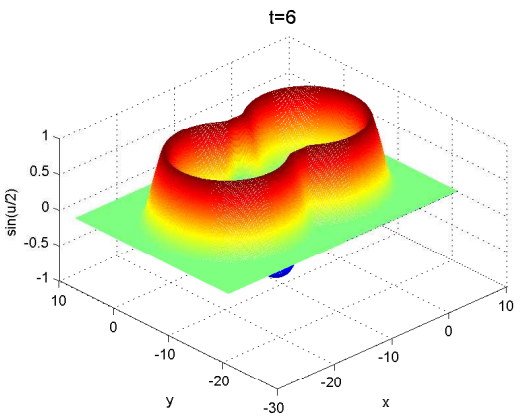
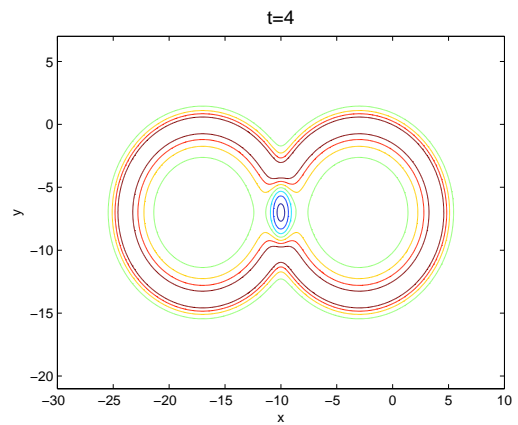
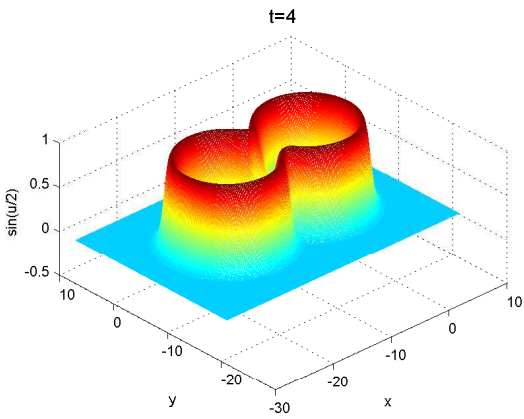
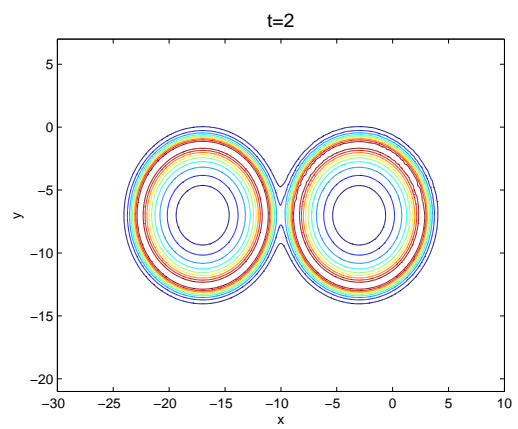
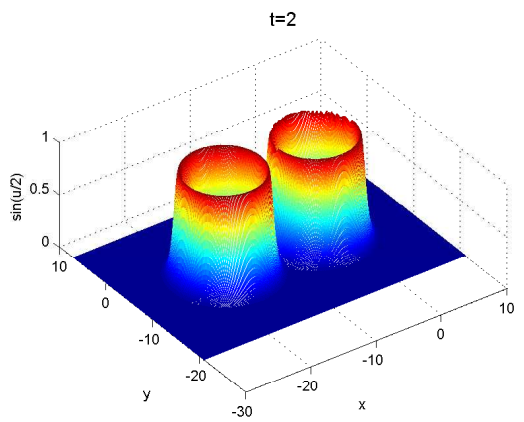
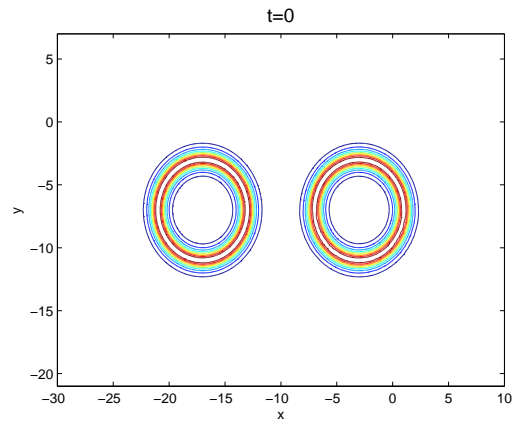
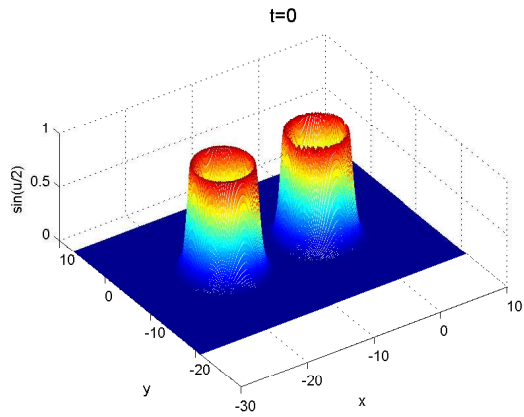
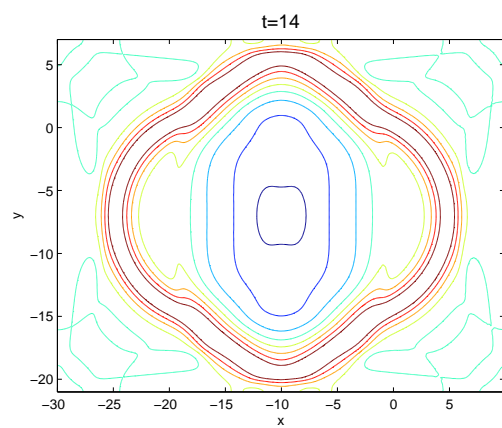
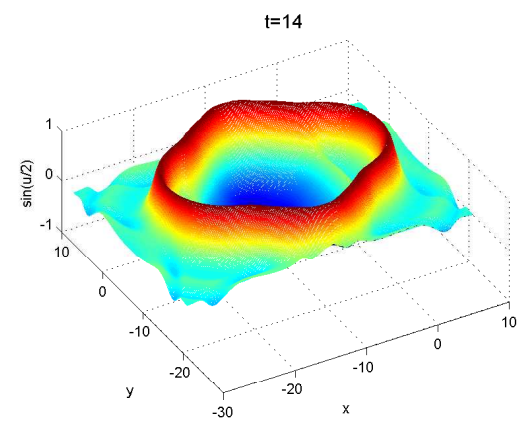
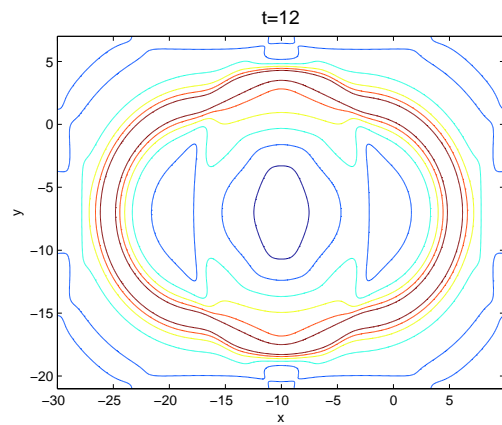
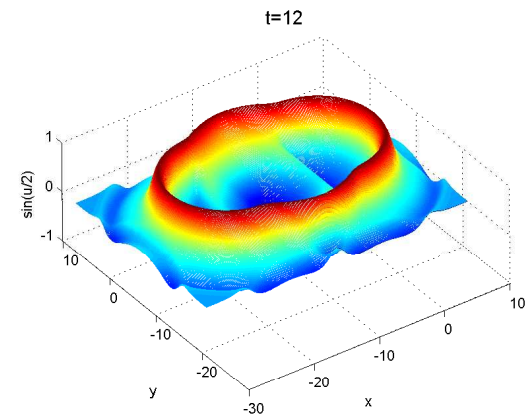
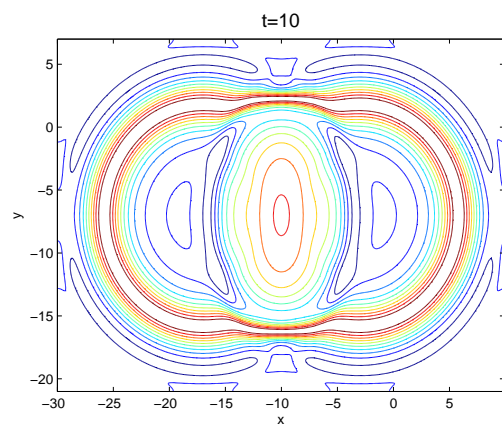
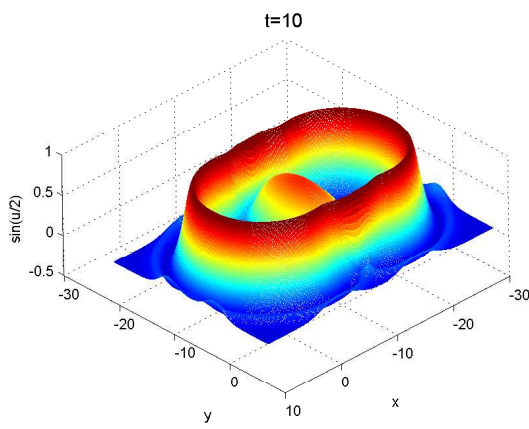
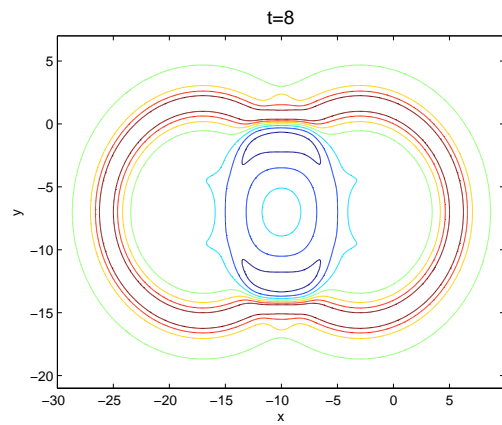
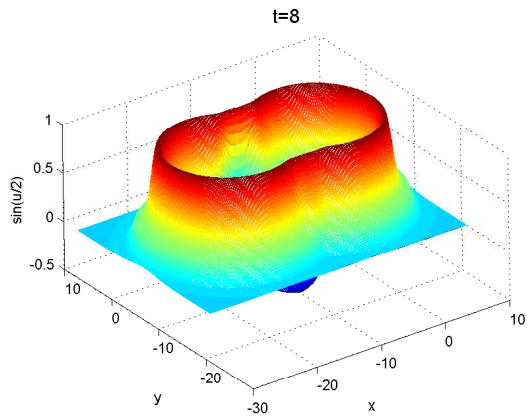


Figure 4: Circular ring solitons solution at $t = 0, 2.8, 5.6, 8.4, 11.2, 15, 18, 20$ with (left) $\rho = 0.05$ and (right) $\rho = 0.5$.





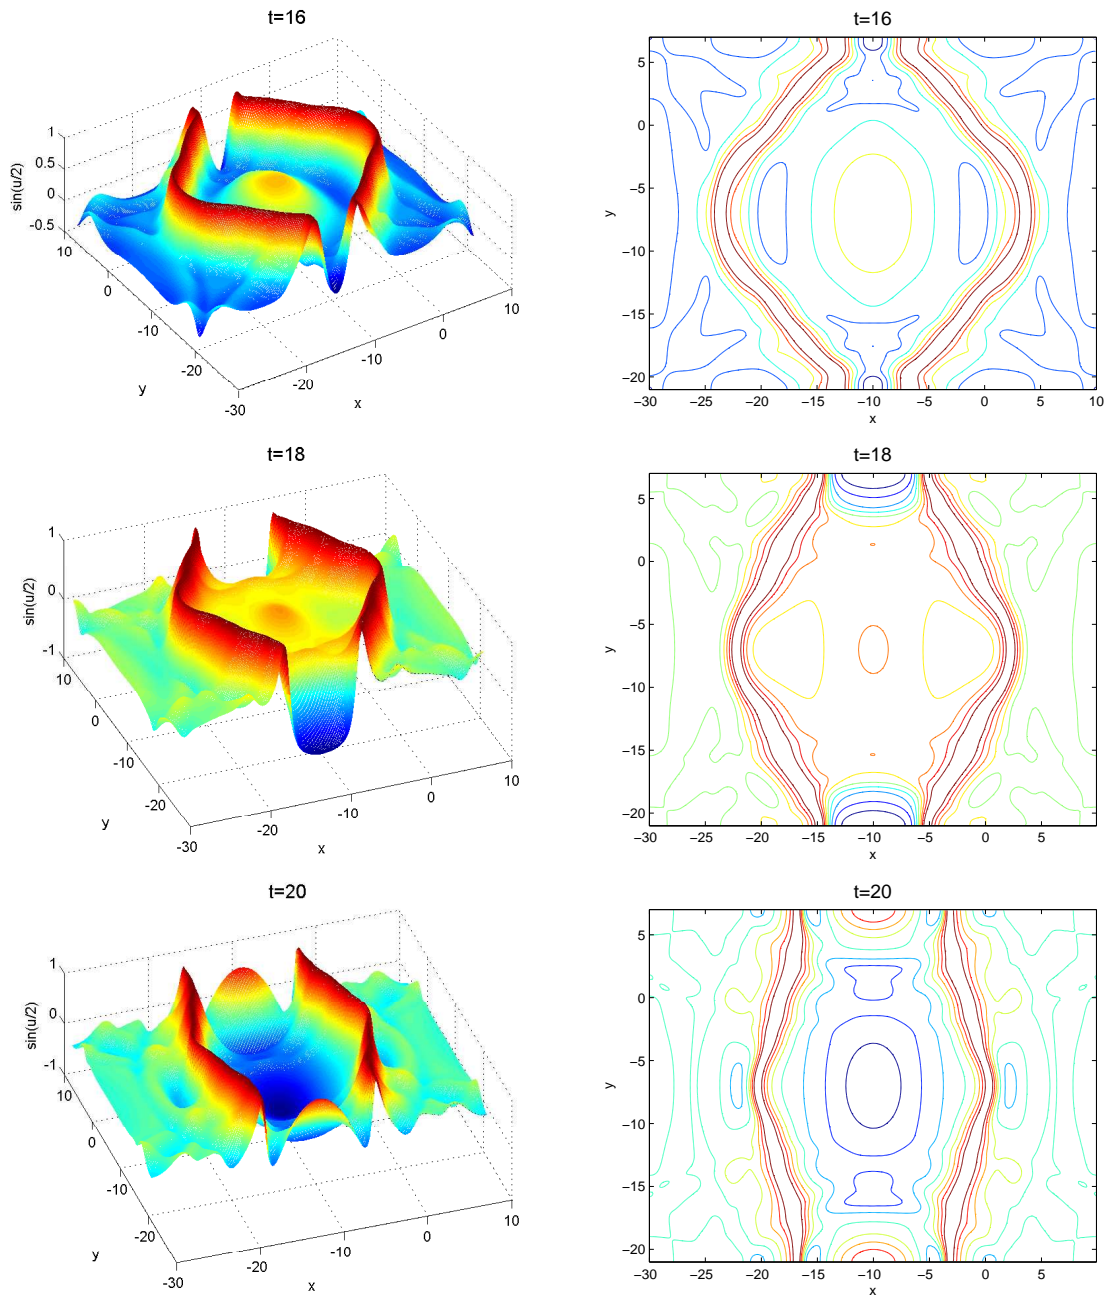


Figure 5: Collision of two circular solitons, at $t=0, 2, 4, 6, 8, 10, 12, 14, 16, 18, 20$ with $\rho = 0$.

- [3] L. Bergé and T. Colin, *A singular perturbation problem for an envelope equation in plasma physics*, *Physica D* 84 (1995), 437-459.
- [4] N. Bloembergen, M. Mlejnek, J. Moloney, E. Wright, *Femtosecond pulses at the boundary of a nonlinear dielectric*, preprint, 1998.
- [5] I. L. Bogolyubskiĭ and V.G. Makhankov, *Life time of pulsating solitons in certain classical models*, *JETP Lett.* 24 (1)(1976), 12-14.
- [6] I. L. Bogolyubskiĭ and V.G. Makhankov, *Oscillating particle-like solutions of the nonlinear Klein-Gordon equation*, *JETP Lett.* 24 (10)(1976), 535-538.
- [7] T. Brabec and F. Krausz, *Nonlinear optical pulse propagation in the single-cycle regime*, *Phys. Rev. Lett.* 78(17)(1997), 3282-3286.
- [8] A.G. Bratsos, *A modified predictor-corrector scheme for the two-dimensional sine-Gordon equation*, *Numer. Algor.* 43(2006), 295-308.
- [9] A.G. Bratsos, *The solution of the two-dimensional sine-Gordon equation using the method of lines*, *J. Comput. Appl. Math.* 206 (2007), 251-277.
- [10] A.G. Bratsos, *A third order numerical scheme for the two-dimensional sine-Gordon equation*, *Mathematics and Computers in Simulation* 76(2007), 271-282.
- [11] J. Chen, Z. Chen and S. Cheng, *Multilevel augmentation methods for solving the sine-Gordon equation*, *J. Math. Anal. and Appl.* 375(2011), 706-724.
- [12] P.L. Christiansen and P.S. Lomdahl, *Numerical solution of 2+1 dimensional sine-Gordon solitons*, *Physica 2D* 56(1981), 482-494.
- [13] M. Dehghan and A. Shokril, *A numerical method for solution of the two-dimensional sine-Gordon equation using the radial basis functions*, *Mathematics and Computers in Simulation* 79(2008), 700-715.
- [14] K. Djidjeli, W.G. Price and E.H. Twizell, *Numerical solutions of a damped sine-Gordon equation in two space variables*, *J. Eng. Math.* 69 (2004), 1-10.
- [15] W. E. Fitzgibbon, *Strongly damped quasilinear evolution equations*, *J. Math. Anal. Appl.* 79(2)(1981), 536-550.
- [16] C. Gorria, Yu. B. Gaididei, M.P. Soerensen, P.L. Christiansen, J.G. Caputo, *Kink propagation and trapping in a two-dimensional curved Josephson junction*, *Phys. Rev. B* 69 (2004), 1-10.
- [17] B.-Y. Guo, P.J. Pascual, M.J. Rodriguez and L. Vzquez, *Numerical solution of the sine-Gordon equation*, *Appl. Math. Comput.* 18(1986), 1-14.
- [18] M.A. Helal, *Soliton solution of some nonlinear partial differential equations and its application in fluid mechanics*, *Chaos Solitons Fractals* 13(2002), 1917-1929.
- [19] R. Hirota, *Exact three-soliton solution of the two-dimensional sine-Gordon equation*, *J. Phys. Soc. Jpn.* 35(1973) 1566.
- [20] P. Kaliappan and M. Lakshmanan, *Kadomtsev-Petviashvili and two-dimensional sine-Gordon equations: reduction to Painlevé transcendents*, *J. Phys. A: Math. Gen.* 12 (1979), 233-249.
- [21] M. -C. Lai, C. -Y. Huang, T.-S. Lin, *A simple Dufort-Frankel type scheme for the Gross-Pitaevskii equation of Bose-Einstein condensates on different geometries*, *Numerical Methods for Partial Differential Equations* 20(4)(2004), 624-638.
- [22] G. Leibbrandt, *New exact solutions of the classical sine-Gordon equation in 2+1 and 3+1 dimensions*, *Phys. Rev. Lett.* 41(1978), 435-438.
- [23] B. Lu, *On convergence and Stability of Nonlinear Evolution Equation*, *proc. of INEEIDDS*, Guo Boling(ed) Zhongshan Univ. press 1995.
- [24] P. A. Markowich, P. Pietra, C. Pohl and H. P. Stimming, *A Wigner-measure analysis of the Dufort-Frankel scheme for the Schrödinger equation*, *SIAM J Numer. Anal.* 40(4)(2002), 1281-1310.
- [25] D. Mirzaei and M. Dehghan, *Boundary element solution of the two-dimensional sine-Gordon equation using continuous linear elements*, *Engineering Analysis with Boundary Elements* 33(2009),12-24.
- [26] K. M. Morton and D. F. Mayers, *Numerical Solution of Partial Differential Equation*, Cambridge: Cambridge University Press 2005.
- [27] K. Nakajima, Y. Onodera, T. Nakamura and R. Sato, *Numerical analysis of vortex motion on Josephson structures*, *J. Appl. Phys.* 45(9)(1974), 4095-4099.
- [28] Q. Sheng, A.Q.M. Khaliq and D.A. Voss, *Numerical simulation of two-dimensional sine-Gordon solitons via a split cosine scheme*, *Math. Comput. Simulation* 68(2005), 355-373.
- [29] L. Wu, *Dufort-Frankel-type methods for linear and nonlinear Schrödinger equations*, *SIAM J Numer. Anal.* 33(4)(1996), 1526-1533.
- [30] J. X. Xin, *Modeling light bullets with the two-dimensional sine-Gordon equation*, *Physica D* 135(2000), 345-368.
- [31] J. Zagrodzinsky, *Particular solutions of the sine-Gordon equation in 2+1 dimensions*, *Phys. Lett.* 41(1978), 435-438.