

Titre: Tuning particle-particle interactions to control Pickering emulsions constituents separation. Suppléments
Title: constituents separation. Suppléments

Auteurs: Faezeh Sabri, Kevin Berthomier, Chang-Sheng Wang, Louis Fradette, Jason Robert Tavares et Nick Virgilio
Authors: Fradette, Jason Robert Tavares et Nick Virgilio

Date: 2019

Type: Article de revue / Journal article

Référence: Sabri, F., Berthomier, K., Wang, C.-S., Fradette, L., Tavares, J. R. & Virgilio, N. (2019). Tuning particle-particle interactions to control Pickering emulsions constituents separation. Suppléments. *Green Chemistry*, 21(5), p. 1065-1074.
Citation: doi:[10.1039/c8gc03007c](https://doi.org/10.1039/c8gc03007c)



Document en libre accès dans PolyPublie

Open Access document in PolyPublie

URL de PolyPublie: <https://publications.polymtl.ca/5335/>
PolyPublie URL:

Version: Matériel supplémentaire / Supplementary material
Révisé par les pairs / Refereed

Conditions d'utilisation: Tous droits réservés / All rights reserved
Terms of Use:



Document publié chez l'éditeur officiel

Document issued by the official publisher

Titre de la revue: Green Chemistry (vol. 21, no 5)
Journal Title:

Maison d'édition: Royal Society of Chemistry
Publisher:

URL officiel: <https://doi.org/10.1039/c8gc03007c>
Official URL:

Mention légale:
Legal notice:

**Ce fichier a été téléchargé à partir de PolyPublie,
le dépôt institutionnel de Polytechnique Montréal**

This file has been downloaded from PolyPublie, the
institutional repository of Polytechnique Montréal

<http://publications.polymtl.ca>

Supporting Information

Tuning Particle-Particle Interactions to Control Pickering Emulsions Constituents Separation

*Faezeh Sabri, Kevin Berthomier, Chang-Sheng Wang, Louis Fradette, Jason R. Tavares and
Nick Virgilio**

^a Research Center for High Performance Polymer and Composite Systems (CREPEC),
Department of Chemical Engineering, Polytechnique Montréal, Montréal, Québec, H3C 3A7,
Canada

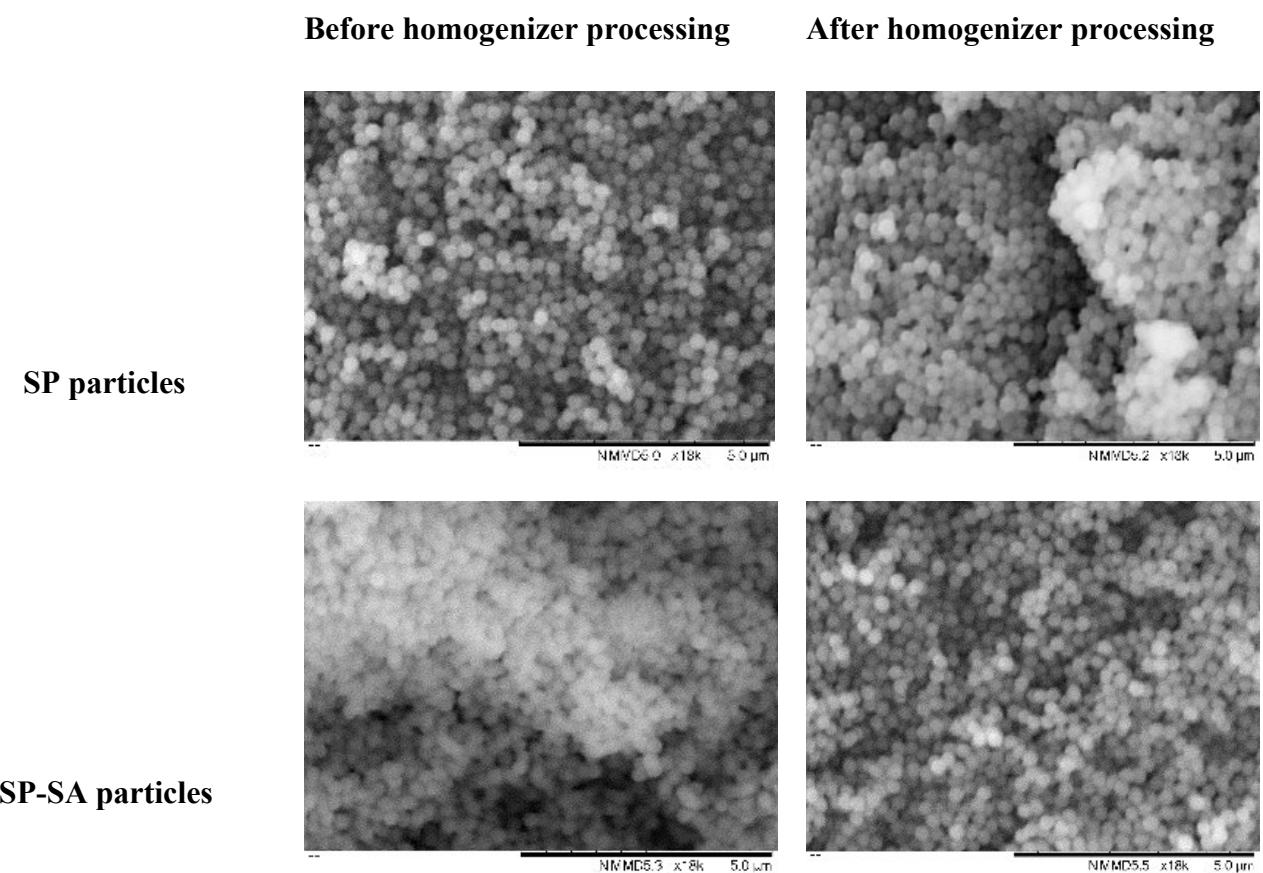


Figure S1. SEM micrographs of SP and SP-SA particles before and after homogenizer processing.

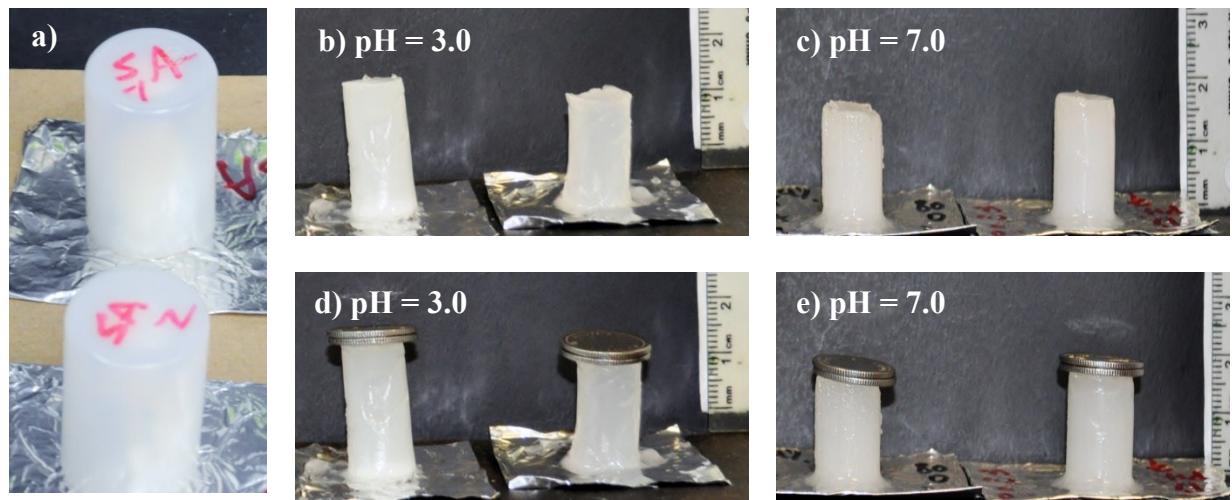


Figure S2. Pictures of concentrated oil-in-water Pickering emulsions comprising 4% SP-SA particles ($\phi_o = 0.8$) when contained into the plastic molds (a), removed from plastic molds (b, c), and under compressive stress (d, e).

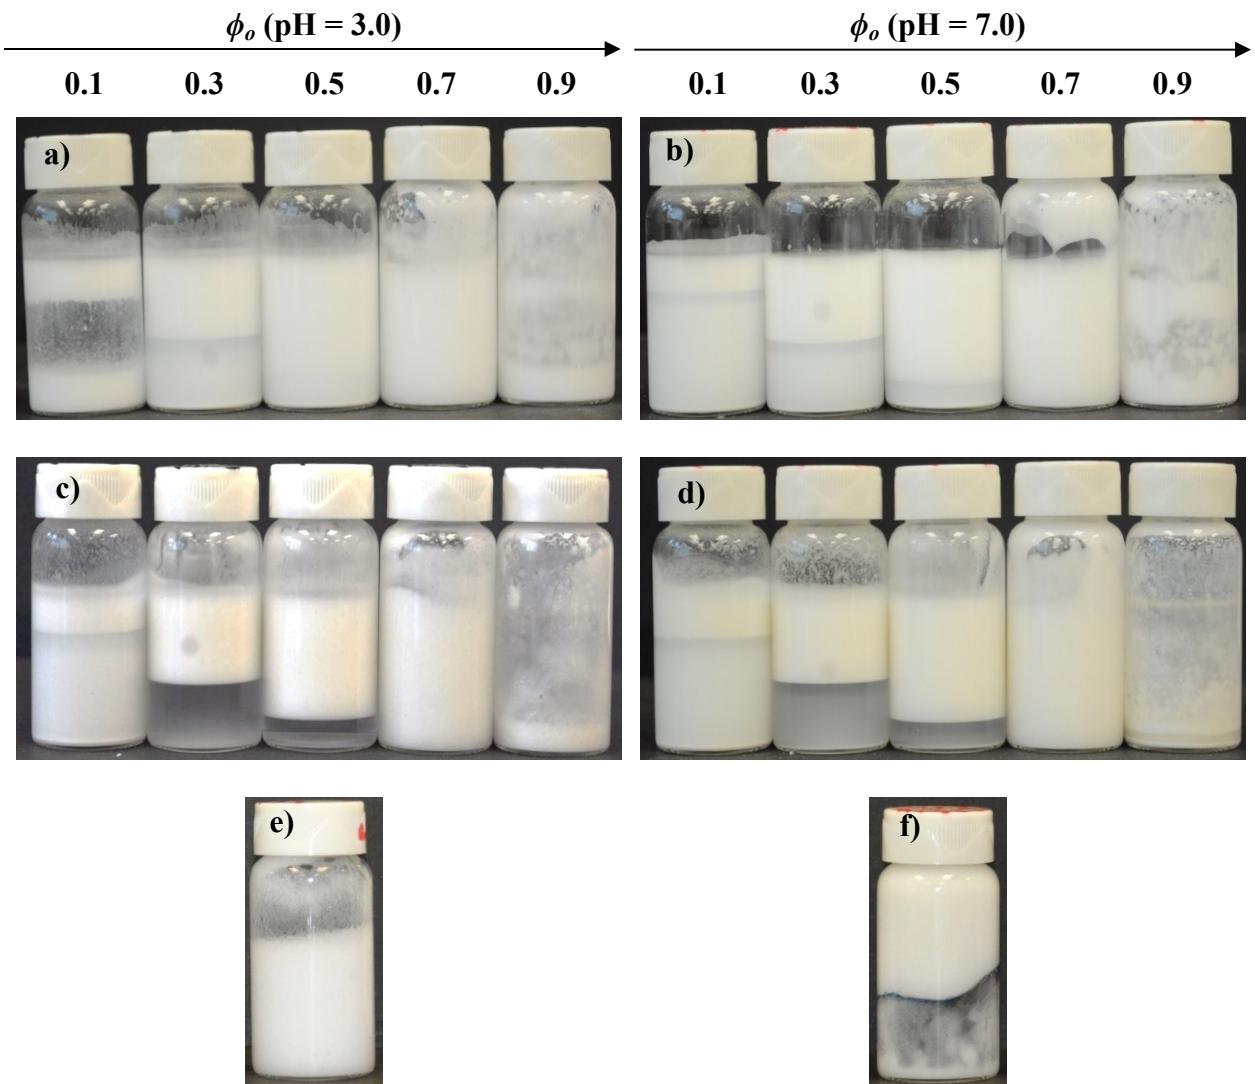


Figure S3. Effect of oil volume fraction ϕ_o on emulsion aspect, with 4% (w/v) particles: a) and b), emulsions prepared with unmodified silica particles (SP) at pHs 3.0 and 7.0, respectively; c) and d), emulsions prepared with sodium alginate-modified particles (SP-SA), at pHs 3.0 and 7.0; e) emulsion composed of SP particles (4% w/v) at $\phi_o = 0.8$, compared to f) emulsion composed of SP-SA particles (4% w/v) at $\phi_o = 0.8$.

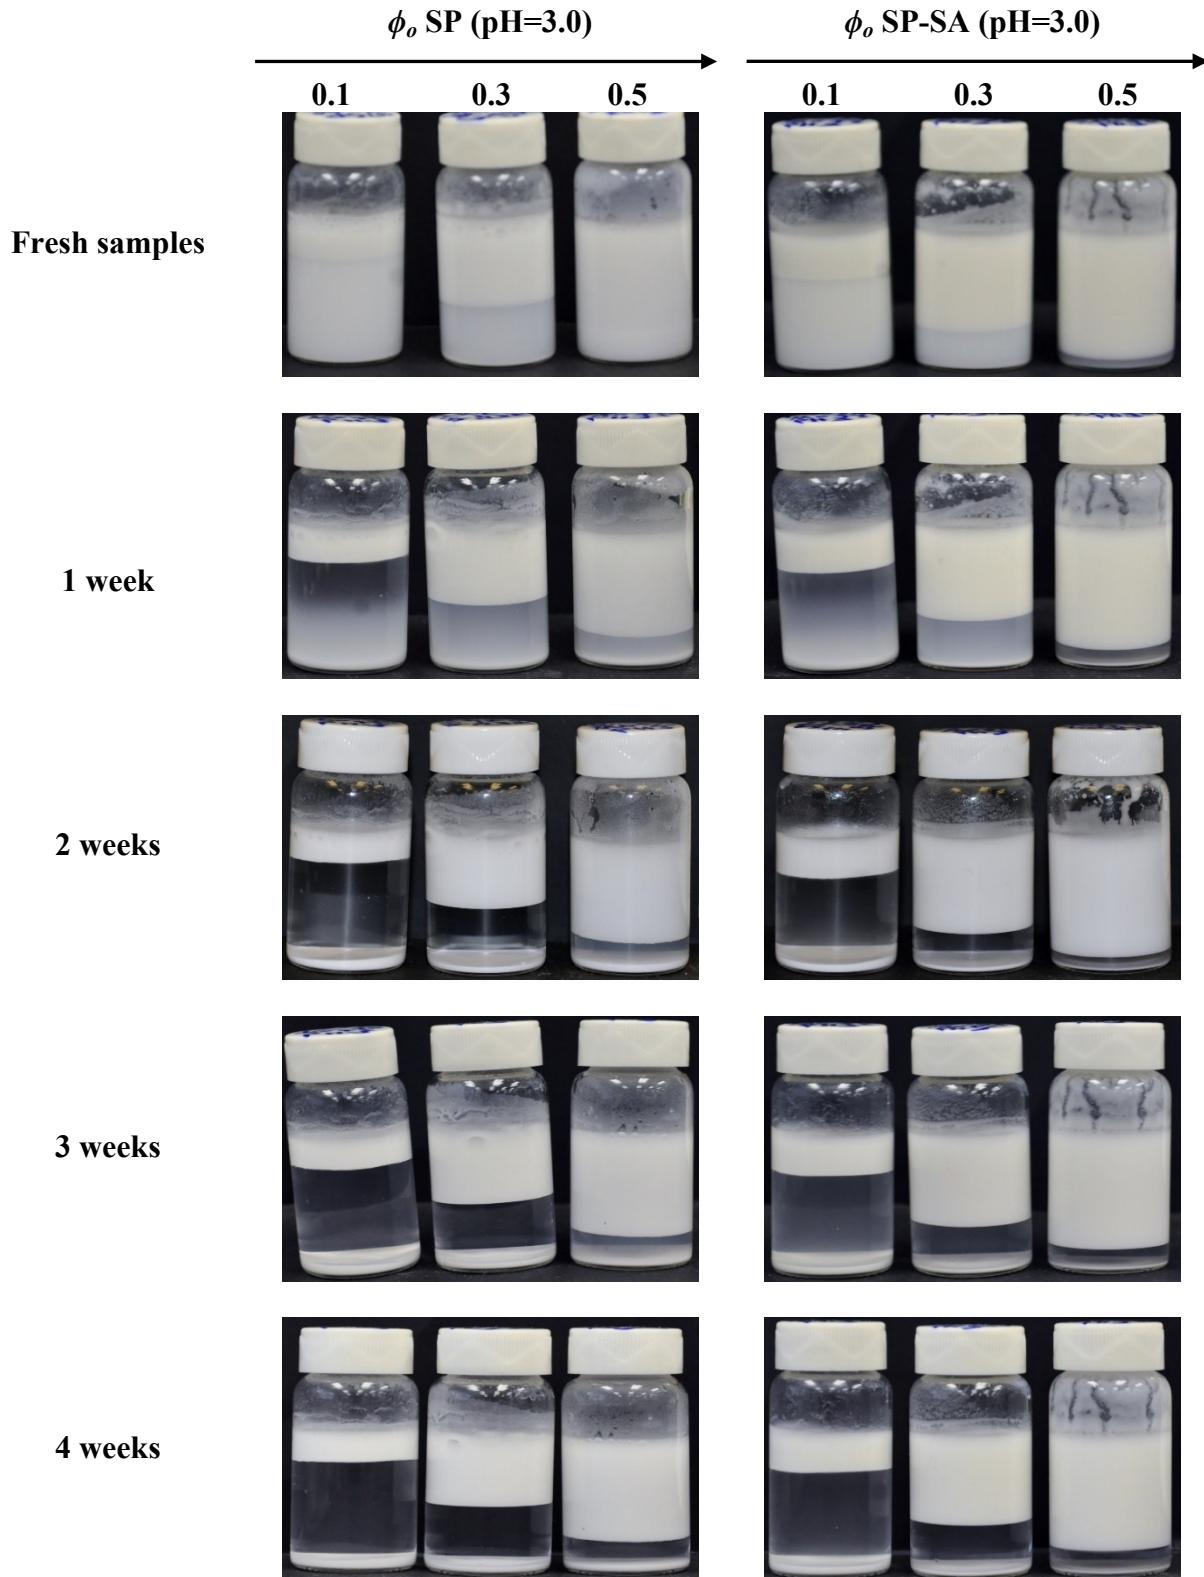


Figure S4. Emulsion stability in time at 3 different oil volume fractions ϕ_o , and constant 4% (w/v) particles.

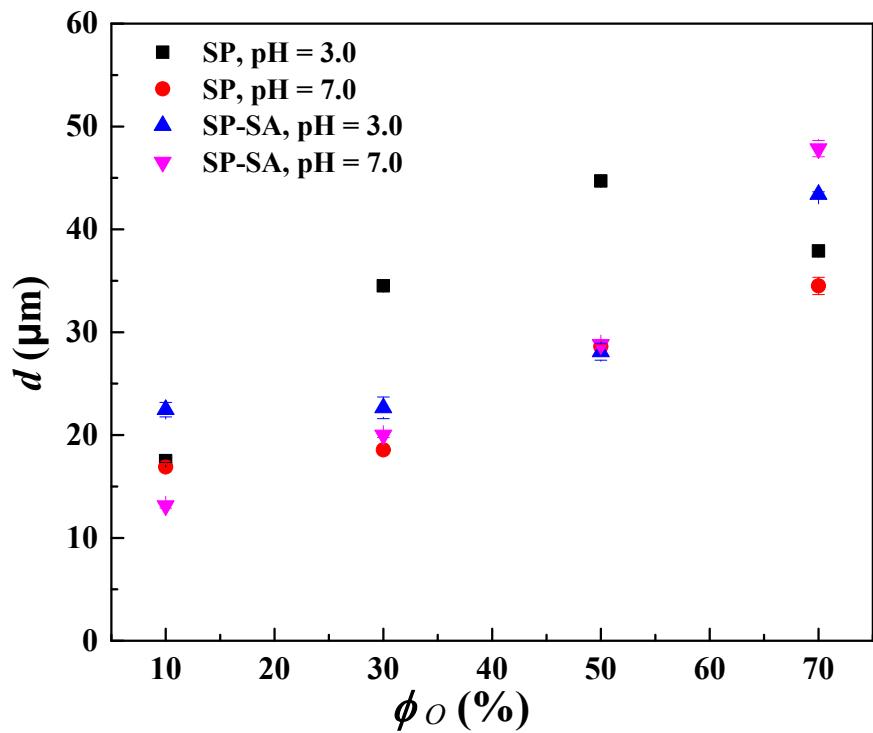


Figure S5. Number average diameter d of oil droplets as a function of oil volume fraction ϕ_o , for both SP and SP-SA particles, at pH 3.0 and 7.0, as obtained by laser diffraction (Mastersizer).

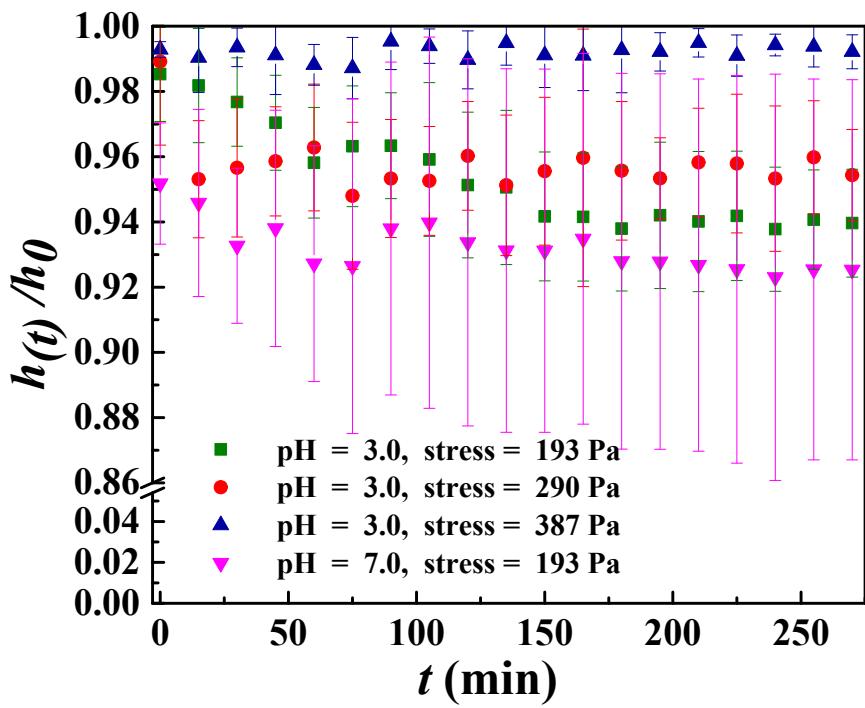


Figure S6. Normalized height ($h(t)/h_0$) with the error bars as a function of time t and applied stress on molded concentrated emulsions ($\phi_o = 0.8$) comprising 4% SP or SP-SA particles, at pH 3.0 and 7.0.


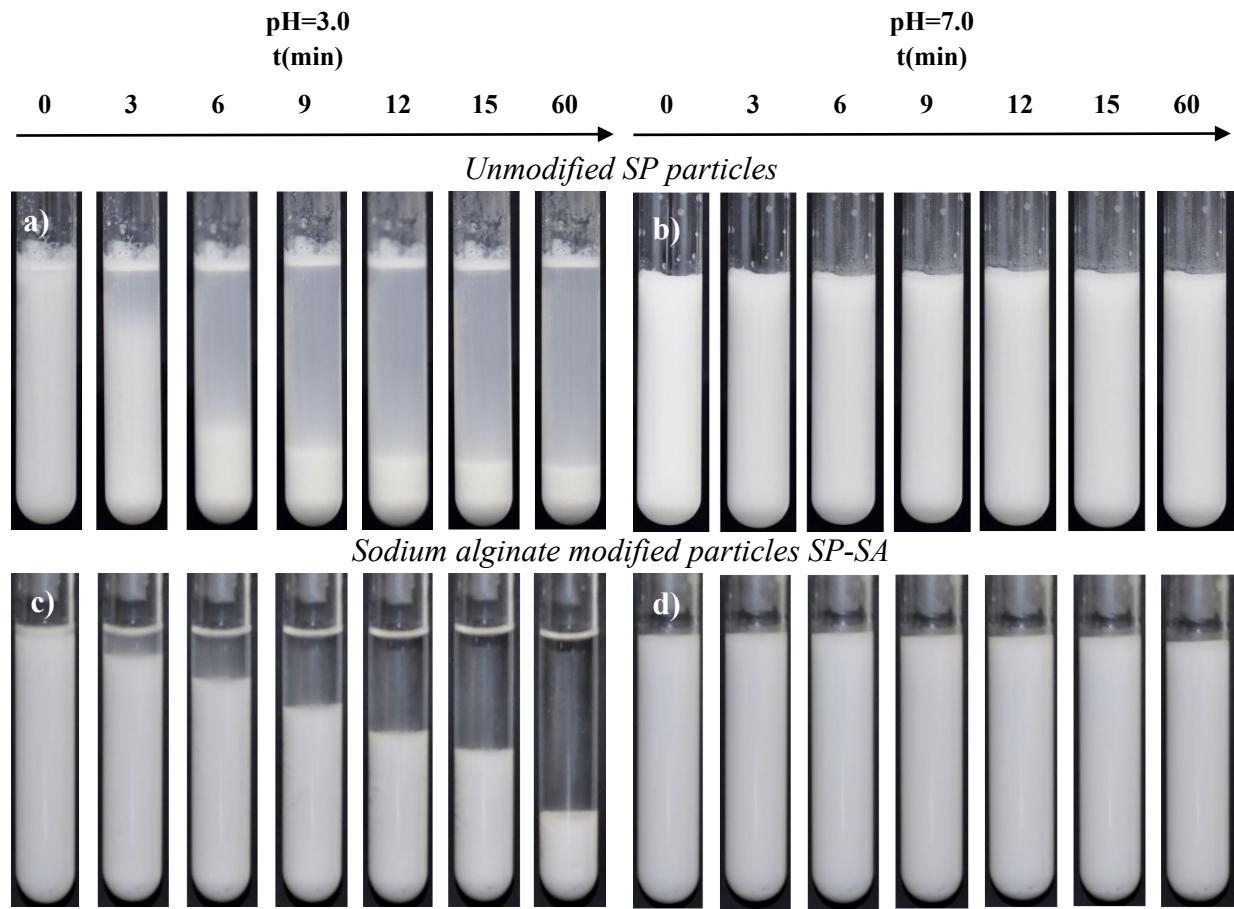


Figure S7. Pictures of the particle's behavior during sedimentation in water (height of test tube = 15.3 cm) for SP (a, b) and SP-SA (c, d), over 60 min at pHs 3.0 and 7.0.

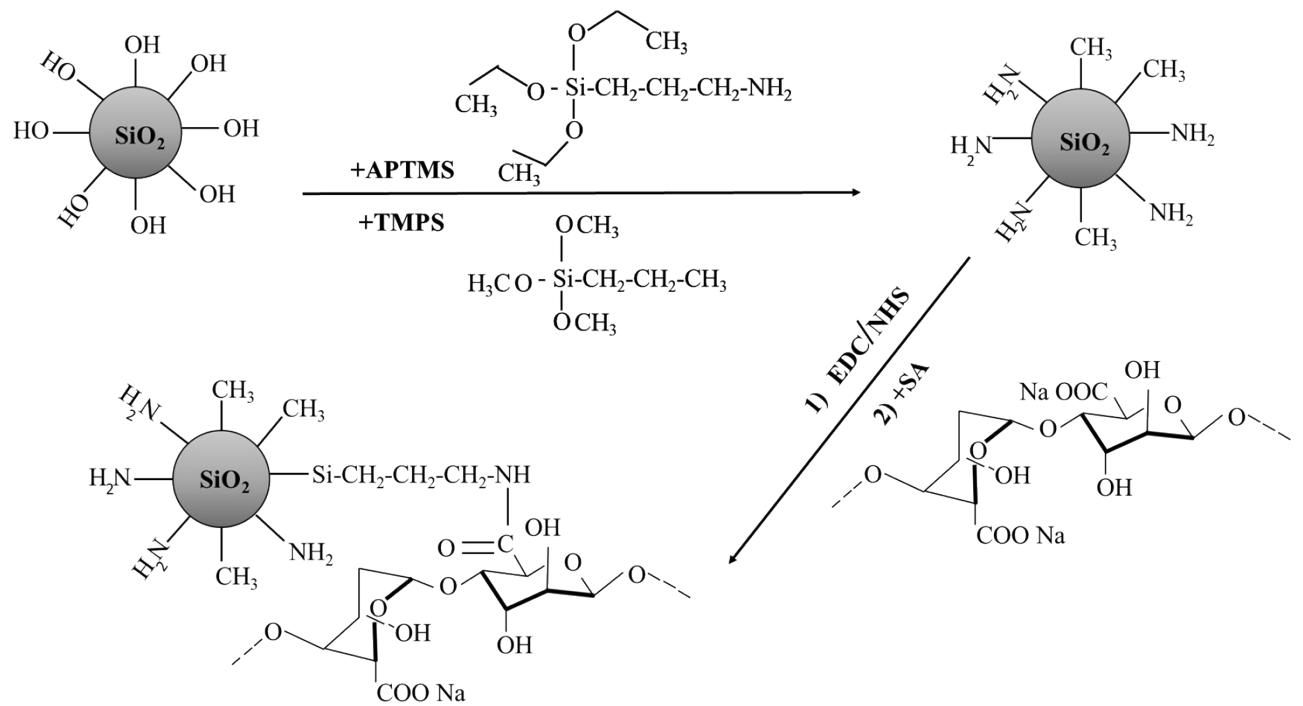

Scheme S1 Reaction Schemes to modify SP particles with APTMS, TMPS and SA molecules

respectively