

Brightness normalization for Blurred Image Matching

Y. Donon^{1,2,3}, A. Kupriyanov^{1,3}, R. Paringer^{1,3}

¹Samara National Research University, Moskovskoye shosse 34, Samara, Russia, 443086

²CERN, Espl. des Particules 1, 1211 Meyrin, Genève, Switzerland

³Image Processing Systems Institute of RAS, – Branch of the FSRC “Crystallography and Photonics” RAS, Molodogvardeyskaya 151, Samara, Russia, 443001

Abstract. Blurred Image Matching (BIM) is based on image pre-processing and Blob detection. BIM methods has been designed to function with images presenting a strong level of noise of different kinds. The technique shows an excellent robustness, speed and unique features when compared to existing methods. This article investigates the process BIM is based on, proposes a new way to improve the range of noise the technique can process with a good range of success by adding image normalization. Moreover, the article investigates the technique’s performances when confronted to different parameters, thus suggestion an ideal brightness for the blob detection to perform at the best of its capacities.

1. Introduction

Blurred Image Matching (BIM), is a key point detection method for images. It is based on the comparison of large areas of interest in images, after a preprocessing involving Gaussian blurring and thresholding. The technique selects large areas identified using a connected components labelling algorithm and matches them from an image to another.

As shown in previous researches, one of the main issues in stitching images using BIM is their brightness level. Thresholding algorithm are by essence heavily impacted by brightness levels. Therefore, it was very difficult to find key points in images presenting different expositions. Different expositions can results from different angles of view, time of the day, metrological phenomena.

In this context, it was necessary, for many samples to first normalize the images characteristics. This normalization would allow finding comparable shapes as used by BIM.

2. Dataset

The dataset used in this experiment are sets of aerial pictures taken by drone, those images include a wide range of colorimetry and brightness in their original state. 917 Images were used, divided in 4 categories. The brightness

2.1. Evaluate brightness

Brightness is one of pixel’s most significant characteristics; however, there is no standard formula for its measurement. In this paper, we used color vector length and base ourselves on arithmetic model mean [1]:

$$Br = \frac{1}{n} \cdot \sum_{i=0}^n \frac{(r_i + g_i + b_i)}{3}$$

Where n is the amount of pixels in the image and r , g and b , the value for each pixels in red, green and blue.

2.2. Define brightness equalization necessity for a set

Experimentations shows that BIM present optimal performance when the difference of brightness between images stays under 5%, especially when using shape contouring for comparison instead of quadrilaterals [BIM1]. Therefore, the formula serving to assess the necessity of normalization presents itself as such

$$\left| \frac{Br_1 - Br_2}{Br_1 + Br_2} \right| < 0.05$$

2.3. Define ideal brightness

Represents the amount of points found depending on images brightness; it shows that the different sets of images with a significant range of characteristics, present comparable areas of matching. Although colorimetry plays a role into shape matching, it seems not to be a relevant feature regarding brightness [third article BIM]. It has been shown in previous experiments that specific colour channels has an influence of points matching after the thresholding operation [third article BIM].

The totality of the points were found in between a brightness of 38 and 161 (23% of the spectrum, hereafter referred as partial brightness spectrum). Which highlight the importance of the brightness for BIM processing. Moreover, the majority of the points, $(-0.25\sigma$ to $0.25\sigma)$ are situated in a range between 89 and 113, or just under 7% of the full brightness spectrum and about 32% of the partial brightness spectrum.

The ideal interval is to be found where the average brightness of the final image lays in the interval defined in 0

Define ideal brightness and confirmed in 3.1 Average brightness modification.

Therefore, the ideal interval is in a brightness range between 78 and 110, where shapes are the more distinctive and where brightness of both images is equal. Which leaves two areas, on the center of both diagonals for which all images respects the following formula:

$$110 > Br > 78$$

3. Equalize

Brightness changes between pictures, whether they come from different exposition time or were taken at different time, with different environmental conditions. Concretely, our objective was to equalize histograms in order to find the same objects of interest from an image to another [2].

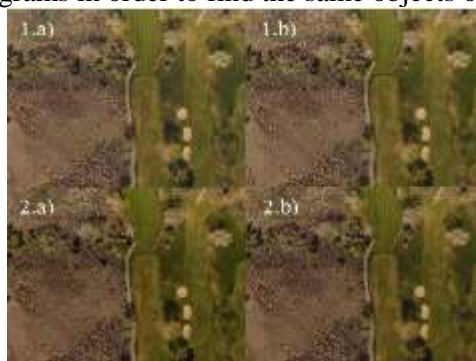


Figure 1. Pair of images having different, opposite brightness. They are "twin" points on the opposite diagonals of **Ошибка! Источник ссылки не найден..**

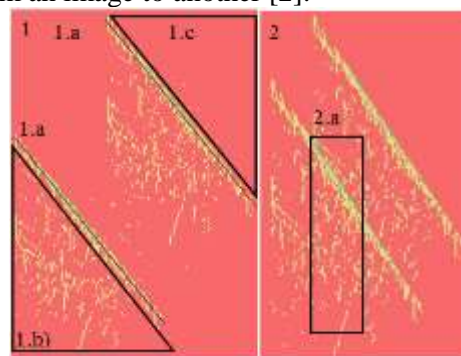


Figure 2. Difference matching results' histogram. On the left, the image's average brightness difference is 120% higher than on the right. The original image is the same.

3.1. Average brightness modification

As shown on **Ошибка! Источник ссылки не найден..**, where the X and Y axis are different values of images' average brightness, from -255 to 255. The results of successful matching are presented on a

pair of diagonal **Ошибка! Источник ссылки не найден..1.a**, the two original images having different brightness, there are two combination for each coordinate, for example (-21;33) and (-33;21) as shown on **Ошибка! Источник ссылки не найден..**

A smaller brightness difference between pairs of images is showed on **Ошибка! Источник ссылки не найден..1** and **Ошибка! Источник ссылки не найден..2** (histogram 1 for the pair with the highest delta, histogram 2 for the pair with the lowest delta), the closer the two diagonals, the lower the delta, which results in a less significant brightness correction. The best results appearing when no brightness difference exists, then the two diagonals are merged into one.

On **Ошибка! Источник ссылки не найден..**, the area directly below (**Ошибка! Источник ссылки не найден..1.b**) the diagonal shows dispersed points; those are either noise or isolated points that are very distinctive shapes on an image. Brightness change has a lesser impact on such shapes; they are usually caused by a sudden change of colour in the landmark (such as a red roof in a green forest). The area directly above the diagonal (**Ошибка! Источник ссылки не найден..1.c**) is empty as it represents the part of the array where images are brightness correction of both images diverge in opposite directions; any point in this area is extremely likely to be noise.

Ошибка! Источник ссылки не найден..2.a also confirms the results obtained in 0

Define ideal brightness, it is then mentioned that 60% of the points could be found in 32% of the partial brightness spectrum. The shape 2.a contains 33% of the given spectrum and contains 62.8% of the points matched. This information also establishes a direct link between the amount of points and their quality and the amount of points found can be used as feature without the need of running matches.

4. Conclusion

BIM performs best with a brightness range between 78 and 110, with the highest peak at 91. 91, is therefore the recommended image brightness value when operating BIM.

The experiment presented in this paper allowed to successfully determining sets of preprocessing parameters, while proposing a process modification allowing BIM to perform with a higher robustness than previously, introducing the treatment of new noise sources in BIM's abilities range.

5. Acknowledgments

The research was carried out within the state assignment theme FSSS-2020-0017, was partly financially supported by the Russian Foundation for Basic Research under grant # 19-29-01135.

6. References

- [1] Bezryadin S. Brightness Calculation in Digital Image Processing // International Symposium on Technologies for Digital Photo Fulfillment – San Francisco, 2007.
- [2] Donon, Y. Blur-robust image registration and stitching // Journal of Physics: Conference Series. – 2019. – Vol. 1368. – P. 5.
- [3] Linear accelerator 4 [Electronic resource]. – Access mode: <https://home.cern/science/accelerators/linear-accelerator-4> (17.08.2019).
- [4] Greco, V. A partnership-mentorship approach // ICEC Workshop – CERN, Geneva, 2017.
- [5] Xiong, H. Enhancing data analysis with noise removal // IEEE Transactions on Knowledge and Data Engineering. – 2006. – Vol. 18(3). – P. 304-319.
- [6] Donon, Y. Key point detection on images: A new polyvalent method // ITNT Proceedings – Samara, 2019.
- [7] Rosenblatt, M. Remarks on Some Nonparametric Estimates of a Density Function // The Annals of Mathematical Statistics. – 1956. - Vol. 27(3). – P. 832-837.
- [8] Parzen, E. On Estimation of a Probability Density Function and Mode // The Annals of Mathematical Statistics. – 1962. – Vol. 33(3). – P. 1065-1076.
- [9] Arabie, P. Comparing partitions // Journal of Classification. – 1985. – Vol. 2(1). – P. 193-218.
- [10] Everitt, S. The Cambridge Dictionary of Statistics – New York: Cambridge University Press, 1998.

- [11] Brown, H. Introduction to random signals and applied Kalman filtering – New York: Wiley, 1992. – Vol. 3.
- [12] Shumway, R.H. Time series analysis and its applications: with R examples – New York: Springer, 2017.
- [13] Kalman, S. Filtering – Heidelberg: Springer, 2011.
- [14] Lim, K. Fading Kalman filter-based real-time state of charge estimation in LiFePO₄ battery-powered electric vehicles // Applied Energy, 2016. – P. 40-48.
- [15] Kalman, S. Optimization approach to adapt filters for the real-time application of accelerometer and gyroscope signals // Digital Signal Processing. – 2011. – Vol. 21(1). – P. 131-140.
- [16] Alkofer, J.S. Contrast adjustment in digital image processing method employing histogram normalization // USA Patent US4731671A, 1988.