



Journal of Scientific & Industrial Research
Vol. 79, October 2020, pp. 914-917



Maintenance Maturity Level Identification using MABAC Method: An Adaptation of TPM Pillars in a Public Service Sector

Hisham Alidrisi

Department of Industrial Engineering, King Abdulaziz University (KAU), PO Box 80204, Jeddah 21589 Saudi Arabia

Received 2 August 2019; revised 23 February; accepted 1 May 2020

Having systematic maintenance practices does sustain the lifecycle of the facilities. Hence, engineers have always been seeking for practical approaches toward providing better maintenance scheme. Such attempts have resulted in the appearance of numerous maintenance management models including the most commonly accepted one, that is, the total productive maintenance (TPM). Although the concept of TPM and its corresponding pillars have extensively been investigated in the recent literature of Maintenance Engineering and Management, the majority of the previous research attempts, including the multi-criteria decision making (MCDM) applications, have handled them within the context of the manufacturing sector; and almost none of them have been applied in the services sector. This paper proposes the multi-attributive border approximation area comparison (MABAC) method, a newly developed MCDM technique, as a tool upon which eight TPM pillars are evaluated in order to identify the maintenance maturity level in a public service sector. The investigations indicate that the proposed model equips maintenance engineers with an insight into the mechanism upon which TPM pillars can operate effectively. The results of the proposed model indicate that the investigated institution is generally not matured enough to be up to the desired level of TPM performance.

Keywords: MABAC, Maintenance, MCDM, TPM

Introduction

Total productive maintenance (TPM) pillars have extensively been investigated in the recent literature of maintenance engineering and management (MEM). However, the majority of the previous research attempts have handled them only within the context of the manufacturing sector and almost none of these attempts have employed TPMs in the services sector.¹ Moreover, none of the previous studies have utilized such a newly multi-criteria decision making (MCDM) technique as the multi-attributive border approximation area comparison (MABAC) method. This paper aims to propose the MABAC method as a tool upon which eight TPM pillars are evaluated in order to identify the maintenance maturity level in the service sector.

TPM Evaluation using MABAC

In life, “there’s birth, there’s death, and in between there’s maintenance”.² Indeed, having systematic maintenance practices do sustain the lifecycle of the facilities. Hence, engineers have always been seeking for practical approaches toward providing better maintenance scheme. Such attempts have resulted in the appearance of numerous maintenance notions

and/or maintenance management models such as preventive maintenance (PM), predictive maintenance (PdM), corrective maintenance (CM), maintenance prevention (MP), and finally TPM.³ The roots of TPM belong to 1964 in which the Plant Maintenance award (PM Award) was launched by the Japan Institute of Plant Maintenance (JIPM) and has been given to such respected companies as Toyota, Nissan, and Mitsubishi.⁴ In 1971, the award has been given to Nippondenso Company, a Japan’s leading producer of automobile components and one of the leading international producers (currently known as DENSO Corporation), and since then the award is known as a TPM Award.^{3,4} The notion of TPM can be defined as an innovative practical approach for improving maintenance efficiency and effectiveness throughout better utilization of resources such as time, materials, equipment, and workers.⁵⁻⁷ TPM has eight pillars, namely, autonomous maintenance (TPM1), focused improvement (TPM2), planned maintenance (TPM3), quality maintenance (TPM4), education and training (TPM5), safety, health and environment (TPM6), office TPM (TPM7), and development management (TPM8).^{3,8,9} These pillars have always been under investigation in the TPM literature.^{10,11}

In order to examine the adaptation of TPM pillars in a relatively different workplace environment

compared to the manufacturing sector, a MABAC model is developed for a case chosen from the public service sector. In order to implement MABAC, six steps should be followed:¹²⁻¹⁵

Step 1: Let (\tilde{F}) , m , n refer to the initial decision matrix, number of criteria, and number of alternatives, respectively. Accordingly, \tilde{F} can be expressed as follows:

$$\tilde{F} = \begin{matrix} & D_1 & D_j & D_m \\ \begin{matrix} B_1 \\ B_i \\ B_n \end{matrix} & \begin{bmatrix} \tilde{f}_{11} & \tilde{f}_{1j} & \tilde{f}_{1m} \\ \vdots & \vdots & \vdots \\ \tilde{f}_{n1} & \tilde{f}_{nj} & \tilde{f}_{nm} \end{bmatrix} \end{matrix} \quad \dots (1)$$

Where D_j refers to the criterion j , ($j = 1, \dots, m$); B_i refers to the alternative i , ($i = 1, \dots, n$); and \tilde{f}_{ij} refers to the value of alternative B_i with respect to the criterion D_j .

Step 2: Finding the normalized version of the initial decision matrix, \tilde{H} , as follows:

$$\tilde{H} = \begin{matrix} & D_1 & D_j & D_m \\ \begin{matrix} B_1 \\ B_i \\ B_n \end{matrix} & \begin{bmatrix} \tilde{h}_{11} & \tilde{h}_{1j} & \tilde{h}_{1m} \\ \vdots & \vdots & \vdots \\ \tilde{h}_{n1} & \tilde{h}_{nj} & \tilde{h}_{nm} \end{bmatrix} \end{matrix} \quad \dots (2)$$

Where \tilde{h}_{ij} equals to:

- a. In the case of benefit criterion (i.e. higher value is preferable):

$$\tilde{h}_{ij} = (\tilde{f}_{ij} - \tilde{f}_i^-) / (\tilde{f}_i^+ - \tilde{f}_i^-) \quad \dots (3)$$

- b. In the case of cost criterion (i.e. lower value is preferable):

$$\tilde{h}_{ij} = (\tilde{f}_{ij} - \tilde{f}_i^+) / (\tilde{f}_i^- - \tilde{f}_i^+) \quad \dots (4)$$

Where \tilde{f}_i^+ and \tilde{f}_i^- are elements located in \tilde{F} and defined as:

$$\tilde{f}_i^+ = \max (\tilde{f}_{i1}, \tilde{f}_{i2}, \dots, \tilde{f}_{in}); \quad \dots (5)$$

(i.e. the maximum value among alternatives with respect to the criterion.)

$$\tilde{f}_i^- = \min (\tilde{f}_{i1}, \tilde{f}_{i2}, \dots, \tilde{f}_{in}); \quad \dots (6)$$

(i.e. them inimumv alue among alternatives with respecttothecriterionj.)

Step 3: Calculating the weighted matrix, \tilde{R} , as follows:

$$\tilde{R} = \begin{bmatrix} \tilde{r}_{11} & \tilde{r}_{1j} & \tilde{r}_{1m} \\ \vdots & \vdots & \vdots \\ \tilde{r}_{n1} & \tilde{r}_{nj} & \tilde{r}_{nm} \end{bmatrix} = \begin{bmatrix} \tilde{k}_1(\tilde{h}_{11} + 1) & \tilde{k}_j(\tilde{h}_{1j} + 1) & \tilde{k}_m(\tilde{h}_{1m} + 1) \\ \vdots & \vdots & \vdots \\ \tilde{k}_1(\tilde{h}_{n1} + 1) & \tilde{k}_j(\tilde{h}_{nj} + 1) & \tilde{k}_m(\tilde{h}_{nm} + 1) \end{bmatrix} \quad \dots (7)$$

Where \tilde{r}_{ij} is calculated as:

$$\tilde{r}_{ij} = \tilde{k}_j \cdot (\tilde{h}_{ij} + 1) \quad \dots (8)$$

Where \tilde{k}_j is the weight of each criterion D_j ; ($j = 1, \dots, m$).

Step 4: Determining the Border Approximation Area (BAA) and BAA matrix. For each criterion, BAA is calculated as follows:

$$g_j = (\prod_{i=1}^n \tilde{h}_{ij})^{1/n} \quad \dots (9)$$

After determining the value of g_j for each criterion, the BAA matrix (\tilde{G}) can be constructed in a form of $m \times 1$ (m represents the total number of criteria) as follows:

$$\tilde{G} = [g_1 \quad g_j \quad \dots \quad g_m] \quad \dots (10)$$

Step 5: Determining the distance of the alternatives from BAA, (\tilde{t}_{ij}), as follows:

$$\tilde{T} = \tilde{R} - \tilde{G} = \begin{bmatrix} \tilde{r}_{11} & \tilde{r}_{1j} & \tilde{r}_{1m} \\ \vdots & \vdots & \vdots \\ \tilde{r}_{n1} & \tilde{r}_{nj} & \tilde{r}_{nm} \end{bmatrix} - \begin{bmatrix} g_1 & g_j & g_m \\ \vdots & \vdots & \vdots \\ g_1 & g_j & g_m \end{bmatrix} = \begin{bmatrix} \tilde{t}_{11} & \tilde{t}_{1j} & \tilde{t}_{1m} \\ \vdots & \vdots & \vdots \\ \tilde{t}_{n1} & \tilde{t}_{nj} & \tilde{t}_{nm} \end{bmatrix} \quad \dots (11)$$

Alternative B_i eht no detacol eb dluoc BAA (i.e. \tilde{G}), Upper Approximation Area (\tilde{G}^+), or Lower Approximation Area (\tilde{G}^-); So $B_i \in \{\tilde{G} \cup \tilde{G}^+ \cup \tilde{G}^-\}$. \tilde{G}^+ is the area in which the ideal alternative (B^+) is located while \tilde{G}^- is the area in which the anti-ideal alternative (B^-) is located. The location of Alternative B_i is determined as follows:

$$B_i \in \begin{cases} \tilde{G}^+ & \text{if } \tilde{t}_{ij} > 0 \\ \tilde{G} & \text{if } \tilde{t}_{ij} = 0 \\ \tilde{G}^- & \text{if } \tilde{t}_{ij} < 0 \end{cases} \quad \dots (12)$$

The best alternative is selected based on the number of criteria that belong to the \tilde{G}^+ , that is, it is Imperative for the winner alternative to have as many criteria located within \tilde{G}^+ as possible. Figure 1 illustrates the upper (\tilde{G}^+), lower (\tilde{G}^-), and border (\tilde{G}) approximation area.

Step 6: Ranking the alternatives as follows:

$$Z_i = \sum_{j=1}^m \tilde{t}_{ij}, \quad i = 1, 2, \dots, n; \quad j = 1, 2, \dots, m. \quad \dots (13)$$

Where Z_i represents the value through which the ranking of alternative i is identified.

Results and Discussion

The eight pillars of TPM were employed in order to formulate the proposed MABAC model. Additionally, according to the corresponding literature of TPM, six criteria were identified in the proposed model: productivity, quality, costs, delivery, safety, morale³. These criteria represent the base upon which TPM pillars have been evaluated. Although these criteria have always been involved with respect to manufacturing sectors¹, the attempt herein was to adapt these criteria for the purpose of measuring and evaluating maintenance maturity level in one of the biggest public service institutions in the Middle East, North Africa, and Turkey (MENAT) region. A group of experts was carefully selected from different divisions that represent the maintenance and operational affairs within the vice presidency for projects in the investigated institution. Experts' opinions were collected in order to feed the initial decision matrix using linguistic terms. The linguistic terms of Very High (VH), High (H), Fair (F), Weak (W), and Very Weak (VW) were translated into five triangular fuzzy numbers: (4.5, 5, 5), (3.5, 4, 4.5), (2.5, 3, 3.5), (1.5, 2, 2.5), and (1, 1, 1), respectively. The results of all mathematical computations of the MABAC's steps are shown in Fig. 1. As TPM3 (Planned Maintenance) represents relatively the best practice and attains the highest score among all TPMs ($B_3 = 0.312$), it can be utilized as a benchmark. Utilizing TPM3 as a benchmark implies considering it as a reference point with which all other TPMs can be evaluated. By normalizing the final score (Z_i) of each TPM, benchmarking scores can be extracted as shown in Table 1.

Conclusions

Maintenance issues in the public services sector are in need to be investigated using MCDM-based

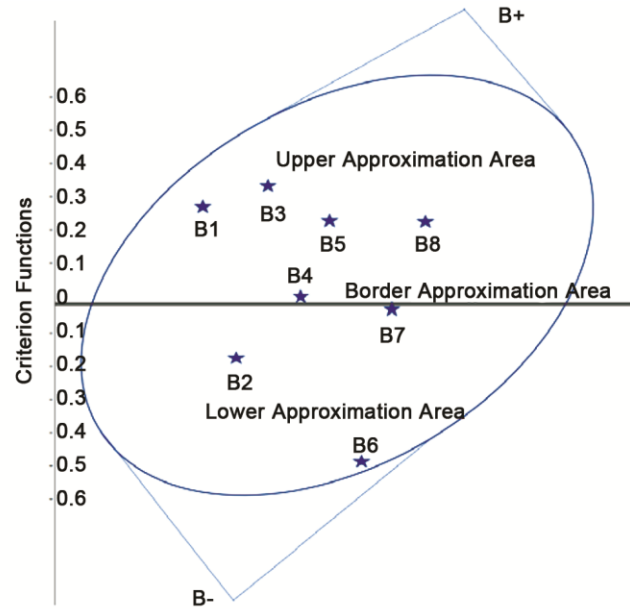


Fig. 1 — TPM Pillars and the corresponding upper (\tilde{G}^+), lower (\tilde{G}^-), and border (\tilde{G}) approximation area

Table 1 — Benchmarking scores

TPM Pillars	Final Score (Z_i)	Benchmarking Scores*
TPM 1 (Autonomous maintenance)	0.260	83%
TPM 2 (Focused improvement)	-0.188	-60%
TPM 3 (Planned Maintenance)	0.312	100%
TPM4 (Quality Maintenance)	0.061	19%
TPM5 (Education and Training)	0.227	73%
TPM6 (Safety, health and environment)	-0.517	-166%
TPM7 (Office TPM)	-0.025	-8%
TPM8 (Development management)	0.227	73%
Maximum Z_i	0.312	—

Benchmarking Score (or the Normalized final score) of TPM1, for example, = (Final Score (Z_i) for TPM1 / Maximum Z_i)*100= (0.260/0.312)*100 = 83

research works and studies, which have not been attempted previously in the literature of MEM. This paper has introduced a MABAC method as a tool for screening, measuring, and evaluating TPM performance in such a sector. The results of the proposed model indicate that the investigated institution is generally not matured enough to be up to the desired level of TPM performance. It is suggested for future MCDM studies to investigate the TPM pillars implementation process in terms of identifying which TPM pillars are to be implemented in initial phases (Drivers), which TPM pillars that are dependents, and which TPM pillars are in between (Linkages). The technique of Interpretive Structural Modelling (ISM) is the most suitable

MCDM tools in order to conduct such an investigation. Another suggestion for future attempts is to measure the efficiency scores for each TPM pillar using the technique of Data Envelopment Analysis (DEA). Input and output measures for such a DEA model can be extracted from the literature, or even from the commonly practiced criteria for TPM as discussed in this research.

Acknowledgments

The author would like to thank King Abdulaziz University (KAU), Jeddah, Saudi Arabia, for providing therequired support in order to conduct and publish this paper.

References

- 1 Jain A, Bhatti R & Singh H, Total productive maintenance (TPM) implementation practice: a literature review and directions, *Int J Lean Six Sigma*, **5** (2014) 293–323.
- 2 Robbins T, *Fierce invalids home from hot climates*, (Bantam) 2001, 1–464.
- 3 Ahuja I P S & Khamba J S, Total productive maintenance: literature review and directions, *Int J Qual Reliab Manag*, **25** (2008) 709–756.
- 4 Nakamura T, *History of TPM and JIPM: The TPM Awards From the Japan Institute of Plant Maintenance (JIPM)*, in Baroncelli C & Ballerio N, *WCOM* (Springer, Cham) 2016, 169–179.
- 5 Bhadury B, Management of productivity through TPM, *Prod*, **4** (2000) 240–251.
- 6 Jain A, Bhatti R, Sharma S K & Jain R K, *Total productive maintenance (TPM) is an effective tool for minimization of downtime of machine, production losses and scrap, in context of Indian industries*, in ICETET (Teerthankar Mahaveer University, Moradabad) 6–7 April, 2012.
- 7 Jain A, Bhatti R & Singh H, *Implementation of autonomous maintenance for the improvement of OEE of machines in SMEs – in context of Indian enterprises*, in Int Conf on STME (Technological University, Delhi) 25–26 October, 2013.
- 8 Nakajima S, *Introduction to TPM: total productive maintenance (Translation)*, (Productivity Press, Inc.) 1988, 1–129.
- 9 Pomorski T R, *Total productive maintenance (TPM) concepts and literature review*, (Brooks Automation) 2004, 1–110.
- 10 Patra N K, Tripathy J K & Choudhary B K, Implementing the office total productive maintenance (“Office TPM”) program: a library case study, *Libr rev*, **54** (2005) 415–424.
- 11 Shinde D D & Prasad R, Application of AHP for ranking of total productive maintenance pillars, *Wirel Pers Commun*, **100** (2018) 449–462.
- 12 Pamučar D & Ćirović G, The selection of transport and handling resources in logistics centers using Multi-Attributive Border Approximation area Comparison (MABAC), *Expert Syst Appl*, **42** (2015) 3016–3028.
- 13 Peng X, Dai J & Yuan H, Interval-valued fuzzy soft decision making methods based on MABAC, similarity measure and EDAS, *Fundam Inform*, **152** (2017) 373–396.
- 14 Debnath A, Roy J, Kar S, Zavadskas E & Antucheviciene J, A hybrid MCDM approach for strategic project portfolio selection of agro by-products, *Sustainability*, **9** (2017) 1302–1334.
- 15 Chatterjee K, Zavadskas E, Tamošaitienė J, Adhikary K & Kar S, A hybrid MCDM technique for risk management in construction projects, *Symmetry*, **10** (2018) 46–73.