

**STUDY OF NONLINEAR STATIC PUSHOVER ANALYSES
DUE TO LATERAL LOAD PATTERNS**

Final Project

By:

ROSALIA WIDYANINGSIH

Student Number: 06 13 12590



ATMA JAYA YOGYAKARTA UNIVERSITY

Faculty of Engineering

Department of Civil Engineering

International S1 Program

July 2012

APPROVAL

Final Project

**STUDY OF NONLINEAR STATIC PUSHOVER ANALYSES
DUE TO LATERAL LOAD PATTERNS**

By:

ROSALIA WIDYANINGSIH

Student Number: 06 13 12590

has been approved

Yogyakarta, July 27, 2012

Advisor



Dr. Ir. A.M. Ade Lisantono, M.Eng.

Department of Civil Engineering

Head



J. Januar Sudjati, S.T., M.T.

APPROVAL

Final Project

**STUDY OF NONLINEAR STATIC PUSHOVER ANALYSES
DUE TO LATERAL LOAD PATTERNS**

By:

ROSALIA WIDYANINGSIH

Student Number: 06 13 12590


Has been examined and approved by the examination committee

Sign Date


Chairperson Dr. Ir. A.M. Ade Lisantono, M.Eng


..... 27/07 2012

Member Prof. Ir. Yoyong Arfiadi, M.Eng., Ph.D.


..... 26/07 2012

Member Ir. Pranowo Widagdo, M.T.


..... 26/07 2012

PREFACE

First and foremost, the author would like to thank God for His blessing so that the author could prepare and finish the final project report. This report was arranged to finish the S1 degree at Faculty of Engineering, Department of Civil Engineering, Atma Jaya Yogyakarta University.

The author would like to say thank you for:

1. Dr. Ir. A.M. Ade Lisantono, M.Eng., as Dean of Engineering Faculty of Atma Jaya Yogyakarta University and as final project advisor
2. J. Januar Sudjati, S.T., M.T., as Head of Civil Engineering Department of Atma Jaya Yogyakarta University
3. Ir. Y. Lulie, M.T., as Coordinator of International Civil Engineering Program of Atma Jaya Yogyakarta University
4. My parents and my sister, Monica, who always give support and motivation, and never stop praying for me
5. Marcelinus Anton Krismiono, thank you for the day by day support and care
6. All of international class friends
7. Ms Anas, Mas Wiko, Bu Etty and all lecturers and friendly staff
8. All people that I could not mention one by one, thank you for the support and prayer.

The author realizes that there are still limitations and flaws in this final project report. However the author hopes that this final project report might be useful for the readers and the author herself.

Yogyakarta, July 2012

Rosalia Widyaningsih




CONTENTS

| | |
|---|------|
| COVER | i |
| LEGALIZATION SHEET | ii |
| PREFACE | iv |
| CONTENTS | vi |
| FIGURE CONTENTS | ix |
| TABLE CONTENTS | xii |
| ABSTRACT | xiii |
| CHAPTER I. INTRODUCTION | 1 |
| 1.1 Background | 1 |
| 1.2 Problem Statement | 2 |
| 1.3 Problem Limitation | 2 |
| 1.4 Objectives | 4 |
| 1.5 Methodology | 4 |
| CHAPTER II. LITERATURE REVIEW | 5 |
| 2.1 Basic Design Theory | 6 |
| 2.1.1 Loading Analysis | 6 |
| 2.1.2 Seismic Design | 7 |
| 2.1.3 Beam Design | 8 |
| 2.1.3.1 The design of the flexure reinforcement | 8 |
| 2.1.3.2 The design of the shear reinforcement | 10 |
| 2.1.3.3 The design of the torsion reinforcement | 11 |
| 2.1.3.4 The design of SMRF | 11 |
| 2.1.4 Column Design | 12 |
| 2.1.4.1 The design of flexure reinforcement | 12 |
| 2.1.4.2 The design of shear reinforcement | 13 |

| | |
|--|-----------|
| 2.1.4.3 The design of SMRF | 14 |
| 2.2 Building Performance Level | 15 |
| 2.3 Nonlinear Static Pushover Analysis | 16 |
| 2.4 Target Displacement and Lateral Load Pattern | 19 |
| CHAPTER III. SEISMIC DESIGN | 22 |
| 3.1 T_{Rayleigh} analysis | 22 |
| 3.2 Service Limit (Δ_s) and Ultimate Limit (Δ_m) | 25 |
| CHAPTER IV. STRUCTURAL ELEMENT DESIGN | 27 |
| 4.1 Design of the Beam | 27 |
| 4.1.1 Beam 600x800 | 27 |
| 4.1.1.1 Flexure Reinforcement | 27 |
| 4.1.1.2 Nominal Flexure Moment Capacity | 43 |
| 4.1.1.3 Shear Reinforcement | 49 |
| 4.1.1.4 Torsion Reinforcement | 56 |
| 4.1.1.4.1 Shear and Torsion Combination | 56 |
| 4.1.1.4.2 Additional Longitudinal reinforcement | 60 |
| 4.1.2 Beam 400x700 (secondary beam) | 64 |
| 4.1.2.1 Flexure Reinforcement | 64 |
| 4.1.2.2 Shear Reinforcement | 79 |
| 4.1.2.3 Torsion reinforcement | 80 |
| 4.2 Design of Column | 81 |
| 4.2.1 Strong Column Weak Beam Checking | 83 |
| 4.2.1.1 Earthquake on X direction | 83 |
| 4.2.1.2 Earthquake on Y direction | 89 |
| 4.2.2 Transversal Reinforcement | 90 |
| 4.2.3 Column Shear Reinforcement | 91 |
| 4.2.4 Beam Column Connection | 94 |

| | |
|---|------------|
| CHAPTER V. NONLINEAR STATIC PUSHOVER ANALYSIS SUBJECTED TO LATERAL LOAD PATTERN..... | 97 |
| 5.1 Nonlinear Static Pushover Analysis Subjected to Lateral Load Pattern I..... | 99 |
| 5.2 Nonlinear Static Pushover Analysis Subjected to Lateral Load Pattern II ... | 119 |
| 5.3 Discussion of the Analysis Result..... | 131 |
| 5.3.1 Structural performance..... | 131 |
| 5.3.2 Plastic Hinge Mechanism..... | 131 |
| CHAPTER VI. CONCLUSION..... | 133 |
| REFERENCES..... | 135 |

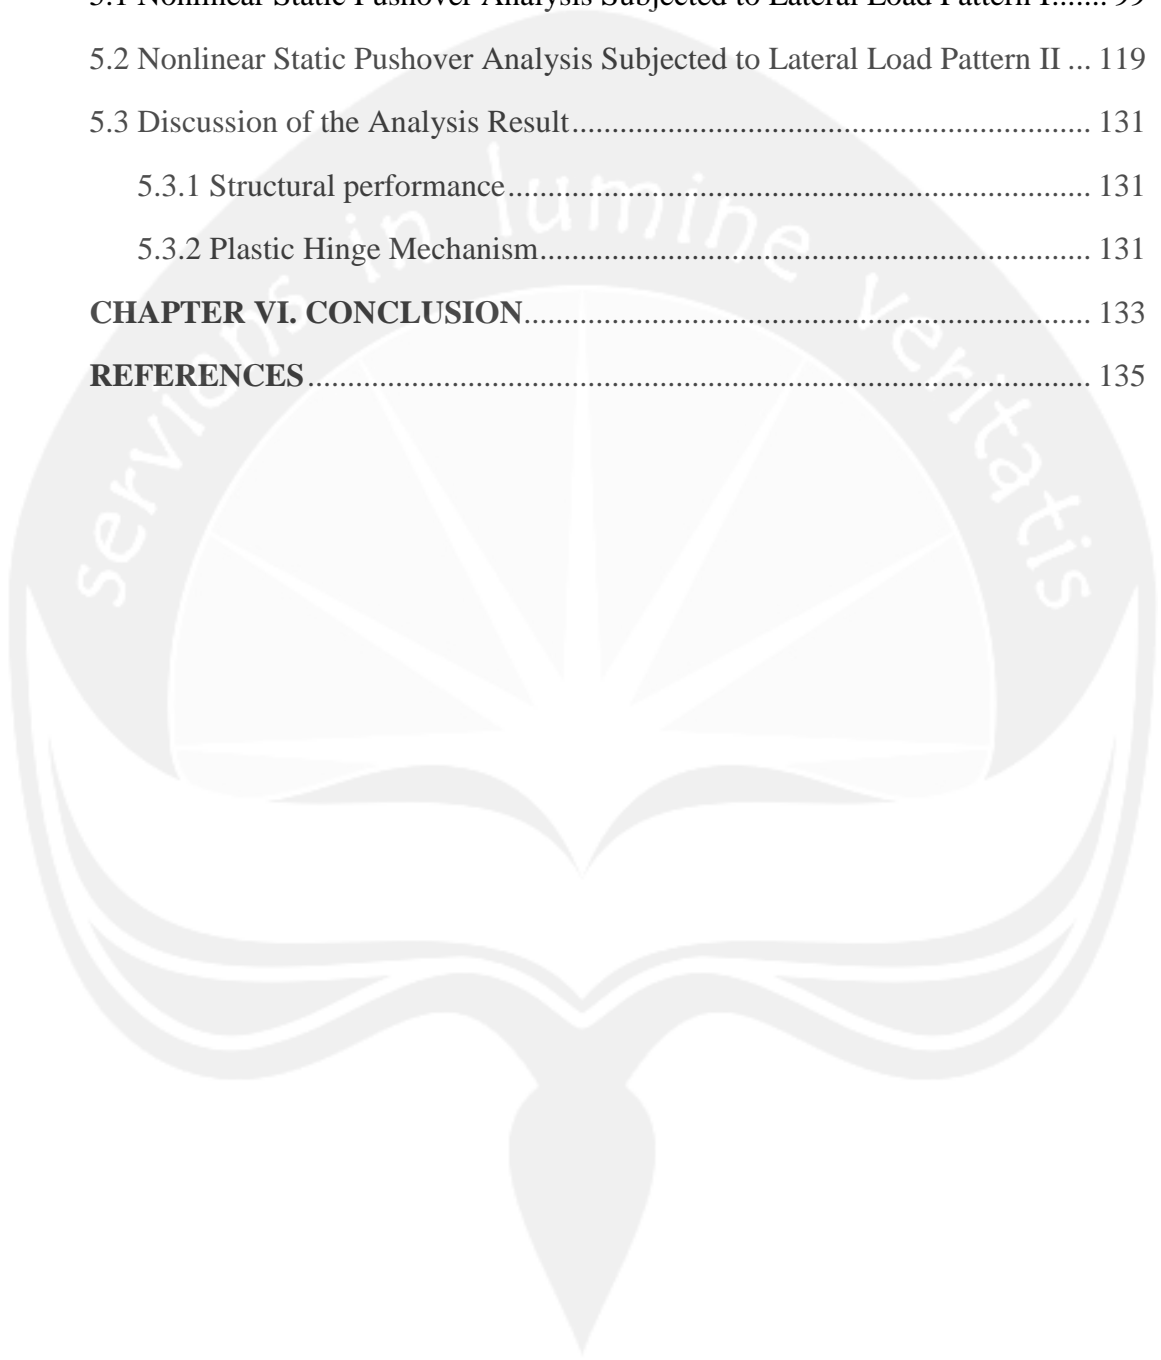

FIGURES CONTENTS

| | |
|---|----|
| Figure 1.1 Plan View | 2 |
| Figure 1.2 Elevation View | 3 |
| Figure 2.1 Diagram of Stress in Beam | 8 |
| Figure 2.2 Columns with Bars at Four Faces | 12 |
| Figure 2.3 Force-Deformation Curve | 16 |
| Figure 2.4 Demand vs Capacity Curve | 18 |
| Figure 4.1 Beam section and stress-strain diagram..... | 31 |
| Figure 4.2 Reinforcement of B600x800 at supports | 38 |
| Figure 4.3 Reinforcement of B600x800 at midspan | 42 |
| Figure 4.4 Cross section of the beam | 43 |
| Figure 4.5 Cross section of the beam | 47 |
| Figure 4.6 Tributary Area of Beam 20 story 2..... | 49 |
| Figure 4.7 Reinforcement of the beam..... | 54 |
| Figure 4.8 Shear force design | 55 |
| Figure 4.9 T-beam section..... | 56 |
| Figure 4.10 Beam section..... | 57 |
| Figure 4.11 Additional longitudinal reinforcement at support..... | 61 |
| Figure 4.12 Additional longitudinal reinforcement at midspan | 63 |
| Figure 4.13 Reinforcement of B400x700 at left support | 70 |
| Figure 4.14 Reinforcement of B400x700 at midspan | 74 |
| Figure 4.15 Reinforcement of the beam..... | 80 |
| Figure 4.16 Earthquake direction of the checked column..... | 83 |
| Figure 4.17 Beam-column reaction due to right direction earthquake..... | 88 |
| Figure 4.18 Beam-column reaction due to left direction earthquake..... | 88 |
| Figure 4.19 Column reinforcement design section | 96 |

| | |
|--|-----|
| Figure 5.1 Material properties data | 100 |
| Figure 5.2 Frame section data | 101 |
| Figure 5.3 Model | 102 |
| Figure 5.4 Static Load Case | 103 |
| Figure 5.5 EX at story 6 | 104 |
| Figure 5.6 EY at story 6 | 104 |
| Figure 5.7 EX at story 1-5 | 105 |
| Figure 5.8 EY at story 1-5 | 105 |
| Figure 5.9 Frame hinges of beam | 106 |
| Figure 5.10 Frame hinges of column | 107 |
| Figure 5.11 Pushover case 1 | 107 |
| Figure 5.12 Pushover case 2 | 108 |
| Figure 5.13 Pushover curve case PUSH 1 due to pattern I EX | 109 |
| Figure 5.14 Pushover curve case PUSH 2 due to pattern I EY | 110 |
| Figure 5.15 Capacity versus demand curve of PUSH 1 pattern I EX | 112 |
| Figure 5.16 Capacity versus demand curve of PUSH 2 pattern I EY | 113 |
| Figure 5.17 Yielding plastic hinges due to lateral load pattern I EX | 114 |
| Figure 5.18 IO plastic hinges due to lateral load pattern I EX | 115 |
| Figure 5.19 LS plastic hinges due to lateral load pattern I EX | 115 |
| Figure 5.20 Yielding plastic hinges due to lateral load pattern I EY | 117 |
| Figure 5.21 IO plastic hinges due to lateral load pattern I EY | 117 |
| Figure 5.22 LS plastic hinges due to lateral load pattern I EY | 117 |
| Figure 5.23 Static Load Case | 120 |
| Figure 5.24 Pushover curve case PUSH 1 pattern II EX | 122 |
| Figure 5.25 Pushover curve case PUSH 2 pattern II EY | 123 |
| Figure 5.26 Capacity versus demand curve of PUSH 1 pattern II EX | 124 |
| Figure 5.27 Capacity versus demand curve of PUSH 2 pattern II EY | 125 |

| | |
|--|-----|
| Figure 5.28 Yielding plastic hinges due to lateral load pattern II EX..... | 126 |
| Figure 5.29 IO plastic hinges due to lateral load pattern II EX | 127 |
| Figure 5.30 LS plastic hinges due to lateral load pattern II EX..... | 127 |
| Figure 5.31 Yielding plastic hinges due to lateral load pattern II EY..... | 129 |
| Figure 5.32 IO plastic hinges due to lateral load pattern II EY | 129 |
| Figure 5.33 LS plastic hinges due to lateral load pattern II EY..... | 129 |

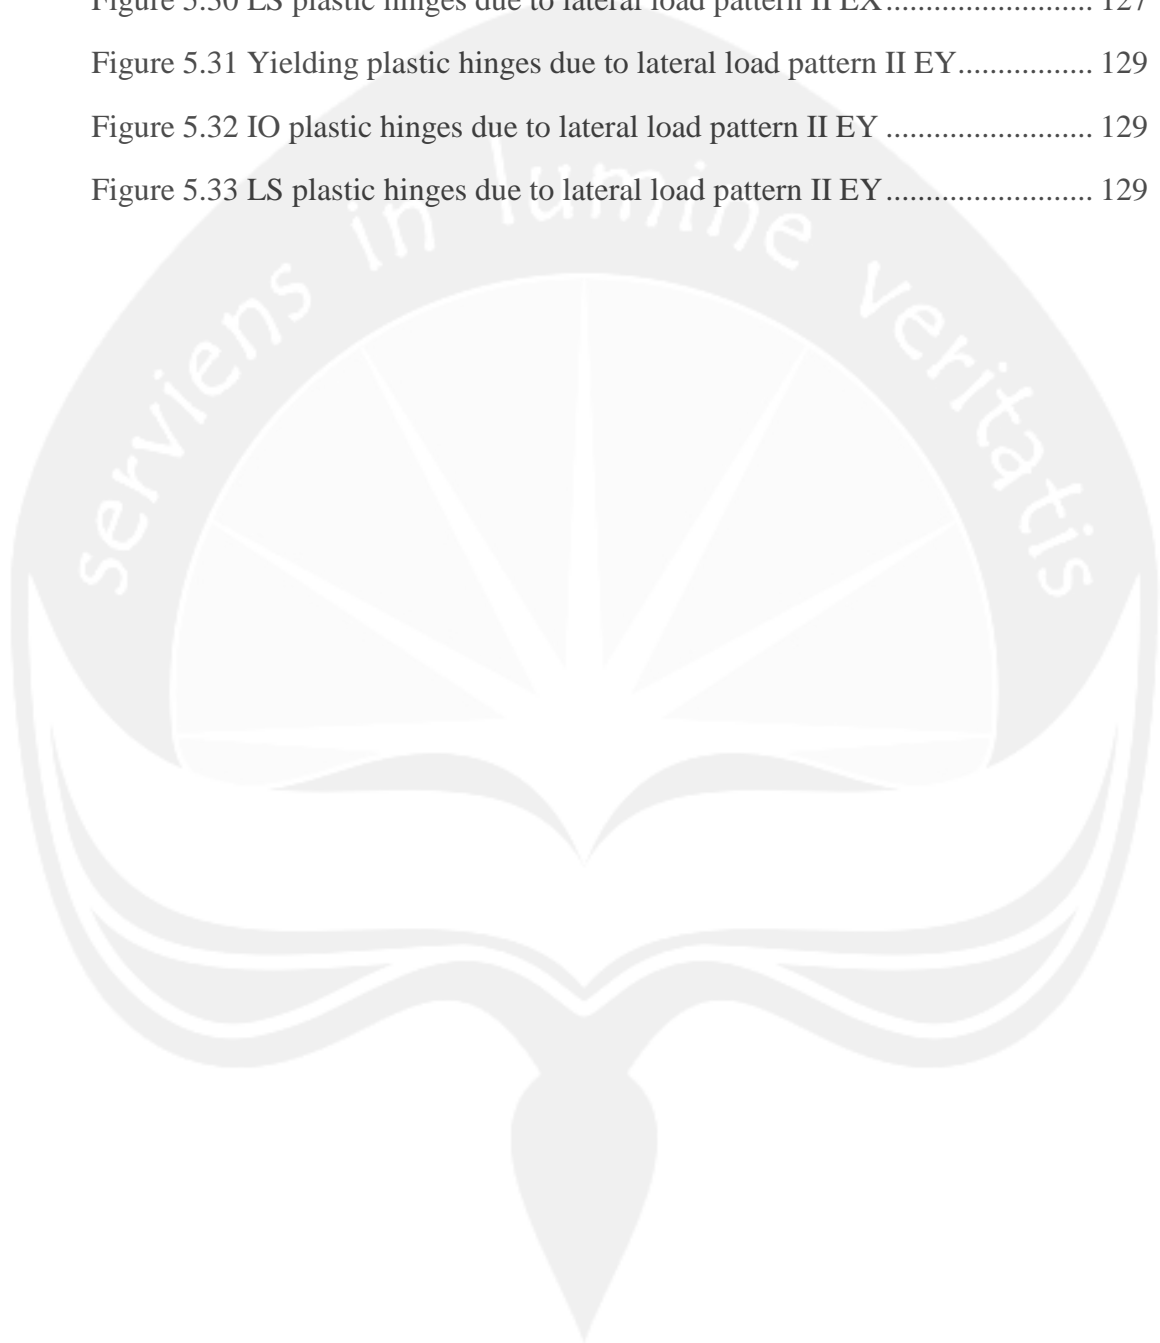


TABLE CONTENTS

| | |
|--|-----|
| Table 3.1 T_{Rayleigh} analysis using uniform distribution..... | 23 |
| Table 3.2 T_{Rayleigh} analysis using equivalent lateral force..... | 24 |
| Table 3.3 Service limit and ultimate limit analysis..... | 26 |
| Table 4.1 Moment envelope combo 19 at B20 story 2..... | 27 |
| Table 4.2 Surface Acceleration (A_0)..... | 51 |
| Table 4.3 ψ value..... | 51 |
| Table 4.4 Moment Envelope combo 19 at B18 story 1..... | 64 |
| Table 5.1 Longitudinal reinforcement of the beam B600x800..... | 97 |
| Table 5.2 Shear reinforcement of the beam B600x800..... | 97 |
| Table 5.3 Longitudinal reinforcement of the beam B400x700..... | 98 |
| Table 5.4 Shear reinforcement of the beam B400x700..... | 98 |
| Table 5.5 Longitudinal reinforcement of the column C850x850..... | 98 |
| Table 5.6 Shear reinforcement of column C850x850..... | 98 |
| Table 5.7 Table of uniform distribution lateral load..... | 99 |
| Table 5.8 Plastic hinge location and type..... | 106 |
| Table 5.9 Plastic hinge distribution of pattern I due to EX..... | 116 |
| Table 5.10 Plastic hinge distribution of pattern I due to EY..... | 118 |
| Table 5.11 Table of equivalent lateral force..... | 119 |
| Table 5.12 Plastic hinge distribution of pattern II due to EX..... | 128 |
| Table 5.13 Plastic hinge distribution of pattern II due to EY..... | 130 |

ABSTRACT

STUDY OF NONLINEAR STATIC PUSHOVER ANALYSES DUE TO LATERAL LOAD PATTERNS, Rosalia Widyaningsih, Student Number 061312590, 2012, Structure, International Civil Engineering, Department of Civil Engineering, Atma Jaya Yogyakarta University.

Nonlinear Static Pushover Analysis is one of several methods for seismic performance evaluation of structures. It can evaluate the strength of the structure until its performance level. It can also provide reasonable estimates of the location of the plastic hinge of the members. The performance point of structure in Nonlinear Static Pushover Analysis depends on the lateral load pattern applied on the structure. In this study, a 6 story regular building is subjected to two lateral load patterns recommended by FEMA 273. The first lateral load pattern is uniform distribution and the second is equivalent lateral force distribution. The result of the analysis shows that both applied lateral load patterns give the performance of building located between IO-LS level. For both applied lateral load patterns show the similar plastic hinge order, starts from beam end and continues to beam end of the higher story. For both lateral load patterns, the plastic hinge limited to D-E level. In general, the two lateral load patterns give the close result. The structure is safe for both applied lateral load patterns. The target displacement or maximum displacement of the building is 0.08 m. The maximum base shear of the building due to EX is 6432.0498 kN at 0.0629 m. The maximum base shear of the building due to EY is 8252.8213 kN at 0.1874 m.

Keywords: Nonlinear Static Pushover Analysis, uniform distribution, equivalent lateral force distribution, performance point, target displacement