28

29

30

31 32

33

34

35

36

37

39

40

41

42

43

44

45

46

47

48

49

50

51

52

53

54

55

56

57

58

7

A new method for the determination of low-level actinium-227 in geological samples

- 5 Henrieta Dulaiova · Kenneth W. W. Sims ·
- 6 Matthew A. Charette · Julie Prytulak ·
- Jerzy S. Blusztajn
- Received: 31 July 2012
- © Akadémiai Kiadó, Budapest, Hungary 2012

10 **Abstract** We developed a new method for the determi-

- nation of ²²⁷Ac in geological samples. The method 11
- uses extraction chromatographic techniques and alpha-12
- 13 spectrometry and is applicable for a range of natural matri-
- 14 ces. Here we report on the procedure and results of the
- 15 analysis of water (fresh and seawater) and rock samples.
- 16 Water samples were acidified and rock samples underwent
- 17 total dissolution via acid leaching. A DGA (N,N,N',N'-tetra-
- 18 *n*-octyldiglycolamide) extraction chromatographic column
- 19 was used for the separation of actinium. The actinium frac-
- 20
- tion was prepared for alpha spectrometric measurement via
- 21 cerium fluoride micro-precipitation. Recoveries of actinium
- 22 in water samples were $80 \pm 8 \%$ (number of analyses
- 23 n=14) and in rock samples $70\pm12~\%~(n=30)$. The
- minimum detectable activities (MDA) were 0.017-24
- 0.5 Bq kg⁻¹ for both matrices. Rock sample ²²⁷Ac activities 25
- ranged from 0.17 to 8.3 Bq kg⁻¹ and water sample activities 26
- A1
- Department of Geology and Geophysics, University of Hawaii, A2
- A3 1680 East-West Road, POST 707, Honolulu, HI 96822, USA
 - e-mail: hdulaiov@hawaii.edu
- A5 K. W. W. Sims
- A6 Department of Geology and Geophysics, University
- of Wyoming, Laramie, WY 82071, USA A7
- A8 M. A. Charette
- A9 Department of Marine Chemistry and Geochemistry, Woods
- Hole Oceanographic Institution, Woods Hole, MA 02543, USA A10
- A11
- A12 Department of Earth Science and Engineering, Imperial College,
- A13 London SW7 2AZ, UK
- A14 J. S. Blusztain
- Department of Geology and Geophysics, Woods Hole A15
- A16 Oceanographic Institution, Woods Hole, MA 02543, USA

ranged from below MDA values to 14 Bq kg⁻¹of ²²⁷Ac. From the analysis of several standard rock and water samples with the method we found very good agreement between our results and certified values.

Keywords Actinium-227 · Extraction chromatography · Water · Rock · Alpha-spectrometry

Introduction

Actinium-227 is a member of the naturally occurring ²³⁵U decay series (Fig. 1). It is a beta-emitter with a half-life of $T_{1/2} = 21.77$ years. The concentration of ²²⁷Ac in natural samples is extremely low, in seawater the reported activities range from 0.83 to 90 mBq m^{-3} [1], in some basalts, assuming equilibrium with ²³¹Pa, the expected range can be as low as <0.1-5 Bq kg⁻¹ [2]. Actinium-227 is used as an oceanographic tracer for studies of deep-ocean mixing and upwelling [1, 3], and it has the potential to be used as a tracer for geochemical characterization of rocks and other geological material. Some already existing techniques for ²²⁷Ac analysis include separation on ion exchange columns followed by measurement of its daughters ²²⁷Th and ²²³Ra by alpha-spectrometry [4, 5]. The disadvantage of the ion exchange columns is that chemical recoveries tend to be lower ($\sim 50-60$ %) and may not be well suited for actinium separation from complex matrices. Another popular method uses a radium delayed coincidence counting (RaDeCC) system [6]. Actinium-227 in water samples is quantitatively sorbed on a MnO₂-coated acrylic fiber and allowed to sit for 90 days for ²²³Ra ingrowth. The fiber is then measured by the RaDeCC system in which the ²¹⁹Rn-²¹⁵Po pair is counted. This technique works well for seawater analysis for example [6], but is impractical for rock samples.





89

90

91

92

93

94

95

96

97

98

99

100

101

102

103

104

105

106

107

108

109

110

111

112

113

114

115

116

59

60

61

62

63

64

65

66

67

68

69

70

71

72

73

74

75

76

77

78

79

80

81

82

83

84

85

86

We adapted a single-column extraction chromatographic technique (DGA column), which simplifies the separation step, reduces analysis time and the amount of reagents needed. The use of this technique assures clean separation of actinium from other elements and leads to close to quantitative chemical recoveries from diverse geological matrices. Here we report on its use for ²²⁷Ac separation from freshwater, seawater, and rock samples.

Experimental


Experimental design

A commercially available extraction chromatographic resin containing N,N,N',N'-tetra-n-octyldiglycolamide sorbed on 50-100 μm particle size Amberchrom^R CG-71 (DGA column manufactured by Eichrom Technologies, Inc [7]) was chosen for separation of actinium from other actinides and the sample matrix. This resin has high adsorption capacity for rare earth elements and actinides (0.086 mmol/mL of Eu) and various concentrations of acidic solutions allow a sequential elution of individual elements. The separation sequence for Ac was selected based on distribution coefficients of actinides and common ions on DGA derived by Horwitz et al. [7] using batch experiments for 1-h contact time of solutes with DGA at 22 °C. Figure 2 illustrates k' for Ac, Th, Fe and alkaline earth cations in each separation and rinsing step on the column. K' is defined as the volume distribution ratio of the element between the stationary extractant phase and the mobile aqueous phase times the ratio of the volumes of the stationary and mobile phases in a slurry packed column. We used 4 M HCl as load solution for which the k' of Ac is 20, of Th, U and Am is >1,000, of Ba, Sr, Ca and Ra is 1-5, and of Fe is 1,000. Based on these k' values, actinides and iron are well retained on the column with a 4 M HCl load solution while radium and other alkaline earth elements have no affinity and pass through the column without retention. We used 3 M HNO₃ to rinse any leftover alkaline earth elements and iron from the column. In 3 M HNO_3 the k' of iron drops to <2, while all actinides including Ac have k' > 1,000. In the next step we eluted actinium with 2 M HCl, which is efficient for Ac but leaves Th and other actinides retained on the DGA column. If needed for further analysis, thorium (²²⁸Th for ²²⁸Ac or ²²⁷Th analysis) can be stripped from the column using dilute nitric acid [7]. We tested the procedure using an aliquot of NIST certified ²²⁹Th/²²⁵Ac standard solution (Fig. 1), which offered an ideal opportunity to demonstrate good separation between actinium and thorium on the DGA column. Consistent with the findings of Horwitz et al. [7] we observed that the presence of iron in the load solution positively affects the actinium uptake on DGA due to the salting out effect. Therefore, each load solution was spiked with 1 mg of iron as FeCl₃.

Chemical procedure

Rock samples were crushed to <1 mm and then dissolved completely by a series of digestions using HF and HNO₃, followed by $\rm HNO_3 + H_3BO_3$ and $\rm HClO_4$ to decompose fluorides [8]. In the final stage they were dissolved and stored in 4 M or higher $\rm HCl + sat. \ H_3BO_3$ until analysis. Freshwater and seawater samples were acidified to pH 1.

Fig. 1 Decay schemes of a ²³⁵U including ²²⁷Ac and its daughters ²²⁷Th–²²³Ra, and **b** the ²²⁹Th–²²⁵Ac pair used as a yield tracer. The *vertical arrows* indicate alpha decays and the *tilted arrows* represent transformations via beta decay. Half-lives are indicated below each isotope

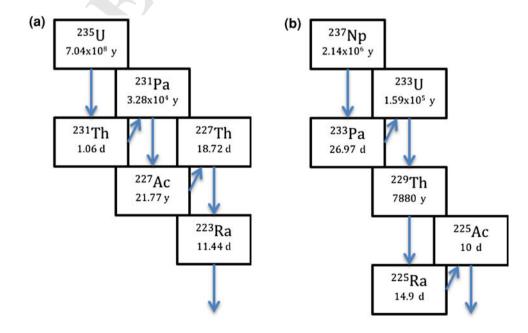







123

124

125

126

127

128

129

130

131

132

133

134

135

136

137

138

139

140

141

142

143 144

145

146

147

148

149

150

151

152 153

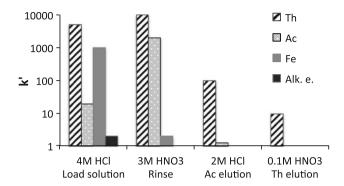


Fig. 2 Resin capacity factor k' for Ac, Th, Fe and alkaline earth cations in each separation and rinsing step on the DGA column derived using batch experiments for 1-hour contact time of solutes with DGA at 22 °C [7]. The higher the k' the higher the fraction of the element in the stationary extractant phase

All samples were spiked using a NIST certified ²²⁹Th/²²⁵Ac tracer.

While it is possible for water samples to be evaporated, dissolved in 4 M HCl and loaded to the column directly, the high amount of salts in dissolved rock samples required a pre-concentration step. We used a PbSO₄ co-precipitation technique after Martin et al. [4]. All sample volumes were reduced to 100 mL. We added 1 mL of 98 % H₂SO₄ to each sample after which 2 g of K₂SO₄ were added and dissolved. While stirring, 1 mL of 0.24 M Pb(NO₃)₂ solution was added to the sample drop-wise. The sample was then heated and the precipitation was allowed to settle. The supernatant was decanted and the precipitate was washed using 20 mL of $0.1 \text{ M K}_2\text{SO}_4 + 0.2 \text{ M H}_2\text{SO}_4$. The precipitate was then easily dissolved in 20 mL of 4 M HCl. Some precipitates required heating and the addition of higher volumes of 4 M HCl; we tested the method with up to 50 mL of load solution for which we still achieved quantitative recoveries. A 1 mg Fe in solution was added to the solution prior to loading on the DGA column. The column was attached to a vacuum box (Eichrom Technologies, Inc.), which was used to achieve flow rates of 1 mL/min. The beaker was rinsed with 2 × 5 mL of 4 M HCl, which was loaded on the column. The DGA was then rinsed using 10 mL of 3 M HNO₃ and the eluate, which contained iron and any leftover alkaline earth elements was discarded. Actinium was eluted using 20 mL 2 M HCl while Th and other actinides were retained on the DGA column.

The Ac fraction was saved and an alpha-source was prepared using CeF₃ micro-precipitation [9]. 100 μg of Ce carrier in solution was added to the Ac fraction, stirred and 2 mL of concentrated HF were added while stirring. The solution rested for 30 min and then the precipitate was filtered using 0.1 µm polypropylene, 25 mm diameter 0.1 µm polypropylene ResolveTM filters (Eichrom Technologies, Inc.). The filters were dried and mounted on steel planchets.

Alpha-spectroscopy

The samples were counted using silicon surface barrier alpha detectors (Ortec, 450 mm) that were calibrated by a NIST certified ²⁴¹Am solution prepared in the same geometry as the samples. The source detector distance was 10 mm and in this geometry the detector efficiencies ranged from 19.3 to 20.9 %. After source preparation the samples were stored for 15-20 min for the ingrowth of the ²²⁵Ac daughters ²²¹Fr $(T_{1/2} = 4.8 \text{ min})$ and ^{217}At (0.3 s). The sample was then counted immediately to obtain the highest count rate due to the 10-day half-life of ²²⁵Ac. From this measurement, counts from the region of ²¹⁷At at 7.06 MeV (Fig. 3a) were used to calculate the chemical recovery of ²²⁵Ac and therefore also ²²⁷Ac. A second measurement was performed after 90 days of sample preparation, which allowed for the decay of ²²⁵Ac and the ingrowth of ²²⁷Th and ²²³Ra from ²²⁷Ac (Fig. 3b). Counts from the energy region of 5.38-6.10 MeV originating from ²²⁷Th and ²²³Ra (99.4 %) were used to calculate ²²⁷Ac. Any leftover ²²⁵Ac still present was subtracted from this region.

154

155

156

157

158

159

160

161

162

163

164

165

166

167

168

169

170

171

172

173

174

175


176

177

178

179

The ²²⁷Ac activity was calculated using the count-rate in the 7.06 MeV peak of ²¹⁷At for yield determination and in the 5.38-6.10 MeV originating from ²²⁷Th and ²²³Ra minus any decay corrected leftover counts from the ²²⁵Ac spike [4]. Actinium-227 at the time of separation A_{227}_{Ac} was then calculated using the branching ratios for ²²⁷Ac of

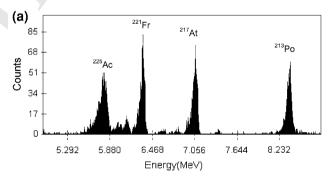

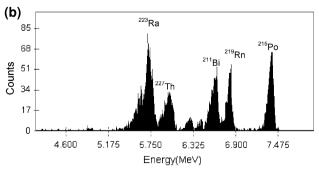


Fig. 3 Alpha-spectrum of the actinium fraction of a seawater sample a counted immediately after source preparation showing peaks of ²²⁵Ac, ²²¹Fr and ²¹⁷At, and **b** the same source counted 90-days after preparation when ²²⁵Ac has mostly decayed and daughters ²²⁷Th and ²²³Ra are almost in equilibrium with ²²⁷Ac



215

216

217

218

219

220

221

222

223

224

225

226

227

228

229

230

231

232

233

234

235

236

237

238

239

240

241

184

185

186

187

188

189

190

191

192

193

194

195

196

197

198

199

200

201

202

203

204

205

206

207

208

209 210

211

212

213

98.2 % by beta-decay to $^{227} Th$ and 1.38 % by alphaparticle emission to $^{223} Fr,$ while 100 % of $^{227} Th$ and 180 181 182

99.4 % of ²²³Ra decay via alpha-particle emission:

$$A_{^{227}\text{Ac}} = \frac{A_{^{227}\text{Th} + ^{223}\text{Ra}}}{0.9862I_{^{227}\text{Th}} + 0.994I_{^{223}\text{Ra}}},$$

where $A_{227\text{Th}+223\text{Ra}}$ is the measured $^{227}\text{Th} + ^{223}\text{Ra}$ activity. and $I_{227\text{Th}}$ and $I_{223\text{Ra}}$ are the calculated ingrowth fractions of ²²⁷Th and ²²³Ra at the time of separation [4].

Minimum detectable activities (MDA) were calculated for a confidence limit of $\alpha = 0.05$, 3-day counting times and one sigma standard deviation of the counts from the ²²⁷Th + ²²³Ra region of background spectra according to the method described by Currie [10].

Results and discussion

We tested the procedure with ²²⁹Th/²²⁵Ac spike in deionized water. As suggested by Horwitz et al. [7], in our test solutions the chemical recovery increased from 70 % (²²⁹Th/²²⁵Ac solution in de-ionized water) to 100 % with the addition of Fe (²²⁹Th/²²⁵Ac in de-ionized water with 50 mg Fe). Increasing Fe concentrations did not have further beneficial effects on the Ac sorption, the chemical recovery dropped to 70 % when we added up to 1 g of iron (Fig. 4). During these test runs we observed good separation of ²²⁹Th from the ²²⁵Ac fraction. One way to check the performance of our chemical separation was to evaluate the alpha-spectra for radium, polonium and thorium. Radium-226 (4.8 MeV), ²²²Rn (5.49 MeV) and ²¹⁸Po (6.00 MeV) counts in the spectrum would be an indication of 226Ra impurity, ²¹⁰Po has a peak at 5.30 MeV and finally ²²⁸Th and its daughters can be detected via the ²¹²Po peak at 8.78 MeV. All our spectra including seawater and rock samples were free of these or only had minor interferences indicating that the extraction chromatography procedure reliably removes any interferences and impurities from the Ac fraction.

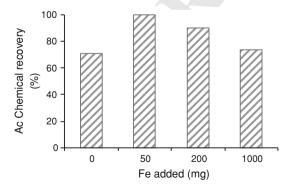


Fig. 4 Actinium recoveries from a ²²⁹Th/²²⁵Ac spiked de-ionized water solution without and with the addition of variable amounts of iron

The analyzed water samples included de-ionized water, seawater and tap water spiked with ²²⁷Ac. The analysis of the de-ionized water sample was considered as blank and resulted in zero net counts in the ²²⁷Th + ²²³Ra region after background correction. Our analysis of a certified ²²⁷Ac standard (AEA Technology supplied by the IAEA [11]) resulted in (333 \pm 16) Bq kg⁻¹ and was in good agreement with the IAEA value of (329 \pm 16) Bg kg⁻¹ [11]. Actinium recoveries of water samples were 80 \pm 8 % (number of analyses n = 14; where the standard deviation of the average of the 14 analyses is 8 %). The average minimum detectable activity for water samples for ~ 4 day counting time was 0.017 Bq kg⁻¹. The sample activities ranged from below MDA values to 14 Bg kg⁻¹of ²²⁷Ac.

The weights of analyzed rock samples were between 0.3 and 5.4 g and we analyzed various basalts and USGS and U-series community rock standards (BCR-2 [12], BHVO-1 [13], Hawaiian basalt (HK) [2], Samoan basalt (SAV) [14]). No certified value for ²²⁷Ac exists for these standards but assuming equilibrium through the decay chain (all basalts were over 100 years old) and a closed system we can compare ²²⁷Ac to ²³¹Pa [2] (Table 1). There is a good agreement for ²²⁷Ac and ²³¹Pa, for all samples the ²²⁷Ac/²³¹Pa ratio is within 5 % of secular equilibrium. For the 24 rock analyses the chemical recoveries were $70 \pm 12 \%$ (n = 24). The lower recoveries were the results of (1) an incomplete PbSO₄ precipitation because some rock samples could not be held dissolved unless kept in high acidity solution, (2) a high iron

Table 1 227 Ac activities in selected standard water and basalt samples (BCR-2 [12], BHVO-1 [13], Hawaiian basalt (HK) [2], Samoan basalt (SAV) [14]) analyzed by DGA-column followed by alphaspectrometry

Standard	DGA Bq/kg	Certified ²²⁷ Ac Bq/kg	²²⁷ Ac _{DGA} / ²²⁷ Ac _{cert}	Chemical recovery (%)
Water AEA technology- IAEA	333 ± 16	329 ± 16	1.01	75
		231 D o*	227 🔥 a	

		²³¹ Pa*	²²⁷ Ac _{DGA} / ²³¹ Pa	
Rocks (basalt	ts)			
BCR-2	0.955 ± 0.083	0.967	0.99	83
BHVO-1	0.299 ± 0.017	0.283	1.05	71
HK-018	0.965 ± 0.009	0.948	1.02	86
HK-019	0.962 ± 0.073	0.966	0.99	91
HK-021	0.559 ± 0.055	0.572	0.98	80
HK-022	0.887 ± 0.080	0.862	1.03	68
SAV B6	0.677 ± 0.067	0.680	1.00	66

All of the basalt rock samples analyzed are older than 100 years and ²³¹Pa and ²²⁷Ac are expected to be in secular radioactive equilibrium * 2 σ uncertainty of ²³¹Pa < 0.8 %





254

255

256

257

258

259

260

261

262

263

264

265

266

267

268

269

270

271

272

273

274

275

276

277

278

279

280

281

282

283

242

243

244

245

246

284

285

286

287

288

289

290

291

292

293

294

295

296

297

298

299

300

301

302

303

304

305

306

307

308 309

310

311

312

313

314 315

330 331 332

337

content (>1 g) remaining in the samples even after the PbSO₄ precipitation negatively affects the Ac sorption on DGA (Figs. 3, 4) the presence of significant amount of lanthanides which negatively affects the co-precipitation of actinium by PbSO₄ [4].

The minimum detectable activities for rock samples averaged 0.05 Bq kg⁻¹ for 3-day counting and MDAs for individual sample measurements were in the range of 0.017-0.5 Bq kg⁻¹. Sample activities ranged from 0.17 to 8.3 Bq kg^{-1} .

Uncertainties were derived from counting statistics of the ²¹⁷At (usually 3 % error) and ²²⁷Th + ²²³Ra (ranged from 3 to 10 %) region peaks and error propagation. Uncertainties of all analysis were <10 %. Overall the DGA separation method performed well, providing actinium fractions without interferences in alpha-spectrometry and resulting in high chemical recoveries. Our results agree well with certified values for water and 231Pa values for rock samples.

Conclusions

The advantages of extraction chromatographic techniques over ion exchange columns in general are a shorter analysis time and less acid waste produced. The method developed here has a high sensitivity due to the low backgrounds on the alpha-detectors and because of the use of the doublepeak of ²²⁷Th and ²²³Ra, which doubles the counts and lowers the counting error [15]. Additional advantage of the DGA method is its possible extension to the analysis of thorium isotopes. Our typical 2 σ errors were 5 % which are much higher than those usually obtained for example by mass spectrometric analysis (ICP-MS, TIMS) of other isotopes, however due to the low abundance of ²²⁷Ac MS methods are currently not sensitive enough for its analysis. For comparison, in units of fg g^{-1} used for MS techniques, our method has a limit of detection of 0.02 fg g⁻¹.

Acknowledgments We would like to acknowledge Phil Horwitz and William Burnett for their advice on the extraction chromatographic techniques. Ken Sims' lab at the Woods Hole Oceanographic Institution performed the rock dissolution procedures and Ken Buesseler (WHOI) provided the counting equipment for the alphaspec analysis. Jan Scholten from the IAEA provided the actinium standard and spiked seawater samples.

References

- 1. Geibert W, Rutgers van der Loeff MM, Hanfland C, Dauelsberg H-J (2002) Actinium-227 as a deep-sea tracer: sources, distribution and applications. Earth Planet Sci Lett 198(1-2):147-165
- 2. Sims KWW, Murrell MT, DePaolo DJ, Baldridge WS, Goldstein SJ, Clague D, Jull M (1999) Porosity of the melting zone and variations in the solid mantle upwelling rate beneath Hawaii: inferences from 238U-230Th-226Ra and 235U-231Pa disequilibria. Geochim Cosmochim Acta 63(23):4119-4138
- 3. Nozaki Y (1984) Excess ²²⁷Ac in deep ocean water. Nature 310:486-488
- 4. Martin P, Hancock GJ, Paulka S, Akber RA (1995) Determination of ²²⁷Ac by α-particle spectrometry. Appl Radiat Isot 46(10):1065-1070
- 5. Geibert W, Vöge I (2008) Progress in the determination of ²²⁷Ac in sea water. Mar Chem 109(3-4):238-249
- 6. Moore WS, Arnold R (1996) Measurement of ²²³Ra and ²²⁴Ra in coastal waters using a delayed coincidence counter. J Geophys Res (Oceans) 101(1):1321-1329
- 7. Horwitz EP, McAlister DR, Bond AH, Barrans RE (2005) Novel extraction chromatographic resins based on tetraalkyldiglycolamides: characterization and potential applications. Solvent Extr Ion Exch 23:219
- 8. Ball LA, Sims KWW, Schwieters J (2008) Measurement of ²³⁴U/²³⁸U and ²³⁰Th/²³²Th in volcanic rocks using the Neptune MC-ICP-MS. J Anal At Spectrom 23:173-180
- 9. Dulaiova H, Kim G, Burnett WC, Horwitz EP (2001) Separation and analysis of Am and Pu from large soil and sediment samples. Radioact Radiochem 12(3):4-15
- Currie LA (1968) Limits for qualitative detection and quantitative determination. Application to radiochemistry. Anal Chem 40(3): 586-593
- 11. Scholten JC, Pham MK, Blinova O, Charette MA, Dulaiova H, Eriksson M (2010) Preparation of Mn-fibers standards for the efficiency calibration of the delayed coincidence counting system (RaDeCC). Mar Chem 121(1-4):206-214
- 12. Prytulak J, Elliott T, Hoffmann DL, Coath CD (2008) Measurement of USGS BCR-2 as a reference material for siliscate rock U-Pa disequilibrium measurements. Geostand Geoanal Res 32(1):55-63
- 13. Pichat S, Sims KWW, Francois R, McManus JF, Brown Leger S, Albarede F (2004) Lower export production during glacial periods in the equatorial Pacific derived from (²³¹Pa/²³⁰Th)_{xs.0} measurements in deep-sea sediments. Paleoceanography 19 PA4023. doi:10.1029/2003PA000994
- 14. Sims KWW, Hart SR, Reagan MK, Blusztajn J, Staudigel H, Sohn RA, Layne GD, Ball LA, Andrews J (2008) $^{238}U^{-230}Th^{-226}Ra^{-210}Pb^{-210}Po,\ ^{232}Th^{-228}Ra,\ and\ ^{235}U^{-231}Pa$ constraints on the ages and petrogenesis of Vailulu'u and Malumalu lavas, Samoa. Geochem Geophys Geosyst 9:Q04003
- 15. Bojanowski R, Holm E, Whitehead NE (1987) Determination of ²²⁷Ac in environmental samples by ion-exchange and alphaspectrometry. J Radioanal Nucl Chem 115(1):23-37