

ISSN(Online): 2320-9801  
ISSN (Print): 2320-9798

# International Journal of Innovative Research in Computer and Communication Engineering

(An ISO 3297: 2007 Certified Organization)

Vol. 1, Issue 7, September 2013

## Delay Time Analysis and Energy Consumption Issues in Short Range Wireless Transaction System

Kamani Krunalkumar C.<sup>1</sup>, Kathiriya Dhaval R.<sup>2</sup>

Assistant Professor, Dept. of Computer Science, Anand Agricultural University, Anand, Gujarat, India<sup>1</sup>

Director (I.T.) & Dean, College of AIT, Agricultural University, Anand, Gujarat, India<sup>2</sup>

**ABSTRACT:** Bluetooth is a promising short range wireless personal area network technology and is on the verge of being ubiquitously deployed over a wide range of devices. The basic unit of a Bluetooth network is a centralized master-slave topology, namely a piconet, which can be easily extended into a multi-hop adhoc network called a scatternet. Scatternets increase Bluetooth's usability multi-folds such that numerous applications may be built over them to unleash the potential of Bluetooth. When more than seven devices to be connected in a Bluetooth scatternet, bridge devices are used to connect two piconets into a scatternet. To deal with possible data transmissions between different piconets, the bridge device must switch to different masters frequently. This may cause traffic in network. Our work tries to explore a less popular but powerful applications of Bluetooth which can help extend the range of Bluetooth communication and provide a free infrastructure for communication and find the transaction delay in Bluetooth network. Our approach is to design a transaction system that can be used to emulate and test the path selection from plentiful paths available from source to the destination. At the same this it assist user to select the optimal path. Due to this innovative approach; in transaction system it cause less traffic and it resultant in to less delay. Our work also analyzes the end-to-end packet delays, cumulative delay for both intra- and inter-piconet traffic and energy consumption, in a Bluetooth scatternet. Finally, we conduct simulations by using eclipse and NS-2 to demonstrate the efficiency and effectiveness of the proposed transaction system.

**Keywords:** Piconet, Sactternet, Personal Area Network (PAN), Adhoc Network, Delay time, Energy consumption.

### I. INTRODUCTION

Recently, much attention has been given to the research and development of Personal Area Networks (PAN). These networks are comprised of personal devices, such as cellular phones, PDAs and laptops, in close proximity to each other. Bluetooth is an emerging PAN technology which enables portable devices to connect and communicate wirelessly via short-range ad-hoc networks [1], [2] since its announcement in late spring 1998; the Bluetooth technology has attracted a vast amount of research. However, the issue of capacity assignment in Bluetooth networks has been rarely investigated. Moreover, most of the research regarding network protocols has been done via simulation [3]. In this paper we formulate a model for the short range transaction system and delay analysis and energy consumption concerns of the transaction system.

Bluetooth; a promising wireless personal area network technology to provide a low power, low cost, globally uniform radio interface between any two devices with Bluetooth support. Today, Bluetooth is on the verge of being ubiquitously deployed over a wide range of devices.

# International Journal of Innovative Research in Computer and Communication Engineering

(An ISO 3297: 2007 Certified Organization)

Vol. 1, Issue 7, September 2013

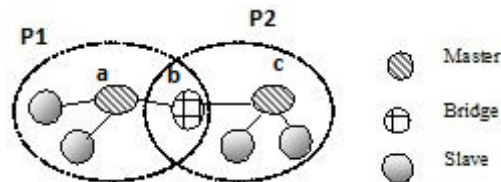


Figure 1 Scatternet Structure

An ad hoc network based on Bluetooth, however, brings new challenges. There are specific Bluetooth constraints not present in other wireless networks. For example, a Bluetooth network is composed of piconets. Each piconet contains one master and up to seven slaves. Piconets can be connected into a larger scatternet (Figure 1) by sharing slaves. As shown by Miklos et al. [9] and Zurbes [10], the configuration of a scatternet has significant impact on the performance of the network. For instance, when a scatternet contains more piconets, the rate of packet collisions increases. Before we can make effective use of Bluetooth ad hoc networking, we must first devise an efficient model to form a scatternet from isolated Bluetooth devices. [8]

In this paper, we analyze the delay time analysis and energy consumption issues for our proposed short range wireless transaction system.

Study the problem of scatternet formation in the situation where the devices are not in-range of one another. The communication range is at least 10 meters according to the current Bluetooth specification. This means that our formation model should work when the maximum distance between any two devices is more than 10 meters.

We adopt a layer approach to this problem. First, we investigate how these devices can be organized into scatternets. We design and evaluate the performance of a new scatternet formation model. Second, as a subroutine of the formation model, we study how the devices can discover each other efficiently and generate optimal path between to nodes. [11, 12]

This paper is organized as follows: In Section 2, we discuss the background of our research in order to get a better understanding of how our model formulated. In section 3 we discuss our proximity wireless transaction system. In Section 4, we introduce with dynamic optimal path selection. Delay time analysis using eclipse emulator in Section 5. We present analyses and simulation results of our model using NS2 in Section 6. In Section 7 we mentioned the concluding remarks for our research work.

Scatternets increase Bluetooth's usability multi-folds and open many new arenas to provide excellent value-added services to the users. Numerous applications may be built over them to unleash the potential of Bluetooth. The main ingredients of a scatternet-based application include a topology formation, model design and a routing algorithm, which themselves are of many types as the Bluetooth specification does not define any specific ones. Every implementation of these applications requires an implementation of one of these algorithms hence making one re-invent the wheel most of the time. This calls for a standard model framework to integrate all the applications and algorithms in a seamless, modular and reusable fashion.

To build a highly flexible and robust model to deploy a wide variety of scatternet-based applications over Bluetooth, we have identified the following requirements:

# International Journal of Innovative Research in Computer and Communication Engineering

(An ISO 3297: 2007 Certified Organization)

Vol. 1, Issue 7, September 2013

### A. Platform Independent

Any application that wishes to be deployed over Bluetooth should aim to be portable over a wide range of platforms. This platform independence is required on two accounts:

#### 1. Stack Independence:

With the coming of Bluetooth, came a surplus of stacks, both open-source and proprietary. A basic Bluetooth stack spans at least four layers of the OSI network model from the physical to the transport. Most of these layers are directly accessible to the applications running at the top. With each stack having its own API and specifications, porting an application over each of these stacks poses an extraordinary task. So the idea is to provide a standard API between the applications and the stacks such that an application complying with this standard API becomes independent of the underlying implementation.

#### 2. Device Independence:

Bluetooth intends to get deployed on just any wireless device that may ever exist. To achieve device independence, the application should be written in a programming language that is portable across most of these devices. Java comes as a natural choice. Java 2 Platform Micro Edition (J2ME), with its Connected Limited Device Configuration (CLDC) augmented with the Mobile Information Device Profile (MIDP), is the most widely deployed version of Java and spans almost every wireless device that possesses the capability to connect to a network.

So to meet both the above requirements of stack independence and device independence, we need a standard API between the applications and the stack and that too Java-based.

#### 3. Plug-n-Play

Scatternet formation and routing algorithms are responsible for defining the characteristics of a scatternet. A scatternet can deliver better performance to particular type of applications if these algorithms are application-oriented. By simply switching among algorithms the users can easily decide what works best for them. So to allow selection of algorithms at run-time, we have integrated them into the architecture in a plug-n-play fashion. In this way, the user may also download and run algorithm modules that may be developed independently but in accordance with the architecture.

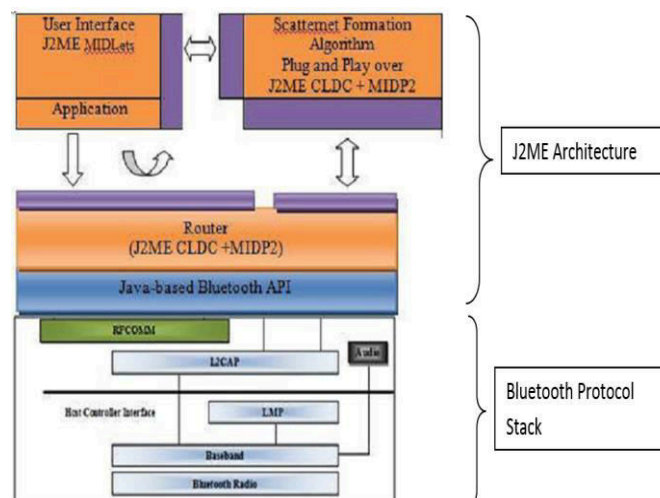


Figure 2 Architecture of Proposed Transaction System

# International Journal of Innovative Research in Computer and Communication Engineering

(An ISO 3297: 2007 Certified Organization)

Vol. 1, Issue 7, September 2013

Based on above; we have design a new data transaction system for short range communication and proposed a solution to find optimal path in this proposed model. The work for the same is published [14, 15].

## II. PROXIMITY WIRELESS TRANSACTION SYSTEM DESIGN

We have developed a proximity wireless transaction system which can help extend the range of Bluetooth communication and provide a free infrastructure for communication using eclipse and J2ME. The architecture is shown in figure -2. [11, 12]

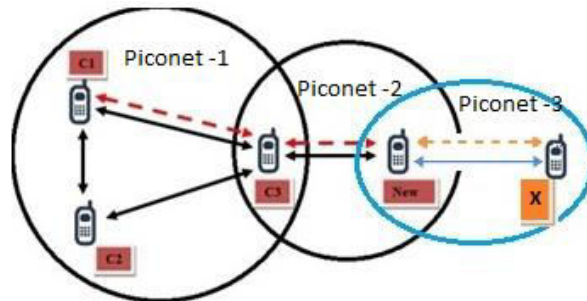


Figure 3 Design View of Proximity Transaction System

In this particular transaction model a device C1 (piconet-1) could send a message to device New (piconet-2), which is not within the range of C1 (piconet-1), via devices C3, which are within short range of each other. Same way X (piconet-3) is in range New; which is not range of C1 even though transaction system.

In figure -3, C1, C2 and C3 are in one piconet, means they are directly as well as indirectly connected with each other. While node New is in second piconet, which is directly connected with C3. Node X is in third piconet. Which is directly connected with node New.

The figure- 4 for shows how nodes are arranged in eclipse emulator as mentioned in figure -3. [14]



Figure 4 Nodes in Eclipse Emulator

## III. DYNAMIC OPTIMAL PATH SELECTION

In this new design, we have evaluated extension possibilities derived for more than two hops in network and exploring different routing path / link for communication.

After successful implementation of above architecture design in figure - 4; our next task to work on routing mechanism for shortest path in the above network design as shown in figure 5. [13]

# International Journal of Innovative Research in Computer and Communication Engineering

(An ISO 3297: 2007 Certified Organization)

Vol. 1, Issue 7, September 2013



Fig. 5 multiple network path with hop count

In order to display dynamic optimal path in our model we have use \* sign against the path. When two paths are same with equal hop we consider the path which found first in the network as an optimal path. The same is shown in figure 6. [7]

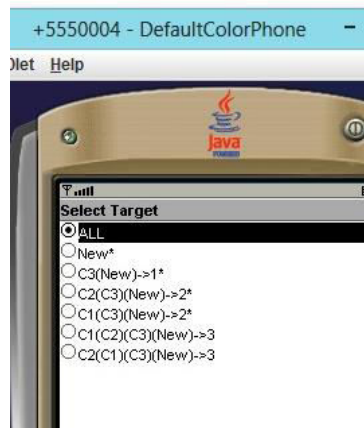


Figure 6 Dynamic optimal Path

## IV. DELAY TIME ANALYSIS

To find end to end delay, cumulative delay; we have first emulated the model in eclipse.

### A. End2End delays:

End2End delay = time (in seconds) when packet was received by OTHER NODE - time (in seconds) when packet was sent by CURRENT NODE. In our short range wireless network the calculations of packets sent at source trace level and received at destination trace level are considered. Trace level at the source and destination nodes can be chosen from the list. [4]

When data is transmitted from source (C1) to destination (X) at that time it passes from different intermediate nodes. That delay is due to packet receiving and packet forwarding time. The same is shown in below figure. The delay at node NEW.

# International Journal of Innovative Research in Computer and Communication Engineering

(An ISO 3297: 2007 Certified Organization)

Vol. 1, Issue 7, September 2013

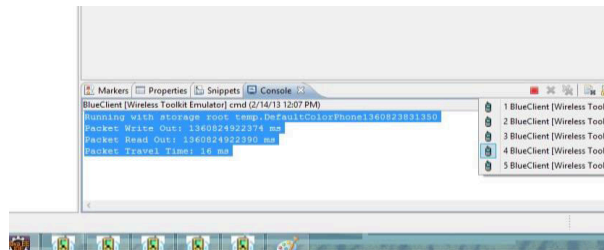


Figure 7 packet delay time

### B. Cumulative Delay:

Average number of nodes receiving packets = sum of numbers of all the intermediate nodes (nodes between source and destination nodes) receiving packets sent by all the source nodes / number of received packets at all the destination nodes. [6]

Average number of nodes forwarding packets = sum of numbers of all the intermediate nodes (nodes between source and destination nodes) forwarding packets sent by all the source nodes / number of received packets at all the destination nodes.

The total or cumulative delay i.e. the delay between sender and receiver is shown in following figure. Cumulative delay is nothing but the total time taken by packets at each intermediate node. Below figure shows the total delay time at node X.

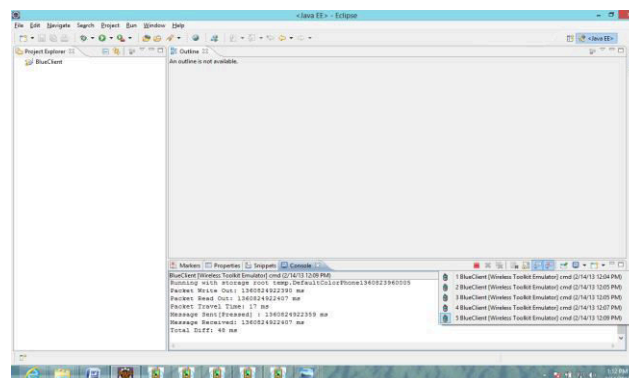


Figure 8 Total delay time

### C. Traffic Delay:

We have emulated the by populating nodes in our network model. As a result we state that when numbers of intermediate nodes are more the delay time is more and less the number of node resultant in to less delay. In addition to that we have also emulated data transmission between two nodes when they are directly and indirectly connected with each other. From the result we can state that directly connected nodes takes less time and indirectly connected nodes more time because of delay at intermediate node. Time for directly and indirectly connected node. [4,5]

In our case when C1 and C2 are directly connected it takes 15 ms (figure 9). When we transmit data from C1 to C3 via C2 it takes more delay time. In our case it takes 46 ms (figure 10).

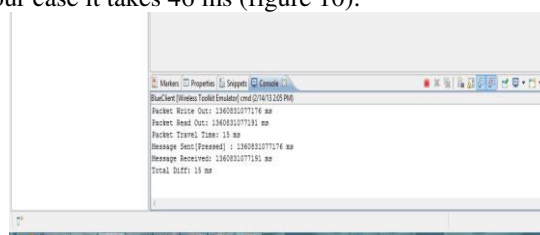


Figure 9 Delay time Direct Connection C1-C3

# International Journal of Innovative Research in Computer and Communication Engineering

(An ISO 3297: 2007 Certified Organization)

Vol. 1, Issue 7, September 2013

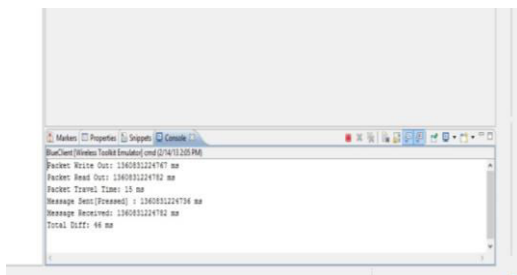


Figure 10 Delay time indirect connection C1-C3 via C2

## V. SIMULATION USING NS2

In order to evaluate packet generation and packet size along with the delay time analysis and energy consumption we simulated the same transaction system using NS2. In NS2 first we have setup the topology as shown in figure 11.

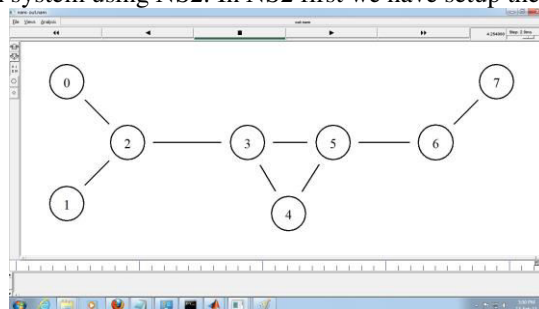


Figure 11 Nodes in NS2

Figure 12 provides network information of our model. Node 0, 1,4 in first piconet, node 2,3,7 in second piconet and node 3,5,6 in third piconet. Node 7 is the intermediate node through which node 0 and node 6 can able to communicate with each other.

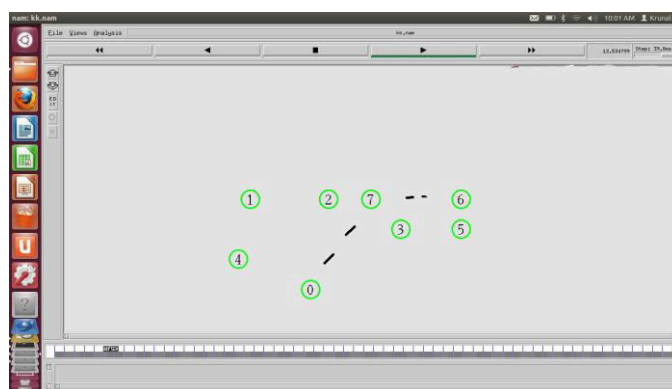


Figure 12 Node Simulation in NS2

We have also examined the energy consumption by nodes in our model using NS2. Initial energy we have assume 1000 Joule for each node as shown in figure 13 and the result at the end of simulation that we have shown in figure 14 in our case energy is 991.864574 Joule and the graph for the same is generated using the xgraph as shown in figure 15.

# International Journal of Innovative Research in Computer and Communication Engineering

(An ISO 3297: 2007 Certified Organization)

Vol. 1, Issue 7, September 2013

```

kruna@ubuntu:~$ head new.tr
s 1.000000000 _0_AGT --- 0 tcp 40 [0 0 0 0] [energy 1000.000000 el 0.000 es 0.000 et 0.000 er 0.000] ----- [0:0 7:0 32 0] [0 0] 0 0
r 1.000000000 _0_RTR --- 0 tcp 40 [0 0 0 0] [energy 1000.000000 el 0.000 es 0.000 et 0.000 er 0.000] ----- [0:0 7:0 32 0] [0 0] 0 0
s 1.000000000 _0_RTR --- 0 tcp 40 [0 0 0 0] [energy 1000.000000 el 0.000 es 0.000 et 0.000 er 0.000] ----- [0:0 7:0 32 0] [0 0] 0 0
S 1.000000000 _0_MAC --- 0 ARP 86 [0 ffffffff 0 000] [energy 1000.000000 el 0.000 es 0.000 et 0.000 er 0.000] ----- [REQUEST 0/0 0/7]
N -t 1.000095 -n 1 -e 990.999217
N -t 1.000095 -n 2 -e 990.999217
N -t 1.000095 -n 3 -e 990.999217
N -t 1.000095 -n 4 -e 990.999217
N -t 1.000095 -n 5 -e 990.999217
N -t 1.000095 -n 6 -e 990.999217
kruna@ubuntu:~$

```

Figure 13 Energy at Initial Stage

```

kruna@ubuntu:~$ tail new.tr
s #135123000 _0_MAC --- 0 ACK 38 [0 7 0 0] [energy 991.064888 el 1.318 es 0.000 et 5.782 er 1.035]
N -t #.135122 -n 1 -e 991.064574
N -t #.135122 -n 2 -e 991.064574
N -t #.135122 -n 3 -e 991.064574
N -t #.135122 -n 4 -e 991.064574
N -t #.135122 -n 5 -e 991.064574
N -t #.135122 -n 6 -e 991.064574
N -t #.135122 -n 7 -e 991.064574
r #135137000 _0_AGT --- 1185 ack 40 [13a 0 7 000] [energy 991.064574 el 1.318 es 0.000 et 5.782 er 1.035] ----- [7:0 0:0 32 0] [592 0] 1
0
r #135126000 _0_MAC --- 0 ACK 38 [0 7 0 0] [energy 991.064574 el 1.318 es 0.000 et 1.046 er 5.771]
kruna@ubuntu:~$

```

Figure 14 Energy at end of simulation

During the analysis we found that during scatternet formation, there are many devices trying to get connected at the same time, so the inquiry and page processes will occur. We call this propagation for device discovery when a set of in range devices try to connect with each other. In the following, we discuss our approach and present the simulation results using xgraph.

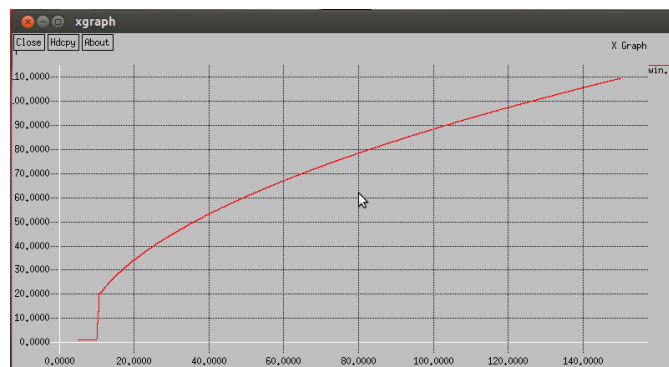


Figure 15 Energy Consumption by nodes

Graph indicates that in the beginning for propagation or device discovery and connection establishment it requires more energy and afterwards it indicates the energy consumed by the nodes.

## VI. CONCLUSION

This work provides the facility of multiple path analysis and dynamic optimal path analysis. It gives almost real behaviour of path transmission with the mobility of the nodes. By using this work, once all possible paths from the source and the destination are found, the link stability of the nodes are observed, and basis of these parameters, the paths are shown with numbers, these numbers shows the number of intermediate hops between source and destination. Less the number between source and destination is more optimal path.

In addition, we presented end-to-end delay, cumulative delay and traffic delay analysis using eclipse and energy consumption issues by NS2 simulator.





# International Journal of Innovative Research in Computer and Communication Engineering

(An ISO 3297: 2007 Certified Organization)

Vol. 1, Issue 7, September 2013

## REFERENCES

- [1] <http://en.wikipedia.org/wiki/Bluetooth>
- [2] <http://www.bluetooth.com/Pages/Bluetooth-Home.aspx>
- [3] Gil, Z. and Adrian, S., "Capacity Assignment in Bluetooth Scatternets – Analysis and Algorithms", CCIT Report pp. 355., 2001.
- [4] Gwo-Jong, Y. and Wei-Chen, H., "A Minimum Delay Routing Protocol for Bluetooth Radio Networks", Tamsui Oxford Journal of Mathematical Sciences, Aletheia University 20(2) pp. 291-314, 2004.
- [5] Chang, W., Y., Kun-Ming, Y., Shu, L. L., "Reducing Inter-piconet Delay for Large-Scale Bluetooth Scatternets", Emerging Technologies in Knowledge Discovery and Data Mining Lecture Notes in Computer Science Volume 4819, pp 562-573, 2007.
- [6] Mistic, V.B., "Minimizing end-to-end delays in Bluetooth scatternet with a slave/slave bridge", Proceedings of Eleventh International Conference on Computer Communications and Networks, pp 634 – 639, 2002.
- [7] Rehman, M.U. and Husbullah, H.B., "Optimal path selection in Bluetooth scatternet based on fuzzy set theory", IEEE potentials, pp 930-935, 2010.
- [8] Chih-Min, Y. and Jing-Rung, Y., "A configurable routing protocol for Bluetooth wireless network", American Journal of Engineering and Technology Research, pp 43-46, Vol. 11 No. 12, 2011.
- [9] Miklos, G., Racz, A., Turanyi, Z., Valko, A., and Johansson, P., "Performance aspects of Bluetooth scatternet formation", In Proceedings of The First Annual Workshop on Mobile Ad Hoc Networking and Computing, 2000.
- [10] Zurbes, S., "Considerations on link and system throughput of Bluetooth networks", In Proceedings of the 11<sup>th</sup> IEEE International Symposium on Personal, Indoor and Mobile Radio Communications, volume 2, pp. 1315–1319, 2000.
- [11] Kamani, K.C., Kathiriya, D.R. and Virpariya P.V., "Proposed Bluetooth Protocol for Short Range Communication" International Journal of Information and Computing Technology, 2011.
- [12] Kamani, K.C., Kathiriya, D.R., Virpariya P.V., and Ghodasara ,Y.R., "A Routing Mechanism in Bluetooth: A Short Range Communication Technology" Proceedings of National Conference on Technology Driven Society, 2011.
- [13] Kamani, K.C., Kathiriya, D.R., Virpariya P.V., and Ghodasara ,Y.R., "An Protocol Usage Model and An Architecture Design for Bluetooth – A Short Range Transaction System. International Journal of Advance Research in Computer Science, Vol. 1 No. 4., 2010.
- [14] Kamani, K.C., Kathiriya, D.R. and Virpariya P.V., "Architectural Challenges in Designing of Data Transaction System for Short Range Communication", International Journal of Management, IT and Engineering (IJMIE), Vol.2 Issue 8, 2012.
- [15] Kamani, K.C., Kathiriya, D.R. and Ghodasara ,Y.R., "Optimal Path Selection in Short Range Wireless Communication", IEEE Xplore Digital Library, ISBN No: 978-1-4799-0316-0, pp. 246 – 250 available on: <http://ieeexplore.ieee.org>, 2013.

## BIOGRAPHY



PROF. KRUNAL KAMANI (M.Phil. (Computer Science), MCA, M.Sc.IT) is currently working as an Assistant Professor (Computer Science) at College of Sheth M. C. College of Dairy Science, Anand Agricultural University, Anand, Gujarat, India. His publication includes 7 research papers in international journals, 2 book chapters, 2 papers in national journals and 13 papers in national conferences/seminars. He received 3rd rank for the best research paper at the national seminar at Shri M & N Virani Science College – Rajkot, Gujarat, India in the year 2006.



DR. DHAVAL KATHIRIYA (Ph.D. (Computer Science), M.Sc.IT) is currently working as a Dean & Principal at College of Agricultural Information Technology and Director (Information Technology) at Anand Agricultural University, Anand, Gujarat, India. His publication includes 4 books, 9 international research papers, 2 projects attended, and 11 national/state level conferences / seminars on various topics of IT. He is also involved in syllabus designing in different UG and PG courses in Gujarat – India. He is recognized Ph.D. guide in various universities. He is involved in various academic, research and IT administration activities at Anand Agricultural University, Anand, Gujarat – India