

**COMBINED SENSING AND ACTUATION: A NEW CONTROL LABORATORY
EXPERIMENT****Mohammad H. Elahinia**

Assistant Professor

ASME Member

Department of Mechanical
Industrial and Manufacturing Engineering
The University of Toledo
Toledo, Ohio 43606
mohammad.elahinia@utoledo.edu**Abstract**

This paper describes a new control experiment developed for Mechanical Engineering undergraduate students. The experiment with a Shape Memory Alloy (SMA) actuated robotic arm is designed for the senior undergraduate laboratory (ME4006) in the Department of Mechanical Engineering at Virginia Tech. ME4006 is designed to provide the students with experience in experimental investigation of mechanical engineering systems. In designing this control experiment it was intended for the students to have a hands-on experiment with smart materials. Furthermore, students learn about control problems and limitations of these materials along with sensing and actuation advantages of the SMAs. The experiment uses a problem solving approach; students are not given a procedure to follow for conducting the experiment. The problem is described in a memorandum to the students from a supervisor, who defines the purpose of the problem and defines the audience for the report.

1 Background

As smart materials are changing the practice of Engineering, providing undergraduate engineering students with experiences with these materials has become necessary. To address the educational needs, several engineering departments have developed elective courses or laboratory experiments on smart materials. California State University at Fullerton, for example, has re-

cently established an Intelligent Systems Laboratory to provide Mechanical Engineering students with hands-on experience on integrated design and manufacturing of intelligent systems [1]. As another example, a case study has been done in the Department of Aerospace Engineering at Texas A&M University. In their study, they have integrated shape memory alloy into a first-year engineering course and a first-year engineering project. The results, that have been reported both qualitatively and quantitatively, showed the successful impact of the experience [2]. Measurement and control have also been focus of several Engineering departments for developing new laboratory experiments as additions to their curriculum or to enhance the existing laboratories [3, 4]. As an example, a new control experiments has been designed in the Department of Mechanical Engineering at Purdue University using a gantry crane [5]. More recently, a new mobile-robot-experiment has been developed in the Information Technology Department at the Brigham Young University. This experiment was used to teach mechatronics to students with different backgrounds [6].

ME4006 (Experimental Laboratory II) is a successful, large-enrollment laboratory course in mechanical engineering at Virginia Tech. This course interweaves instruction on engineering principles with instruction on engineering communication [7]. The student presentations are effectively incorporated into the laboratory course. Each presentation follows by students addressing the critiques from the faculty, graduate teaching as-

sistants, and another group of students. Incorporation of the presentations has enhanced the understanding by the students of the technical issues of the laboratory. The course consists of four laboratory problems that students work on in teams, but communicate in individual reports (and for two problems, in team presentations). Each of these problems is described in a memorandum from a supervisor, who defines the purpose of the problem and defines the audience for the communication. For each laboratory problem, students attend two lectures that discuss the engineering principles of those problems and attend two laboratory sessions in which they make measurements to understand and address the problem [8]. In the lab, the students design the experiment procedure based on their engineering judgments. After performing the experiment the students, working in teams of five, present their results to an audience of faculty, graduate teaching assistants, and two other student teams.

To this end, we found the methodology developed in ME4006 a suitable platform for conducting a control experiment that also includes studying different aspects of Shape Memory Alloys. After this course the students' practical knowledge of the subject of control was considerably enhanced. The enhancement can be attributed to the facts that the students have to design the procedure for running the test and collecting data, they need to look at the problem from multiple perspectives, and as engineers they deal with solving practical issues related to the problem. The other factor that plays an important role in improving the learning is that the students have to present their results; these presentations are critiqued by faculty, graduate teaching assistants, and peer students. The purpose of this paper is to show the effectiveness of a problem solving approach in designing a control experiment for undergraduate engineering student. Lectures, laboratory experiments, and presentations are three essential parts of this approach; together they greatly enhance the learning process.

2 The Robot Control Experiment

In the case of the SMA-actuated robot, the lecture covers some background on classical control, background on SMAs as well as introducing different applications of these materials. In the memorandum, presented in Section 4, the system is introduced as a prototype robot that will be installed on a mobile platform. The purpose of the mobile robot is to deploy sensors in a hostile environment. Students, as employees of the company, are asked to test the SMA-actuated robot for two main goals. The first goal is to choose appropriate PID controller gains such that the robot meets certain criteria in deploying the sensors. The choice of controller gains is also limited by the energy available to the system. The second goal is to investigate the possibility of using the SMA wire as a sensor. Currently, the robot uses an encoder for position feedback. The intent of this second objective is to determine if a relationship between the resistance of the wire

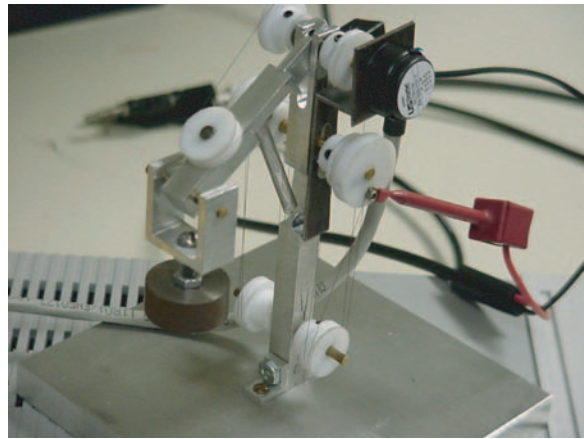


Figure 1. Laboratory set-up for the Shape Memory Alloy experiment. For this problem, students must measure the voltage and current of the SMA wire to find the proper gains for a position controller

and the position of the robot can be used to replace the encoder.

For this experiment as for the other experiments of the course [8], rather than giving the students a recipe of steps to follow, we give the students the problem, two technical lectures on different aspects of the problem, and two two-hour laboratory sessions to solve the problem. On hand during those laboratory sessions is a graduate teaching assistant who provides advice and makes sure that neither the students nor the equipment is damaged. The experiment setup consists of a Shape Memory Alloy actuated robot instrumented with an encoder for measuring the angular position of the robot. The signal conditioning and power regulation hardware, and the data collection and control design software (MATLAB/dSPACE) are also part of the experiment's setup. The robot, shown in Figure 1, is actuated by a Shape Memory Alloy wire that upon heating undergoes phase transformation and therefore contracts and rotates the moving arm upward. The temperature of the wire changes as the result of the energy balance between the input energy in the form of Joule heating and dissipative energy in the form of natural convection. The SMA wire's contraction is a function of temperature and stress of the material. The position control of the robotic arm is a complicated problem partly due to the fact that the phase transformation takes place between two stress-dependent temperatures.

Students attend the first lecture before the first lab session. This lecture is on the background of SMAs, their applications and a review on Proportional-Integral-Derivative (PID) controllers. In the lab the students are to investigate the robot to find a set of gains that enables the PID controller to accurately position the robot while satisfying the energy requirements. Furthermore, the students are to investigate the possibility of using the SMA wire as a displacement sensor. Details of the requirements for the experiment are shown in the problem memorandum presented in Section 4. Students, acting as the employees of the

robotics company, spend the second lecture asking any questions they might have from the company's consultant (the instructor). They return to the lab for the second time to finish collecting data or to repeat some parts of the experiment.

The experiment is designed to cover several engineering disciplines including controls, heat transfer, circuit analysis, signal processing, and the thermomechanical behavior of the Shape Memory Alloys in order to prepare the students for dealing with multi-disciplinary engineering problems with their solution mostly being the compromise between several design-restrains. Also, the memorandum is prepared in a way that the problem does not have unique, straight-forward answers. For example, the restriction on the amount of electrical energy that the robot can use, over the period of one hour, to perform its task makes the search for control gains an iterative process. Instead of going through this rather time consuming process some students learned to design a rapid test procedure in order to check whether or not all the design requirements can be satisfied. They measured the amount of electrical power that the SMA-actuated robot consumes to steadily hold the pay-load and compared it with the energy consumption limit. Performing this test showed the need to compromise between the task and energy requirements.

The control of SMA actuators, due to their nonlinear behavior, is a complex problem and the subject of ongoing research [9–11]. Designing a PID control system for an SMA-actuated system is primarily a hands-on control experience for the students. The lab's setup allows the students to investigate the effect of each set of control gains on the closed-loop response of the robot. Performing the experiment also gives the students the opportunity to see the shortcomings of linear controllers in controlling nonlinear systems. Due to the nonlinearity of the system (the robot) and the actuator (SMA wire), the PID controller cannot provide uniform performance. In other words the same set of gains cannot position the robot in all desired angular positions. Nonetheless, it is possible to have a nonlinear controller made of multiple sets of PID gains and a scheme for switching between these gains. This type of controller, which was suggested by a group of students who were unable to obtain acceptable performance with PID controller, is an effective control design.

Several properties of the SMAs change as they undergo phase transformation. To make this fact more accessible to the students we added a part to the experiment in which the change in the resistance SMA wire, as the result of phase transformation, is used as a replacement for the angular position sensor. To this end, the students characterize the hysteresis of the SMA wire while it actuates the robot. In the process of making decisions to replace the encoder with a relationship between the resistance of the SMA wire and the angular position of the robot, the students need to correlate the characteristic of the hysteresis with the closed-loop response restrictions. Figures 2 and 3 show the collected data for this part of the experiment. Due to the hysteretic behavior of the SMA wire, the relationships between the angular

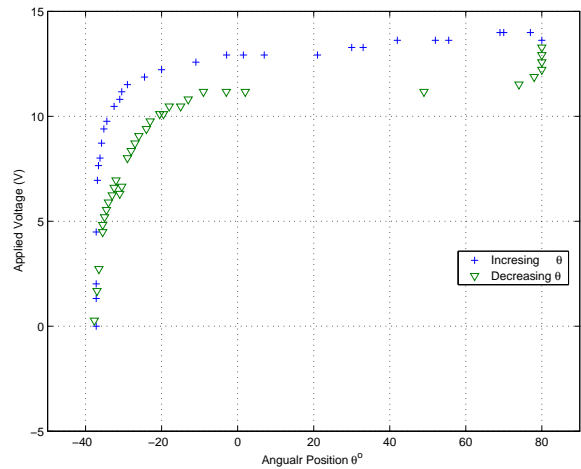


Figure 2. The hysteretic behavior of the SMA wire; angular position of the robot versus applied voltage to the wire

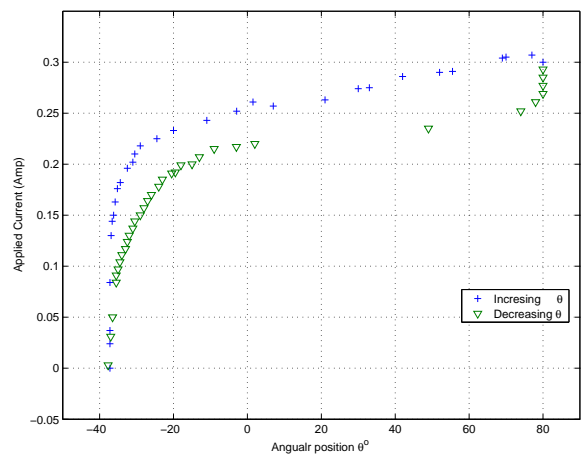


Figure 3. The hysteretic behavior of the SMA wire; angular position of the robot versus applied current to the wire

position of the robot and the applied voltage and current to the SMA wire is direction-dependent. In other words, the direction of motion of the robot defines the nonlinear relationship between the rotation of the applied voltage and current and the position of the robot. Nevertheless, as shown in Fig. 4, the resistance of the SMA wire can be used as an indication for the position of the angular position. The relationship between the angle θ and the resistance is close to linear and therefore it is possible to use SMA both for actuation as well as sensing.

3 Summary of the Results

The ME undergraduate students do not have a course on smart materials. This experiment provides an opportunity for them to become familiar with smart materials, in general, and

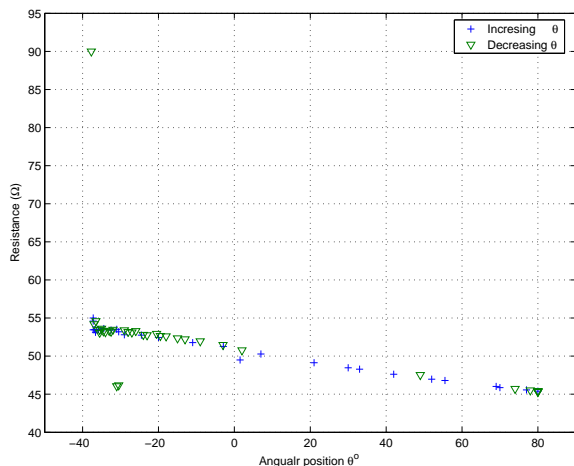


Figure 4. The hysteretic behavior of the SMA wire lend itself to a close-to-linear relationship between the angular position of the robot and the resistance of the SMA wire

Shape Memory Alloys, in particular, without having a one-semester-long course that would cover details. Using a problem solving approach, in the form of a laboratory experiment, for teaching smart materials to the undergraduate student has several advantages including:

1. The experiment presents the students with a real-life engineering problem. In solving the problem they need to utilize multiple disciplines including controls, heat transfer, circuit design, and Shape Memory Alloy thermomechanical behavior.
2. As is the case of almost all engineering problems this experiment does not have a unique answer. The restrictions for the system are chosen in a way for the problem not to have a straight-forward answer. The students have to compromise between the design requirements.
3. The experiment also serves as a practical control problem for which the previously learned control background can be used to design the control gains. The shortcoming of the linear controllers is a practical introduction for the student to think about nonlinear control solutions.
4. The SMA robotic experiment also provides the means for investigating more advanced properties of Shape Memory Alloy like the interdependency of the transformation temperatures and material stress. This property makes the use of the SMA wire as a position sensor more challenging.
5. The lectures, lab sessions, reports, and presentations educate students on solving real-life engineering problems and help them to be prepared for their job as engineers.
6. The experiment has a level of challenge for the students who are interested to in more details to this problem. Taking this course has inspired several students to use smart materials in their senior design projects.

7. Analyzing the course evaluation data shows that the majority of the students have found this experiment interesting and they think that they had a better learning experience. This is in part because most of the students have had no experience with shape memory alloys before. Another contributing factor is the way that the experiment was conducted; the students had to design their own lab procedures. Also the communication of the results in the form of reports and presentations played a major role in making the lab more attractive and a better learning experience.

4 Memorandum

MicroRobotics, Inc.
Blacksburg, VA 24060-0238
August 27, 2003

To: Pat Philips, Engineer

From: Kelly Smith, Project Manager

Subject: Request for Testing of a Shape Memory Alloy Manipulator

As discussed in our previous meeting, our company has been asked to develop a manipulator for a miniature mobile robot (10 cm by 10 cm by 10 cm). Needing to operate in the desert, the robot should be capable of sensor deployment, adjustment, and replacement. For that reason, the manipulator must be lightweight and relatively powerful to pick up and work with objects. Our manufacturing group has designed and built a one-degree-of-freedom manipulator that is actuated by the Shape Memory Alloy (SMA) wire. SMA was chosen because of its light weight, sensing capabilities, and compatibility with the environment. This memo requests you to find an appropriate control system for the manipulator. Because the mobile platform is still under development, we have installed the manipulator on a stationary base. You can use this model for testing (for a cutaway drawing of the prototype, see Figure 5). The manipulator is initially positioned at approximately , and the SMA wire is pre-stressed by the linear spring. The wire is heated by the Joule heating. When the temperature exceeds the activation start temperature, the wire starts the phase transformation. As a result of this transformation, the wire contracts, thus applying torque to the moving arm. Therefore, the arm can be positioned anywhere between and . The hanging mass simulates the gripper and the payload. Your job is to test the model and choose the most appropriate set of controller gains. The manipulator's task

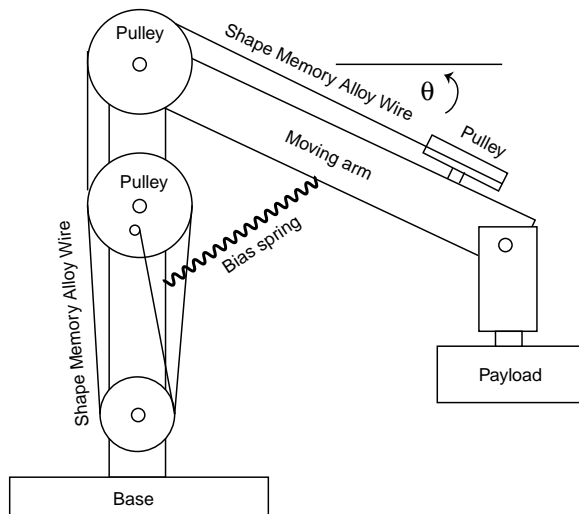


Figure 5. Laboratory set-up for the Shape Memory Alloy experiment. For this problem, students must measure the voltage and current of the SMA wire to find the proper gains for a position controller

is to pick up sensors from the platform (lower position) and to put them on an object (horizontal position 1 degree) in less than 1 second. The manipulator is then to remain horizontal before it picks up the next sensor. On a typical mission, the robot needs to deploy 60 sensors per hour. The mobile robot is autonomous; therefore, the manipulator's is internally powered by an alkaline 9-volt battery. Each battery has a capacity of 350 milliamp-hours (mAh). Required is that the manipulator can work for 1 hour using this 9-volt battery. Your choice of the control gains should satisfy both the task requirement and the power restriction. After designing the controller, please test it for three other desired angular positions (set-points). Comment on the controller's ability to reach those set-points. Also, evaluate your controller's ability to follow a joystick. Document your design procedure and justify your final choice for control gains. Will the proposed controller work? If you are suggesting a different control design, please document and justify your design. Our manufacturing group has initially installed an encoder for sensing the angular position of the manipulator. Because the robot has to perform in hostile environments, you are required to reduce the number of sensitive items such as the encoder. It has been suggested that the electrical resistance, a physical property of SMA that characteristically changes with phase transformation, can be used to determine the state or phase of the SMA actuators and, therefore, can be used for closed loop control. Please determine if it is, in fact, possible to use the measured resistance of the wire to determine the angular position of the manipulator. Please report your results.

REFERENCES

- [1] Moini, H., 1998. "Active Materials & Microcontroller Applications in Design of Intelligent Systems.". *Proceedings of the ASEE, Seattle, WA, USA* [June].
- [2] Penrod, L. and Talley, D. and Froyd, J. and Caso, R. and Lagoudas, D. and Kohutek, T. "Integrating smart materials into a first-year engineering curriculum: A case study.". *Proceedings - Frontiers in Education Conference*, v 2 200: F3B/21-F3B/26 (IEEE cat n 02CH37351).
- [3] Bluestein, M., 1995. "Demonstration of PID control using a process control trainer.". *Investing in the Future ASEE Annual Conference Proceedings*. v 1 1995. ASEE - American Society for Engineering Education, Washington, DC, USA. p 780-784 [].
- [4] Lyon, D. E. Meckl, P. H. and Nwokah, O. D I., 1994. "Senior control systems laboratory at Purdue University.". *IEEE Transactions on Education*. v 37 n 1 Feb 1994. p 71-76 [].
- [5] Reynolds, M. C. Meckl, P. H. and Yao, B., 2002. "The educational impact of a gantry crane project in an undergraduate controls class.". *American Society of Mechanical Engineers, Dynamic Systems and Control Division (Publication) DSC*. v 71 2002. p 987-992. [].
- [6] Hoopes, D. Davis, T. Norman, K. and Helps, R., 2003. "An autonomous mobile robot development platform for teaching a graduate level mechatronics course.". *Proceedings - Frontiers in Education Conference*. v 2 2003. p F4E17-F4E22 (IEEE cat n 03CH37487). [].
- [7] Alley, M. and Robertshaw, H., 2001. "Interweaving Engineering and Writing: A Model Large-Laboratory Course at Virginia Tech.". *Proceedings of the annual ASEE Conference, Albuquerque, NM, USA* [June].
- [8] Alley, M. and Robertshaw, H., 2001. "An Effective Incorporation of Student Presentations Into a Large Laboratory Course.". *Proceedings of the annual ASEE Conference, Albuquerque, NM, USA* [June].
- [9] Elahinia, M. H. and Ashrafiuon, H., 2002. "Nonlinear control of a shape memory alloy actuated manipulator.". *ASME Journal of Vibration and Acoustics*, **124** [October], pp. 566-575.
- [10] Elahinia, M. H. and Seigler, T. Michael and Leo, D. J. and Ahmadian, M., 2004. "Nonlinear Stress-Based Control of a Rotary SMA-Actuated Manipulator". *Journal of Intelligent Material Systems and Structures*, **15** (6) [June], pp. 495-508.
- [11] Elahinia, M. H. and Ahmadian, M. and Ashrafiuon, H., 2004. "On the Design of Kalman Filter for Rotary Shape Memory Alloy Actuators.". *Smart Materials and Structures*, **13** (4) [May], pp. 691-697.