




ELSEVIER

Contents lists available at ScienceDirect

Renewable and Sustainable Energy Reviews

journal homepage: www.elsevier.com/locate/rser

Review on the start-up experiences of continuous fermentative hydrogen producing bioreactors

q1 P. Bakonyi*, N. Nemestóthy, V. Simon, K. Bélafi-Bakó

Research Institute on Bioengineering, Membrane Technology and Energetics, University of Pannonia, Egyetem ut 10, 8200 Veszprém, Hungary

ARTICLE INFO

Article history:

Received 23 April 2014

Received in revised form

16 July 2014

Accepted 5 August 2014

Keywords:

Biohydrogen

Production

Continuous system

Bioreactor

Start-up

ABSTRACT

The start-up of continuous biohydrogen fermentations is a complex procedure and a key to acceptable hydrogen production performance and successful long-term operation. In this review article, the experiences gained and lessons learned from relevant literature studies dealing with various aspects of H₂ producing bioreactor start-up are comprehensively surveyed. Firstly, the importance of H₂-forming biosystem start-up including its main steps is outlined. Afterwards, the role of main influencing factors and methods (e.g. strain selection, seed pretreatment and inocula stimulation, switch-over time, bioreactor design, operating conditions) in avoiding the deterioration of starting a reactor is analyzed and presented in detail. Finally, the so far suggested applicable start-up strategies and the corresponding findings are critically discussed pointing out the advantages and disadvantages of each strategy.

© 2014 Published by Elsevier Ltd.

Contents

1. Introduction	1
2. The role of start-up in the efficacy of continuous hydrogen production	2
3. Factors affecting the initiation of continuous H ₂ fermenters	2
3.1. H ₂ producing strains	2
3.2. Pretreatment and stimulation	2
3.3. Switch-over time	3
3.4. Bioreactor configuration	4
4. Experiences and lessons of continuous H ₂ producing bioreactor start-up	5
5. Conclusions	6
Acknowledgments	6
References	6

1. Introduction

Hydrogen is an emerging candidate among the various alternative energy carriers. H₂ is believed to help the transition of current fossil-based economy to a renewable-based one [1], however, only if it is derived by sustainable processes. Though H₂ can be prepared by many conventional and mature methods (e.g. steam reformation of hydrocarbons), environmental-friendly methods such as with biological routes are required and still subjects to extensive research [2].

Nowadays, microbiologically produced hydrogen is recognized as an emerging way ahead, especially when formed via dark fermentation because of its inherent advantages such as relatively low energy demand (attributed to the gentle reaction conditions), the usability of wide range of feedstocks e.g. derivatives of biomass, waste streams and agricultural residues [3–5], and the possibility to integrate with other e.g. membrane-based processes in order to accomplish the sufficient reuse of hydrogen producing cells [6] or to upgrade bioH₂ [7–9] so that it could be a viable feedstock in energy efficient fuel cells.

Nevertheless, additional efforts are still essential to make biohydrogen generation more attractive. From practical aspect, the two major criteria to be considered are H₂ production yields and rates. As a result of the investigations in the past decades, several factors were identified that significantly affect the main

* Corresponding author. Tel.: +36 88 624385; fax: +36 88 624292.

E-mail address: bakonyipeter85@gmail.com (P. Bakonyi).

1 technological indicators mentioned above. Among them, bioreac-
2 tor configuration and operation are apparent ones [10]. Regardless
3 the type of the fermenter, it can be concluded that feasible
4 biohydrogen fermentation should be conducted in continuous
5 rather than batch systems [11], e.g. due to higher expectable
6 process efficiencies.

7 The establishment of continuous flow bioreactors usually starts
8 in batch mode, and it is to note that successful transition and
9 reliable, long-term operation is highly influenced by the start-up
10 strategy applied [12–14]. However, up to the authors' best knowl-
11 edge, there is no recent review paper comprehensively surveying
12 start-up experiences in continuous hydrogen producing bioreac-
13 tors. Hence, in this work, the experiences gained and lessons
14 learned from batch to continuous shifts are reviewed and sugges-
15 tions are given to achieve proper continuous operation.

18 2. The role of start-up in the efficacy of continuous hydrogen 19 production

20 Process instability is a frequently observed drawback in
21 fermentative H₂ production [15] that could be attributed to
22 multiple reasons as specified later in this paper. In fact, beyond
23 steady-state operational parameters and medium composition,
24 stable and continuous bioreactor operation to obtain acceptable
25 hydrogen production performance is strongly dependent on the
26 start-up phase [16]. It could involve the following steps:

- 27 – Selection of the hydrogen producing biocatalysts.
- 28 – Enhancement and acclimatization of H₂-forming strains to
29 fermentation circumstances.
- 30 – System transition until steady-state is reached.

31 These steps in a line require great attention and comprehensive
32 control in terms of environmental and operational circumstances
33 to develop robustful H₂ fermenting culture [17]. Otherwise, start-
34 ing a reactor may easily be deteriorated e.g. due to the insufficient
35 growth and H₂ production capacity of microorganisms. Such
36 bottlenecks can be avoided or at least mitigated by properly
37 designed start-up strategy.

38 In the next sections of the paper, the aforementioned parts of
39 the continuous dark fermentative bioreactor establishment are
40 outlined and discussed in details.

42 3. Factors affecting the initiation of continuous H₂ fermenters

43 3.1. H₂ producing strains

44 Fermentative biohydrogen generation can be realized either by
45 pure cultures [18] such as *Escherichia coli* [19,20] or mixed
46 bacterial consortia [21,22] and both have their own benefits. For
47 example, cultures of pure isolates may be easier to control but
48 need constantly sterile environment to prevent contamination
49 that is difficult and costly to maintain out of laboratories. Con-
50 sidering their application in a non-sterile environment, pure
51 cultures may be used in the bioaugmentation of diverse H₂
52 producing population to attain better gas turnouts [23]. The
53 restrictions of sterility criteria are the main reasons why mixed
54 bacterial communities are preferred to their pure counterparts in
55 real-case, scaled-up applications.

56 3.2. Pretreatment and stimulation

57 Conceptually, anaerobic, mixed H₂-producing consortia (e.g. in
58 sewage sludge, biogas plants, etc.) are built up by co-existing and

59 synergic species [24]. However, in most cases, they naturally occur
60 together with H₂-consumer microorganism such as methanogenic
61 archaea, homoacetogenic (producing acetate from CO₂ and H₂-),
62 lactic- and propionic acid bacteria which must certainly be
63 suppressed or more preferentially totally eliminated [25]. As a
64 consequence, regardless the source of mixed inocula, it should
65 undergo initial pretreatment in order to select the desired whole
66 cell biocatalysts. For such purposes, a lot of tools have been
67 developed based on heat shock, addition of chemicals, swinging
68 the oxidation–reduction potential (ORP) e.g. by aeration, high
69 energy irradiation, alteration of pH, freezing and thawing [26–
70 28]. These pretreatment techniques exploit the distinct sensitivity
71 of strains present in the mixture and in general could provide a
72 satisfactory starter culture to be used as seed inocula for subse-
73 quent biohydrogen fermentation. In other words, these procedures
74 aim to eliminate hydrogen-consuming vegetative cells and on the
75 other hand, are devoted to enhance acidogenic- and often sporu-
76 lative H₂-forming cells [29].

77 Although culture pretreatments can effectively suppress unde-
78 sired microbiological activity, they may also reduce the number of
79 indigenous H₂-former bacteria, especially the ones with low stress
80 tolerance. For these reasons, as a next step after culture pretreat-
81 ment, treated inocula should be submitted to stimulative environ-
82 ment (e.g. to a batch reactor) to let the microbes proliferate so that
83 a reasonable amount of active cellmass can be accumulated,
84 harvested and further applied. Also, batch cultivation can play a
85 role to help biofilm development on carrier materials (e.g. pow-
86 dered- and granulated activated carbon) if an immobilized, con-
87 tinuous H₂ production system is to be implemented [30,31].

88 According to literature reports, pretreated inocula are more
89 often than not dominated by spore-forming and robust H₂-
90 producer species such as *Clostridium* sp. [13]; however some
91 organisms of no utility (e.g. propionic acid and homoacetogenic
92 bacteria) may also survive and reclaim their niche over time
93 [21,25]. Changes in the microbial background can be revealed by
94 the modern technical apparatus of molecular biology [32,33].

95 Furthermore, it is presumable that the age of the seed source –
96 most commonly sewage or biogas (anaerobic fermenter) sludge as
97 suggested by Tables 1 and 2 – may also be a factor to take into
98 account. It is assumable that the microbial community structure of
99 anaerobic mixed cultures varies constantly during storage due to
100 changes (e.g. concentration differences) within micro-
101 environments. Consequently, aging of an anaerobic seed culture
102 over time can result in the variation of the obtainable bacterial
103 populations and their activity. Thus, it might lead to alterations in
104 the attainable biohydrogen performances even though standar-
105 dized, identical pretreatment conditions are ensured time after
106 time to prepare H₂ producing inocula.

107 Moreover, beyond the goal of activating H₂-producer organisms
108 [16,34,35], preliminary cultivation – mostly in batch – may also
109 serve as a tool to acclimatize the microflora to certain substrates
110 and their loadings e.g. to overcome inhibitory effect [36], which
111 will induce a dynamic competition between the various groups of
112 bacteria. Although batch-continuous start-up strategy was pro-
113 posed by various authors to follow (for examples, please refer to
114 Tables 1 and 2), some researchers reported adequate start-up
115 directly in continuous operation [37–41].

116 The advantage of this strategy lacking initial discontinuous cell
117 growth might be that in batch operation the nutrient concentra-
118 tions as the time passes, especially at the end hours of the cycle,
119 are insufficiently low and consequently a shift in the dominant
120 strains could occur, depressing H₂ production [12]. During careful
121 continuous adaptation, broth is constantly supplemented and such
122 disadvantageous phenomenon may be avoided. Moreover, contin-
123 uous (hydraulic detention time influenced) acclimatization strat-
124 egy encompasses the so-called biokinetic control which causes the

Table 1
Start-up experiences during H₂ fermentation in CSTR.

Reactor type	Inoculum	Inoculum Pretreatment	Substrate	pH	T (°C)	Start-up experiences	Reference
CSTR	5 Different thermophilic sludge	–	Starch	N.C.	55	Continuous feeding was started after obtaining exponential growth phase in batch operation. Stable hydrogen production was attained in less than 30 days of start-up	[70]
CSTR	Indigenous microflora of substrate	–	Sweet sorghum extract	3.5–6.5	35C	24 h in batch mode to activate the indigenous microflora contained in substrate	[74]
CSTR	Anaerobic digester sludge	Heat shock (85 °C, 45 min)	Cheese whey wastewater	5.5	55	2 days in batch mode, conversion to continuous operation when hydrogen production reached its peak value	[75]
CSTR	<i>E. coli</i>	–	Na-formate	6.5	37	Batch operation until exponential growth phase took place	[20]
CSTR	Anaerobic granular sludge	Heat shock (boiling for 40 min)	Cheese whey	7.5	37	Batch operation for 12 h	[49]
CSTR	Digester sludge	N.M.	Cellulose	N.C.	70	90 days until steady-state	[72]
CSTR	Waste activated sludge	Heat shock (70 °C, 30 min)	Glucose	5.5–6.5	37	15 h in batch mode, 10 days to reach steady-state	[39]
CSTR	Anaerobic digester sludge	N.M.	Sugarbeet water extract	5.2	32	Continuous operation was commenced once significant hydrogen production occurred	[76]
CSTR	Anaerobic digester sludge	Heat shock (90 °C, 20 min)	<i>L. japonica</i>	5.5–8	35	When the yield reached 60 mL H ₂ /g dcw, the operation was shifted to continuous mode	[78]
CSTR	Anaerobic digester sludge	Heat shock (90 °C, 10 min)	Food waste	5.3	35	When cumulative H ₂ production was equivalent to 0.5 mol H ₂ /mol hexose, the reactors were put into continuous mode	[15]
CSTR	Anaerobic digester sludge	Heat shock (90 °C, 15 min)	Sucrose	5.3	35	20 days long start-up	[47]
CSTR	Wastewater treating sludge	Heat shock (100 °C, 45 min)	Starch	5.5	35	Continuous feeding started after 24 h of batch operation. During start-up, decreased initial organic loading rate could enhance hydrogen production efficiency	[48]
CSTR	Wastewater sludge	Heat shock (100 °C, 45 min)	Sucrose	6	35	The fermenter was first operated in a batch mode for two days and then switched to a continuous operation	[63]
CSTR	Indigenous microflora of substrate	–	Cheese whey	5.2	35	For start-up, the reactor was operated in batch mode for 24 h to activate the indigenous microflora contained in the seed before initiation of continuous operation	[34]
CSTR	Anaerobic digester sludge	N.M.	Whey permeate	4–5	35–38	Continuous bioreactors were operated as a batch for the first 40 h	[79]
CSTR	Anaerobic digester sludge	Heat and acid treatment (98 °C, 2 h; pH=2, 24 h)	Glucose	5.5	37	1 day in batch mode before continuous operation, Steady gas production was observed after 19 days	[66]
CSTR	Sewage sludge	–	Terephthalic acid processing wastewater	6	35	Stabilized gas production was achieved after 25 days	[46]

N.M.: not mentioned; N.C.: not controlled.

wash out of existing microbes possessing inadequately low growth rates or adaption capabilities [42]. In other words, feeding regime affects the culture diversity and the relative abundance of the bacterial species.

Additionally, pH, temperature and ORP adjustment are also of crucial importance, since their values change the generation time, growth rate and metabolic pathways of microorganisms present in a mixed culture [12,43–45]. It was also demonstrated that sustained continuous hydrogen formation could be achieved with a start-up strategy completely lacking preliminary inocula pretreatment and batch propagation. For example, bioreactor inoculated with untreated consortia achieved the suppression of H₂ consuming microorganisms through the simultaneous enrichment of biohydrogen producers, taking place because of the insistent acidophilic microenvironment maintained from the beginning of operation [46]. For more studies skipping inocula pretreatment, the reader is referred to Tables 1 and 2.

Besides the adequate substrate composition and loading, temperature, pH and OPR there are other parameters such as hydrogen partial pressure in the bioreactor that may need a control since it is a potential threat that hydrogenotrophic consortial activity may be provoked under high H₂ concentrations [25]. From another point of view, reduced H₂ partial pressure was proven to increase hydrogenase activity and making H₂ formation thermodynamically favorable [47].

3.3. Switch-over time

Since the establishment of continuous hydrogen fermentation implicates an initiative batch cycle for most cases, another issue to be discussed is its duration.

The literature is not consistent about this question, or in other words, it is not fully obvious when to convert to continuous hydrogen fermentation. However, as listed in Tables 1 and 2, the following strategies could be identified as the most popular ones:

- switch-over when significant biohydrogen production commences,
- switch-over when reaching the exponential H₂ production phase, and
- switch-over after a few days of batch cultivation.

Regardless the hydrogen fermentation system employed, dilution rate, substrate loading intensity, pH and temperature applied during transition-state (caused by the switch between batch and continuous operation) reactor run will result in the enrichment of certain bacterial populations and moreover, these factors inherently direct their metabolic pathways. After a period of time when the functional consortia got used to the environmental conditions and consequently stabilized, steady-state can take place which is mostly considered to reach when variations in H₂ gas production, pH and effluent (spent media) quality

Table 2
Start-up experiences during H₂ fermentation in reactors other than CSTR.

Reactor type	Inoculum	Inoculum Pretreatment	Substrate	pH	T	Start-up experiences	Reference
UASBR	Mixture of precultured and granulated sludge	Heat shock (100 °C, 2 h)	Starch	5	55	After confirming the exponential production of the biogas, the operation was turned into continuous mode	[73]
UASBR	Sewage sludge	Heat shock (100 °C, 45 min)	Sucrose	6.7	35	Time-consuming start-up, almost 40 days were taken to reach steady-state	[52]
AFBR	Wastewater treating sludge	Heat shock (90 °C, 15 min)	Glucose, cheese whey	N.M.	30	Initially, the reactors were operated as batch for 76 h prior to switching to continuous mode	[29]
UASBR, CSTR	Anaerobic digester sludge	Heat shock (90 °C, 20 min)	Coffee drink manufacturing wastewater	5.5	35	Continuous operation was delayed until a yield of 0.5 mol H ₂ /mol hexose achieved in the batch, start-up took 10 days in continuous mode	[77]
UASBR	Anaerobic digester sludge	Heat shock (90 °C, 20 min)	Coffee drink manufacturing wastewater	5.5	35	When the yield of produced H ₂ reached 0.5 mol H ₂ /mol hexose, continuous operation started	[59]
ASBR	Anaerobic digester sludge	Heat shock (90 °C, 10 min)	Food waste	5.3	35	When cumulative H ₂ production of 0.5 mol H ₂ /mol hexose was observed, the reactors were put into continuous operation. Steady-state was reached in 10–30 days depending on the HRT and inoculation conditions	[57]
AFBR	Wastewater treating sludge	Heat shock (90 °C, 10 min)	Glucose	N.C.	30	The bioreactor was initially run as a batch for 2 days to stimulate the hydrogen-producing biomass	[16]
ABR	Anaerobic digester sludge	Heat shock (105 °C, 2 h)	Tapioca wastewater	6.5 ^a ; 9 ^b	32	Multistep batch operation and gradual acclimatization of mixed consortia to substrate. First 3 days in batch operation. 37 days were required to reach steady-state H ₂ production	[64]
ASBR	Anaerobic digester sludge	Heat shock (100 °C, 30 min)	Liquid swine manure mixed with glucose	5	37	Firstly, the bioreactor was operated in a batch mode for 24 h until the established biogas production took place	[56]
ASBR	Anaerobic digester sludge	Heat shock (boiled, 30 min)	Liquid swine manure mixed with glucose	5 ^a ; 4.4–5.6 ^b	37	Firstly, the bioreactor was operated in a batch mode for 24 h until established biogas production took place	[58]
UASBR	Enriched facultative anaerobic culture	Enriched culture with <i>Clostridium pasteurianum</i>	Citric acid wastewater	7	35–38	More than a month long acclimatization before starting continuous mode. UASB start-up took 20 days, excellent system stabilization	[55]
UASBR	Wastewater treating sludge	N.M.	Sucrose	6.1–9.5	39	The start-up of the UASB reactor lasted for 300 days to enrich H ₂ -producing microbes and establish a stable gas generation. Afterwards, a successful operation was achieved with the formation of the H ₂ -producing granules	[53]

ABR: anaerobic baffled reactor; AFBR: anaerobic fluidized bed reactor; N.M.: not mentioned; N.C.: not controlled.

^a During start-up.

^b After start-up.

e.g. in terms of soluble metabolic product (SMP) distribution and related concentrations are below 10% on a daily average base [48].

Therefore, appropriate threshold levels of the parameters mentioned can develop an attractive hydrogen-generating bio-community and govern the whole bioreactor towards better performances e.g. volumetric production rates and yields [49].

3.4. Bioreactor configuration

The configuration of the bioreactor set-up is also a concern to keep in mind since different kinds of reactors can be characterized by distinct start-up stage features, for example in terms of its duration [6,14]. Nowadays, the suspended-cell, completely stirred tank reactor (CSTR) is the most routinely applied one, however, up-flow anaerobic sludge blanket (UASBR) reactors, anaerobic membrane bioreactors and immobilized (e.g. fluidized bed) bioreactors [16,29] became popular due to their improved H₂ producing potentials.

Generally, the CSTR is featured by a relatively short induction phase [50] as compared to other applications (e.g. UASBR) due to better mass transfer, but it needs rigorous supervision due to the disposition of cells to wash out at inadequate operating bioreactor regimen. Troubleshooting the risk of wash out can be performed by biomass-rejective systems such as the membrane bioreactors [6] or immobilized e.g. fixed bed systems [51,70]. These

alternatives may demonstrate more robust operation and enhanced hydrogen production efficiency even in smaller reactor volumes that is of economical importance.

Another option is the usage of UASBR. Basically, this construction is described by extended start-up phase [52,53] since the flocculation of bacterial communities in the sludge-bed demands longer time. However, start-up period of granular systems for biohydrogen generation could be considerably shortened through the transformation of methanogenic granules (obtained e.g. from already existing and well-established anaerobic, methane forming UASB reactors) into hydrogen producing ones, as recently reported [54].

An important trait of UASBR is the fact that it does not apply mechanical mixing and therefore pH gradients can occur which is not easy to control. For pH regulation purposes, the buffer capacity of the fermentation media may be adjusted to withstand progressive pH depression caused by the formation of acidic by-products that is always expectable in parallel to H₂ bioproduction. However, in return to laborious start-up, granulated reactors reflect remarkably improved operational stability [55]. This is because granulation reactors enhance the active biomass concentration and thereby able to sustain under increased substrate dosage and greater dilution rates so that higher H₂ production intensity can be accomplished [56].

Last but not least, the anaerobic sequencing batch reactor is also among the available design options for continuous H₂ fermentation [56–58].

4. Experiences and lessons of continuous H₂ producing bioreactor start-up

Alternatively to the strategy described in [54], it has been reported that the start-up time of UASBR could also be significantly decreased by thriving H₂-producing cells in CSTR arrangement prior to transferring them to the up-flow anaerobic sludge blanket reactor as seeding source [59]. As it was found, despite the high shearing forces in CSTR, self-flocculation of hydrogen-generating bacteria was notably faster than in UASBR and explained by the more intense mass transfer capacity of the former reactor type.

Besides, organic loading rate fluctuation was reported to accelerate the start-up process both in suspended- and immobilized cell applications [31]. This strategy was shown as an efficient way to rapidly and effectively establish a good biohydrogen evolver culture and less than 3 weeks were required to obtain stabilized operation, which is considerably shorter in comparison with other similar systems [60].

In relation to start-up duration, anaerobic sequencing batch reactor (ASBR) was demonstrated as a feasible concept to provide quick steady-state. Studies indicated that start-up time requirements in the range of 12–14 days were far below the values revealed for UASBR and CSTR [56,61].

As communicated [62], operational conditions employed in UASBR start-up could have significant impact on the microbial fingerprint of mixed H₂ producing sludge, depending on the seed inocula structure.

Likewise, pH adjustment was noticed to express marked influence during H₂-formation bioreactor start-up [46,58]. It has appeared that pH values out of optimal range may induce population- and metabolic shifts (i.e. solventogenesis). Moreover, the hydrogenase enzyme activity and growth rate of microorganism responsible for H₂ fermentation can also be hindered under inappropriate pH conditions. Hence, non-optimal pH probably causes an unambiguous delay in attaining steady-state conditions with the desired H₂ production rate and yield.

Moreover, pre-culturing seed inocula and initial batch strategy were observed to be efficient start-up concept that supported biomass growth and consistent H₂ production well in subsequent continuous operation [63]. The adaption of H₂ producing microflora to a given substrate can be conducted in complex and multistep batch operation, where bacterial consortia are periodically supplied with gradually increasing feed concentrations before putting into continuous mode [64]. Nevertheless, as mentioned above, there are studies that skipped preliminary batch operation and adapted the H₂ generating cultures during continuous operation. Regarding these start-up strategies, it is to conclude that the hydraulic retention time (HRT) is usually stepwise refined from long to short time intervals to allow the acclimatization of microorganisms to new environments and prevent washing out the bacteria of interest [65]. As a result of shifting HRT, the microbial population dynamically changes leading to the disappearance of certain species while others show up [66].

Additionally to HRT, altering organic loading rate (OLR) is also a stress source to the strains that are forced to get accustomed to new surroundings [52]. Varying OLR might cause sporulation in hydrogen producing cultures and contribute to the observable fluctuations in the H₂ production efficacy during start-up stage [48,67].

It is an ongoing progress in biohydrogen research that various waste substances are utilized to improve process viability. However, depending on the nature of these problematic raw materials (e.g. cheese whey), it is presumptive that they contain indigenous microflora which of course, from the beginning, might affect

bioreactor performance in a negative manner [75]. In this regard, it was evaluated [15] that attention should be paid to the pretreatment (e.g. by means of alkali) and sufficient storage circumstances (preferentially at cold temperature) of such streams. This is attributed to the fact that indigenous strains, for example non-H₂-producing acidogens such as lactic- and propionic bacteria present in non-aseptic substrate could cause strong contamination and even outcompete the H₂-producing microbes [68,69].

Even though the biosystems may resist the perturbations caused by contamination and might be able to express the performance required, dominance of disadvantageous non-hydrogen producing bacteria potentially leads to problematic start-up, unsuccessful continuous operation in long terms and consequently may force to reinoculate and restart the H₂ fermenting bioreactor.

Recently, it was experimentally demonstrated that non-hydrogen producing cells, as a result of long batch cultivation, were promoted alongside their useful H₂ evolver counterparts and could take over, causing tough start-up failure. In order to avoid such undesired microbiological activity, an early switch-over time was recommended that highly increased the chance of successful and long-term continuous H₂ fermentation [69]. It is also extractable from the literature that inocula source can be a determining factor of the time necessary for starting-up a continuous H₂ producing fermenter [70].

In addition to contamination related issues, operational failures caused by unforeseen technical difficulties (e.g. broken pumps, leaking tubes) may also challenge the adequate start-up since they can cause insufficient or shocking organic loading rates, altered hydraulic detention times and thus, disturb the developing microbial consortia and affect its survivability.

To aid bioreactor start-up, monitoring the soluble metabolites such as volatile fatty acids is apparently beneficial. The ratios of acetic-, butyric-, and propionic acids produced by the various groups of microorganisms can be useful feedbacks about the state of the hydrogen producing consortia. When propionic acid concentration gradually increases in fermentation broth, it assumes the occurrence of microbes with no utility for H₂ production and gives the sign that troubleshooting of the reactor is required to avoid strong deterioration of its performance.

In cases when an unusual decline in hydrogen production efficiency occurs (e.g. as a consequence of population shift or appearance of methanogenic activity) during start-up that threatens achieving steady-state, a temperature shift strategy may be carried out which includes heating the bioreactor to higher temperature ranges (e.g. to 70–80 °C) for a short time (e.g. 1 h) to reclaim hydrogen producing bacteria and reactor performance [71]. However, it may be ineffective for granulated systems, since it was proven that granules serve as protective structure. In such cases, disintegration of granules prior to temperature shift or combined methods (e.g. temperature- and pH shift together) might work [62]. On the contrary, it was demonstrated that simple washing and subsequent boiling of granular sludge could be a feasible approach to inactivate hydrogen consuming microorganisms [49].

It is to mention that process temperature – even in the same bioreactor design – could influence the reactor behavior during start-up. As a matter of fact, comparison of meso- and (hyper)thermophilic H₂ production in CSTRs indicates that start-up of the latter group could last as long as 90 days to achieve stabilized H₂ fermentation [72], while mesophilic H₂ production in similar system configurations was reported to reach steady-state circumstances in shorter times [39,47,67].

As a summary, the flow chart depicted in Fig. 1 presents the connection network of the various steps involved in continuous hydrogen producing bioreactor start-up.

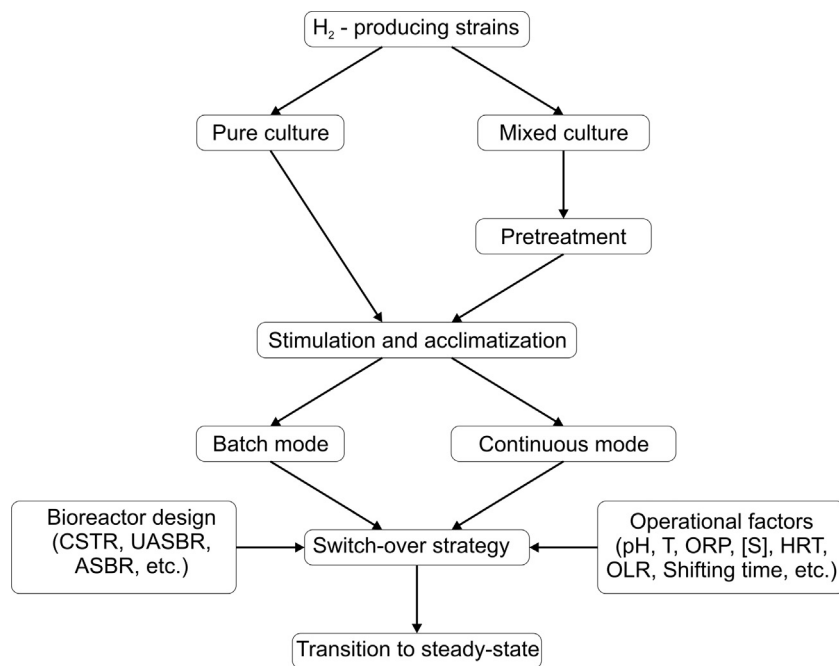


Fig. 1. Flow chart illustrating the various steps of start-up process.

5. Conclusions

In this review, the experiences of continuous hydrogen fermentation start-up were scoped and analyzed. The lessons of relevant literature papers about the routes leading to continuous and efficient, steady-state hydrogen production imply that start-up is of high concern to avoid significant performance losses. As a general guideline, the establishment of reliable, continuous hydrogen producing bioreactors should start with proper inocula selection and its pretreatment (if necessary), followed by an acclimatization period – conducted mainly as a batch – to adopt the living biocatalysts to the intended substrate which may also require preliminary treatment to eliminate native and undesirable microflora present in it. Subsequently, switch-over strategy – assigned to ensure viable and smooth batch to continuous shift – must be designed e.g. timed properly in order to preserve and ensure microorganism with as high hydrogen producing capacity as possible. Besides timing, transition from batch to continuous mode hydrogen fermentation should take also into account the suitable adjustment of major environmental (physiological) factors – such as pH, temperature, etc. – and the operating conditions (e.g. hydraulic retention time, organic loading rate, etc.) applied with respect to bioreactor configuration (CSTR, UASB, AnMBR, etc.). Currently, CSTRs are the most widely used reactors for continuous hydrogen production due to their relatively rapid start-up phase. Nevertheless, as a result of the efforts made to cut start-up time demand of other devices, more wide-spread employment of granular- and immobilized systems and that of reactors integrated with downstream (membrane bioreactors) is presumable in the future, which is also attributed to their potential benefits (e.g. higher long-term performance and enhanced stress tolerance) over the conventional set-ups.

Acknowledgments

Péter Bakonyi thanks the TÁMOP 4.2.4.A/2-11-1-2012-0001 'National Excellence Program' supported by the European Union and the State of Hungary, co-financed by the European Social

Fund. Nándor Nemestóthy acknowledges the János Bolyai Research Scholarship of the Hungarian Academy of Sciences. The research infrastructure was supported by TÁMOP 4.2.2/A-11/1/KONV-2012-0071 financed by the European Union and the European Social Fund.

References

- [1] Azwar MY, Hussain MA, Abdul-Wahab AK. Development of biohydrogen production by photobiological, fermentation and electrochemical processes: a review. *Renew Sustain Energy Rev* 2014;31:158–73.
- [2] Ren NQ, Guo WQ, Liu BF, Cao GL, Ding J. Biological hydrogen production by dark fermentation: challenges and prospects towards scaled-up production. *Curr Opin Biotechnol* 2011;22:365–70.
- [3] Cheng CL, Lo YC, Lee KS, Lee DJ, Lin CY, Chang JS. Biohydrogen production from lignocellulosic feedstock. *Bioresour Technol* 2011;102:8514–23.
- [4] Guo XM, Trably E, Latrille E, Carrère H, Jean-Philippe S. Hydrogen production from agricultural waste by dark fermentation: a review. *Int J Hydrog Energy* 2010;34:10660–73.
- [5] Lin CY, Lay CH, Sen B, Chu CY, Kumar G, Chen CC, et al. Fermentative hydrogen production from wastewaters: a review and prognosis. *Int J Hydrog Energy* 2012;37:15632–42.
- [6] Bakonyi P, Nemestóthy N, Simon V, Bélafi-Bakó K. Fermentative hydrogen production in anaerobic membrane bioreactors: a review. *Bioresour Technol* 2014;156:357–63.
- [7] Bakonyi P, Nemestóthy N, Bélafi-Bakó K. Biohydrogen purification by membranes: an overview on the operational conditions affecting the performance of non-porous, polymeric and ionic liquid based gas separation membranes. *Int J Hydrog Energy* 2013;38:9673–87.
- [8] Bakonyi P, Kumar G, Nemestóthy N, Lin CY, Bélafi-Bakó K. Biohydrogen purification using a commercial polyimide membrane module: studying the effects of some process variables. *Int J Hydrog Energy* 2013;38:15092–9.
- [9] Ramírez-Morales JE, Tapia-Venegas E, Nemestóthy N, Bakonyi P, Bélafi-Bakó K, Ruiz-Filippi G. Evaluation of two gas membrane modules for fermentative hydrogen separation. *Int J Hydrog Energy* 2013;38:14042–52.
- [10] Hallenbeck PC, Ghosh D. Advances in fermentative biohydrogen production: the way forward? *Trends Biotechnol* 2009;27:287–97.
- [11] Wang J, Wan W. Factors influencing fermentative hydrogen production: a review. *Int J Hydrog Energy* 2009;34:799–811.
- [12] Hawkes FR, Dinsdale R, Hawkes DL, Hussy I. Sustainable fermentative hydrogen production: challenges for process optimisation. *Int J Hydrog Energy* 2002;27:1339–47.
- [13] Hawkes FR, Hussy I, Kyazze G, Dinsdale R, Hawkes DL. Continuous dark fermentative hydrogen production by mesophilic microflora: principles and progress. *Int J Hydrog Energy* 2007;32:172–84.
- [14] Jung KW, Kim DH, Kim SH, Shin HS. Bioreactor design for continuous dark fermentative hydrogen production. *Bioresour Technol* 2011;102:8612–20.

- [15] Kim SH, Shin HS. Effects of base-pretreatment on continuous enriched culture for hydrogen production from food waste. *Int J Hydrog Energy* 2008;33:5266–74.
- [16] Shida GM, Barros AR, Reis DCM, Amorim ELCD, Damianovic MHRZ, Silva ED. Long-term stability of hydrogen and organic acids production in an anaerobic fluidized-bed reactor using heat treated anaerobic sludge inoculum. *Int J Hydrog Energy* 2009;34:3679–88.
- [17] Hernández-Mendoza CE, Moreno-Andrade I, Buitrón G. Comparison of hydrogen-producing bacterial communities adapted in continuous and discontinuous reactors. *Int J Hydrog Energy* 2014. <http://dx.doi.org/10.1016/j.ijhydene.2014.01.014>.
- [18] Lee DJ, Show KY, Su A. Dark fermentation on biohydrogen production: pure culture. *Bioresour Technol* 2011;102:8393–402.
- [19] Bakonyi P, Nemestóthy N, Lövitusz É, Bélafi-Bakó K. Application of Plackett–Burman experimental design to optimize biohydrogen fermentation by *E. coli* (XL1-BLUE). *Int J Hydrog Energy* 2011;36:13949–54.
- [20] Bakonyi P, Nemestóthy N, Ramirez J, Ruiz-Filippi G, Bélafi-Bakó K. *Escherichia coli* (XL1-BLUE) for continuous fermentation of bioH₂ and its separation by polyimide membrane. *Int J Hydrog Energy* 2012;37:5623–30.
- [21] Valdez-Vazquez I, Poggi-Varaldo HM. Hydrogen production by fermentative consortia. *Renew Sustain Energy Rev* 2009;13:1000–13.
- [22] Wong YM, Wu TY, Juan JC. A review of sustainable hydrogen production using seed sludge via dark fermentation. *Renew Sustain Energy Rev* 2014;34:471–82.
- [23] Pattrá S, Lay CH, Lin CY, O-Thong S, Reungsang A. Performance and population analysis of hydrogen production from sugarcane juice by non-sterile continuous stirred tank reactor augmented with *Clostridium butyricum*. *Int J Hydrog Energy* 2011;36:8697–703.
- [24] Hung CH, Chang YT, Chang YJ. Roles of microorganisms other than *Clostridium* and *Enterobacter* in anaerobic fermentative biohydrogen production systems – a review. *Bioresour Technol* 2011;102:8437–44.
- [25] Saady NMC. Homoacetogenesis during hydrogen production by mixed cultures dark fermentation: unresolved challenge. *Int J Hydrog Energy* 2013;38:13172–91.
- [26] Bakonyi P, Borza B, Orlovits K, Simon V, Nemestóthy N, Bélafi-Bakó K. Fermentative hydrogen production by conventionally and unconventionally heat pretreated seed cultures: a comparative assessment. *Int J Hydrog Energy* 2014;39:5589–96.
- [27] Ren NQ, Guo WQ, Wang XJ, Xiang WS, Liu BF, Wang XZ, et al. Effects of different pretreatment methods on fermentation types and dominant bacteria for hydrogen production. *Int J Hydrog Energy* 2008;33:4318–24.
- [28] Wang J, Wan W. Comparison of different pretreatment methods for enriching hydrogen-producing bacteria from digested sludge. *Int J Hydrog Energy* 2008;33:2934–41.
- [29] Ferreira Rosa PR, Santos SC, Silva EL. Different ratios of carbon sources in the fermentation of cheese whey and glucose as substrates for hydrogen and ethanol production in continuous reactors. *Int J Hydrog Energy* 2014;39:1288–96.
- [30] Lee KS, Lin PJ, Chang JS. Temperature effects on biohydrogen production in a granular sludge bed induced by activated carbon carriers. *Int J Hydrog Energy* 2006;31:465–72.
- [31] Ren NQ, Tang J, Liu BF, Guo WQ. Biological hydrogen production in continuous stirred tank reactor systems with suspended and attached microbial growth. *Int J Hydrog Energy* 2010;35:2807–13.
- [32] Li RY, Zhang T, H.H.P. Fang. Application of molecular techniques on heterotrophic hydrogen production research. *Bioresour Technol* 2011;102:8445–56.
- [33] Tolvanen KES, Karp MT. Molecular methods for characterizing mixed microbial communities in hydrogen-fermenting systems. *Int J Hydrog Energy* 2011;36:5280–8.
- [34] Venetsaneas N, Antonopoulou G, Stamatelatou K, Kornaros M, Lyberatos G. Using cheese whey for hydrogen and methane generation in a two-stage continuous process with alternative pH controlling approaches. *Bioresour Technol* 2009;100:3713–7.
- [35] Wu X, Lin H, Zhu J. Optimization of continuous hydrogen production from co-fermenting molasses with liquid swine manure in an anaerobic sequencing batch reactor. *Bioresour Technol* 2013;136:351–9.
- [36] Badiei M, Jahim JM, Anuar N, Abdullah SRS. Effect of hydraulic retention time on biohydrogen production from palm oil mill effluent in anaerobic sequencing batch reactor. *Int J Hydrog Energy* 2011;36:5912–9.
- [37] Chen CC, Lin CY, Chang JS. Kinetics of hydrogen production with continuous anaerobic cultures utilizing sucrose as the limiting substrate. *Appl Microbiol Biotechnol* 2001;57:56–64.
- [38] Cheng CH, Hung CH, Lee KS, Liao PY, Liang CM, Yang LH, et al. Microbial community structure of a starch-feeding fermentative hydrogen production reactor operated under different incubation conditions. *Int J Hydrog Energy* 2008;33:5242–9.
- [39] Hafez H, Baghchehsaraee B, Nakhla G, Karamanev D, Margaritis A, Naggar HE. Comparative assessment of decoupling of biomass and hydraulic retention times in hydrogen production bioreactors. *Int J Hydrog Energy* 2009;34:7603–11.
- [40] Li J, Zheng G, He J, Chang S, Qin Z. Hydrogen-producing capability of anaerobic activated sludge in three types of fermentations in a continuous stirred-tank reactor. *Biotechnol Adv* 2009;27:573–7.
- [41] Lin CY, Wu CC, Hung CH. Temperature effects on fermentative hydrogen production from xylose using mixed anaerobic cultures. *Int J Hydrog Energy* 2008;33:43–50.
- [42] Tapia-Venegas E, Ramirez JE, Donoso-Bravo A, Jorquera L, Steyer JP, Ruiz-Filippi G. Bio-hydrogen production during acidogenic fermentation in a multi-stage stirred tank reactor. *Int J Hydrog Energy* 2013;38:2185–90.
- [43] Ren NQ, Zhao D, Chen X, Li J. Mechanism and controlling strategy of the production and accumulation of propionic acid for anaerobic wastewater treatment. *Sci China Ser B* 2002;45:319–27.
- [44] Ren NQ, Chua H, Chan SY, Tsang YF, Wang YJ, Sin N. Assessing optimal fermentation type for bio-hydrogen production in continuous-flow acidogenic reactors. *Bioresour Technol* 2007;98:1774–80.
- [45] Wang L, Zhou Q, Li FT. Avoiding propionic acid accumulation in the anaerobic process for biohydrogen production. *Biomass Bioenergy* 2006;30:177–82.
- [46] Biohydrogen production from purified terephthalic acid (PTA) processing wastewater by anaerobic fermentation using mixed microbial communities. In: Zhu GF, Wu P, Wei QS, Lin JY, Gao YL, Liu HN, editors. *Int J Hydrog Energy*, 35; 2010. p. 8350–6.
- [47] Kim DH, Han SK, Kim SH, Shin HS. Effect of gas sparging on continuous fermentative hydrogen production. *Int J Hydrog Energy* 2006;31:2158–69.
- [48] Lin CY, Chang CC, Hung CH. Fermentative hydrogen production from starch using natural mixed cultures. *Int J Hydrog Energy* 2008;33:2445–53.
- [49] Davila-Vazquez G, Cota-Navarro CB, Rosales-Colunga LM, León-Rodríguez A, Razo-Flores E. Continuous biohydrogen production using cheese whey: improving the hydrogen production rate. *Int J Hydrog Energy* 2009;34:4296–304.
- [50] Yuan Z, Yang H, Zhi X, Shen J. Increased performance of continuous stirred tank reactor with calcium supplementation. *Int J Hydrog Energy* 2010;35:2622–6.
- [51] Keskin T, Giusti L, Azbar N. Continuous biohydrogen production in immobilized biofilm system versus suspended cell culture. *Int J Hydrog Energy* 2012;37:1418–24.
- [52] Chang FY, Lin CY. Biohydrogen production using an up-flow anaerobic sludge blanket reactor. *Int J Hydrog Energy* 2004;29:33–9.
- [53] Zhao QB, Yu HQ. Fermentative H₂ production in an upflow anaerobic sludge blanket reactor at various pH values. *Bioresour Technol* 2008;99:1353–8.
- [54] Hernández-Mendoza CE, Buitrón G. Suppression of methanogenic activity in anaerobic granular biomass for hydrogen production. *J Chem Technol Biotechnol* 2014;89:143–9.
- [55] Yang H, Shao P, Lu T, Shen J, Wang D, Xu Z, et al. Continuous bio-hydrogen production from citric acid wastewater via facultative anaerobic bacteria. *Int J Hydrog Energy* 2006;31:1306–13.
- [56] Wu X, Zhu J, Dong C, Miller C, Li Y, Wang L, et al. Continuous biohydrogen production from liquid swine manure supplemented with glucose using an anaerobic sequencing batch reactor. *Int J Hydrog Energy* 2009;34:6636–45.
- [57] Kim SH, Han SK, Shin HS. Optimization of continuous hydrogen fermentation of food waste as a function of solids retention time independent of hydraulic retention time. *Process Biochem* 2008;43:213–8.
- [58] Wu X, Yao W, Zhu J. Effect of pH on continuous biohydrogen production from liquid swine manure with glucose supplement using an anaerobic sequencing batch reactor. *Int J Hydrog Energy* 2010;35:6592–9.
- [59] Jung KW, Kim DH, Kim SH, Shin HS. A simple method to reduce the start-up period in a H₂-producing UASB reactor. *Int J Hydrog Energy* 2011;36:1466–73.
- [60] Wu SY, Hung CH, Lin CY, Lin PJ, Lee KS, Lin CN, et al. HRT-dependent hydrogen production and bacterial community structure of mixed anaerobic microflora in suspended, granular and immobilized sludge systems using glucose as the carbon substrate. *Int J Hydrog Energy* 2008;33:1542–9.
- [61] Kim SH, Han SK, Shin HS. Performance comparison of a continuous-flow stirred-tank reactor and an anaerobic sequencing batch reactor for fermentative hydrogen production depending on substrate concentration. *Water Sci Technol* 2005;52:23–9.
- [62] Carrillo-Reyes J, Celis LB, Alatraste-Mondragón F, Razo-Flores E. Different start-up strategies to enhance biohydrogen production from cheese whey in UASB reactors. *Int J Hydrog Energy* 2012;37:5591–601.
- [63] Lin CY, Wu SY, Lin PJ, Chang JS, Hung CH, Lee KS, et al. Pilot-scale hydrogen fermentation system start-up performance. *Int J Hydrog Energy* 2010;35:13452–7.
- [64] Thanwitt P, Wirojanagud W, Reungsang A. Effect of hydraulic retention time on hydrogen production and chemical oxygen demand removal from tapioca wastewater using anaerobic mixed cultures in anaerobic baffled reactor (ABR). *Int J Hydrog Energy* 2012;37:15503–10.
- [65] Chen CC, Lin CY. Start-up of anaerobic hydrogen producing reactors seeded with sewage sludge. *Acta Biotechnol* 2001;21:371–9.
- [66] Zhang ZP, Show KY, Tay JH, Liang DT, Lee DJ, Jiang WJ. Effect of hydraulic retention time on biohydrogen production and anaerobic microbial community. *Process Biochem* 2006;41:2118–23.
- [67] Lin CY, Cheng CH. Fermentative hydrogen production from xylose using anaerobic mixed microflora. *Int J Hydrog Energy* 2006;31:832–40.
- [68] Jo JH, Jeon CO, Lee DS, Park JM. Process stability and microbial community structure in anaerobic hydrogen-producing microflora from food waste containing kimchi. *J Biotechnol* 2007;131:300–8.
- [69] Kim DH, Kim SH, Ko IB, Lee CH, Shin HS. Start-up strategy for continuous fermentative hydrogen production: early switchover from batch to continuous operation. *Int J Hydrog Energy* 2008;33:1532–41.
- [70] Akutsu Y, Li YY, Tandukar M, Kubota K, Harada H. Effects of seed sludge on fermentative characteristics and microbial community structures in thermophilic hydrogen fermentation of starch. *Int J Hydrog Energy* 2008;33:6541–8.
- [71] Chang JS, Lee KS, Lin PJ. Biohydrogen production with fixed-bed bioreactors. *Int J Hydrog Energy* 2002;27:1167–74.

- 1 [72] Gadow SI, Jiang H, Hojo T, Li YY. Cellulosic hydrogen production and microbial
2 community characterization in hyper-thermophilic continuous bioreactor. *Int J Hydrog*
3 *Energy* 2013;38:7259–67.
- 4 [73] Akutsu Y, Lee DY, Chi YZ, Li YY, Harada H, Yu HQ. Thermophilic fermentative
5 hydrogen production from starch-wastewater with bio-granules. *Int J Hydrog*
6 *Energy* 2009;34:5061–71.
- 7 [74] Antonopoulou G, Gavala HN, Skiadas IV, Lyberatos G. Influence of pH on
8 fermentative hydrogen production from sweet sorghum extract. *Int J Hydrog*
9 *Energy* 2010;35:1921–8.
- 10 [75] Azbar N, Dokgöz FTC, Keskin T, Korkmaz KS, Syed HM. Continuous fermenta-
11 tive hydrogen production from cheese whey wastewater under thermophilic
12 anaerobic conditions. *Int J Hydrog Energy* 2009;34:7441–7.
- 13 [76] Hussy I, Hawkes FR, Dinsdale R, Hawkes DL. Continuous fermentative hydro-
gen production from sucrose and sugarbeet. *Int J Hydrog Energy* 2005;30:
471–83.
- [77] Jung KW, Kim DH, Kim SH, Shin HS. Continuous fermentative hydrogen
production from coffee drink manufacturing wastewater by applying UASB
reactor. *Int J Hydrog Energy* 2010;35:13370–8.
- [78] Jung KW, Kim DH, Kim SH, Shin HS. Continuous fermentative hydrogen and
methane production from *Laminaria japonica* using a two-stage fermentation
system with recycling of methane fermented effluent. *Int J Hydrog Energy*
2012;37:15648–57.
- [79] Yang P, Zhang R, McGarvey JA, Benemann JR. Biohydrogen production from
cheese processing wastewater by anaerobic fermentation using mixed micro-
bial communities. *Int J Hydrog Energy* 2007;32:4761–71.

UNCORRECTED PROOF