

ATTENUATION CHARACTERISTICS OF SAUDI ARABIAN RESERVOIR SANDSTONE AND LIMESTONE CORES

M. A. Mohiuddin¹, G. Korvin², A. Abdulraheem¹, and K. Khan¹

¹Center for Petroleum & Minerals, The Research Institute. ²Earth Science Department. King Fahd University of Petroleum & Minerals, Dhahran, Saudi Arabia.

INTRODUCTION

Lithology, porosity, permeability, pore fluids, and effective pressure are some of the important criteria for reservoir characterization. These parameters significantly affect the seismic signature of a reservoir. Thus, establishing correlations between seismic properties on one hand, and lithology, porosity, permeability, and stress on the other, will increase the reliability of reservoir property predictions from seismic measurements. Another advantage of seismic attributes is that they are much easier to measure in-situ than the above mentioned reservoir properties, and since such measurements are noninvasive, an observed correlation between them could also prove useful as an important exploration tool for oil and gas reservoirs.

In recent years, with the improvement in borehole sonic sources and receivers, full waveforms are being recorded and processed at the rig site itself. Enough expertise is gained to accurately compute the attenuation quality factors from the full waveforms recorded in the laboratory and borehole sonics. In this paper attenuation quality factors of several Saudi Arabian reservoir sandstone and limestone cores are computed and possible correlation between quality factors and reservoir properties like porosity, permeability, velocities, and wetting state are studied.

OBJECTIVE

The objective of this paper is to study the pressure dependent behavior of quality factor and to discuss the possible correlation of the seismic attributes like attenuation to the more relevant reservoir characterization properties like porosity, permeability, velocity, and saturation. It has been observed that quality factor Q does not have a good correlation with either porosity or permeability (Best et al., 1994 and Assefa et al., 1999). Hence, in this paper another term, the ratio of P-wave quality factor (Q_p) to S-wave quality factor (Q_s) is shown to have better correlation with porosity and permeability.

LABORATORY MEASUREMENTS

A total of twenty sandstone and limestone reservoir cores have been tested for porosity, permeability, P- and S-wave velocities and quality factors under dry and water saturated conditions. The dried cores were flushed with air, therefore in effect, dry core samples are air saturated dry rocks. Nine simultaneous P- and S-wave measurements were made in the pressure range of 0 – 82 MPa. The dry and water saturated P- and S-wave velocities and quality factors were measured on the same core sample. First the measurements on dry core were completed, the core sample was then fully saturated with water and then the P- and S-wave velocities and quality factors were measured on the water saturated core

sample under the same confining pressure conditions. Simultaneous Porosity and Permeability measurements in the same pressure range were made on a different sister sample from the same depth.

The full wave broadband ultrasonic waves used in this study had a central frequency of 700 KHz. The attenuation quality factors were calculated using spectral ratio method (Toksoz et al., 1979). Correction for diffraction loss due to the finite size of the transducer and the non-planar wavefronts (Papadakis, 1968) were applied using tabulated data of Benson and Kiyohara (1974).

To validate the calculation and diffraction correction procedure for the quality factors, Q , some experiments were performed on French Gres' des Vesges sandstone samples and the results were compared to those available in the literature (Lucet, 1989). Geological description of the Gres' des Vesges sandstone is also given in Lucet, 1989. Table 1 gives the P- and S-wave quality factor, Q , of the Gres' des Vesges sandstone samples where it is observed that the calculated and published results compare favorably.

RESULTS AND DISCUSSION

Figure 1 shows the behavior of quality factors with confining pressure. It is observed that quality factor Q increases with stress. Since quality factor is inversely proportional to attenuation, this implies that the attenuation decreases with increase in confining pressure (Tao et al., 1995 and Best, 1997). Similar affect of confining pressure is observed on P- and S-wave quality factors under both dry and saturated conditions. In Tao et al. (1995) it is suggested that the rate of increase in Q with pressure depends on the pore structure of the rock.

Several investigators (Assefa et al., 1999; Best et al., 1994 and Klimentos and McCann, 1990) have reported that, in general, attenuation increases with porosity and permeability but the correlation is very weak with a large scatter in the data. Similar weak correlations were observed between quality factor, porosity and permeability for this dataset also. Hence a new parameter, the ratio of Q_p to Q_s , is correlated to porosity, permeability, and V_p/V_s in this paper. It is observed in figures 2 and 3 that the ratio of P-wave to S-wave quality factor gives a better correlation with reservoir hydraulic properties like porosity and permeability. Q_p/Q_s is better correlated to permeability than to porosity. Considering the importance of permeability and the difficulty in predicting it in-situ from the available techniques, the authors believe that this correlation is very promising. It may be noted that in figures 2 and 3, the Q_p/Q_s versus porosity and permeability are plotted at in-situ conditions.

In figure 4, the P-wave quality factors of dry cores are plotted against those of water saturated cores at in-situ conditions. It is observed that Q_p of dry rocks is greater than that of water saturated rocks. This confirms the results presented by Klimentos (1995) and Tao et al. (1995). In figure 5, the Q_p versus Q_s of the sandstone and limestone reservoir core samples at different saturation conditions is plotted. It is observed that Q_p is greater than Q_s for all the samples except for dry sandstones. It confirms that $Q_p/Q_s < 1$ for gas saturated sandstone as reported by Klimentos (1995). For limestones and water saturated sandstone $Q_p/Q_s \geq 1$.

Klimentos (1995) reported that a plot of Q_p/Q_s versus V_p/V_s distinguishes between oil and water via V_p/V_s ratio and also eliminates the possibility of the hydrocarbon being detected as gas via Q_p/Q_s since $Q_p > Q_s$ in hydrocarbon zone. Thus combining Q_p/Q_s and V_p/V_s may help differentiate between gas, oil, and water. Figure 6 gives a plot of Q_p/Q_s versus V_p/V_s at in-situ conditions for the reservoir cores studied in this paper. It is observed that Q_p/Q_s ratio shows significant difference for dry and water saturated sandstones. Difference in saturations of limestones could not be distinguished on the basis of Q_p/Q_s ratio alone. However, this difference can be pointed out using V_p/V_s ratio.

CONCLUSIONS

- A new parameter, the ratio of P-wave to S-wave quality factors Q_p/Q_s gives a good correlation to porosity and permeability.
- The results presented in this paper confirm the previously published results in literature.
- In most of the studies reported in literature, outcrop rocks with emphasis on sandstone were used. Whereas in this paper sandstone and limestone reservoir cores are used. Therefore correlations developed using outcrop samples give a good estimate of reservoir rock properties.

ACKNOWLEDGMENT

The authors appreciate the support provided by The Research Institute and Earth Sciences Department during this research. This research is part of a study sponsored by Saudi ARAMCO. Permission to publish this paper is highly appreciated. The French outcrop sandstone samples were provided to us by Dr. B. Zinszner, IFP. His review of the Q calculation procedure is also gratefully acknowledged.

REFERENCES

- Assefa, S., C. McCann, and J. Sothcott (1999). Attenuation of P- and S-waves in limestones. *Geophysical Prospecting*, v. 47, p. 359-392.
- Benson, G. C. and O. Kiyohara (1974). Tabulation of some integral functions describing diffraction effects on the ultrasonic field of a circular piston source. *Journal of the Acoustical Society of America*, v. 55, p. 184-185.
- Best, A. I., C. McCann, and J. Sothcott (1994). The relationships between the velocities, attenuations and petrophysical properties of reservoir sedimentary rocks. *Geophysical Prospecting*, v. 42, p. 151-178.
- Best, A. I. and M. S. Sams (1997). Compressional wave velocity and attenuation at ultrasonic and sonic frequencies in near-surface sedimentary rocks. *Geophysical Prospecting*, v. 45, p. 327-344.
- Klimentos, T. and C. McCann (1990). Relationships among compressional wave attenuation, porosity, clay content, and permeability in sandstones. *Geophysics*, v. 55, p. 998-1014.
- Klimentos, T. (1995). Attenuation of P- and S-waves as a method of distinguishing gas and condensate from oil and water. *Geophysics*, v. 60, p. 447-458.
- Lucet, N. (1989). *Vitesse et atténuation des ondes élastiques soniques et ultrasoniques dans les roches sous pression de confinement*. Ph. D. Thesis, Institut Français du Pétrole.

Papadakis, E. P. (1968). Ultrasonic attenuation caused by scattering in polycrystalline media. *Physical Acoustics 4, Part B* (ed. W. P. Mason), Academic Press Inc., p. 269-328.

Tao, G., M. S. King, and M. Nabi-Bidhendi (1995). Ultrasonic wave propagation in dry and brine-saturated sandstones as a function of effective stress: laboratory measurements and modeling. *Geophysical Prospecting*, v. 43, p. 299-327.

Toksoz, M. N., D. H. Johnston, and A. Timur (1979). Attenuation of seismic waves in dry and saturated rocks. I. Laboratory measurements. *Geophysics*, v. 44, p. 681-690.

Table 1. Comparison of quality factors Q for French sandstone Gres' des Veges.

Effective Confining Pressure (MPa)	Q _p		Q _s	
	Present Calculation	Lucet (1989)	Present Calculation	Lucet (1989)
5	18	17	-	8
10	22	23	14	11
20	29	31	15	12

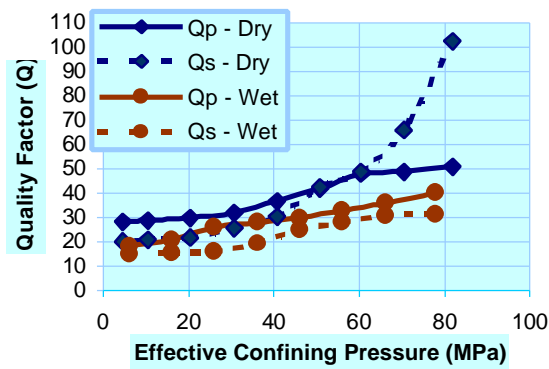


Figure 1: Q versus confining pressure of a representative rock sample.

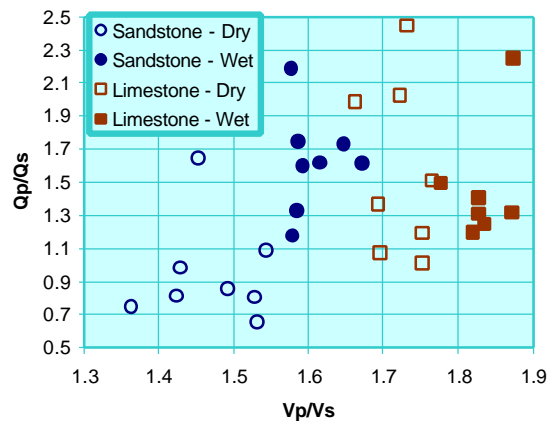


Figure 2: Qp/Qs versus porosity.

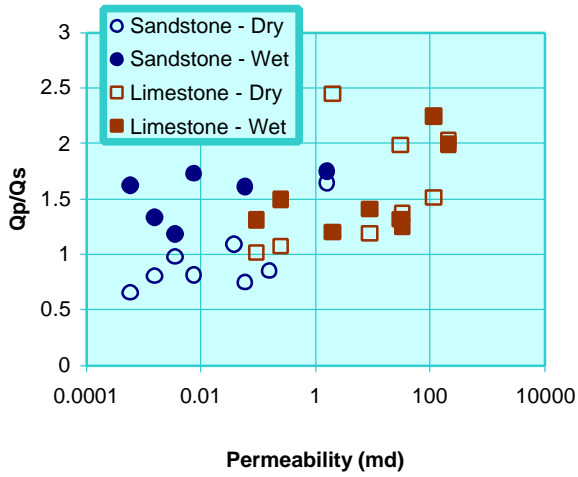


Figure 3: Q_p/Q_s versus permeability.

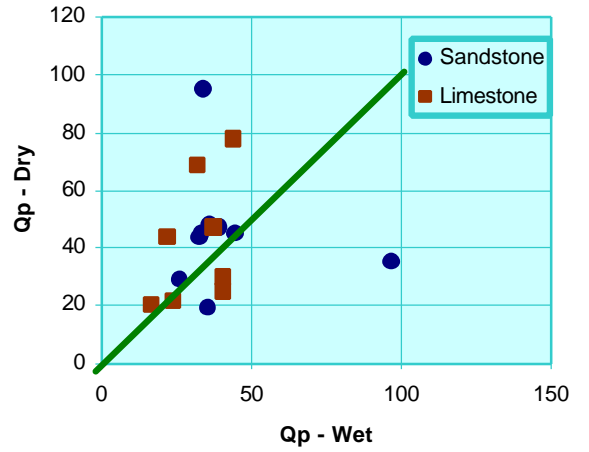


Figure 4: P-wave quality factor for dry and water saturated rock samples.

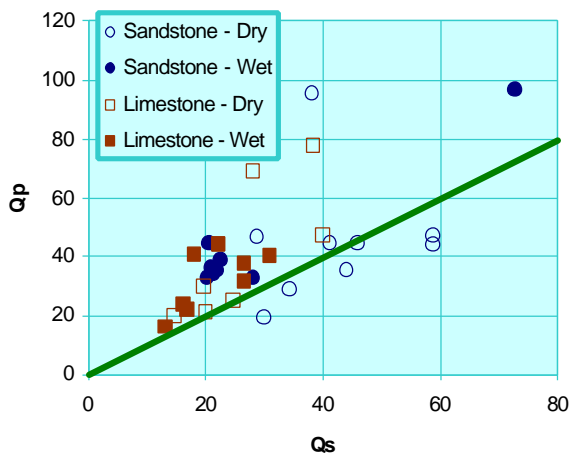


Figure 5: P-wave versus S-wave quality factors.

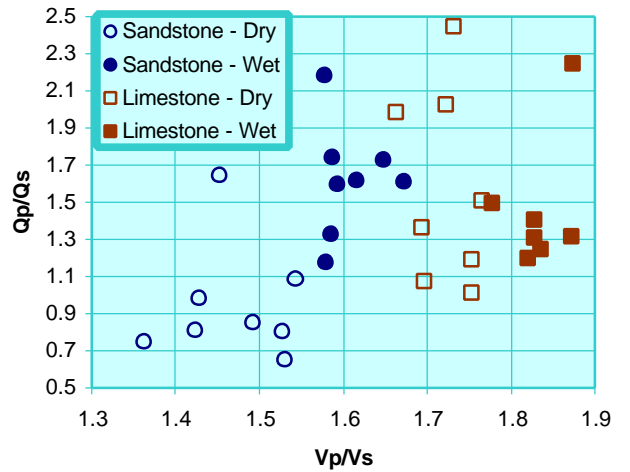


Figure 6: Q_p/Q_s versus V_p/V_s ratio for the Saudi Arabian reservoir rock cores.