

An ETOP metric for Link Positions Routing in Wireless Network

G. D. Govindwar *, Prof. P. A. Tijare **

*Department of Information Technology, SANT GADAGE BABA AMRAVATI University, Amravati

** Department of Computer Science, SANT GADAGE BABA AMRAVATI University, Amravati

Abstract

Here we account for the fact that MAC protocols incorporate a finite number of transmission attempts per packet. The performance of a path depends not only on the number of the links on the path and the quality of its links, but also, on the relative positions of the links on the path based on this observation, we propose ETOP (Expected number of Transmissions On a Path), a path metric that captures the expected number of link layer transmissions required for reliable end-to-end packet delivery. We can analytically compute ETOP, which is not trivial, since ETOP is a noncommutative function of the link success probabilities. Although ETOP is a more involved metric, we show that the problem of computing paths with the minimum ETOP cost can be solved by a greedy algorithm. We will try to implement and evaluate a routing approach based on ETOP metric on wireless network.

Keywords - Greedy choice, link position, noncommutative metric, optimal substructure property, wireless network.

1. Introduction

In general routing scenario it is difficult to reduce the number of link layer retransmissions in a wireless networks and so it is hard to ensure that there may be increase in throughput of complete system. We can easily achieve by selecting routes with inherently reliable links. Reducing retransmission has two effects. 1. By using this reliable path the throughput of the overall system will increase. 2. The throughput of the network as a whole increases, since the fewer number of transmissions is inversely proportional to the overall network-wide contention.

The cost of a path when the link layer offers limited reliability depends not only on the number of links on the path and the quality of these links, but also on the relative positions of the links on the path. In more detail, one has to account for the possibility that a packet may be dropped at the link layer given the bounded number

of retransmissions at that layer. With a reliable transport protocol, such a dropped packet will have to be retransmitted from the source again and again. Thus, a packet drop close to the destination is more costly, since it induces retransmissions (in the subsequent transport layer retransmission attempt) on links that were successfully traversed prior to the drop.

We can analyze the above scenario with the help of following example shown in figure 1. In this we have two paths to travel data from source P to destination Q. The number shown on the link indicates the probability of successful transmission in between source to destination and the intermediate nodes. These values are considered as link success probability across that link. If we consider the minimum hop count as a metric for routing then it may seem that [P, L, M, Q] is the better path instead of [P, I, J, K, Q]. In fact, previous strategies such as [1] which works on minimum hop count based parameter will choose that path but in case if another path [P, I, J, K, Q] can work better than [P, L, M, Q]. If the link layer performs at most two transmissions per packet then it consist one transmission and one retransmission attempt is allowed. So it is easy to compute that the expected total number of link layer transmissions per packet is approximately 13 for the path [P, I, J, K, Q], while it is approximately 20 for the path [P, L, M, Q]. The cost is higher because of weaker link and so the packet drop possibility is much higher close to destination, in the path [P, L, M, Q].

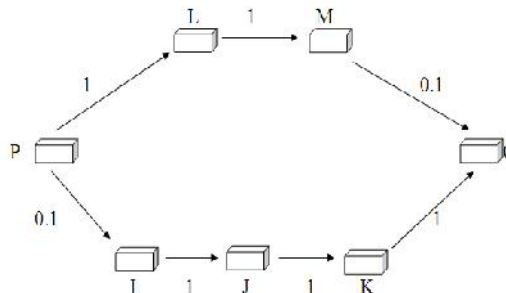


Figure1. The effect of the link positions on the performance of a path.

In [9] Author G. Jakllari has proposed a new path metric. This path metric calculates the expected number of link layer transmissions, while this we assume that they are finite number of retransmissions at link layer. We call our metric as Expected number of Transmissions On a Path or ETOP for short. Expected number of Transmissions On a Path routing metric considers the relative position of the links. ETOP is a non commutative function of the link success probabilities unlike the previously used metrics because transmission based on the number of retransmission and the link positions which vary as the node position will vary.

1. We derive a closed form expression to compute the ETOP cost of a path. Note that this derivation is nontrivial; the ETOP cost cannot be computed as a simple sum of link level metrics, because of the finite number of retransmissions at the link layer. 2. It is more involved calculation, ETOP satisfies: 1) the greedy-choice property, and 2) the optimal substructure property. Thus, computing the paths of minimum ETOP cost can be achieved with a greedy approach [1], and we develop an algorithm to that effect. 3. We develop and implement an ETOP based routing protocol [2].

2. Literature Review & Related Work

We have to account for the possibility that a packet may be dropped at the link layer given the bounded number of retransmissions at that layer. With a reliable transport protocol, such a dropped packet will have to be retransmitted from the source. Thus, a packet drop close to the destination is expensive, since it induces retransmissions on links that were successfully traversed prior to the drop. We have a link metric called ETX (Expected Transmission Count) [2], which is equal to the inverse of a link's reliability. The end-to-end cost of a path is the sum of the ETX values of the links on the path; the routing layer simply computes routes that minimize this cost. A mechanism for estimating the link reliabilities, based on dedicated broadcast packets. Experiments on a 29-node 802.11 testbed showed that ETX based routing results in better end-to-end throughput as compared to minimum-hop routing.

Other related efforts in [3], [4] and [5] have used the inverse of the link reliability (ETX) in combination with other parameters (such as the link bandwidth) for improving routing performance in multihop wireless networks. In [4] Draves et al. propose a new routing metric, WCETT (Weighted Cumulative Expected Transmission Time), that considers the link bandwidth

and interference in addition to the (inverse of) the link reliability. In this multi-radio, multiple channel technology is a visible solution to increase the capacity of wireless mesh network. On the one hand, the interference can be reduced by tuning neighboring nodes on different channels. On the other hand, multi-hop coordination schemes that exploit the presence of multiple radios can be deployed at the MAC layer so author has proposed a cross layer architecture that provides efficient end-to-end communication in multi-radio multi-channel wireless mesh networks.

In [5], C. Koksall and H. Balakrishnan propose a mETX (modified ETX) and ENT (Expected Number of Transmission) that extend ETX to account for highly variable link reliabilities. These quality aware routing metric expected number of transmission count can improve the throughput of wireless mesh network by significant amount compared to traditional shortest hop-count routing protocol, it does not cope well with short-term channel variations because it uses the mean loss ratios in making routing decision. For example radio channel have high variability and less packet loss ratio which indicates that metrics that use mean loss ratio will perform poorly because they do not adapt well to burst loss conditions.

The number of transmission of the packet on radio link is an appealing cost metric because minimizing the total number of transmission maximizes the overall throughput; moreover this metric minimizes the transmission energy consumed in transferring the packet along a path in a network when the nodes transmit at a constant power level. Although experimental result in [5] shows that ETX performs better than traditional shortest-path routing under static network condition, it may perform poorly under highly variable channel condition, because ETX consider only the average channel behavior. In particular, the routing protocol measures the channel state using a set of probe packet sent once every second, averaging the loss ratio over an interval of about 10 seconds. The reciprocal of this estimate is assigned as the ETX of the link. In this procedure, the number of transmissions is implicitly assumed to be a geometric random variable; if successive packet are lost independently with probability equal to the average packet error rate of channel, the assumption is accurate. Packet losses generally occur in burst, however, and the packet loss probability is usually not constant.

The used metric is similar to ETX for finding minimum energy paths used in [6]. There are two more

models. In first model, the link layer performs no retransmissions and all the reliability is handled end-to-end. In the second model, referred to as the mixed model, the link layer either performs no retransmissions, and the reliability is handled end-to-end, or it performs an unbounded number of retransmissions. For both the models design optimal algorithms. However, the case in which the link layer offers a finite number of retransmissions is not considered. In [7] the product of ETX with the distance traversed toward the destination is used for energy-efficient geographic routing.

A similar model is used for energy efficient routing. In [14], routing is jointly considered with power control, and in addition to the unicast case, the multicast case is also considered based on measurements, it uses broadcast packets to estimate the link reliability for data packets could lead to inaccuracies. Therefore, both efforts propose algorithms for data-driven link reliability estimation.

The inverse of the link reliability estimates the expected number of transmissions (including retransmissions), IE, needed to send a packet across a link, with the implicit assumption that an infinite number of retransmissions is allowed on the link. Therefore, the link layer never drops a packet. To elucidate this, let p be the probability of a successful transmission across a link. Assuming that the outcomes of the transmission attempts on the link are independent and identically distributed, IE can be computed as

$$IE = \sum_{j=1}^{\infty} j(1-p)^{j-1} p \quad (1)$$

Since the link layer never drops a packet, there is never a need for a transport layer retransmission. This simplifies the calculation of the retransmissions needed for reliable packet delivery over a path; the number of retransmissions depends only on the link quality and not on their positions, i.e., the calculation is commutative. In practice, however, there are a bounded number of link layer transmission attempts (as with 802.11) per packet and a reliable transport protocol will need to perform an end-to-end retransmission to cope with link layer packet drops. In this case, as discussed with example in Figure 1, the relative position of the links on a path becomes important when computing the cost of a path.

3. Analysis of Problem

Conventional routing protocols for adhoc networks select the routes under the metric of the minimum hop count.

The metric most commonly used by existing ad hoc routing protocols is minimum hop-count. These protocols typically use only links that deliver routing probe packets (query packets, as in DSR or AODV, or routing updates, as in DSDV). This approach implicitly assumes that links either work well or don't work at all. While often true in wired networks, this is not a reasonable approximation in the wireless case: many wireless links have intermediate loss ratios. A link that delivers only 50% of packets may not be useful for data, but might deliver enough routing update or query packets that the routing protocol uses it anyway.

Minimizing the hop-count maximizes the distance traveled by each hop, which is likely to minimize signal strength and maximize the loss ratio. Even if the best route is a minimum hop-count route, in a dense network there may be many routes of the same minimum length, with widely varying qualities; the arbitrary choice made by most minimum hop-count metrics is not likely to select the best. One contribution of this paper is to quantify these effects. One approach to fixing this problem is to mask transmission errors. For example, the 802.11b ACK mechanism resends lost packets, making all but the worst 802.11b links appear loss-free. However, retransmission does not make lossy links desirable for use in paths: the retransmissions reduce path throughput and interfere with other traffic. Another approach might be to augment minimum hop-count routing with a threshold that ignores lossy links, but a lossy link may be the only way to reach a certain node, and there might be significant loss ratio differences even among the above threshold links.

Minimum hop-count performs well whenever the shortest route is also the fastest route, especially when there is a one-hop link with a low loss ratio. A one-hop link with a loss ratio of less than 50% will outperform any other route. The overhead of DSDV route advertisements reduces the maximum link capacity by about 15 to 25 packets. A number of superficially attractive metrics are not suitable. Using hop-count as the metric while ignoring links with loss ratios above a certain threshold may cause some destinations to be unreachable. Using the product of the per-link delivery ratios as the path metric, in an attempt to maximize the end-to-end delivery probability, fails to account for inter-hop interference; this metric would view a perfect two-hop route as better than a one-hop route with a 10% loss ratio, when in fact the latter would have almost twice the throughput. The same objection applies to

using the useful throughput of a path's bottleneck (highest-loss-ratio) link as the path's metric. ETOP, however, addresses each of these concerns. End-to-end delay is another potential metric, but changes with network load as interface queue lengths vary; this can cause routes to oscillate away from a good path once the path is used.

The use of ETOP reduces the number of link layer transmissions (including retransmissions) significantly compared to ETX. ETOP is designed to reduce the retransmissions costs at the MAC layer and thus, it is important that as we are suppose to be examine whether ETOP has met its design goals in further sections.. Our goal is to design a metric that have a less packet loss ratio and minimum transmission delay which performed well in larger network. In further section 4, we discuss about how to compute the ETOP metric with certain assumption and network notations. The key observation that motivates this work is the cost of a path when the link layer offers limited reliability depends not only on the number of links on the path and the quality of these links, but also on the relative positions of the links on the path. In more detail, one has to account for the possibility that a packet may be dropped at the link layer given the bounded number of retransmissions at that layer. With a reliable transport protocol, such a dropped packet will have to be retransmitted from the source. Thus, a packet drop close to the destination is expensive, since it induces retransmissions (in the subsequent transport layer retransmission attempt) on links that were successfully traversed prior to the drop.

4. Proposed Work and Objectives

4.1 Computing ETOP

In our model, unlike previous efforts, we account for the fix number of retransmission attempts at the data link layer (leading to possible packet drops at this layer). We then assume that a transport layer protocol such as UDP performs end-to-end retransmission attempts (e2e attempts) until the packet is finally delivered to the destination node from source node.


4.2 Assumptions

1. The probability of a successful transmission on a link does not change between retransmission attempts. In other words, the outcomes of link layer transmission attempts are independent and identically distributed (IID).

2. Assume that the power and bit-rate used for each transmission by a node will not vary.

4.3 Network representation and notation

Author model the wireless network as a directed graph $G(V,E,w)$, where V is the set of nodes and E the links. Every link $i \in E$ is assigned a weight $0 < p_i \leq 1$, which represents the packet delivery probability over that link with a single transmission attempt. Consider the problem of sending a packet from a source node v_0 , to a destination node v_n , along a n -link path via nodes v_1, v_2, \dots, v_n . The source, node v_0 , initiates an end to end attempt. First, the packet is passed on to the link layer, which will transmit it to node v_1 . If successfully received by node v_1 , it will then be transmitted to node v_2 , and so forth, until the packet reaches node v_n . There is a probability $0 < p_i \leq 1$ where $i = 1, 2, \dots, n$ that the packet, when transmitted by node v_{i-1} , will reach node v_i . If the packet transmitted by node v_{i-1} does not reach node v_i , it is transmitted again by the link layer of node v_{i-1} . Upto K transmission attempts (including the initial attempt) are made, and the packet is dropped if the K^{th} transmission fails to reach node v_i .

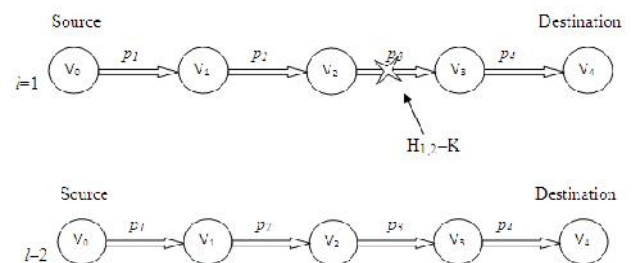

First e2e attempt (l=1) failed after crossing two links - > $M_1=2$

Second e2e attempt (l=2) succeeded - > $M_2=4$

There were two e2e attempts on a 4 links path - > Y_4

Figure 3: An example to illustrate our modeling assumption and highlight notation

The drop is reported to the transport layer of node v_0 . In response, the transport layer of v_0 initiates a new e2e attempt for the same packet. For every e2e attempt, there is a cost: the number of link level transmissions during this attempt. Let T_n be a random variable that represents the sum of the costs of all the e2e attempts made in order for a packet to be delivered from node v_0 to node v_n . Our goal is to compute the expected value of T_n , the ETOP cost of the path, as a function of link weights, p_i , and the

bound on the number of link level transmissions, K . Let Y_n denote the random variable representing the number of e2e attempts required in order for the packet to be delivered to the destination on the n -hop path. Let M_l denote the number of consecutive hops that are successfully traversed along the path, beginning at node v_0 , in the l^{th} e2e attempt. Thus, $M_l = 0$ if the packet fails to reach node v_1 from node v_0 , and $M_l = n$ if the message has reached v_n . If $M_l < n$, the $(l+1)^{st}$ e2e attempt begins. We assume that the random variables M_1, M_2, \dots , are independent and identically distributed (IID) and can be represented by a single random variable M . Let $H_{l,j}$ denote the number of link layer transmissions needed to deliver the packet from node v_j to node v_{j+1} in the l^{th} e2e attempt. If the message has successfully traversed the link from v_j to v_{j+1} , $H_{l,j} = 1$; else, if the message fails to reach node v_{j+1} from node v_j , then, $H_{l,j} = K$ and a new e2e attempt is started at node v_0 . For each node v_j , we assume that $H_{1,j}, H_{2,j}, \dots$, are IID random variables and we use the notation H_j to represent this common random variable. To elucidate the meaning of the variables defined so far, we consider a simple scenario, depicted in Fig.3, that can occur when a packet is transmitted from v_0 to v_4 . Let there be two e2e attempts ($Y_4 = 2$) to deliver a single packet from the node v_0 to node v_4 . On the first e2e attempt, the packet crosses links (v_0, v_1) and (v_1, v_2) after being transmitted only once. However, it is dropped at node v_2 . Therefore, $H_{1,0} = H_{1,1} = H_{1,2} = K$, and $M_1 = 2$. The cost in terms of link level transmissions incurred on this e2e attempt is $K + 2$. On the second attempt, the packet is delivered to the destination, node v_4 , and crosses each link with a single link layer transmission attempt. Therefore, $H_{2,0} = H_{2,1} = H_{2,2} = H_{2,3} = 1$ and $M_2 = 4$.

The cost in terms of link level transmissions incurred on this e2e attempt is 4. The total cost incurred in terms of link level transmissions to deliver the packet from node v_0 to node v_4 , is $T_4 = K + 6$. The cost of a path, using the model and the random variables defined above, for the general case of a n -link path, the cost, T_n , is given by

$$T_n = \sum_{l=1}^{Y_n} \left(\left[\sum_{j=0}^{M_l-1} H_{l,j} \right] + K \cdot \text{II}(l < Y_n) \right) \quad (2)$$

where $\sum_{j=0}^{M_l-1} H_{l,j} = 0$ and $\text{II}(l < Y_n)$ represents the indicator function that takes on a value 1 when $l < Y_n$ and 0 otherwise. If $l < Y_n$, the specific e2e attempt failed to deliver the packet to the destination, i.e., the packet was dropped somewhere along the path. We know that the

node at which the packet was dropped performed exactly K transmissions. The summation inside the parentheses simply represents the number of link level transmissions in the process of crossing M_l links during the l^{th} e2e attempt.

We will implement a routing strategy based on the algorithm described in ETOP using greedy algorithm on indoor wireless mesh network. While routing implementation, we will use ETOP-based routing as part of a modified version of the AOMDV (Adhoc On demand Multipath Distance Vector routing) protocol for the Linux kernel. We chose AOMDV because 1) it is one of the most popular protocols for multihop wireless networks and hence, its implementations are readily available and 2) it allows a source to decide on the path to the destination (required by ETOP-R since it is noncommutative). Furthermore, we consider the ETX metric for comparison and use the implementation of the routing strategy based on ETX. For ease of notation we refer to ETOP-based routing as ETOP-R and to ETX-based routing as ETX-R.

With AOMDV, a node attempts to find a route to a destination by broadcasting a route request message (RREQ). The RREQ is subsequently rebroadcasted once by each node in the network, upon receipt. A node inserts its own address in the RREQ before rebroadcasting it. The sequence of addresses in the forwarded RREQ specifies the route traversed from the source to the destination. Upon receiving a RREQ, the destination sends a route reply message (RREP) to the source (with the route embedded within), along the reverse route recorded in the corresponding RREQ. The source stores the routes collected from all the RREPs received in a cache and uses, for a limited time, the route with the minimum hop count for forwarding data. The route error messages (RERR messages) induced by AOMDV are disabled during the experiments; this functionality of AOMDV is not utilized with either ETX-R or ETOP-R.

5. Experimental Results and Discussion

The ETOP model is implemented using Network Simulator 2.34. The simulation parameters are 300 seconds simulation time for 40 numbers of mobile nodes using constant bit rate. The routing protocol used for simulation is Ad-hoc On-Demand Multipath Distance Vector Protocol.

The ETOP model is compared with ETX Model [2] from different perspectives such as cost, delay, packet loss

and network load. The network simulator setup is shown in Table.

TABLE 1
Simulation Parameter

Simulator	Ns-2 (Version 2.34)
Simulation Time	300 (s)
Number of mobile nodes	40
Routing Protocol	AOMDV
Traffic	CBR
Transport Protocol	UDP
Packet Size	512 Bytes

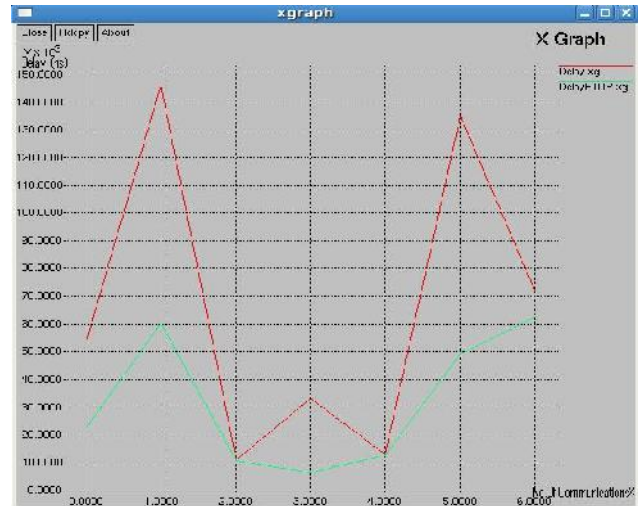


Figure 5: Variation of end to end delay with number of communication

5.1 Evaluation of transmission cost for ETOP model and ETX model



Figure 4: Variation of transmission cost with number of communications.

Above Fig. 4 Show the transmission cost of ETOP and ETX model for varying number of communication .The X-axis indicate the number of communication from source to destination and Y-axis indicate the cost in terms of distance vector in meters. From the Fig 4., we can analyze that the transmission cost in ETOP model is lesser than ETX model.

5.2 Evaluation of Delay for ETOP model and ETX model

Above Fig 5 Show the end to end delay incurred in sending the data from the source node to destination node by ETOP model and ETX model for varying number of communication. The X-axis indicates the number of communication from source to destination and Y-axis indicates the end to end delay in terms of time. From the Fig 5., we can analyze that the end to end delay incurred in sending the data from the source node to destination node is much more reduced in the ETOP model as compared to the ETX model.

5.3 Evaluation of Network Load for ETOP model and ETX model



Figure 6: Variation of Network Load with Simulation Time

Above Fig 6 Show the Network Load of ETOP model and ETX model for varying the simulation time. The X-axis indicates the network load and Y-axis indicate the simulation time.

From the Fig 6., we can analyze that the network load is well handled in the ETOP model as compared to the ETX model.

5.4 Evaluation of number of packet loss for ETOP model and ETX model

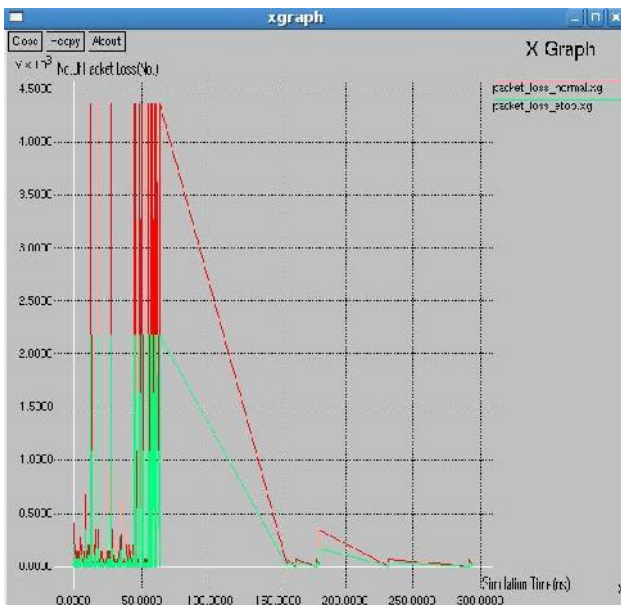


Figure 7: Variation of number of packet loss with simulation time

Above Fig 7 Show the packet loss incurred in sending the data from the source node to destination node by ETOP model and ETX model for varying simulation time .The X-axis indicate the number of packet loss and Y-axis indicate the simulation time. From the Fig 7., we can analyze that the number of packet loss while sending the data from the source node to destination node is much more reduced in the ETOP model as compared to the ETX model which in turns increase the packet delivery ratio.

6. Conclusion

Here we revisit the problem of computing the path with the minimum cost in terms of the number of link layer transmissions and retransmissions in multihop wireless networks. The key feature that distinguishes is that we consider a finite number of link level retransmissions,

unlike previous efforts (such as ETX). We demonstrate that in addition to the magnitude of the link reliabilities on a path, the relative ordering of the links is critical in computing the correct minimum cost path. We provide an analytical model to compute a noncommutative path metric, ETOP that captures this cost. We show that in spite of ETOP's complex form, the problem of computing the path with the minimum ETOP value can be solved using our greedy routing strategy. We will implement ETOP based routing and perform extensive experiments on a mesh network to quantify and evaluate its performance. We compare the performance of the paths computed with our metric with those computed with a routing strategy based on ETX.

References

- [1] D. S. J. De Couto, D. Aguayo, J. Bicket, and R. Morris, "A High-Throughput Path Metric for Multi-Hop Wireless Routing", Proc.ACM MobiCom, 2003.
- [2] T. Cormen, C. Leiserson, and R. Rivest, "Introduction to Algorithms".McGraw Hill, 2000.
- [3] S. Banerjee and A.Misra, "Minimum Energy Paths for Reliable Communication in MultiHop Wireless Networks", Proc. Third ACM MobiHoc, 2002.
- [4] C. Koksall and H. Balakrishnan, "Quality-Aware Routing Metrics for Time-Varying Wireless Mesh Networks", IEEE J. Selected Areas in Comm., vol. 24, no. 11, pp. 1984- 994,Nov.2000.
- [5] R.Draves,J.Padhye, and B. Zill,"Routing in Multi-Radio, Multi- Hop Wireless Meshnetwork",Proc.ACM Mobi Com,2004.
- [6] K. Kimm and K. G. Shin, "On Accurate Measurement of Link Quality in Multi-Hop Wireless Mesh Networks", Proc. ACM MobiCom, 2006.
- [7] Q. Dong, S. Banerjee, M. Adler , and A. Misra, "Minimum Energy Reliable Paths Using Un- reliable Wireless Links", Proc. ACM MobiHoc, 2005.
- [8] K. Seada, M. Zuniga, A. Helmy, and B. Krishnamachari, "Energy-Efficient Forwarding Strategies for Geographic Routing in Lossy Wireless Sensor Networks", Proc. ACM Second Int'l Conf. Embedded Networked Sensor Systems (SenSys '04), 2004.

- [9] G. Jakllari, S. Eidenbenz, N. Hengartner, S.V. Krishnamurthy, and M. Faloutsos, “Link Positions Matter: A Noncommutative Routing Metric for Wireless Mesh Networks”, Proc. IEEE INFOCOM, 2008.
- [10] E. S. Jung, N.H.Vaidya, “A Power Control MAC Protocol for Ad Hoc Networks”, Proceeding of MOBICOM, September 2002.
- [11] C. K. Toh, H. Cobb and D. A. Scott: “Performance Evaluation of Battery-Life- Aware Routing Schemes for Wireless Ad Hoc Networks”. Proceedings of IEEE ICC, June 2001.
- [12] X. Li, Y. Shu, H. Chen, and X.Chu, “Energy Efficient Routing with Unreliable Links in Wireless Networks”, Proc. IEEE Int’l Conf. Mobile AdHoc and Sensor Systems(MASS’06),2006.
- [13] D.B. Johnson, Y. Hu, and D.A. Maltz, “The Dynamic Source Routing Protocol (DSR) for Mobile Ad Hoc Networks for IPv4”, IETF RFC 4728, Apr. 2003.
- [14] E. Kohler, R. Morris, B. Chen, J. Jannotti, and M.F. Kaashoek, “The Click Modular Router”, ACM Trans. Computer Systems, vol. 18, no. 3, pp. 263-297, 2000.
- [15] Iperf-Tool, <http://dast.nlanr.net/projects/iperf>, 2009.