

## Thermal treatment on MSWI bottom ash fines

**Citation for published version (APA):**

Tang, P., Florea, M. V. A., Spiesz, P. R., & Brouwers, H. J. H. (2014). Thermal treatment on MSWI bottom ash fines. In V. Bilek, & Z. Kersner (Eds.), Proceedings of the International Conference of Non-Traditional Cement and Concrete (NTCC2014), June 16-19, 2014, Brno, Czech Republic (pp. 305-306). Brno: NOVOPRESS.

**Document status and date:**

Published: 01/01/2014

**Document Version:**

Publisher's PDF, also known as Version of Record (includes final page, issue and volume numbers)

**Please check the document version of this publication:**

- A submitted manuscript is the version of the article upon submission and before peer-review. There can be important differences between the submitted version and the official published version of record. People interested in the research are advised to contact the author for the final version of the publication, or visit the DOI to the publisher's website.
- The final author version and the galley proof are versions of the publication after peer review.
- The final published version features the final layout of the paper including the volume, issue and page numbers.

[Link to publication](#)

**General rights**

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal.

If the publication is distributed under the terms of Article 25fa of the Dutch Copyright Act, indicated by the "Taverne" license above, please follow below link for the End User Agreement:

[www.tue.nl/taverne](http://www.tue.nl/taverne)

**Take down policy**

If you believe that this document breaches copyright please contact us at:

[openaccess@tue.nl](mailto:openaccess@tue.nl)

providing details and we will investigate your claim.

# THERMAL TREATMENT ON MSWI BOTTOM ASH FINES

P. Tang<sup>1</sup>, M.V.A. Florea<sup>2</sup>, P. Spiesz<sup>3</sup>, H.J.H. Brouwers<sup>4</sup>

<sup>1</sup> Department of the Built Environment, Eindhoven University of Technology, the Netherlands, [p.tang@tue.nl](mailto:p.tang@tue.nl)

<sup>2</sup> Department of the Built Environment, Eindhoven University of Technology, the Netherlands, [m.v.a.florea@tue.nl](mailto:m.v.a.florea@tue.nl)

<sup>3</sup> Department of the Built Environment, Eindhoven University of Technology, the Netherlands, [p.spiesz@tue.nl](mailto:p.spiesz@tue.nl)

<sup>4</sup> Department of the Built Environment, Eindhoven University of Technology, the Netherlands, [jos.brouwers@tue.nl](mailto:jos.brouwers@tue.nl)

## Abstract

The municipal solid waste incineration (MSWI) bottom ash is the main by-product in the waste-to-energy plant, which accounts for about 80% of the total by-products. The further challenge after incineration is to find a suitable way to dispose or use the solid residue. It is well understood that the bottom ash contains contaminants, such as heavy metals, which pose an environmental risk. In order to reduce landfill of these residues and enhance the recycling of resources, different treatments are applied to upgrade the quality of the bottom ash, for instance, weathering, washing, etc. However, the treatments on the MSWI fine bottom ash particles are less sufficient. Hence, in this study the thermal treatment is applied on fine bottom ash and its effect on the bottom ash properties are investigated.

**Key Words:** MSWI bottom ash fines, thermal treatment, cement hydration, leaching properties

-----\*\*\*-----

## 1. INTRODUCTION


The municipal solid waste incineration (MSWI) bottom ash has the potential to be used as a building material ingredient [1]. However, the leaching concentration of some heavy metals, as well as salts, poses an environmental risk [2]. Hence, treatments are conducted on the bottom ash to upgrade its quality [3]. The leachable contaminants in fine bottom ash (< 2 mm) are higher than that of coarse bottom ash particles. In this study, the thermal treatment is conducted on the bottom ash fines, and its effect on the bottom ash properties is investigated. Moreover, the possibility of use of treated bottom ash fines as cement replacement is studied.

### 1.1 Treatment and materials

The MSWI bottom ash is provided by the waste-to-energy plant of Attero (the Netherlands), and the particles below 2 mm which contains higher amount of contaminants than coarse bottom ash particles is chosen to be investigated. The cement used in this study is CEM I 52.5 R. Thermal treatments at different temperature, combined with milling and sieving is performed on the fine bottom ash. The procedure is described below and summarized in Fig. 1.

- Method 1: milling the bottom ash to reduce its particle size, the sample is labelled as S1;
- Method 2: firstly milling the bottom ash, followed by a thermal treatment at 550 °C or 750 °C in an oven, the samples are labelled as S2 and S3;
- Method 3: thermally treating the bottom ash in an oven under 550 °C, and then milling the treated bottom ash, the sample is labelled as S4;
- Method 4: thermally treating the bottom ash in an oven at 550 °C, followed by selecting the particles

below 63 µm after milling, the sample is labelled as S5.

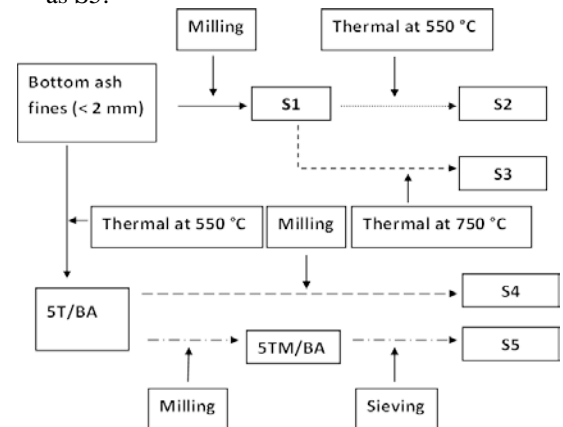

**Fig. 1:** The description of treatments procedure on bottom ash fines

### 1.2 Methods

The chemical compositions of the treated bottom ash and cement are determined by the x-ray fluorescence (XRF). The effect of treated bottom ash on the cement hydration is investigated using the isothermal calorimetric measurement. The water to cement ratio is 0.7 and 30% of cement is replaced by the treated bottom ashes. The leaching properties of the treated bottom ash are evaluated by applying column leaching test according to Dutch standard NEN 7383 (2004) [4].

## 2. RESULTS


The treated bottom ashes have similar chemical compositions as cement, and the total amount of SiO<sub>2</sub>-CaO-Al<sub>2</sub>O<sub>3</sub>-Fe<sub>2</sub>O<sub>3</sub> accounts for more than 70% wt. of the bottom ash. However, the treated bottom ashes contain

higher amount of SiO<sub>2</sub> and less CaO than cement, and the content of Al<sub>2</sub>O<sub>3</sub> and Fe<sub>2</sub>O<sub>3</sub> is relatively high. Thermal treatment contributes to a decrease amount of Cl and SO<sub>3</sub>. S5 has higher content of CaO, and relatively lower amount of SiO<sub>2</sub>. Furthermore, the Cl and SO<sub>3</sub> content in this sample are the highest.

**Table 1:** Chemical compositions

% wt.	CEM	S1	S2	S3	S4	S5
SiO <sub>2</sub>	17.4	39.3	42.1	41.8	37.3	26.7
CaO	66.0	21.9	20.2	20.3	22.6	30.0
Al <sub>2</sub> O <sub>3</sub>	3.9	10.1	9.8	10.0	10.3	11.8
Fe <sub>2</sub> O <sub>3</sub>	3.6	12.7	12.2	12.3	12.8	9.8
Cl	0.0	0.8	0.7	0.6	0.8	1.1
SO <sub>3</sub>	4.0	5.7	5.4	5.3	6.1	9.2
Others	2.9	8.7	8.4	9.0	8.8	9.0

The heat development during the hydration of cement and treated bottom ashes mixes (Fig. 2) shows that the bottom ash has a retardation effect on cement hydration and thermal treatment of pre-milled bottom ash can minimize this effect. Moreover, it is observed that the aluminate reaction in the decelerate stage is enhanced by adding treated bottom ashes.

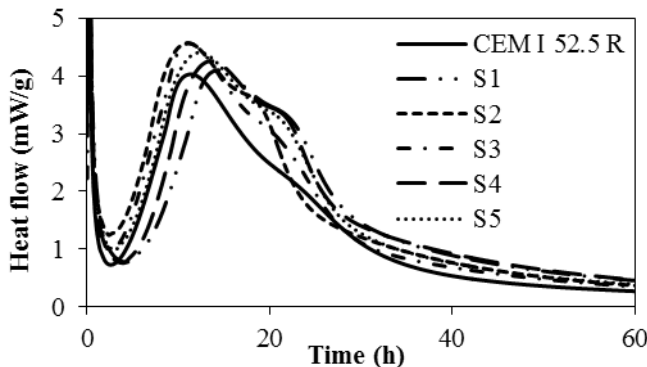

**Fig.2:** The heat evolution of cement with 30% treated bottom ash

**Table 2:** The leaching properties of treated samples

(mg/kg)	Limited value	S1	S4	S5
Sb	0.16	0.79	0.037	0.023
Cu	0.9	3.6	<0.050	0.3
Mo	1	0.67	1.4	2.6
Cl	616	4400	3300	6600
SO <sub>3</sub>	1730	16000	20000	23000

The leaching results shown in Table 2 indicate that the leaching of Sb and Cu of bottom ashes after thermal treatment is significantly reduced, and is well under the limit level. The leaching of Cl after thermal treatment decreases. S5 has highest leaching concentration of all the analysed compounds.

**CONCLUSIONS**

The thermal treatment on milled bottom ash contributes to the decrease of Cl and SO<sub>3</sub> content. Moreover, the thermal treatment reduces the retardation effect of fine bottom ash on cement hydration. The higher amount of SO<sub>3</sub> in the treated bottom ash enhances the second aluminate reaction in the decelerate stage of cement hydration. After thermal treatment the leaching properties of the bottom ash is improved, especially copper and antimony.

**REFERENCES**

[1] A.A. Al-Rawas, A. Wahid Hago, R. Taha, K. Al-Kharousi, Use of incinerator ash as a replacement for cement and sand in cement mortars, *Build. Environ.* 40 (2005) 1261–1266.  
 [2] C.C. Wiles, Municipal solid waste combustion ash : State-of-the-knowledge, *J. Hazard. Mater.* 47 (1996) 325–344.  
 [3] H. Ecke, H. Sakanakura, T. Matsuto, N. Tanaka, a. Lagerkvist, State-of-the-art treatment processes for municipal solid waste incineration residues in Japan, *Waste Manag. Res.* 18 (2000) 41–51.  
 [4] NEN 7383, Uitloogkarakteristieken -Bepaling van de cumulatieve uitloging van anorganische componenten uit poeder- en korrelvormige materialen met een vereenvoudigde procedure voor de kolomproef - Vaste grond- en steenachtige materialen, (2004).

**BIOGRAPHIES**



**P. Tang** is a PhD candidate at Eindhoven University of Technology since 2011. Her PhD topic is concerning the treatment and application of secondary raw materials.



**M.V.A. Florea** is a postdoctoral researcher at TU/e, after finishing a PhD thesis on secondary materials for cement-based products in 2014.



**P. Spiesz** is a postdoctoral researcher at the TU/e, where he obtained his PhD title in 2013. His research interests include durability of concrete and concrete technology.



**H.J.H. Brouwers** is professor Building Materials and head of the unit Building Physics & Services at Eindhoven University of Technology.