The Open University

Open Research Online

The Open University's repository of research publications and other research outputs

Implications of using systematic decomposition structures to organize building LCA information: A comparative analysis of national standards and guidelines- IEA EBC ANNEX 72

Journal Item

How to cite:

Soust-Verdaguer, B.; García Martínez, A.; Llatas, C.; Gómez de Cózar, J.C.; Allacker, K.; Trigaux, D.; Alsema, E.; Berg, B.; Dowdell, D.; Debacker, W.; Frischknecht, R.; Ramseier, L.; Veselka, J.; Volf, M.; Hajek, P.; Lupíšek, A.; Malik, Z.; Habert, G.; Hollberg, A.; Lasvaux, S.; Peuportier, B.; Pomponi, F.; Wastiel, L.; Gomes, V.; Zara, O.; Gomes, M.; Gusson Baiocchi, A.; Pulgrossi, L.; Ouellet-Plamondon, C.; Moncaster, A.; Di Bari, R.; Horn, R.; Lenz, K.; Balouktsi, M.; Lützkendorf, T.; Röck, M.; Hoxha, E. and Passer, A. (2020). Implications of using systematic decomposition structures to organize building LCA information: A comparative analysis of national standards and guidelines- IEA EBC ANNEX 72. IOP Conference Series: Earth and Environmental Science, 588(2) 1.01-1.05.

For guidance on citations see FAQs.

© 2020 IOP Publishing

Version: Version of Record

Link(s) to article on publisher's website:

http://dx.doi.org/doi:10.1088/1755-1315/588/2/022008

Copyright and Moral Rights for the articles on this site are retained by the individual authors and/or other copyright owners. For more information on Open Research Online's data policy on reuse of materials please consult the policies page.

oro.open.ac.uk

Implications of using systematic decomposition structures to organize building LCA information: A comparative analysis of national standards and guidelines- IEA EBC ANNEX 72

B Soust-Verdaguer^{1*}, A García Martínez¹, C Llatas¹, J.C. Gómez de Cózar¹, K Allacker², D Trigaux^{2,5}, E Alsema³, B Berg⁴, D Dowdell⁴, W Debacker⁵; R Frischknecht⁶, L Ramseier⁶, J Veselka⁷, M Volf⁷, P Hajek⁷, A Lupíšek⁷, Z Malik⁷, G Habert⁸; A Hollberg^{8,9}, S Lasvaux¹⁰, B Peuportier¹¹, F Pomponi¹², L Wastiel¹³, V Gomes¹⁴, O Zara¹⁴, M Gomes¹⁵, A Gusson Baiocchi¹⁴, L Pulgrossi¹⁴, C Ouellet-Plamondon¹⁶, A Moncaster¹⁷, R di Bari¹⁸, R Horn¹⁸, K Lenz, ¹⁸, M Balouktsi¹⁹, T Lützkendorf¹⁹; M Röck²⁰, E Hoxha²⁰, A Passer^{20**}

- Universidad de Sevilla, Instituto de Arquitectura y Ciencias de la Construcción, Spain;
- ² KU Leuven, Belgium;
- W/E Consultants, Netherlands;
- ⁴ BRANZ, New Zealand;
- ⁵ EnergyVille / VITO, Belgium;
- ⁶ treeze Ltd., Switzerland
- ⁷ Czech Technical University in Prague University Centre for Energy Efficient Buildings, Czech Republic;
- ⁸ ETH Chair of Sustainable Construction, Switzerland;
- ⁹ Chalmers University of Technology, Department of Architecture and Civil Engineering, Sweden;
- ¹⁰ University of Applied Sciences of Western Switzerland, Switzerland;
- ¹¹ MINES ParisTech Centre Efficacité énergétique des Systèmes, France;
- ¹² Edinburgh Napier University Resource Efficient Built Environment Lab, Scotland;
- ¹³ Belgian Building Research Institute (BBRI-CSTC-WTCB), Belgium;
- ¹⁴ University of Campinas GBLab, Brazil;
- ¹⁵ Federal University of Espirito Santo, Brazil;
- ¹⁶ Université du Québec, Department of Construction Engineering, Canada;
- Open University, UK;
- ¹⁸ Fraunhofer IBP, Dept. Life Cycle Engineering, Stuttgart Germany;
- ¹⁹ Karlsruhe Institute of Technology Sustainable Management of Housing and Real Estate Karlsruhe Germany;
- ²⁰ Graz University of Technology Working Group Sustainable Construction, Austria; *Corresponding author: bsoust@us.es,

Abstract. Introduction: The application of the Life Cycle Assessment (LCA) technique to a building requires the collection and organization of a large amount of data over its life cycle. The systematic decomposition method can be used to classify building components, elements and materials, overcome specific difficulties that are encountered when attempting to complete the life cycle inventory and increase the reliability and transparency of results. In this paper, which was developed in the context of the research project IEA EBC Annex 72, we demonstrate the implications of taking such approach and describe the results of a comparison among different national standards/guidelines that are used to conduct LCA for building decomposition. Methods: We initially identified the main characteristics of the standards/guidelines used by Annex participant countries. The "be2226" reference office building was used as a reference to apply the different national standards/guidelines related to building decomposition. It served as a basis of comparison, allowing us to identify the implications of using different systems/standards in the LCA practice, in terms of how these differences affect the LCI structures, LCA databases and the methods used to communicate results. We also analyzed the

Published under licence by IOP Publishing Ltd

Content from this work may be used under the terms of the Creative Commons Attribution 3.0 licence. Any further distribution of this work must maintain attribution to the author(s) and the title of the work, journal citation and DOI.

doi:10.1088/1755-1315/588/2/022008

implications of integrating these standards/guidelines into Building Information Modelling (BIM) to support LCA. **Results:** Twelve national classification systems/ standards/guidelines for the building decomposition were compared. Differences were identified among the levels of decomposition and grouping principles, as well as the consequences of these differences that were related to the LCI organization. In addition, differences were observed among the LCA databases and the structures of the results. **Conclusions:** The findings of this study summarize and provide an overview of the most relevant aspects of using a standardized building decomposition structure to conduct LCA. Recommendations are formulated on the basis of these findings.

1. Introduction

Buildings and the construction industry are responsible of almost 40% of energy-related CO₂-e emissions and 35% of the global final energy use. Thus, considering current construction practices and their growing tendencies, researchers and practitioners can take advantage of a critical window of opportunity and address climate change mitigation goals by reducing the impacts of buildings and construction [1,2].

The Life Cycle Assessment (LCA) technique is used to calculate the potential environmental impacts caused by a product such as a building. The method described in ISO-14040 [3], ISO-14044 [4] and particularly in EN-15978 [5] (adaptation to buildings) can be applied to define the scope of the study, identify the life cycle stages scenarios to be considered and determine the calculation procedure [5]. However, aspects such as the building information structure and the systematic building decomposition (i.e., decompose into systems and building components) are not defined. Considering this gap as a research opportunity, our aim in this paper is to show that integrating a systematic building decomposition for LCA purposes can improve the transparency and reliability of the assessment results and provide other benefits. In doing so, this study supports the achievement of the UN Sustainable Development Goals (SDG) number 12 (Responsible consumption and production), 13 (Climate action) as well as (Sustainable Cities and Communities).

The present paper is based on discussions that arose and contributions that were to the ongoing international research project IEA EBC Annex 72 "Assessing Life Cycle Related Environmental Impacts Caused by Buildings." The project "is researching harmonization issues arising when applying LCA approaches on buildings" [6], that are developed in five main subtasks. The present paper was developed in the context of Subtask 2 (ST2), which is dedicated to building assessment workflows and tools, with "focus on the analysis and outlook of national or regional state-of-the-art building assessment tools, the integration of environmental information in planning tools and requirements in different planning phases with focus on LCA and BIM" [6].

In this paper, we present and compare different national approaches that are taken to perform systematic building decomposition from the viewpoint of building LCA information management. A reference building (be2226) [7,8] was used to illustrate the main differences and similarities among the national approaches. Finally, based on these findings, recommendations were made that contribute to check and communicate the completeness of the building description, improvement the transparency and comparability of LCA results, and allow the LCA application to be integrated into Building Information Modelling (BIM).

2. Background

2.1. Systematic building decomposition for LCA application

Authors of the current literature have recognized that a large amount of data and calculations are involved in a building's LCA [9]. To facilitate the processes of collecting these data and performing these calculations, a building can be decomposed into a number of "portions," "component groups," "elements," products, materials, typologies and fabricants [9]. To decompose a building into different "portions" (e.g., systems, parts, components, elements, materials), these must be identified and grouped according to specific criteria or a specific structure. By using a systematic approach to decompose the

doi:10.1088/1755-1315/588/2/022008

building into portions, researchers can improve the organization and identification of the building parts, which ultimately helps guide and standardize the overall process.

2.2. Classification systems for building decomposition purposes

A systematic building decomposition to conduct LCA can be performed by using classification systems [10,11]. A classification system is applied to sort series of objects into different classes, members of which have specific properties [12,13]. Cavalliere et al. [10] demonstrated the potential to use a hierarchical, systematic method of decomposing the building, relating the design phases (in BIM) with the level(s) of hierarchy that are applied to organize the Bauteilkatalog, according to the Swiss code eBKP-H (SN 506 511) [14]. Hollberg et al. [11] used the same Swiss code [14] to decompose the building elements while determining LCA benchmarks. Röck et al. [15] highlighted the relevance of using a data structure and a naming convention that were based on a systematic approach (e.g., Omniclass [16], Uniclass [17], Uniformat [18], mostly based on ISO 12006-2 [19]) to conduct LCA, especially when coupled with BIM.

The act of decomposing is "to break, or to break something, into smaller parts" [20], and the classification can be defined as "the act or process of dividing things into groups according to their type" [19,20]. Relating both concepts to the building field suggests that a classification system can be effectively applied to organize information and develop a systematic approach to decomposition.

Tables and data structures are used to organize different aspects of the building's information during its life cycle. As different stakeholders are interested in different properties and information, all classifications are based on specific properties and purposes, for example, placing a focus on cost estimation, management and operating activities. Another relevant aspect of the classification systems are the naming codes and grouping principles used. The naming codes or naming convention are the rules that are used to name the different systems and group of parts, and the grouping principles are the rules or criteria that are used to organize and classify these items.

2.3. Classification systems for building decomposition in BIM

The relevance of using classification systems in BIM has been clearly highlighted in the literature [21–23]. Authors have recognized the challenge involved in integrating structures/tables that are based on the classification and identification of objects in digital tools, such as BIM. These structures/tables, however, can provide a common language, a structure for building decomposition and more uniform and transparent means of information management, among other things [21]. In addition, one of the main advantages of using classification systems in BIM is that it offers the possibility to integrate naming codes that can be used to organize and manage the building elements/objects that compose the model.

3. Methods

The study begins by offering an overview of the standards/guidelines for building decomposition used by IEA EBC Annex 72 participant countries. The office building "be2226" [24] was used as a basis to illustrate the differences and similarities in the organization of building parts, and to analyze the implications of using those national standards/guidelines to organize the building information relevant for LCA, including the organization of the Life Cycle Inventory (LCI), LCA databases and results communication. The authors also analyzed the implications of integrating these standards/guidelines into BIM for LCA purposes.

3.1. Overview of national standards for building decomposition

National standards or guidelines for building decomposition to conduct LCA used in twelve countries participating in the IEA EBC Annex 72 are analyzed: Austria, Belgium, Brazil, Canada, Czech Republic, France, Germany, the Netherlands, New Zealand, Spain, Switzerland and the United Kingdom (Table 1).

doi:10.1088/1755-1315/588/2/022008

Table 1. National standards and guidelines for building decomposition used to organize LCA information in twelve countries participating in the IEA EBC Annex 72 (source: Prepared by the authors based on national regulations in classification systems).

Country	Standard or guideline based on	Main purpose
Austria	ÖNORM B1801 [25]	Building construction cost estimation and LCA data structure.
Belgium	BB/SfB plus [26]	Classification and coding system, building construction cost estimation and LCA data structure.
D '1	A DAIT AIDD 15575 [27]	
Brazil	ABNT NBR 15575 [27]	Building performance (also suitable for construction cost
		estimation and LCA data structure)
Canada	UNIFORMAT II Elemental	Building specifications, cost estimating, cost analysis and
	Classification (E1557-97) [18]	LCA data structure.
Czech Republic	Not specified – ad-hoc table	LCA data structure
France	EQUER model [28]	LCA data structure and energy demand calculation
Germany	DIN 276 [29] DIN 18960 [30]	Building construction, cost estimation, (LCA data structure).
The Netherlands	NL/SfB	Building construction, cost and LCA data structure
New Zealand	Uniclass 2015 [17]	Building construction, cost estimation and LCA data structure.
Spain	CTE [31] (Spanish Building Technical	Building construction, cost estimation and LCA data structure.
•	Code) and BBCA [32]	
Switzerland	SN 506 511 [14]	Building construction, cost estimation and LCA data structure.
UK	SFCA [33]	Building construction, cost estimation and LCA data structure.

3.2. Brief description of the case study reference building

The "be2226" office building is located in Lustenau (Austria) and was previously used within the IEA EBC Annex 72 project as a reference building to compare national LCA methods, as reported in [24]. For the present study, the same template information developed for [24] was used to apply different national classification systems and standards/guidelines for the building decomposition and organize the building information. This template encompasses the following building element types: foundation, external walls, floor structure, roof structure, stairs, flooring, roofing, windows, doors and building services.

4. Results

The results presented are based on the tables and data structures obtained from the application of the national standard/guidelines to the building decomposition of the reference building "be2226."

4.1. Tables and data structures

ISO 12006-2 [19] provides recommendations for the development of classification systems and tables to organize building information. Specifically, the level "order of specialisation" (classes and subclasses) and the level 'order of composition' allow users to hierarchically organize building parts.

In accordance with the ISO principles for classification and composition, we disaggregate the building parts into vertical levels and horizontal sub-division. Vertical decomposition allows for the subdivision or classification of a system into sub-systems using 'part-of' relations, while the horizontal decomposition allows the order of classes in sub-division determined by 'type-of' relations. Vertical levels and horizontal sub-division decomposition were used to compare and analyze a collection of national standards and guidelines for building decomposition.

The tables and data structures summarize the number of levels of vertical decomposition and subdivisions of horizontal decomposition, that are considered to organize 'part-of' (vertical) and 'type-of' (horizontal) relations of the reference building "be2226." These tables and data structures also include a brief study of the naming codes/conventions and grouping principles.

Table 2. Number of vertical levels of decomposition and horizontal sub-divisions. (source: Prepared by the authors based on national regulation in construction and LCA application to buildings)

						3	2	FS	8	2	717	211
V-levels*	ΑΤ	BE	#	ব	₹	ל	<u>.</u>	3	É	Ź	7	ś
	2	3	9	4	4	Not specified	2	51	3	9	1	5
,	Shall Coro	Ctricting	Systems folomonts:	Major Group of	Catororios.		Custome:	Systoms:	Suctome/	Catonol/System	EE Flomonte	Catogory/Systems
4	Silell, Colle	ori actule,	oystellis/ elellelles.	iviajor Group or	categories.		ayatellis.	ayatellis.	oystellis/	categoly/ 3ystelli	רברובוובוור	Categol y/ 3y stell is
		Substructure and	Structure	Elements	C- Structure		300 Structure	Structure;	Categories:	Foundations,	and	1 Substructure
		Services	Internal floors	A Substructure.	E- Envelope		construction	Envelope:	A Foundations:	Carcass.	functions	2 Superstructure
			Facade	R Shell	G- Interior		works	Partitions.	R Fnyelone	Finishing		3 Finishes
							, , , ,		, cobc;	,		
			Partitions	C Interiors,	F- K001		400 Structure –	Finishing; Air	Cothers	Finishes;		4 Fittings, turnishings
			Roof	D Services	D- Technical		services	conditioning and		Installations E		and equipment (FF&E)
			Plumbing		equipment			installations		Fixed provisions		5 Building
			•							-		services/MEP
2	7 Building parts.	6 Group of	14	8 Group of	10 Building	14 Building	8 Building parts.	92	б	16	9	
1	e ind quint	Flomonts:	100000000000000000000000000000000000000	Elomonte:	olomont:	5 10		02 Foundations	Duilding parts:	Ground of Florecarte.	. 1	Ground of Flomonte:
		Elements.	building parts.	rielliellis.	dellelle.	parts.		or 6:	panding bares.	diodps of Elements.		gloups of Elefflelits.
	Foundation						320	05. Structure			Structural	
	Substructure;	1. Ground	Main structure;	A10 Foundations;	ij.	Foundation	Foundations,	06. Masonry	A Foundations;	Floors on	elements	1.1 Substructure
	Load bearing	substructure	Complementary	B10	Foundation	Waterproofing	330 External	07. Roof	B1 Exterior	foundation;		2.2 Upper floors incl.
	structural frame;	2. Structure	structure; Façade;	Superstructure	2. Stairs	layers	walls, 340	08. Installations	walls	Foundational	Walland	balconies
	Non load bearing	primary elements,	Internal partitions:	B20 Exterior	3. Exterior	Vertical and	Internal walls:	09. Isolations	B2 Interior	construction;	barrier	2.3 Roof
	plements	carcass	Roof: Internal finishing:	Closure:	evode llew	horizontal	350 Floor and	10 Finishing	sllew	External walls: Inner	plements	2.4 Stairs and ramps
	Escaper.	2 Socondany	Except finishing.	- /-	700000000000000000000000000000000000000	construction	callings:	11 Carpontny	B3 Windows	woller Elopee: Chaire		2 5 External Walls
	racades,	3. secondary	rayade IIIIsiiiig,	B30 NOOIIIIB	giodila	י בסווארו מברוסוו	callings,	TT. Cal pellilly	cwobillw ca	walls, ribols, stalls		2.3 External wans
	Koot,	elements of	External flooring;	C10 Interior	4. Window	elements	350 Koots;	and sate and	and doors	and inclines; Koots	Roots, floor	2.6 Windows and
	Fittings and	superstructure	Painting; Waterproof	Construction;	5. Floor	Roof	370 Structural	security	B4 Ground	Main supporting	and paving	External Doors
	furnishings,	4. Finishes to	system; External	C20 Staircases	6. Roof	construction	fitments;	elements	floors	construction;	elements	2.7 Internal Walls and
	Other_systems	structure	windows and doors;	C30 Interior	7. Interior	Roof deck	460 Transport	12. Glass	B5	Exterior wall		Partitions
		Services mainly	Internal windows and	Finishes	wall	Staircase	systems		Intermediate	openings; Interior	Stairs and	2.8 Internal Doors
		electrical	doors; Building	Conveying	8. Ceiling	Internal			floors	wall openings;	ramps	3.1 Wall finishes
		6. Loose furniture	services; Equipment	E20 Furnishings	Technical	partitions			B6 Roofs	Exterior wall		3.2 Floor finishes
		equipment			equipment	Non-bearing			C Sanitary	finishes; Interior wall	Signage,	3.3 Ceiling finishes
					10.Sanitary	cladding			Equipment	finishes; Floor	fittings,	4.1 Fittings, Furnishings
					equipment	Finishes			Transports	finishes; Ceiling	furnishings	& Equipment
						Final floor				finishes; Roof	and	5.1–5.14 Services incl.
						covering				finishes;	equipment	Building-related
						Windows and				Transportation		
						doors					Transport	
3	16 Building	18 Building		18 Individual	16 Building	Not specified	16 Flements	12 Building	47 Materials	25 Building elements	10 Building	24 Building elements
,	elements type	elements type		Elements	components		type	elements type		type	elements	0
					-						type	
4	26 Building	33 Building		52 Sub-elements	72 Materials	Not specified	27 Building	20 Building		31 Building elements	21 Building	42 Sub-elements
	elements	elements					elements	Element			elements	
2	45 Building sub-	54 Sub-elements		69 Materials		Not specified	58 Sub-elements	53 ² Material		50 Sub-elements	48 Sub-	59 Materials
	elements										elements	
u	C7 hAntoniala	- Industry CT					75 Materials			TO MALLICIA	-1 - i - i - i - i - i - i - i - i - i -	

doi:10.1088/1755-1315/588/2/022008

4.2. Table structures: number of levels of decomposition

Most standards or guidelines recommend integrating six vertical levels of decomposition (from the complete building level (level 0) to the material level (level 6)). These levels include a first level that integrates the general classification process applied to the building systems or categories, a second level composed by applying a classification of a group of elements, a third level composed by applying an elemental type classification, a fourth level composed by applying an elemental specific classification, a fifth level that integrates a sub-elemental classification and a sixth level that integrates a material classification process. In this case study ("be2226" reference building), the maximum number of materials detected as a result of the decomposition process was 73, which corresponds to the decomposition of 24 building specific elements (included in the BIM model) into 54 sub-elements, and finally into 73 materials.

The major differences were identified in terms of the organization of the first vertical level of the elements or systems classification (Table 2). At that level, the standards/guidelines examined could not be effectively applied to consider the same number of building groups of elements or their respective elements/sub-elements/materials and products. For example, the Austrian standard (see Figure 1) can be used to consider two major groups (Core and Shell), while the Swiss and Spanish codes respectively take into account four categories (Structure, Technical equipment, Envelope, Interior and Roof) or five systems (Structure; Envelope; Partitions; Finishing; Air conditioning and installations).

In most of the cases analyzed, the levels of desegregation and grouping principles from vertical levels 1–3 depended on the data structure that was defined by the standard/guideline for building decomposition. For levels 4–6 (building elemental classification), however, these mainly depended on the building characteristics and the granularity of the building model, i.e., the variety of element types/sub-elements and materials.

4.3. Table structures: grouping principles and naming codes

Results show differences in naming codes and conventions, following different criteria on the taxonomy and organization of the different levels of decomposition. These could be partly due to translation or local construction culture and meanings.

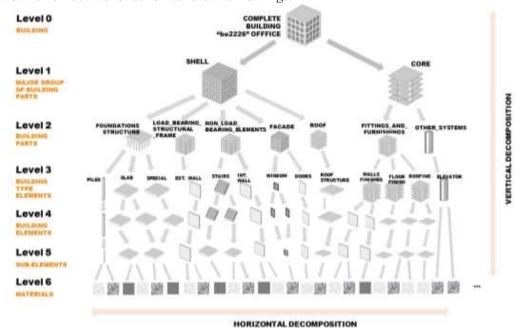


Figure 1. Scheme for reference building decomposition using the Austrian standard (source: prepared by authors based on ÖNORM B1801 [25]).

doi:10.1088/1755-1315/588/2/022008

5. Discussion

The heterogeneity of the standards/guidelines used for building decomposition in the different countries studied became evident when they were applied to the reference building "be2226." The subsequent analysis and discussion of the results places a focus on two aspects: the implications of the use of these standards and guidelines for building decomposition for LCA purposes and their implications with respect to BIM-based design phases.

5.1 Implications regarding aspects of LCA

We detected differences in the organization of the building parts, the granularity or precision in the building decomposition, the sub-divisions and the levels of decomposition of the standards /guidelines across the different systems/standards. These influenced various aspects of the LCA, such as the structure of the LCI, LCA databases and communication of results.

The influence on the structure of the LCI potentially affects the ability to verify its completeness, because the LCI provides a standardized data structure for organizing and grouping the building parts. Thus, the more detailed and hierarchically organized the LCI is, the easier it is to identify the building parts/elements/sub-elements/materials. Regarding the communication of results, the influence mainly affects the ability to detect hotspots and optimize the environmental performance of the building parts/elements/sub-elements/materials. If more levels of vertical and horizontal decomposition are used, a more accurate building decomposition process can be carried out, but this approach also increases the complexity of the data structure, which is a significant drawback. Thus, to effectively communicate results, both aspects should be considered.

Our results also support the hypothesis that—the existence of several data structures (e.g., Austrian, German, Belgium, Dutch, Spanish, Swiss, France, UK) — created by the hierarchical decomposition of building systems or categories/building parts/elements/sub-elements/materials — can support an assessment in various design phases of the building. For example, this information can be used at the element level in an early stage and at the material level in a later stage), as previously proposed by Cavalliere et al. [10].

5.2 Implications for design phases in design tools (BIM)

One of the most relevant implications of integrating a systematic building decomposition into BIM is that it can provide specific rules which can then be applied to organize the building elements/objects. This aspect is also directly related to the granularity and level of definition. In BIM methodology, multiple levels of object definition are needed during the design development process [21]. In the early design phase, generic objects are required, while the detailed design phase requires objects with high granularity and defined object information [21]. The precision of the modelling also changes during the design process.

The results of this study confirm that the organization of the building elements/objects differed, and especially their hierarchy differed. For example, the French table used for building decomposition defines that the elements of the "Interior walls" contains the finishing materials (e.g., "B Envelope"→ "B2 Interior walls"→"B22 Finishes") in the "Envelope" system. The Austrian standard, however, treats the internal wall finishes as part of a separate group called "Wall and ceiling finishes" (e.g., "Core (fittings, furnishings and services)"→ "Fittings_and_furnishings" → "Wall and ceiling finishes"). This means that, the information about the object (e.g. "finish materials") was hierarchically grouped in the French table based on a principle associated with the object itself (e.g., "Interior walls"), while the Austrian standard treated the object as a new sub-system (e.g., "Core (fittings, furnishings and services)") that contained all the building finishings (e.g., "Sanitary fittings, Ceilings, Wall and ceiling finishes, Floor coverings and finishes"). These types of differences were also detected when comparing other systems and elements/objects, such as the structure or the external walls. No matter which standards/guidelines are considered to be the most appropriate, our results indicate that the decomposition or desegregation level of the building elements/objects needs to mirror the way that the objects are organized in the model, especially when considering the different design phase in BIM [34]. Moreover, this organizational aspect should ideally be considered when performing other types of

doi:10.1088/1755-1315/588/2/022008

calculations (e.g., energy calculation) using the same BIM model (which could be developed, for example, by using the French table).

6. Conclusions

In this study, we performed a comparative analysis of twelve national standards as applied to a reference building and illustrated the implications of the findings regarding aspects of the LCA. Our results show that it is relevant to implement a systematic approach in building decomposition to conduct LCA, but they also demonstrate that the application of certain national standards or guidelines for building decomposition to conduct a LCA influences the results obtained. The observed differences are, at least in part, due to the existence of different national environmental reference databases of construction elements (such as the *Bauteilkatalog*), different national standards for building classification (such as BB/SfB-plus [26]) and different guidelines that are currently used by building professionals to organize building information for a certain purpose (such as the *BBCA*).

The authors recommend performing, whenever possible, a systematic building decomposition based on standards or guidelines that integrate hierarchical grouping principles to organize building information for LCA (especially in BIM) and to improve the transparency of LCA results. This will enable the description of which elements/objects are included or not in the study, among other relevant information. This study also enabled us to detect the existence of challenges related to the interoperability, translation and harmonization of available standards and guidelines for building decomposition to conduct LCA among European countries. These challenges must be addressed in future research.

Acknowledgments

The authors thank to the IEA EBC Annex 72 (http://annex72.iea-ebc.org) experts who provided useful input that enriched this research. The Spanish contribution authors were financially supported by the research project entitled "Development of a unified tool for the quantification and reduction of environmental, social and economic impacts of life cycle buildings in Building Information Modelling platforms (BIM)" (ref. BIA2017-84830-R). The Swiss contribution were financially supported by the Swiss Federal Office of Energy, project "Design-integrated Life Cycle Assessment using BIM (BIM-LCA)" (SI/501811-01). The Austrian contribution were financially supported by the Austrian Ministry for Transport, Innovation and Technology (BMVIT), IEA Research Cooperation via the Austrian Research Promotion Agency (FFG) Grant #864142. The Czech contribution have been supported by the Ministry of Education, Youth and Sports within National Sustainability Programme I, project No. LO1605 and within project INTER-EXCELLENCE No. LTT19022.

References

- [1] United Nations Environment Programme, Towards a zero-emission, efficient, and resilient buildings and construction sector, 2017.
- [2] M. Röck, M.R.M. Saade, M. Balouktsi, F.N. Rasmussen, H. Birgisdottir, R. Frischknecht, G. Habertf, T. Lützkendorf, A. Passer, Embodied GHG emissions of buildings The hidden challenge for effective climate change mitigation., Appl. Energy. 253 (2020). doi:https://doi.org/10.1016/j.apenergy.2019.114107.
- ISO, ISO 14040:2006 Environmental management Life Cycle Assessment Principles and Framework, 2006.
- [4] ISO, ISO 14044:2006 Environmental management Life cycle assessment Requirements and guidelines, 2006
- [5] EN, EN 15978:2011 Sustainability of construction works Assessment of environmental performance of buildings Calculation method, Int. Stand. (2011).
- [6] IEA EBC, IEA EBC ANNEX 72, (2017). http://www.iea-ebc.org/projects/ongoing-projects/ebc-annex-72/ (accessed June 1, 2020).
- [7] C. Spirinckx, M. Thuring, L. Damen, K. Allacker, D. Ramon, N. Mirabella, M. Röck, A. Passer, Testing of PEF method to assess the environmental footprint of buildings - Results of PEF4Buildings project, in: IOP Conf. Ser. Earth Environ. Sci., 2019. doi:10.1088/1755-1315/297/1/012033.
- [8] C. Spirinckx, M. Thuring, L. Damen, K. Allacker, N. Mirabella, D. Ramon, A. Passer, M. Röck, Study and related guidance documents on the application of the PEF method to a new office building, 2018.

doi:10.1088/1755-1315/588/2/022008

- [9] V.S. Cheng, J.C. Tong, Building sustainability in East Asia: Policy, design and people, 2017. doi:10.1002/9781119276975.
- [10] C. Cavalliere, G. Habert, G.R. Dell'Osso, A. Hollberg, Continuous BIM-based assessment of embodied environmental impacts throughout the design process, J. Clean. Prod. 211 (2019) 941–952. doi:10.1016/j.jclepro.2018.11.247.
- [11] A. Hollberg, T. Lützkendorf, G. Habert, Top-down or bottom-up? How environmental benchmarks can support the design process, Build. Environ. 153 (2019) 148–157. doi:10.1016/j.buildenv.2019.02.026.
- [12] K. Afsari, C.M. Eastman, A Comparison of Construction Classification Systems Used for Classifying Building Product Models, in: 52nd ASC Annu. Int. Conf., 2016. doi:10.13140/RG.2.2.20388.27529.
- [13] A. Ekholm, A conceptual framework for classification of construction works, Electron. J. Inf. Technol. Constr. (1996).
- [14] CRB, SN 506 511 Code des coûts de construction Bâtiment, ECCC-Bat. (2009).
- [15] M. Röck, A. Hollberg, G. Habert, A. Passer, LCA and BIM: Visualization of environmental potentials in building construction at early design stages, Build. Environ. 140 (2018) 153–161. doi:10.1016/j.buildenv.2018.05.006.
- [16] International Organization for Standardization (ISO), (ICIS), I.C.I. Society, OmniClass Construction Classification System, (n.d.). http://www.omniclass.org/ (accessed March 30, 2019).
- [17] CPIc, Uniclass2, (2015). http://www.cpic.org.uk/uniclass/ (accessed March 30, 2019).
- [18] R.P. Charette, H.E. Marshall, UNIFORMAT II Elemental Classification for Building Specifications, Cost Estimating, and Cost Analysis, U.S. Dep. Os Commer. (1999).
- [19] ISO, ISO 12006-2: 2015 Building construction Organization of information about construction works Part 2: Framework for classification of information, Iso. (2012).
- [20] C. Cambridge Dictionary, Cambridge Dictionary, Cambridge Univ. Press. (2016).
- [21] International Construction Information Society, Classification, Identification, and BIM, 2017. http://www.icis.org/publications/papers/.
- [22] A. Ekholm, ISO 12006-2 and IFC Prerequisites for coordination of standards for classification and interoperability, Electron. J. Inf. Technol. Constr. (2005).
- [23] S. Cursi, D. Simeone, U.M. Coraglia, An ontology-based platform for BIM semantic enrichment, Ecaade 2017 Shar. Comput. Knowledge! (Shock!), Vol 2. (2017).
- [24] R. Frischknecht, H. Birgisdottir, C.U. Chae, T. Lützkendorf, A. Passer, E. Alsema, M. Balouktsi, B. Berg, D. Dowdell, A. Garcia Martinez, G. Habert, A. Hollberg, H. König, S. Lasvaux, C. Llatas, F. Nygaard Rasmussen, B. Peuportier, L. Ramseier, M. Röck, B. Soust Verdaguer, Z. Szalay, R.A. Bohne, L. Braganca, M. Cellura, C.K. Chau, M. Dixit, N. Francart, V. Gomes, L. Huang, S. Longo, A. Lupišek, J. Martel, R. Mateus, C. Ouellet-Plamondon, F. Pomponi, P. Ryklová, D. Trigaux, W. Yang, Comparison of the environmental assessment of an identical office building with national methods, in: IOP Conf. Ser. Earth Environ. Sci., 2019. doi:10.1088/1755-1315/323/1/012037.
- [25] ÖNORM, ÖNORM B1801, 2015.
- [26] F. De Troyer, BB/SfB-plus, 2008.
- [27] A.B. de N.T. ABNT, NBR 15575-1: Edificações habitacionais Desempenho Parte 1: Requisitos gerais, 2013. doi:01.080.10; 13.220.99.
- [28] B. Polster, B. Peuportier, I. Blanc Sommereux, P. Diaz Pedregal, C. Gobin, E. Durand, Evaluation of the environmental quality of buildings, Sol. Energy. 57 (1996) 219–230.
- [29] DIN 276: 2018-12. Kosten im Bauwesen Teil 1: Hochbau, 2018.
- [30] P.J. Fröhlich, P.J. Fröhlich, DIN 18960 Kommentierung, in: Hochbaukosten Flächen Rauminhalte, 2010. doi:10.1007/978-3-8348-9804-3 14.
- [31] CTE, Spanish Building Technical Code, Real Decreto 314/2006 17 Marzo. BOE 74 (2006) 11816–11831. doi:CTE-DB-SE.
- [32] J.L. Barón Cano, J. Conde Oliva, M. Osuna Rodríguez, A. Ramírez de Arellano Agudo, J.A. Solís Burgos, Banco de Costes de la Construcción de Andalucía. Clasificación Sistemática de Precios Básicos, Auxiliares y Unitarios. 2017.
- [33] RICS, BCIS, Elemental Standard Form of Cost Analysis (SFCA), 2012.
- [34] BUILDING SMART Spain, COBIM. Guía de usuario BIM. Diseño Arquitectónico, 2014. https://www.buildingsmart.es/bim/guías-ubim/.