

# Local Optimization of Cooperative Robot Movements for Guiding and Regrouping People in a Guiding Mission

Anaís Garrell and Alberto Sanfeliu

**Abstract**—This article presents a novel approach for optimizing locally the work of cooperative robots and obtaining the minimum displacement of humans in a guiding people mission. Unlike other methods, we consider situations where individuals can move freely and can escape from the formation, moreover they must be regrouped by multiple mobile robots working cooperatively. The problem is addressed by introducing a “Discrete Time Motion” model (DTM) and a new cost function that minimizes the work required by robots for leading and regrouping people. The guiding mission is carried out in urban areas containing multiple obstacles and building constraints. Furthermore, an analysis of forces actuating among robots and humans is presented throughout simulations of different situations of robot and human configurations and behaviors.

**Index Terms**—Cooperative Robotics, Guiding mission, Human-Robot interaction.

## I. INTRODUCTION

Nowadays, robotics area has increased significantly in different fields, nevertheless the branch of social robotics has captured the attention of many researchers which have proposed diverse applications such as cooperative exploration [9], people evacuation [29] or robots companion [6], among others. Recently, there is an interesting and challenging “problem” that involves social and cooperative robotics. It consists of guiding a group of people using mobile robots and network robotics technologies that work cooperatively. Different authors have developed works in order to lead people in bounded environments, such as hospitals or museums [3], [7], or groups of animals [21].

In previous work [10], a model for guiding people in a dynamic environment using several robots working in a cooperative way was presented. This model is called “Discrete Time Motion” (DTM), which is used to represent people and robot motions. The DTM predicts people and robot movements and gives the motion instructions to robots. DTM uses a Particle Filter formulation [1], [18], [25], [27], with the particularity that it incorporates realistic human motion models. The model assumes that obstacles, people and robots are modeled by potential functions. Since the obstacles are assumed to be static, their positions are represented by constant functions. Using these parameterizations, an energy value has been assigned in each point in the space, which is used to control the motion of all robots.

In this research, we go one step ahead, presenting a method to optimize locally the tasks assignment to robots for doing their missions. Robots’ assignment are done by analyzing the minimum work required to do such task, where the function

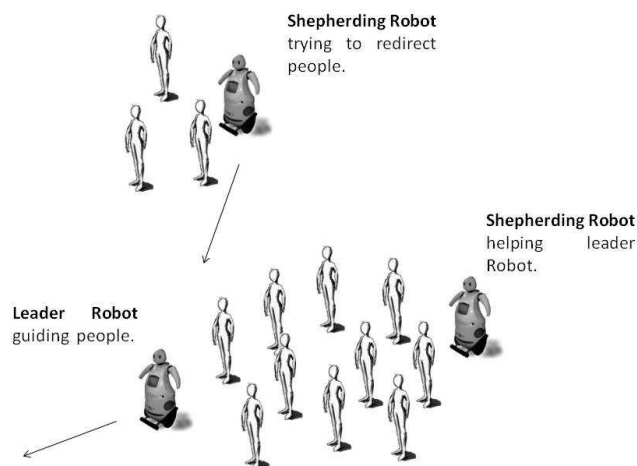


Fig. 1. Guiding people using a group of cooperative robots.

to minimize is based on one hand, by robot’s motion, and, on the other hand, by the impact of such motions on people’s displacement. The first term takes into account the work needed to move a robot from an origin to a destination, whereas the second term analyzes the impact that robots have on people to be moved, and its computation uses the formulation of Helbing et al. [13], [14].

To compute robot’s local optimal trajectories the method estimates robots’ future positions, individuals’ positions and obtain optimal trajectories according to people distribution on urban area. The computation of robots impact on people is done by forces that appear between robots and humans, and between humans and humans. These forces have been identified and quantified in studies of pedestrian crowds and in people evacuation [12], [24], [19], [4], [16], [23].

In the remainder of the paper, we start by discussing the related work in Section II. Section III summarizes the DTM model. Section IV describes the forces that actuate in the task, and how to compute the optimal way to solve the cooperative robots’ tasks based on the minimum work, different configurations and distributions of robots. Computation of configurations for group reunification is presented in Section V. Experiments and Results are presented in Section V and the conclusions in Section VI.

## II. RELATED WORK

The interaction between social robotics and cooperative robotics areas is a new field of study. Therefore, the number of publications that exist nowadays is quiet short, specifically,

if we refer to the study of guiding a group of people in urban areas with several robots. We can find some works presented by Burgard et al. in the literature using a single robot leading people in exhibitions and museums [3], [7], [28], or in hospitals or acting as an assistant [6] done by Dautenhahn et al. Nevertheless, the main purpose of these robots were educational or entertainment, instead of guiding groups. Casper et al. presented similar applications which have been developed for evacuating emergency areas, detecting hazardous materials or offering human assistance [4], but these robots were not specifically designed for guiding people, and they do not, thus, behave in a cooperative way. Another example is the interaction with animal flocks, Vaughan presented some research where flocks automatically has been controlled by using a single robot [21], [26]. Again, the cooperative behavior of our approach is not exploited in these methods, and the environment where the systems are shown to work are highly controlled, and they do not include obstacles.

All the methods mentioned above consider either single robots, or multiple robots moving independently from the rest. To our knowledge, only a few works deal with multiple robots behaving in a cooperative mode. A first work, from Martinez et al. [8], performs a qualitative analysis of the movements of different entities and build an architecture of three robots to guide them. However, realistic situations, such as obstacles or dealing with individuals leaving the group are not considered. In [17] Lien et al. consider several types of robot formations and different robot strategies for approaching to people. Nonetheless, all these issues and the general movements of robots are ruled by a large number of heuristics which makes the system impractical.

Pedestrian motion studies have been carried out experimentally and by simulation. Pedestrian simulation is a representation of pedestrian motion using a set of mathematical models that can be used to evaluate the pedestrian motions in different situations. Helbing has done research in pedestrian motion based on cellular automata [12], or force model [13], [14]. Pedestrian motion analysis can be divided into two levels: macroscopic and microscopic. The first one, the macroscopic level, studies the space allocation of people in the pedestrian facilities [19]. The second one, the microscopic level, investigates pedestrian's motion individually. In our work we are interested in microscopic level, every individual in the group is considered individually.

In the following section we will describe how we compute the best task assignment, using a cost function, of the robots to guide a group of people using several robots behaving in a cooperative manner. Such function not only considers robot motion, but it also considers the consequences of robot motion over the group of people.

### III. OVERVIEW OF DISCRETE TIME MOTION MODEL

In this section we will present shortly the ‘‘Discrete Time Motion’’ model (DTM) presented previously in [10], with DTM robots are able to modelize the representation of the whole environment, made of an open and not bounded area with obstacles, and how the elements of this environment are related with the group of robots and people.

The DTM model has two components: The Discrete Time component and the Motion component. The first one estimates position, orientation and velocity of the robots and persons, and the position of the obstacles at a time instance  $k$ . It will be used to estimate the intersection of the people with the obstacles and detect if someone is leaving the group with a Particle Filter [1], [2], [18]. The Motion component estimates the change of position, orientation and velocity of people and robots between to time instances  $k$  and  $k + p$ . It will be used to compute the robots' trajectory to reach the goal while preventing people leaving the group.

The DTM model aims to represent the areas where the robots will be allowed to move, by means of potential fields. To this end, we define a set of functions that describe the tension produced by the obstacles, people and robots over the working area. These tensions are computed based on the area defined by a security region surrounding each one of the persons, robots and obstacles.

In order to decide the trajectories the robots will follow we will define a potential field over the working area, and perform path planning in it [15]. To this end we will define a set of attractive and repulsive forces. In particular, the goal the robots try to reach will generate an attractive force pulling the robots towards it. On the other hand, the obstacles will generate a repulsive potential pushing a given robot away. The rest of robots and persons will generate similar repulsive forces, although with less intensity than the obstacle's forces.

We parameterized all these attractive and repulsive forces by Gaussian functions. For instance, the repulsive forces for people will be:

$$T_p(\mu_p, \Sigma_p)(x) = \frac{1}{|\Sigma_p|^{1/2} (2\pi)^{n/2}} e^{-\frac{1}{2}(x-\mu_p)^T \Sigma_p^{-1} (x-\mu_p)} \quad (1)$$

where  $\mu_p = (\mu_{p_x}, \mu_{p_y})$  is the center of gravity of the person, and  $\Sigma_p$  is a covariance matrix whose principal axes  $(\sigma_x, \sigma_y)$  represent the size of an ellipse surrounding the person which is used as a security area. A similar expression defines the potential map associated to each robot.

These repulsive forces may be interpreted as continuous probability functions over the entire space. Once they are defined, the tensions at each point of the space may be computed as the intersection of these Gaussians.

We can then define people and robots by the set  $\{(\mu_x, \mu_y), (\sigma_x, \sigma_y), v, \theta, T\}$ , where  $v$  and  $\theta$  are the velocity and orientation computed by the particle filter and  $T$  is the associated tension. As we said, the variances  $(\sigma_x, \sigma_y)$  represent the security area around each individual. This could be set to a constant value. However, for practical issues one may need larger security areas when the robots or persons move faster. As a consequence, we changed appropriately the values of the variances  $\sigma_x$  and  $\sigma_y$  depending on the velocity parameter  $v$ .

In the case of the obstacles, we define their tension as a set of Gaussian functions collocated at regular intervals around their boundaries. Let us denote by  $X = \{(x_1, y_1), \dots, (x_n, y_n)\}$  the set of points evenly spaced around the boundary. Then this boundary will be defined by:

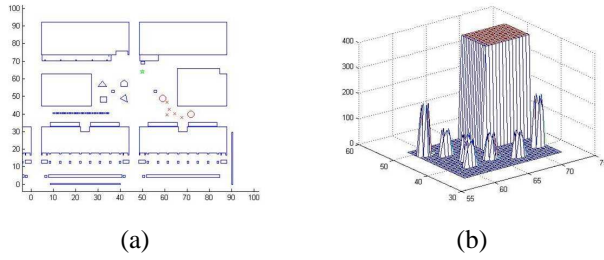


Fig. 2. (a) representation of the environment, circles represent robots and asterisks represent people. (b) representation of the potential field applying DTM model.

$\{(x_i, y_i), (\sigma_{x_i}, \sigma_{y_i}), T_i\}$  for  $i = 1, \dots, n$ , where  $T_i$  follows Equation 1.

After having defined the tensions for each of the components of the environment –i.e. robots, persons and obstacles– we are ready to define the potential field. This is easily computed as the intersection of all the Gaussian functions for a given variances.

Once the potential field is known, we will define the trajectories of the robots, based on the position of the persons and the goal and following the paths with minimum energy in the potential field. This will be explained in the following sections.

#### IV. DEFINITION OF THE OPTIMAL ROBOT TASK ASSIGNMENT FOR THE COOPERATIVE MISSION

In our previous work [10], we used two robots working in a cooperative way, one as a tour guide (the leader robot) and the other one, as a shepherd robot. The mission of the leader robot was to guide a group of people from an origin to a destination. The other robot was used as an assistant based on shepherd dog theory [5], [17] and its objective was to regroup people who escape from the the crowd formation. The strategy followed in the mentioned work, was, firstly, the computation of the estimate people’s velocity with a particle filter [1], [2], and secondly, it calculates the optimal path from the shepherd robot to the estimated position of people that are moving away.

In this work we analyze which is the best strategy in the following situation: “Given a fixed number of robots (usually 2 or 3), assign robots’ tasks that will minimize the work required by them, and, also, will produce the minimum displacement problems for guiding people”.

The cost function, described below, speaks in Work terms, and it can be divided into two blocks: (i) Robot work motion, and (ii) Human work motion.

In order to know what robots’ tasks are, we have considered the following situations:

- The leader robot has to guide people.
- One robot has to look for the person (or people) that can potentially escape from the crowd formation and push him (or them) to regroup him (or them) into group.
- One robot has to go behind the people in order to push them in case that the crowd formation is broken down.

Nonetheless, robots must be able to solve all this task while they are navigating and avoiding obstacles and do not infer in

people’s living space. Furthermore, there are other situations that can happen, however they have not been considered in this present work, for instance, one robot is used as a barrier in a corner, in order that people do not miss the way.

In case that we use two robots, one will be the leader and the second one will do the tasks of regrouping and pushing the people. If we consider three robots, one will be the leader, and the other two will be used for regrouping or pushing people. It is not predefined which robot will be the leader, indeed the robots can interchange their roles depending on the evaluation of the cost function.

The Robot tasks that we are considering are:

- *Leader task*: Firstly the leader robot computes a path planning and moves to the next point. We also assume that there exists a *drag force* that will attract people behind the robot. Here, the robot has only to move from the present position to the next one of the guiding path. In case that a robot, that is not the leader, takes its role, this robot will have first to move still leader’s present position and then carry out this task.
- *Looking for a person that goes away task*: The robot moves to the estimated position of the individual who goes away from the crowd formation. In this case, the robot has to compute all possible paths to reach the estimate position and then, take the one which minimize the itinerary. In our simulations, we have considered a selections of points on the environment where people have a strong probability to scape.
- *Pushing task*: The robot pushes a person that has gone away in order to reach the crowd formation. This task can be also applied when a robot pushes a person (or a group of people) who is (are) going behind the crowd formation in order to regroup people when the formation is broken down. We assume that there exists a repulsion force that pushes the person to follow the direction of the robot. In this case, the robot has only to move from the present to the next position.
- *Crowd traversing task*: The robot has to move through the formation to achieve the estimated position of the person that goes away from the crowd formation. This task implies that the robot has to push people away from their path, which creates a set of repulsion forces from the robot to people. In this work we are not taken into account this situation, due to safety reasons.

In order to compute the dragging, pushing and crowd traversing forces, we use the equations defined in previous works on human behavior with other individuals [12], [13], [14]. People movements are determined by their desired speed and the goal they wish to reach. In our case, the direction of the person movement  $\vec{e}_i(t)$  is given by:

$$\vec{e}_i(t) = \vec{e}_{robot}(t) + \vec{u}(t) \quad (2)$$

where  $\vec{u}$  is the noise. Usually, people do not have a concrete goal and should follow the leader robot, thus, its direction is determined by the robot’s movement or the individual that they have in front, if the robot is not in their visual field.

In following sections we will describe the different forces for the computation of the cost function.

#### A. Robot Work Motion

Working with autonomous mobile robots, the robot  $i$  work motion is expressed by:

$$f_i^{mot} = m_i a_i \quad (3)$$

$$W_i^{mot} = f_i^{mot} \Delta s_i \quad (4)$$

where  $m_i$  is the mass of the  $i$ -th robot,  $a_i$  its acceleration and  $\Delta s_i$  the space traversed by the robot to achieve its goal.

#### B. Human Work Motion

In Human Robot Interaction, it is necessary to consider the *dragging*, *pushing* and *crowd intrusion forces* that robot's motion produces and that can affect to people. This component is called *Human Work Motion*, and it is the expense of people's movements as a result of robot's motions. As it has been mentioned several times in this paper, the group follows the robot guide/leader, and there is a set of robots that help to achieve their goal. The effect of robots on people as forces is as follows:

- leader robot: attractive (dragging) force, it is inversely proportional to the distance, until a certain distance.
- shepherding robot: Repulsive (pushing, traversing) force, has a repulsive effect inside people's living space.

1) *Dragging Work*: The dragging force is necessary when the leader robot guides the group of people from one place to another. It acts as an attractive force, hence the force applied by robot leader  $i$  to each person  $j$  is:

$$f_{ij}^{drag}(t) = -C_{ij} n_{ij}^{\vec{}}(t) = -C_{ij} \frac{x_i(t) - x_j(t)}{d_{ij}(t)} \quad (5)$$

$$d_{ij}(t) = \|x_i(t) - x_j(t)\| \quad (6)$$

where  $d_{ij}(t)$  is the normalized vector pointing from person  $j$  to robot  $i$  at instant  $t$ . See [11] for more information about the parameter  $C_{ij}$ , which reflects the attraction coefficient over the individual  $j$ , and it depends on the distance between the robot leader and person  $j$ .

Thus, the dragging work that robot leader applied to each individual is defined by:

$$W_{drag} = \sum_{\forall \text{ person } j} f_{ij}^{drag} \Delta s_j \quad (7)$$

Where  $\Delta s_j$  is the distance traveled by the person  $j$ .

2) *Pushing Work*: The *Pushing force* is given by the repulsive effect developed by shepherding robot on the group of people, for regrouping a person (or the broken crowd) in the main crowd formation. This repulsive force is due by the intrusion of the robot in the people's living space, which is five feet around humans. The territorial effect may be described as a repulsive social force:

$$f_{ij}^{push} = A_i \exp^{(r_{ij} - d_{ij})/B_i} n_{ij}^{\vec{}} \left( \lambda_i + (1 + \lambda_i) \frac{1 + \cos(\varphi_{ij})}{2} \right) \quad (8)$$

Where  $A_i$  is the interaction strength,  $r_{ij} = r_i + r_j$  the sum of the radii of robot  $i$  and person  $j$ , usually people has radii of one meter, and robots 1.5 m,  $B_i$  parameter of repulsive interaction,  $d_{ij}(t) = \|x_i(t) - x_j(t)\|$  is the distance of the mass center of robot  $i$  and person  $j$ . Finally, with the choice  $\lambda < 1$ , the parameter reflects the situation in front of a pedestrian has a larger impact on his behavior than things happening behind. The angle  $\varphi_{ij}(t)$  denotes the angle between the direction  $\vec{e}_i(t)$  of motion and the direction  $-n_{ij}^{\vec{}}(t)$  of the object exerting the repulsive force. See [11].

So we can write pushing work by:

$$W_{push} = \sum_{\forall \text{ person in } \Omega_i} f_{ij}^{push}(t) \Delta s_j \quad (9)$$

Where  $\Omega_i$  is the set of people in which one of the helper robots have reached the living space, if an individual is at certain distance from the robot, more than two meters, it is considered that the robot does not penetrate in his living space, and therefore is not affected by the drag force.

3) *Traversing Work*: And last but not least, the *Traversing force* is determined by the forces applied by the robot when is traversing the crowd. For security reasons, we have considered in this research that the value of this force is infinity, so we will ensure that a robot will not cross the crowd in order to avoid any damage.

#### C. Total Cost for One Robot

The cost function for robot  $i$ , given a specific task, is the following one:

$$W_i = \delta_{mot} W_i^{mot} + \delta_{drag} W_i^{drag} + \delta_{push} W_i^{push} + \delta_{trav} W_i^{trav} \quad (10)$$

$$\text{where } \delta_k = \begin{cases} 1 & \text{if this task is assigned} \\ 0 & \text{if this task is not assigned} \end{cases}$$

Where  $k$  could be *pushing*, *dragging*, *traversing* or *motion*. For each period of time, the leader and shepherded robots will be given a task in the guiding mission, which will imply one or several robot motion works and human robot works.

#### D. Optimal Robot Task Assignment

Finally, the task assignment for the robots will be the one which minimizes the minimum assigned work cost required to do the global task. It is computed by the following way:

$$C = \operatorname{argmin}\{W_{total}(c)\}, \forall \text{ configuration } c \quad (11)$$

where the *Configurations* mean how the tasks are distributed among the robots, for each configuration  $c$  robots compute

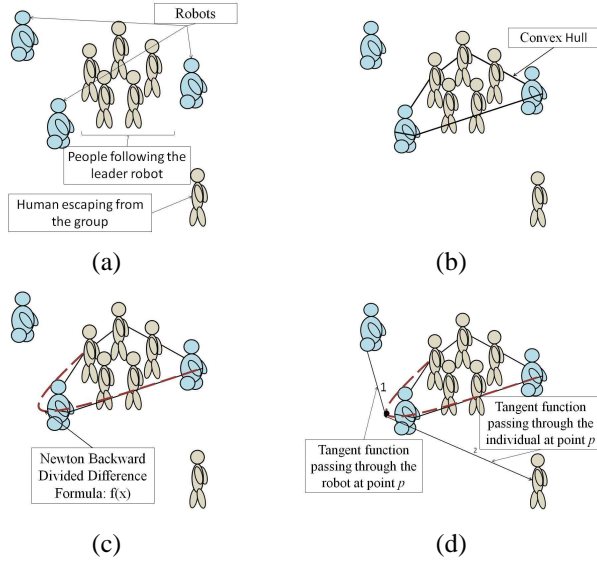


Fig. 3. (a) Environment representation with people and robots. (b) Computation of the convex hull. (c) Interpolation of the convex hull with Newton Backward Divided Difference Formula. (d) Computation of the trajectory for rescuing the individual, this trajectory is composed by two tangents of the function  $f(x)$  at point  $p$ : (1) passing through the shepherd robot (2) passing through the individual is escaping.

$W_{total}$  which is the addition of all  $W_i$  for all robots  $i$  that are working cooperatively.

Once we have this cost function, we can determine which are the optimal trajectories the robots must follow to achieve their goal, and which are the roles for each robot. There is a special case in which several people escape in opposite directions at the same moment, in that situation shepherding robots will go to rescue the individual which has the lower cost function and be redirect to the formation. If the number of people escaping in opposite directions is greater than the number of shepherding robots, robots will act by the same way than previously, and once the robot has redirect the human to the formation, if it is possible, it will search for people who have not been renewed yet.

## V. COMPUTATION OF CONFIGURATIONS FOR GROUP REUNIFICATION

One of the most common problems we can find when robots guide a group of people is when one or more people escape from the group, either because they are attractive by an interest point outside the trajectory of the group or because they do not want to continue. The role the robots should follow is trying to rejoin the group that is distancing, as its main objective is to bring everyone in the group to the goal. In this section we proceed to describe the method of reintegration people who are escaping the group through the cost function we have described previously.

When this problem occurs, it is necessary that robots change their goals, for instance, one of the shepherd robot can change its direction, instead of following leader's trajectory, it should rescue people who are distancing the formation, or leader robot can become an assistant one. Therefore, it is necessary to evaluate which is the cost and which are the

### Algorithm 1 Schematic strategy for regrouping people

- 1: Estimate people's position and directions.
- 2: **if** There are people moving away **then**
- 3:   **for** Each robot **do**
- 4:     Compute convex hull with robots and people's position.
- 5:     Interpolate the function  $f(x)$  with the points on convex hull.
- 6:     Compute the trajectory, which will be the  $f(x)$ 's tangent passing through the escaping group.
- 7:     Compute the cost function.
- 8:   **end for**
- 9:   Choose the configuration such that, minimizes global function cost.
- 10:   Move Robots.
- 11: **else**
- 12:   Continue moving the group.
- 13: **end if**

consequences of such changes of role and trajectories. Below, it proceeds the description of the computation of trajectories using the cost function.

In order to achieve that robots act with sufficient prior need, it is necessary to make a prediction of people's positions and motion vectors [20]. Once the estimated position and direction are obtained, we compute the work cost function, explained before, for each robot, and we will consider the configuration  $C$  which minimizes that function, that is:

Once, the configuration with minimal work cost is obtained, the trajectory the robot must follow to regroup people is described as follows: the convex hull of people and robots positions is computed, in this current state the group of people who are escaping in the same direction is regarded as a single element, taking the position as the arithmetic center of the group, see Fig. 3(b). Having reached this point, the function that interpolates the points in the convex hull is computed for each robot using Newton Backward Divided Difference Formula, but only are considered those that are in the area located between the robot is computing the convex hull and the group that is escaping, and by this way we get the function  $f(x)$ , see Fig. 3(c).

Here, we should compute the trajectory of the robot, it is considered the tangent of  $f(x)$  that passes through the center position of the escaping group. This procedure will be given every interval of time  $k$  until the robot arrives to the escaping group and it is redirected toward the training that must be followed, see Fig. 3(d).

In the experiments section will present the results of the computation of trajectories according to the cost function and there will be a descriptive and comparative study. In the algorithm 1 we show an schematically procedure that must be followed by the group of robots.

Table 1 shows the set of tasks that robots can play in guiding people mission, for instance: guiding task, rescuing people or unifying the group, we present which robots can perform such tasks and which forces act on people and robots' behavior. To compute the total work we compare different trajectories and



TABLE I  
TABLE OF TASKS AND BEHAVES

Task	Robot	Forces Applied	Behave
Guide the group	Leader	$f_{drag}$	Act as a tour guide
	Shepherd	$f_{drag} / f_{push} / f_{trav}$	Interchange the role with leader robot.
		$f_{drag}$	Act as a tour guide.
Join the group	Leader	$f_{drag}$	Reduce the velocity
	Shepherd	$f_{push}$	Increase the velocity
Rescue people	Leader	$f_{drag}$	All the group follows the leader.
		$f_{drag} / f_{push} / f_{trav}$	Robot leader interchange its role with robot shepherd 1 or 2.
	Shepherd	$f_{push} / f_{drag} / f_{trav}$	Compute the trajectory for reconduct people.
Barrier in a cross	Leader	$f_{drag}$	Follows the trajectory till the goal
	Shepherd	$f_{push}$	Robot moves toward the corner and wait for the group passes
Narrow corridor	Leader	$f_{drag}$	Follows the trajectory till the goal
	Shepherd	$f_{push}$	Wait all the group enters the narrow corridor

the one that obtain a lower cost function is chosen.

## VI. EXPERIMENTS AND RESULTS

The current work is done within the framework of the European Project URUS [22], and the scenario where the experiments will be performed corresponds to an urban area of about  $10.000 m^2$  within the North Campus of the Technical University of Catalonia (UPC). The area contains different obstacles, such as buildings, benches and trash cans.

The results we will expose correspond to different synthetic experiments. We have considered two scenarios that robots can find in the North Campus of UPC: open areas and cross areas. In these experiments, the dynamical models of the persons, we have considered a group of 9 persons, will follow the models described by Helbing et al. [13]. We will assume a group of three robots, that will move according to the motion model DTM, and acting according the computation of configurations explained in Section IV.

We made two different experiments. In the first one, three robots guide a group of nine people in an open area without obstacles see Fig. 4. The position of the three robots is plotted with circles and nine persons are represented by asterisks. As we have explained previously, when robots find new challenges, for instance regrouping people who are escaping, they should analyze which is the optimal trajectory and optimal formation, that is, the analysis of different configurations. Possible configurations for regrouping people with three robots, one leader and two shepherd robots are the following: (i) Robot shepherd 1 takes care of grouping people who have escaped following right path 4. (ii) Robot shepherd 1 takes care of grouping people who have escaped following left path. (iii) and (iv) Robot shepherd 2 regroups people who have escaped following right and left path respectively. (v) robot leader regroup the formation, the entire group moves toward the escaping people, (vi) and (vii) robot shepherd 1 takes the role of leader while robot leader is moving toward the escaping people, robot shepherd takes the role of leader, respectively. In table 1 we present the values of the optimal robot task assignment function for those configurations. One can notice that configuration 1 has the minimum value and for this reason is the one we have considered, therefore, crowd formation will

TABLE II  
TABLE ON WORK VALUES OF DIFFERENT CONFIGURATIONS IN OPEN AREAS

Configuration	Experiment 1	Experiment 2
Conf.1	<b>42.24</b>	Inf
Conf.2	152.66	81.44
Conf.3	108.63	<b>32.04</b>
Conf.4	113.46	Inf
Conf.5	205.31	130.30
Conf.6	55.03	91.65
Conf.7	72.01	149.79

follow the leader and robot shepherd 1 will recover people who is escaping.

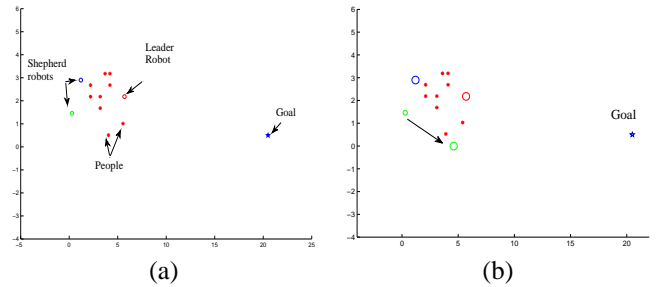


Fig. 4. Experiment 1: Configuration 1. Robot shepherd 1 takes care of grouping people who have escaped following right path.

In the second experiment we introduced a common scenario, a cross area. In the sequences of Fig. 7-13 different time instances are shown, again assuming that one robot needs to follow one of the individuals who left the group. In table 1 there are the results of the cost function for this second experiment, here we can observe that in configurations 1 and 3 this value is infinity, since for obtain the desired configuration robot should move thought the group. One can notice that configuration 3 has the minimum value and for this reason is the one we have considered, therefore, crowd formation will follow the leader and robot shepherd 2 will recover people who is escaping.

Finally, in Fig. 5 we present the evolution of the cost function computed using different robots behaviors, it can be seen that the behavior that obtains the lower cost is the one which follows the optimization of the cost function presented

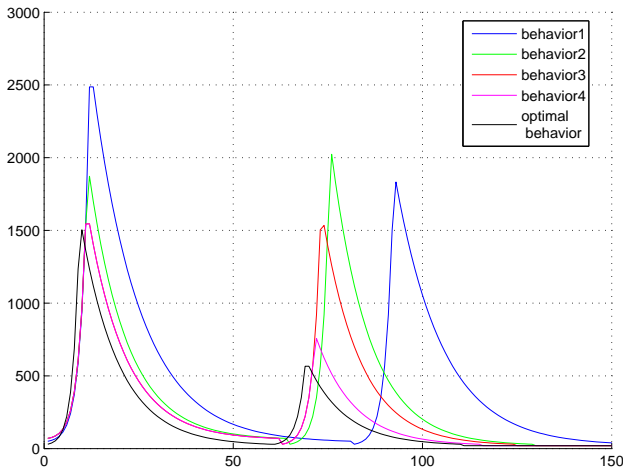


Fig. 5. Evolution of the cost function along time of different behaviors of robots when people are escaping in two different instants of time. In Fig 6 the path followed by the group is shown. Behavior 1: Robot Leader looks for people who are escaping. Behavior 2: Shepherd Robots look for people who are escaping without choosing the shortest way. Behavior 3: Shepherd Robots interchange their positions before looking for people who are escaping. Behavior 4: Shepherd robot which is nearest of people who are escaping is the responsible for resolving this mission without considering the forces presented before. Behavior 5: Robots choose the configuration which minimizes the cost function.

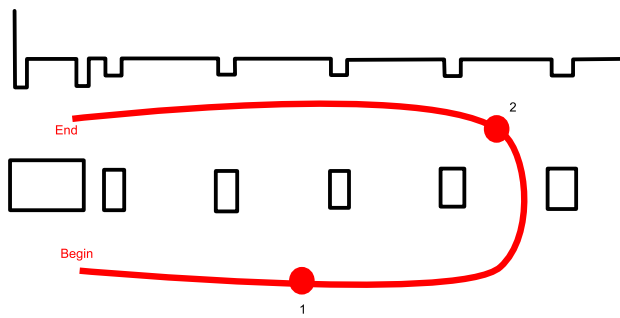


Fig. 6. Trajectory followed by a group of people being guided by three robots, in Fig 5 the computation of the cost function is shown. Point 1 and 2 are the representation where people have tried to escape.

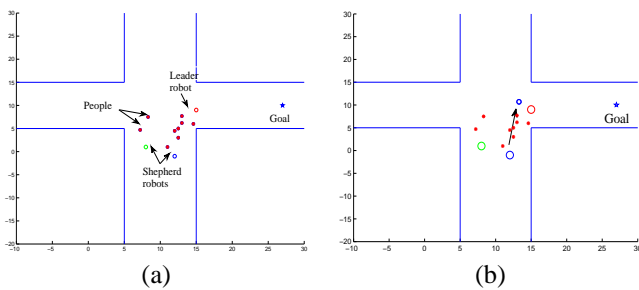


Fig. 7. Experiment 2: Configuration 1. Robot shepherd 1 takes care of grouping people who have escaped following right path.

previously. In Fig. 6 the trajectory the group has followed is presented. Hence, the cost function minimizes globally the work of the group of robots along all the mission.

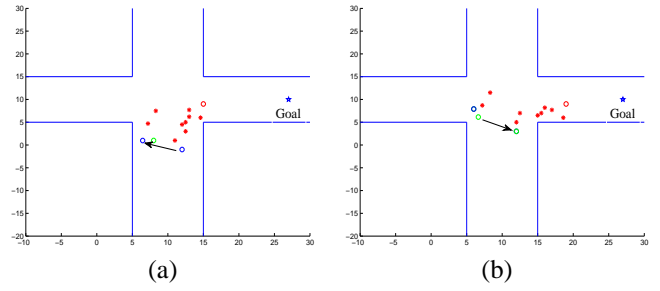


Fig. 8. Experiment 2: Configuration 2. Robot shepherd 1 takes care of grouping people who have escaped following right path.

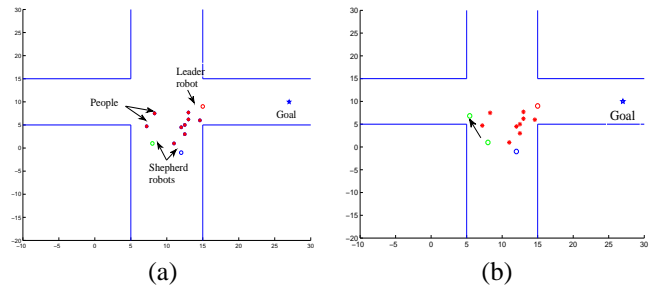


Fig. 9. Experiment 2: Configuration 3. Robot shepherd 2 takes care of grouping people who have escaped following right path.

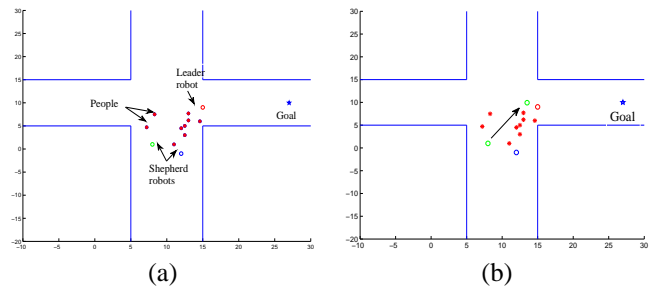


Fig. 10. Experiment 2: Configuration 4. Robot shepherd 2 takes care of grouping people who have escaped following left path. Two different instants of the path are shown (a) and (b).

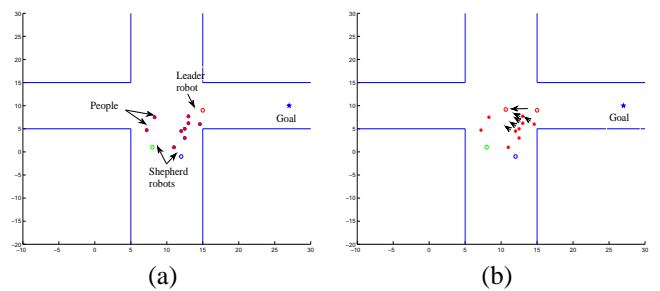


Fig. 11. Experiment 2 Configuration 5. Robot leader regroup the formation, the entire group moves toward the escaping people.

## VII. CONCLUSIONS

We have presented a new cost function for optimizing cooperative robot movements for guiding and regrouping people in a guiding missions. In contrast to existing approaches, our method can tackle more realistic situations, such as dealing with large environments with obstacles, or regrouping people who left the group. For that reason, this work can be applied

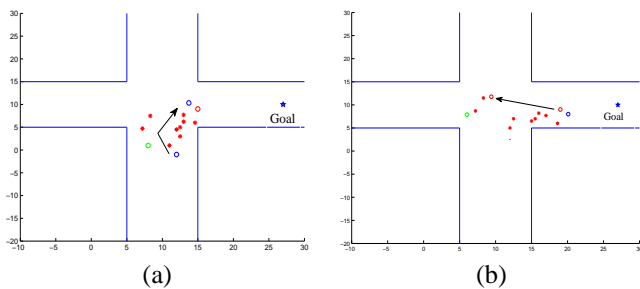


Fig. 12. Experiment 2 Configuration 6. Robot leader regroup the formation, robot shepherd 1 takes the role of leader while robot leader is moving toward the escaping people.

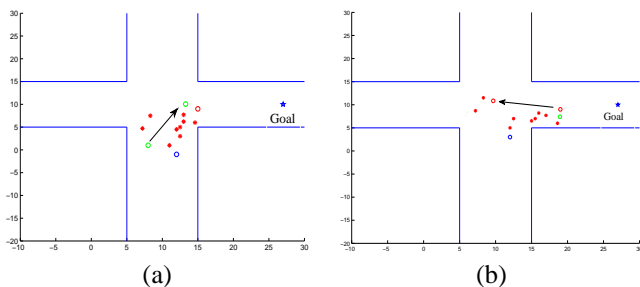


Fig. 13. Experiment 2 Configuration 7. Robot leader regroup the formation, robot shepherd 2 takes the role of leader while robot leader is moving toward the escaping people.

in some real robots applications, for instance, guiding people in emergency areas, or acting as a robot companion.

We presented various results in different situations: guiding in open areas and areas with an obstacle, and can be extended to urban areas with a large number of obstacles. In all of these experiments we showed that the robots can act early enough to satisfactorily guide group of people through a path calculated previously through an exhaustive analysis of different configurations of cooperatively robot motion.

Although our method optimizes locally the cost function, if we are able to know the complete trajectories, then we will be able to compute the global optimal configuration of the robots. This study will be analyzed in future work.

## VIII. ACKNOWLEDGMENTS

This research was conducted at the Institut de Robòtica i Informàtica Industrial (CSIC-UPC). It was partially supported by CICYT projects DPI2007-61452 and Ingenio Consolider CSD2007-018, by CSIC project 200850I055 and by IST-045062 of European Community. The first author acknowledges Spanish FPU grant ref. AP2006-00825.

## REFERENCES

- [1] M.S. Arulampalam, S. Maskell, N. Gordon, T. Clapp, D. Sci, T. Organ, and S.A. Adelaide. A tutorial on particle filters for online nonlinear/non-gaussian bayesian tracking. *Signal Processing, IEEE Transactions on*, 50(2):174–188, 2002.
- [2] M. D. Bolic and P. M. S. Hong. Resampling algorithms and architectures for distributed particle filters. *Signal Processing, IEEE Transactions on*, 53(7):2442–2450, 2005.
- [3] W. Burgard, A. B. Cremers, D. Fox, D. Hahnel, G. Lakemeyer, D. Schulz, W. Steiner, and S. Thrun. The interactive museum tour-guide robot. In *Proc. of the Fifteenth National Conference on Artificial Intelligence, Madison, Wi*, 1998.
- [4] J. Casper and R. R. Murphy. Human-robot interactions during the robot-assisted urban search and rescue response at the world trade center. *IEEE transactions on systems, man, and cybernetics.*, 33(3):367–385, 2003.
- [5] L. Chaimowicz and V. Kumar. Aerial shepherds: Coordination among uavs and swarms of robots. *Proceedings of the 7th International Symposium on Distributed Autonomous Robotic Systems*, 2004.
- [6] K. Dautenhahn, S. Woods, C. Kaouri, M. L. Walters, K. L. Koay, and I. Werry. What is a robot companion friend, assistant or butler? *Proc. Int. Conf. Intelligent Robots and Systems (IROS)*, 25:1488–1493, 2005.
- [7] N. Davies, K. Cheverst, G. Blair, and K. Mitchell. Developing a context sensitive tourist guide. 1998.
- [8] Martinez Garcia E.A., Akihisa O., and S. Yuta. Crowding and guiding groups of humans by teams of mobile robots. *Advanced Robotics and its Social Impacts, 2005.IEEE Workshop on*, pages 91–96, 2005.
- [9] A. Franchi, L. Freda, G. Oriolo, and M. Vendittelli. A randomized strategy for cooperative robot exploration. *DIS, Universita di Roma La Sapienza, Tech. Rep.*, 2006.
- [10] A. Garrell, A.Sanfelii, and F.Moreno-Noguer. Discrete time motion model for guiding people in urban areas using multiple robots. In *IEEE/RSJ International Conference on Intelligent Robots and Systems.*, 2009.
- [11] D. Helbing. A mathematical model for the behavior of pedestrians. *Behavioral Science*, 36(4), 1991.
- [12] D. Helbing, I. Farkas, P. Molnar, and T. Vicsek. Simulation of pedestrian crowds in normal and evacuation simulations. *M. Schreckenberg and S. Sharma (Eds.), Pedestrian and Evacuation Dynamics, Springer*, page 2158, 2002.
- [13] D. Helbing and P. Molnar. Social force model for pedestrian dynamics. *Physical Review E* 51, pages 4282–4286, 1995.
- [14] D. Helbing and P. Molnar. Self-organization phenomena in pedestrian crowds, in self-organization of complex structures: From individual to collective dynamics. *F. Schweitzer (Ed.) (Gordon and Breach, London)*, pages 569–577, 1997.
- [15] Y. K. Hwang and N. Ahuja. A potential field approach to path planning. *IEEE Transactions on Robotics and Automation* 8(1), 1992.
- [16] B. Lavis, Y. Yokokohji, and T. Furukawa. Estimation and control for cooperative autonomous searching in crowded urban emergencies. *Robotics and Automation, 2008.ICRA 2008.IEEE International Conference on*, pages 2831–2836, 2008.
- [17] J.M. Lien, S. Rodriguez, J.P. Malric, and N.M. Amato. Shepherding behaviors with multiple shepherds. *Proc. IEEE Int. Conf. Robot. Autom. (ICRA)*, 2005.
- [18] J. S. Liu and R. Chen. Sequential monte carlo methods for dynamic systems. *Journal of the American Statistical Association*, 93(443):1032–1044, 1998.
- [19] M. Mirhakkak, N. Schult, and D. Thomson. Dynamic quality-of-service for mobile ad hoc networks. In *Proceedings of the 1st ACM international symposium on Mobile ad hoc networking and computing*, pages 137–138, 2000.
- [20] I. M. Rekleitis. A particle filter tutorial for mobile robot localization. *Center for Intelligent Machines, McGill University, Montreal, Quebec, Canada*.
- [21] R.T.Vaughan, N. Sumpter, J. Henderson, A. Frost, and S. Cameron. Experiments in automatic flock control. *Journal Robot and Autom. Sys.*, pages 191–209, 2000.
- [22] A. Sanfelii and J. Andrade-Cetto. Ubiquitous networking robotics in urban settings workshop on network robot systems. *Proc. Int. Conf. Intelligent Robots and Systems (IROS)*, 2006.
- [23] D. A. Shell and M. J. Matari. Insights toward robot-assisted evacuation. *Advanced Robotics*, 19(8):797–818, 2005.
- [24] J. Adler V. Blue. Cellular automata model of emergent collective bi-directional pedestrian dynamics. *Artificial Life VII, The Seventh International Conference on the Simulation and Synthesis of Living Systems*, 2000.
- [25] R. van der Merwe and E. Wan. Gaussian mixture sigma-point particle filters for sequential probabilistic inference in dynamic state-space models. *Acoustics, Speech, and Signal Processing, 2003.Proceedings.(ICASSP'03).2003 IEEE International Conference on*, 6, 2003.
- [26] R. Vaughan. *Experiments in Animal-interactive Robotics*. PhD thesis, University of Oxford, 1998.
- [27] N. Vlassis, B. Terwijn, and B. Krose. Auxiliary particle filter robot localization from high-dimensional sensor observations. *Robotics and Automation, 2002.Proceedings.ICRA'02.IEEE International Conference on*, 1, 2002.
- [28] H. Wotring. Human-robot interaction in an interactive tour guide robot.
- [29] A. Zelinsky. A mobile robot navigation exploration algorithm. *IEEE Transactions of Robotics and Automation*, 8(6):707–717, 1992.