

# Application of Dense Offshore Tsunami Observations from Ocean Bottom Pressure Gauges (OBPGs) for Tsunami Research and Early Warnings



Mohammad Heidarzadeh and Aditya R. Gusman

**Abstract** We introduce a new data source of dense deep-ocean tsunami records from Ocean Bottom Pressure Gauges (OBPGs) which are attached to Ocean Bottom Seismometers (OBS) and apply them for far-field and near-field tsunami warnings. Tsunami observations from OBPGs are new sources of deep-ocean tsunami observations which, for the first time, provide dense tsunami data with spacing intervals in the range of 10–50 km. Such dense data are of importance for tsunami research and warnings and are capable of providing new insights into tsunami characteristics. Here, we present a standard procedure for the processing of the OBPG data and extraction of tsunami signals out of these high-frequency data. Then, the procedure is applied to two tsunamis of 15 July 2009 Mw 7.8 Dusky Sound (offshore New Zealand) and 28 October 2012 Mw 7.8 Haida Gwaii (offshore Canada). We successfully extracted 30 and 57 OBPG data for the two aforesaid tsunamis, respectively. Numerical modeling of tsunami was performed for both tsunamis in order to compare the modeling results with observation and to use the modeling results for the calibration of some of the OBPG data. We successfully employed the OBPG data of the 2012 Haida Gwaii tsunami for tsunami forecast by applying a data assimilation technique. Our results, including two case studies, demonstrate the high potential of OBPG data for contribution to tsunami research and warnings. The procedure developed in this study can be readily applied for the extraction of tsunami signals from OBPG data.

---

M. Heidarzadeh (✉)

Department of Civil and Environmental Engineering, Brunel University London,  
Uxbridge UB8 3PH, UK

e-mail: [mohammad.heidarzadeh@brunel.ac.uk](mailto:mohammad.heidarzadeh@brunel.ac.uk)

A. R. Gusman

GNS Science, Lower Hutt, New Zealand

e-mail: [a.gusman@gns.cri.nz](mailto:a.gusman@gns.cri.nz)

© Springer Nature Singapore Pte Ltd. 2019


T. S. Durrani et al. (eds.), *Geological Disaster Monitoring Based on Sensor Networks*, Springer Natural Hazards, [https://doi.org/10.1007/978-981-13-0992-2\\_2](https://doi.org/10.1007/978-981-13-0992-2_2)

## 1 Introduction and Background

Tsunami science, in general, is younger than earthquake; mainly because the available observations for tsunamis are less than those for earthquakes. Lack of enough observations has been a main barrier to the development of tsunami science [19]. Tsunami observations are made usually by coastal tide gauges (e.g. [9, 10] and offshore gauges in the form of Deep-ocean Assessment and Reporting of Tsunamis (DART) [2, 3, 8] as well as offshore cabled tsunami gauges such as the Canadian North–East Pacific Underwater Networked Experiments (NEPTUNE) (Rabinovich and Eble [16]. However, most of the tsunami observations have been from tide gauges until 1990s when DARTs were born. Deep-ocean records of tsunamis are free from coastal effects such as harbor resonance [7], nonlinear effect (e.g. [4], and coastal refractions and scattering [11]. Hence, deep-ocean tsunami observations provide refined information about tsunami characteristics [10]. Observations from DARTs are significantly important for tsunami research and warnings and have provided the opportunity to study ocean-wide propagation of tsunamis and to develop a tsunami warning system in the Pacific Ocean [20]. The total number of DARTs installed in the Pacific, Atlantic and Indian Oceans is  $\sim 60$ . Although installation and maintenance of this number of DARTs is a major progress worldwide in tsunami research and has been very costly (installation of each DART approximately costs US\$250k), it is not enough to provide high spatial resolution of trans-Pacific tsunamis. The distances between neighboring DARTs are in the range 400–4000 km. Given a wavelength of upto  $\sim 500$  km for tsunami waves in deep-ocean, it is clear that DART records are very sparse to capture a full tsunami wavelength. In fact, the available deep-ocean measurements of tsunamis through DARTs are limited and sparse. Therefore, it is necessary to look for alternate complementary sources of deep-ocean tsunami measurements.

In past few years, Ocean Bottom Pressure Gauges (OBPG) were added to Ocean Bottom Seismometers (OBS); thus OBSs have been able to record tsunami waves in addition to seismic waves. Because OBSs are deployed in a dense array (upto around 100 instruments) with spacing of 10–50 km, the tsunami records by OBPGs have high spatial resolution. Figures 1 shows dense OBSs which have been deployed in past few years in world's oceans. Some of these OBS systems have been equipped with OBPGs which enabled them to record the trans-oceanic tsunamis (Fig. 1). According to Fig. 1, among the recorded tsunami events by OBPGs are the 2009 Dusky Sound (offshore New Zealand), the 2011 Japan and the 2012 Haida Gwaii (offshore Canada) events.

OBPGs are different from DARTs in several ways: (1) OBSs are usually deployed for few-year campaigns and thus are not permanent stations whereas DARTs are permanent, (2) OBSs store the sea-level data in their hard disks which can be accessed usually at the end of the campaigns or at certain intervals while DARTs provide real-time data through satellite connections, (3) the OBS data have

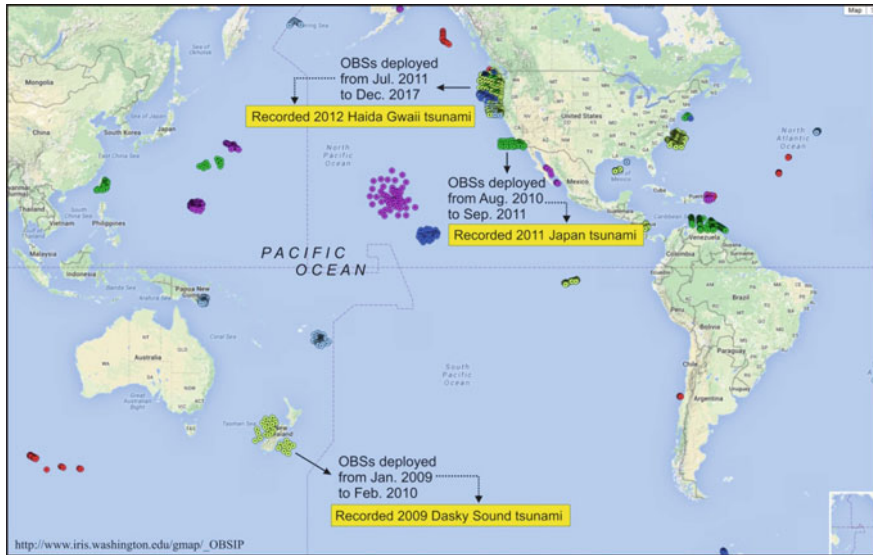

**Fig. 1** Locations of OBS campaigns deployed in world's oceans which record both seismic and tsunami waves through OBPGs (original figure from: [http://www.iris.washington.edu/gmap/\\_OBSIP](http://www.iris.washington.edu/gmap/_OBSIP)). The three tsunamis of 2009 Dusky Sound, 2011 Japan and 2012 Haida Gwaii were recorded by the OBS systems through their OBPGs

high sampling rates of 10–50 samples per second while DARTs record the tsunami waves with a rate of 1 record per 15 s at best, and (4) OBSs are deployed in large numbers (from ~50 to ~100) with spacing in the range 10–50 km (Fig. 1) whereas DARTs are limited in number (total number of DARTs is ~60 worldwide) and are spaced from ~400 to ~4000 km.



Dense OBPG observations are helpful for tsunami research and warnings. While temporal variations of tsunamis are well known by having a large number of time series of tsunamis, little is known about spatial variations of tsunamis because tsunamis have large wavelengths (i.e. hundreds of kilometers) and dense array of tsunamis have not been available so far. Therefore, it has been impossible to provide several measurements of tsunamis per wavelength as they travel across the world's oceans. Data from dense array of OBS pressure gauges provide several measurements per tsunami wavelength; thus can help to study spatial distribution of tsunamis. In addition, dense array of tsunamis provides new opportunities for tsunami warnings by new methods such as warnings based on direct sea-surface measurements (without knowledge about earthquake source), and successive data assimilations (e.g. [15]; Gusman et al. 2016). Application of both of the aforesaid methods has not been possible for tsunami research so far because such methods require dense observations; i.e. several measurements per tsunami wavelength

87 which means observations at 5–20 km intervals. Maeda et al. [15] proposed an  
 88 assimilation method for tsunami warning which was tested using synthetic data.  
 89 The real tsunami data provided by OBSs for the 2012 Haida Gwaii tsunami was the  
 90 first real application of data assimilation method as reported by Gusman et al.  
 91 (2016). In this study, the tsunami data from OBS pressure gauges are introduced  
 92 and the data acquisition and preparation are described. Here, we present the results  
 93 of OBPGs data and tsunami simulations for the 2009 Dusky Sound and the 2012  
 94 Haida Gwaii tsunamis.


## 95 2 Data and Different Types of OBS Pressure Gauges

96 Data from OBSs are available through the website of the project funded by National  
 97 Science Foundation (NSF) at: <<http://www.obsip.org/>>. Figure 1 shows location of  
 98 OBSs deployed in world's oceans in the past decade. The pressure gauges installed  
 99 on the OBSs are of two types: (1) Absolute seafloor Pressure Gauges (APG), and  
 100 (2) Differential seafloor Pressure Gauges (DPG) [5]. The APGs are similar to  
 101 DARTs and give absolute values of pressure above the instrument. DPGs measure  
 102 the difference between water pressure above the instrument and the oil pressure  
 103 within the instrument. Hence, the wave amplitudes obtained from DPGs need  
 104 calibration. Examples of instrument response for the APGs and DPGs at different  
 105 frequencies are given in Fig. 2. It can be seen that APGs' response is constant at the  
 106 tsunami period band (2 min < period < 100 min) (Fig. 2a) while the response  
 107 decreases with increase of period for DPGs (Fig. 2b). In other words, the tsunami  
 108 amplitudes recorded by DPGs are relative values and do not represent the real  
 109 tsunami amplitudes while their periods are correct. Therefore, amplitudes of DPGs  
 110 need correction.


111 In the past decade, few tsunamis have been recorded by OBS pressure gauges  
 112 among which are the 2009 Dusky Sound tsunami (New Zealand) (Fig. 3), the 2011  
 113 Japan tsunami (Fig. 4), and the 2012 Haida Gwaii tsunami (Fig. 5). Figure 6 pre-  
 114 sents examples of DART, APG and DPG records of the 2012 Haida Gwaii tsunami  
 115 and comparisons with simulated waveforms. As shown in Fig. 6, the amplitudes of  
 116 the waves recorded by DPGs are larger than those recorded by neighboring DARTs  
 117 and APGs. This is because of the differential nature of the pressures recorded by the  
 118 DPG instruments and thus the records need to be corrected. However, the periods of  
 119 the waves recorded by DPGs are the same as those recorded by APGs and DARTs.  
 120 Besides the aforesaid three events, other tsunamis also were recorded by the OBS  
 121 arrays such as the 1 April 2014 Iquique (Chile) tsunami.

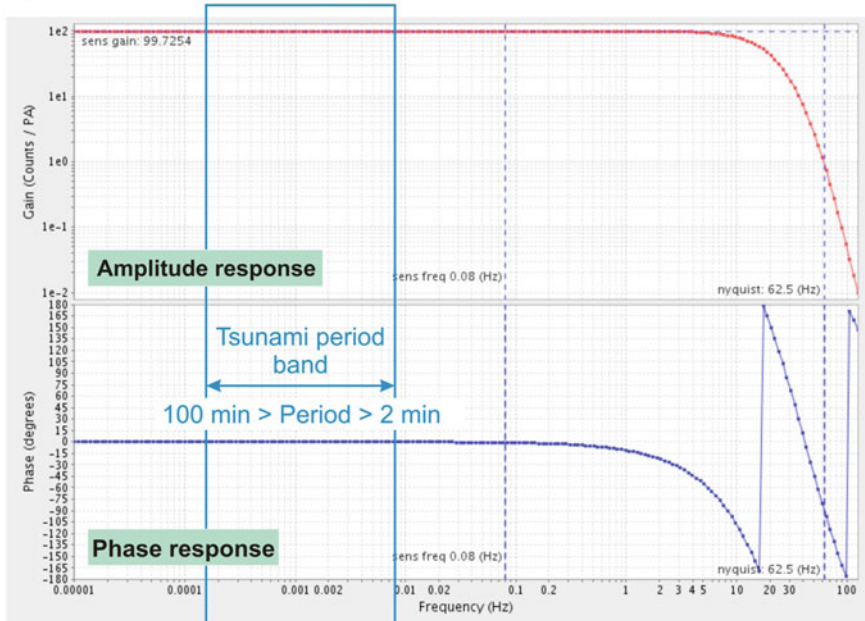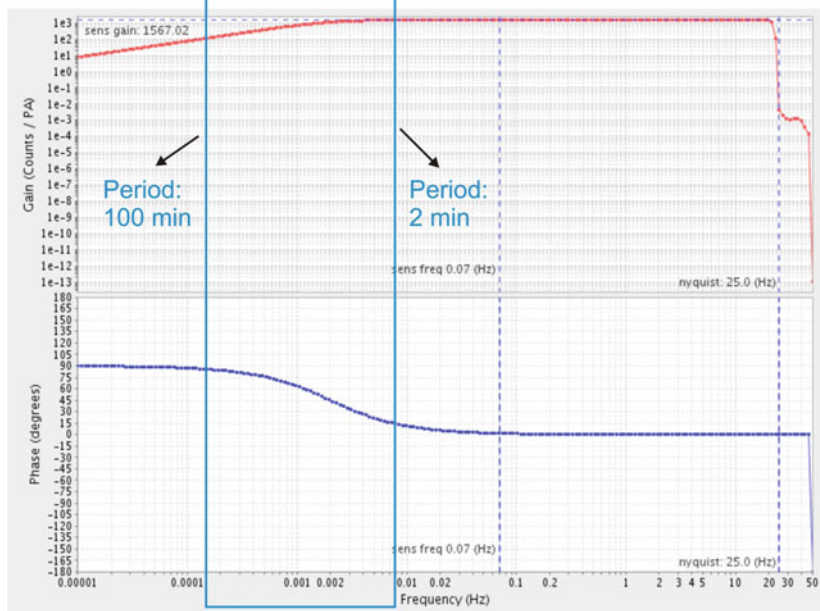**(a) Absolute Pressure Gauge (instrument NZ01 from SIO)****(b) Differential Pressure Gauge (instrument M10B from LDEO)**


**Fig. 2** Sample instrument response for the amplitudes and phases gains at different frequencies for an APG **(a)** and a DPG instrument **(b)**. SIO and LDEO stand for Scripps Institution of Oceanography and Lamont-Doherty Earth Observatory, respectively. Data from: Incorporated Research Institutions for Seismology Data Management Center ([http://ds.iris.edu/mda/\\_OBSIP](http://ds.iris.edu/mda/_OBSIP))

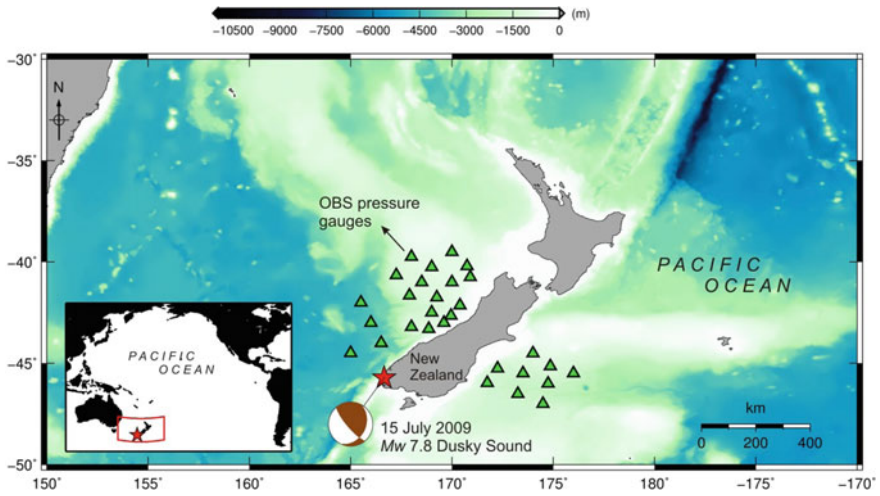


**Fig. 3** Locations of OBPG recordings of the 15 July 2009 Dusky Sound tsunami (New Zealand). An array of 30 OBPGs recorded this tsunami

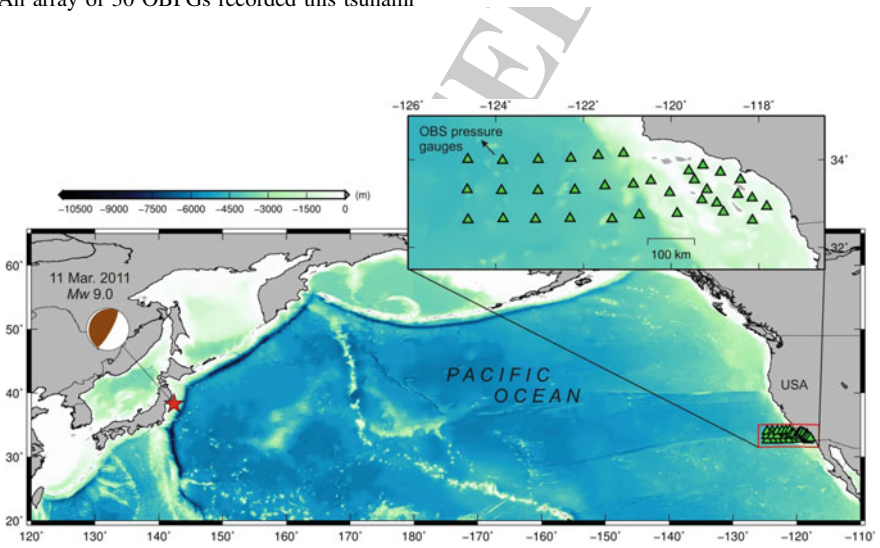

**Fig. 4** Locations of OBPG recordings of the 11 March 2011 Japan tsunami. An array of 34 OBPGs recorded this tsunami

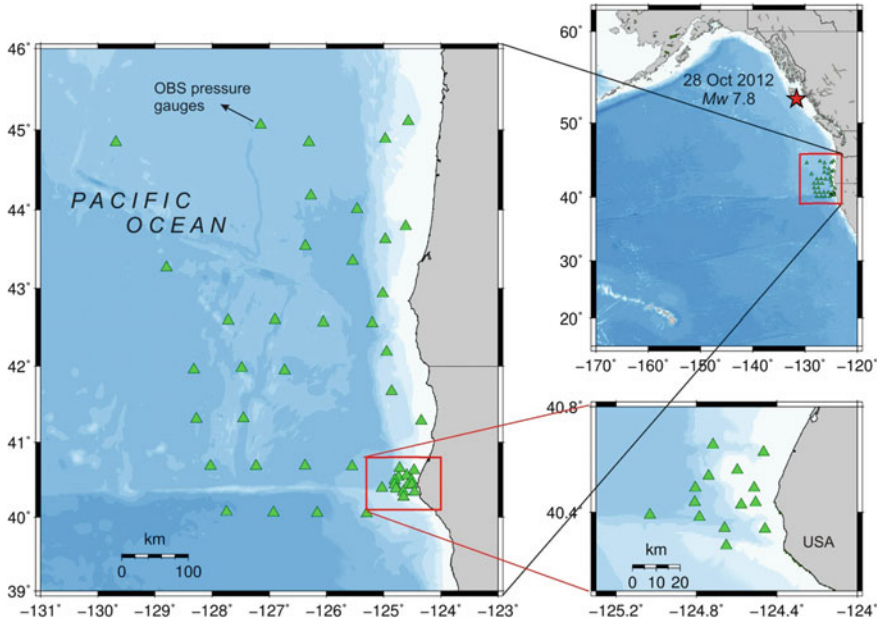

**Fig. 5** Locations of OBPG recordings of the 28 November 2012 Haida Gwaii tsunami. An array of 68 OBPGs recorded this tsunami

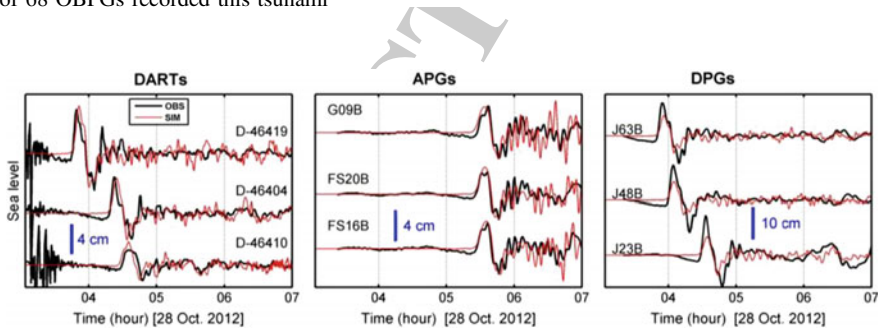

**Fig. 6** Examples of DART (left), APG (middle) and DPG (right) records of the 2012 Haida Gwaii tsunami. Black and red waveforms are observed and simulated waveforms, respectively. The observed waveforms from DPGs are noticeably larger than those from DARTs and APGs showing that DPGs need correction (Color figure online)

122

### 3 Methodology

123

124

125

126

127

Unlike Tide Gauge (TG) or DART data, the process of OBPG data is more complicated. Usually, the amplitude values for the TG and DART data are the absolute real-world values. Therefore, a simple high-pass filter will yield the tsunami signal for the TG and DART data. For two types of OBPG data, the APGs give the absolute values of wave amplitude (same as TG and DARTs) while DPGs give

**Table 1** The procedure used for the preparation of tsunami waveforms from the OBPG data

Step number	Description of the task	SAC <sup>a</sup> command
1	Selecting an appropriate length of the data	cut
2	Removing the mean of the data	rmean
3	Removing the linear trend	rtrend
4	Applying a symmetric taper to each end of data	taper
5	Band pass filtering the data to remove non-tsunami signals	bandpass
6	Removing the mean of the data	rmean
7	Removing the linear trend	rtrend
8	Applying a symmetric taper to each end of data	taper
9	Performs deconvolution to remove an instrument response and convolution to apply another instrument response	transfer
10	Removing the mean of the data	rmean
11	Removing the linear trend	rtrend
12	End	

<sup>a</sup>SAC Seismic analysis code


128 arbitrary numbers which need to be corrected. This correction is conducted using  
 129 the results of tsunami simulations [5].

130 To extract the tsunami signals from OBPGs, we first resample the high-frequency  
 131 date (frequency of 40 or 50 Hz) to a low-frequency data (frequency of 0.0167 Hz),  
 132 then we band-pass filter the original records; finally the instrument responses are  
 133 de-convolved. For the APGs, we do not correct the amplitude values while the DPG  
 134 amplitudes need to be corrected using the results of numerical simulations of  
 135 tsunamis. The software package SAC (Seismic Analysis Code) ([https://ds.iris.edu/  
 136 files/sac-manual/](https://ds.iris.edu/files/sac-manual/)) is used for processing the OBPG data. Table 1 provides a sum-  
 137 mary of the procedure taken for the preparation of the tsunami waveforms from the  
 138 OBPG data along with relevant SAC commands. Numerical simulations of tsunami  
 139 waves are conducted using the numerical package of Satake [17] which solves  
 140 Shallow-Water equations in a spherical domain using the Finite-Difference Method.  
 141 The 30 arc-sec bathymetry data provided by GEBCO is used here for numerical  
 142 modeling of tsunami [21]. The tsunami source models used for the simulations of the  
 143 events are based on the model by Gusman et al. [6] for the 2012 Haida Gwaii event  
 144 (Mw 7.8) and that of Beavan et al. [1] for the 2009 Dusky Sound event (Mw 7.8).

#### 145 **4 Case Study One: The 2012 Haida Gwaii Tsunami,** 146 **Offshore Canada**

147 On 28 October 2012, 03:04:09 UTC, an earthquake with Mw 7.8, which is known  
 148 as the 2012 Haida Gwaii earthquake, occurred offshore British Columbia, Canada.  
 149 The earthquake was initiated at 52.622°N, 132.103°W, at the depth of 14 km [13],



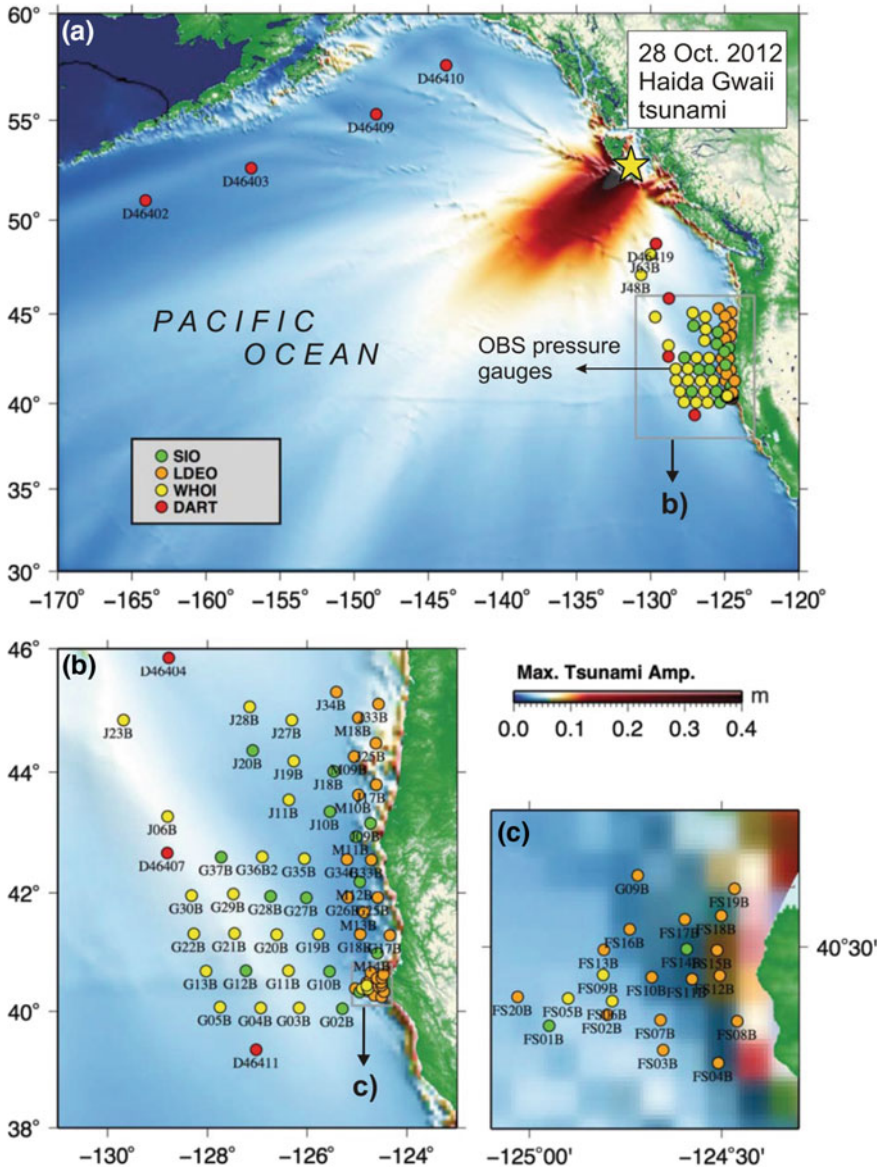

**Fig. 7** The maximum simulated tsunami amplitudes due to the 28 November 2012 Haida Gwaii tsunami and locations of DARTs and OBSs. The OBSs are shown by green (Scripps Institution of Oceanography, SIO), brown (Lamont Doherty Earth Observatory, LDEO) and yellow (Woods Hole Oceanographic Institution, WHOI) circles. Modified from Sheehan et al. [18]. An array of more than 50 OBSs recorded this tsunami (Color figure online)


and ruptured all the way upto the trench axis with a thrust fault motion. A strong tsunami was generated by the earthquake with maximum run-up of 13 m being observed in the near field [14]. The tsunami was recorded on DART stations as well as on the dense array of OBPGs in the Cascadia subduction zone located about 1000 km from the earthquake source region. A total of 57 tsunami waveforms were observed at 8 DARTs, 19 APGs provided by Lamont Doherty Earth Observatory (LDEO), 9 DPGs provided by Scripps Institution of Oceanography (SIO), and 21 DPGs provided by Woods Hole Oceanographic Institution (WHOI) [5, 18] (Fig. 7). The waveforms are presented in Sheehan et al. [18] and Gusman et al. (2016). Figure 8 compares the spectra of the recorded and simulated waveforms from the 2012 Haida Gwaii tsunami. It can be seen that the spectral content of all recorded data, including DPGs, are very similar to those of simulations.

The tsunami waveforms were used to demonstrate the progressive data assimilation method [15] to produce wave fields in the vicinity of the array, then forecasting of wave fields by numerical forward modeling [5]. The tsunami wave field is corrected by using the observed tsunami amplitudes at every time step of 1 s. To transmit the information of tsunami amplitude from each station to its surrounding area, a linear interpolation method [12] is used.


The tsunami reached the northern most station in the modeling domain of the Cascadia subduction zone approximately 70 min after the earthquake. This can be considered as the effective start time for the tsunami data assimilation process. At the beginning of the process an accurate tsunami wave field could not be obtained because there is no information about the tsunami source in tsunami data assimilation method. Accurate wave field prediction can only be achieved after the tsunami passes through several observation stations. For the case of the Haida Gwaii tsunami with the station configuration, the general pattern of a realistic tsunami wave in the Cascadia subduction zones begins to emerge at 30 min after the tsunami data assimilation process or after the tsunami passes through 5 stations. The performance of the forecast algorithm using tsunami data assimilation method is evaluated by comparing the forecasted waveforms with the observations. Figure 9 shows the forecast accuracy versus the length of data used for assimilation. High accuracies of more than 80% of forecasted tsunami waveforms produced from the 60 min (130 min after the earthquake) data-assimilated wave field are obtained at stations in the southern part of the modeling area.

## 5 Case Study Two: The 2009 Dusky Sound Tsunami, Offshore New Zealand

An earthquake with moment magnitude ( $M_w$ ) of 7.8 occurred in Dusky Sound, New Zealand on 15 July 2009 (see Fig. 10 for epicenter). According to the United States Geological Survey (USGS), the earthquake origin time was 09:22:33 UTC on 15 July 2009, located at  $45.722^\circ\text{S}$   $166.64^\circ\text{E}$  and at the depth of 35 km (Fig. 10).

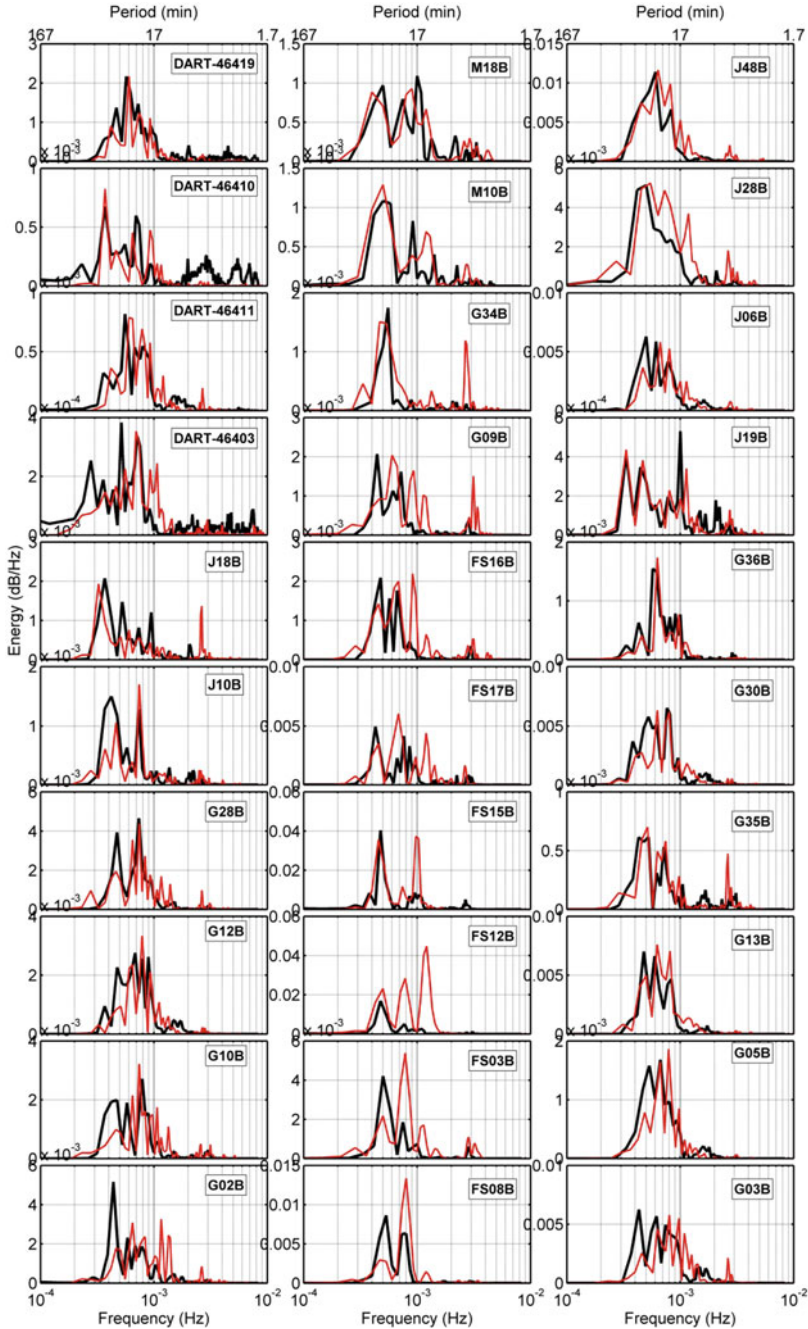


**Fig. 8** Comparison of the spectra of the recorded and simulated waveforms from the 2012 Haida Gwaii tsunami

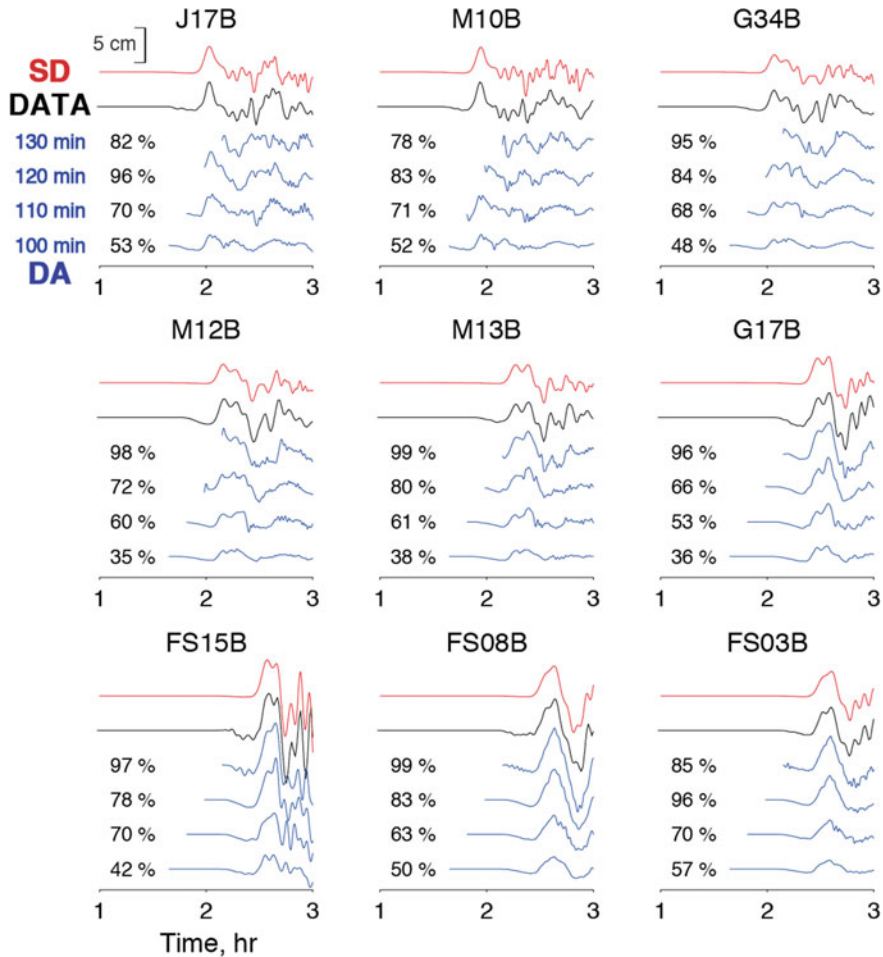

**Fig. 9** Comparison of tsunami data from simulations using slip model (SD) (red), observations (black), and simulations from the data assimilation technique (DA) wave fields (blue). The numbers 100, 110, 120, and 130 min are the length of data used for data assimilations. These OBPG stations show here are located at distances <100 km from the coast. The performance of data assimilation technique in reproducing the observations is shown as percentage [5] (Color figure online)



190 This earthquake was the largest earthquake in New Zealand since 1931 (Beavan  
 191 et al. 2009). The earthquake triggered a tsunami which was recorded on a number  
 192 of tide gauges and Deep-Ocean Assessment and Reporting of Tsunami (DART)  
 193 gauges (see Fig. 10 for locations of the gauges and Fig. 11 for the waveforms). At  
 194 the time of the 2009 earthquake and tsunami, a campaign of OBSs was in operation

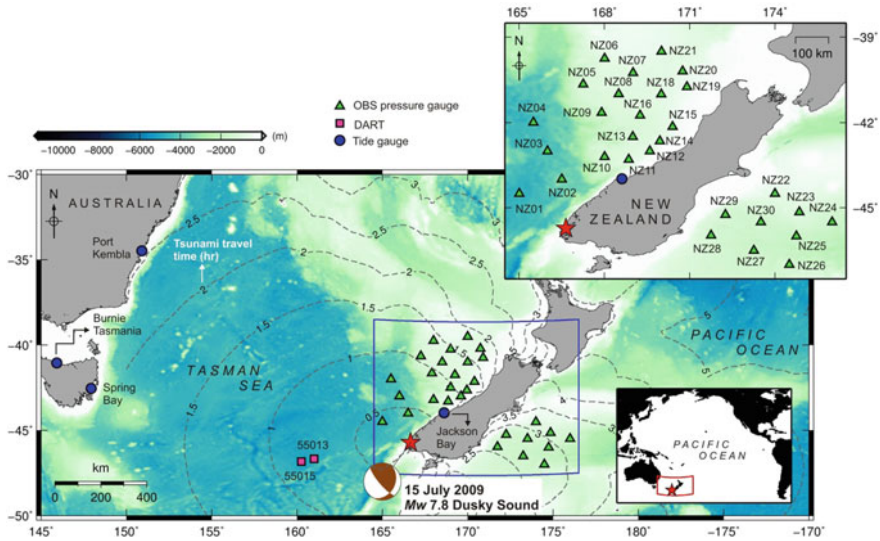

**Fig. 10** Epicentral area and location of various sea level gauges used in this study including OBPBs, TGs and DARTs. The red star shows the earthquake epicenter. Dashed contours are tsunami travel times in hours (Color figure online)

195 in the same region (Fig. 10). These OBSs also recorded the tsunami as they were  
 196 equipped with OBPBs. All of the OBPBs are of the DPG type which means the  
 197 pressure values are not the absolute values. Therefore, the amplitude values were  
 198 corrected using the results of tsunami simulations (Fig. 11).

199 While tsunami signals were fully hidden in high-frequency recordings of the  
 200 OBPBs, we were able to successfully extract the tsunami signals by applying  
 201 re-sampling, filtering, and de-convolving the DPG instrument response (the pro-  
 202 cedure presented in Table 1). In our processed OBPB tsunami data (black lines in  
 203 Fig. 11), the tsunami arrival times were clear and the signals had periods in the  
 204 range of 10–20 min which is the expected period range for a tsunami generated by a  
 205 Mw 7.8 earthquake. Numerical modeling of tsunami was conducted by using the  
 206 tsunami source proposed by Beavan et al. [1] (Fig. 11a). Simulations were able to  
 207 fairly reproduce the observations from OBPB, DART and tide gauge stations.  
 208 However, the amplitudes of the OBPB-DPG data were larger than the simulations;  
 209 therefore, we corrected the OBPB-DPG amplitudes by applying arbitrary ratios in  
 210 order to match them with the maximum amplitudes from tsunami simulations for  
 211 each instrument. Based on Fig. 11, the match for DART and tide gauge records was  
 212 better than that for OBPBs.

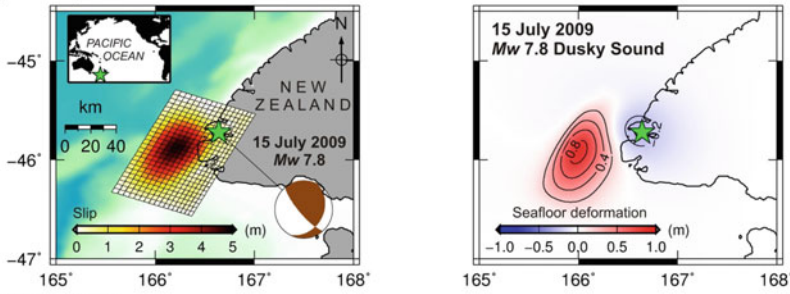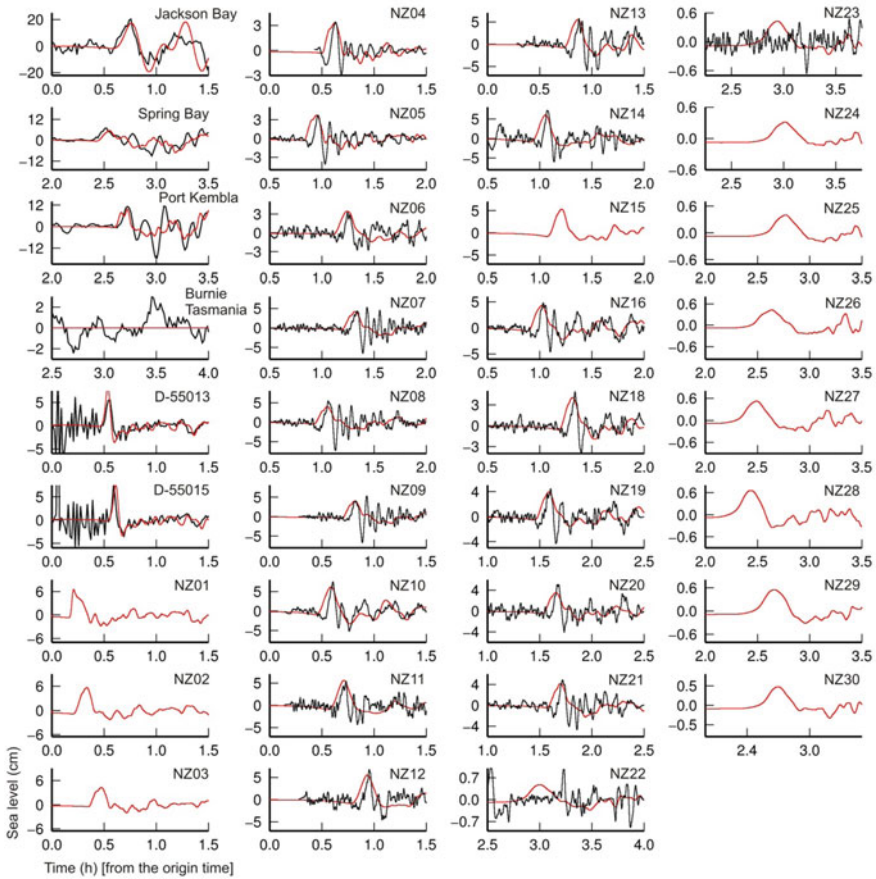**(a): The slip model and crustal deformation**

**(b): Waveforms**


**Fig. 11** **a** Source model of the 2009 earthquake according to the model published by Beavan et al. [1]. **b** Comparison of observed (black) and simulated (red) tsunami waveforms for the 2009 Dusky Sound tsunami. The locations of the gauges are shown in Fig. 10. For OBS gauges NZ-15, and from NZ-24 to NZ-30, the tsunami signals are not clear and are hidden within the noise level (Color figure online)

## 6 Conclusions

We introduced a new source of dense offshore tsunami observations from Ocean Bottom Pressure Gauges (OBPGs) which are attached to Ocean Bottom Seismometers (OBSs). Until recently (i.e. around 2015), offshore deep-ocean tsunami observations were made through DARTs (Deep-ocean Assessment and Reporting of Tsunamis). However, OBPG observations have two main advantages over DARTs namely: (1) they come with large numbers (upto  $\sim 100$ ) and dense distribution with spacing of 10–50 km versus 200–4000 km of DARTs, and (2) they have high frequency with sampling rates of 40–100 Hz versus that of 0.016 Hz for DARTs. The data processing and preparations are more complicated for OBPGs than DARTs. We presented a standard procedure and the sequence of tasks that needs to be taken for the processing of the OBPG data and extraction of the tsunami signals. The procedure is then applied to the two tsunamis of 2009 Dusky Sound (offshore New Zealand) and the 2012 Haida Gwaii (offshore Canada). Our results showed that the standard procedure used for the extraction of the OBPG data was successful in revealing tsunami signals in both cases. The OBPG instruments for these two events were either Differential seafloor Pressure Gauges (DPGs) or Absolute seafloor Pressure Gauges (APGs). The amplitudes from APGs are real values while those from DPGs are relative values and need correction. For the cases of the DPG data, we corrected the amplitudes of the observations signals using the results of tsunami simulations. The OBPG data for the 2012 Haida Gwaii event were successfully applied for tsunami forecast using the data assimilation technique.

**Acknowledgements** We acknowledge NOAA (National Oceanic and Atmospheric Administration of the US) for providing the DART data (<http://www.ndbc.noaa.gov/dart.shtml>), the IOC (Intergovernmental Oceanographic Commission) for the tide gauge records (<http://www.ioc-sealevelmonitoring.org/>) and the Incorporated Research Institutions for Seismology Data Management Center for the OBPG records ([http://ds.iris.edu/mda/\\_OBSIP](http://ds.iris.edu/mda/_OBSIP)). Authors would like to thank Kenji Satake (The University of Tokyo, Japan), Tomohiro Takagawa (Port and Airport Research Institute, Japan), Shingo Watada (The University of Tokyo, Japan) and Anne Sheehan (University of Colorado, US) for their collaboration on the analysis of the OPBG records. Parts of this study were previously presented at the AGU (American Geophysical Union) fall meeting in San Francisco (US) in December 2016. The lead author (MH) was funded by the Brunel University London through the Brunel Research Initiative and Enterprise Fund 2017/18 (BUL BRIEF).

## References

1. Beavan J, Samsonov S, Denys P, Sutherland R, Palmer N, Denham M (2010) Oblique slip on the Puysegur subduction interface in the 2009 July MW 7.8 Dusky Sound earthquake from GPS and InSAR observations: implications for the tectonics of southwestern New Zealand. *Geophys J Int* 183(3):1265–1286
2. Geist EL, Titov VV, Synolakis CE (2006) Tsunami: wave of change. *Sci Am* 294(1):56–63

- 254 3. Gonzalez FI, Milburn HM, Bernard EN, Newman JC (1998) Deep-ocean assessment and  
255 reporting of tsunamis (DART®): brief overview and status report. In: Proceedings of the  
256 international workshop on tsunami disaster mitigation, Tokyo, Japan, 19–22 January 1998
- 257 4. Gusman AR, Murotani S, Satake K, Heidarzadeh M, Gunawan E, Watada S, Schurr B (2015)  
258 Fault slip distribution of the 2014 Iquique, Chile, earthquake estimated from ocean-wide  
259 tsunami waveforms and GPS data. *Geophys Res Lett* 42:1053–1060
- 260 5. Gusman AR, Sheehan A, Satake K, Heidarzadeh M, Mulia IE, Maeda E (2016) Tsunami data  
261 assimilation of Cascadia seafloor pressure gauge records from the 2012 Haida Gwaii  
262 earthquake. *Geophys Res Lett* 43(9):4189–4196
- 263 6. Gusman A, Mulia IE, Satake K, Watada S, Heidarzadeh M, Sheehan AF (2016) Estimate of  
264 tsunami source using optimized unit sources and including dispersion effects during tsunami  
265 propagation: the 2012 Haida Gwaii earthquake. *Geophys Res Lett* 43(18):9819–9828
- 266 7. Heidarzadeh M, Satake K (2013) The 21 May 2003 Tsunami in the Western Mediterranean  
267 sea: statistical and wavelet analyses. *Pure Appl Geophys* 170(9):1449–1462
- 268 8. Heidarzadeh M, Satake K (2013) Waveform and spectral analyses of the 2011 Japan tsunami  
269 records on tide gauge and DART stations across the Pacific Ocean. *Pure Appl Geophys* 170  
270 (6):1275–1293
- 271 9. Heidarzadeh M, Satake K (2014) Excitation of basin-wide modes of the Pacific Ocean  
272 following the March 2011 Tohoku Tsunami. *Pure Appl Geophys* 171(12):3405–3419
- 273 10. Heidarzadeh M, Satake K, Murotani S, Gusman AR, Watada S (2015) Deep-water  
274 characteristics of the Trans-Pacific Tsunami from the 1 April 2014 M w 8.2 Iquique, Chile  
275 Earthquake. *Pure Appl Geophys* 172(3–4):719–730
- 276 11. Heidarzadeh M, Harada T, Satake K, Ishibe T, Gusman A (2016) Comparative study of two  
277 tsunamigenic earthquakes in the Solomon Islands: 2015 Mw 7.0 normal-fault and 2013 Santa  
278 Cruz Mw 8.0 megathrust earthquakes. *Geophys Res Lett* 43(9):4340–4349
- 279 12. Kalnay E (2003) Atmospheric modeling, data assimilation, and predictability. Cambridge  
280 University Press, Cambridge, UK
- 281 13. Kao H, Shan SJ, Farahbod AM (2015) Source characteristics of the 2012 Haida Gwaii  
282 earthquake sequence. *Bull Seismol Soc Am* 105(2B):1206–1218
- 283 14. Leonard LJ, Bednarski JM (2014) Field survey following the 28 October 2012 Haida Gwaii  
284 tsunami. *Pure Appl Geophys* 171(12):3467–3482
- 285 15. Maeda T, Obara K, Shinohara M, Kanazawa T, Uehira K (2015) Successive estimation of a  
286 tsunami wavefield without earthquake source data: a data assimilation approach toward  
287 real-time tsunami forecasting. *Geophys Res Lett* 42(19):7923–7932
- 288 16. Rabinovich AB, Eblé MC (2015) Deep-ocean measurements of tsunami waves. *Pure Appl*  
289 *Geophys* 172:3281–3312
- 290 17. Satake K (1995) Linear and nonlinear computations of the 1992 Nicaragua earthquake  
291 tsunami. *Pure Appl Geophys* 144:455–470
- 292 18. Sheehan AF, Gusman AR, Heidarzadeh M, Satake K (2015) Array observations of the 2012  
293 Haida Gwaii tsunami using Cascadia Initiative absolute and differential seafloor pressure  
294 gauges. *Seismol Res Lett* 86(5):1278–1286
- 295 19. Synolakis CE, Bernard EN (2006) Tsunami science before and beyond Boxing Day 2004.  
296 *Philos Trans R Soc Lond A* 364(1845):2231–2265
- 297 20. Titov VV, Gonzalez FI, Bernard EN, Eble MC, Mofjeld HO, Newman JC, Venturato AJ  
298 (2005) Real-time tsunami forecasting: challenges and solutions. In: *Developing*  
299 *tsunami-resilient communities*. Springer, Netherlands, pp 41–58
- 300 21. Weatherall P, Marks KM, Jakobsson M, Schmitt T, Tani S, Arndt JE, Rovere M, Chayes D,  
301 Ferrini V, Wigley R (2015) A new digital bathymetric model of the world's oceans. *Earth*  
302 *Space Sci* 2:331–345



# Author Query Form

Book ID : 459059\_1\_En

Chapter No : 2



Please ensure you fill out your response to the queries raised below and return this form along with your corrections.

Dear Author,

During the process of typesetting your chapter, the following queries have arisen. Please check your typeset proof carefully against the queries listed below and mark the necessary changes either directly on the proof/online grid or in the 'Author's response' area provided below

Query Refs.	Details Required	Author's Response
AQ1	As chapter-wise Keywords are mandatory, please provide the keywords.	
AQ2	References 'Gusman et al. (2016), Beavan et al. (2009)' are cited in the text but not provided in the reference list. Please provide the respective references in the list or delete these citations.	