



Calhoun: The NPS Institutional Archive

Theses and Dissertations

Thesis Collection

2015-09

Functional flow and event-driven methods for predicting system performance

Steward, Victoria

Monterey, California: Naval Postgraduate School

<http://hdl.handle.net/10945/47334>



Calhoun is a project of the Dudley Knox Library at NPS, furthering the precepts and goals of open government and government transparency. All information contained herein has been approved for release by the NPS Public Affairs Officer.

Dudley Knox Library / Naval Postgraduate School
411 Dyer Road / 1 University Circle
Monterey, California USA 93943

<http://www.nps.edu/library>



**NAVAL
POSTGRADUATE
SCHOOL**

MONTEREY, CALIFORNIA

THESIS

**FUNCTIONAL FLOW AND EVENT-DRIVEN METHODS
FOR PREDICTING SYSTEM PERFORMANCE**

by

Victoria Steward

September 2015

Thesis Advisor:
Second Reader:

Kristin M. Giammarco
Timothy H. Chung

Approved for public release; distribution is unlimited

THIS PAGE INTENTIONALLY LEFT BLANK

REPORT DOCUMENTATION PAGE			<i>Form Approved OMB No. 0704-0188</i>	
Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instruction, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302, and to the Office of Management and Budget, Paperwork Reduction Project (0704-0188) Washington, DC 20503.				
1. AGENCY USE ONLY (Leave blank)		2. REPORT DATE September 2015	3. REPORT TYPE AND DATES COVERED Master's Thesis	
4. TITLE AND SUBTITLE FUNCTIONAL FLOW AND EVENT-DRIVEN METHODS FOR PREDICTING SYSTEM PERFORMANCE			5. FUNDING NUMBERS	
6. AUTHOR(S) Steward, Victoria			8. PERFORMING ORGANIZATION REPORT NUMBER	
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) Naval Postgraduate School Monterey, CA 93943-5000			10. SPONSORING/MONITORING AGENCY REPORT NUMBER	
9. SPONSORING /MONITORING AGENCY NAME(S) AND ADDRESS(ES) N/A			11. SUPPLEMENTARY NOTES The views expressed in this thesis are those of the author and do not reflect the official policy or position of the Department of Defense or the U.S. Government. IRB Protocol number <u> N/A </u> .	
12a. DISTRIBUTION / AVAILABILITY STATEMENT Approved for public release; distribution is unlimited			12b. DISTRIBUTION CODE	
13. ABSTRACT (maximum 200 words) As technology continues to advance at an increasingly rapid pace and systems become more complex, evolving into systems of systems, the discipline of systems engineering will become a more important part of the entire system lifecycle. The scope of this thesis is to apply model-based system engineering principles to the system architecture of a system of systems, and to utilize behavior modeling capabilities to conduct an analysis of alternatives for a realistic design reference mission; the work in this thesis is based around a search and rescue mission. Two models of the search and rescue system of systems were prepared utilizing two model-based system engineering approaches and tools. For functional flow the Innoslate tool (from Spec Innovations) was used, and for event-driven the Monterey Phoenix Analyzer tool (from Naval Postgraduate School) was utilized. The application of both approaches illustrated how difficult it is to model a system of systems, and this examination uncovered opportunities to improve both approaches. The ability to allow an asset to asynchronously proceed through a scenario would improve the flexibility of Innoslate. To improve the utility of Monterey Phoenix Analyzer for analyses of alternatives, the capability to automatically input the characteristics for assets should be incorporated.				
14. SUBJECT TERMS Systems of systems, MBSE, functional flow, event-driven, Monterey Phoenix			15. NUMBER OF PAGES 119	
			16. PRICE CODE	
17. SECURITY CLASSIFICATION OF REPORT Unclassified	18. SECURITY CLASSIFICATION OF THIS PAGE Unclassified	19. SECURITY CLASSIFICATION OF ABSTRACT Unclassified	20. LIMITATION OF ABSTRACT UU	

THIS PAGE INTENTIONALLY LEFT BLANK

Approved for public release; distribution is unlimited

**FUNCTIONAL FLOW AND EVENT-DRIVEN METHODS FOR PREDICTING
SYSTEM PERFORMANCE**

Victoria Steward
Civilian, Naval Undersea Warfare Center
B.S., Worcester Polytechnic Institute, 2002
M.S., Worcester Polytechnic Institute, 2003

Submitted in partial fulfillment of the
requirements for the degree of

MASTER OF SCIENCE IN SYSTEMS ENGINEERING MANAGEMENT

from the

**NAVAL POSTGRADUATE SCHOOL
September 2015**

Author: Victoria Steward

Approved by: Kristin M. Giammarco, Ph.D.
Thesis Advisor

Timothy H. Chung, Ph.D.
Second Reader

Ronald Giachetti, Ph.D.
Chair, Department of Systems Engineering

THIS PAGE INTENTIONALLY LEFT BLANK

ABSTRACT

As technology continues to advance at an increasingly rapid pace and systems become more complex, evolving into systems of systems, the discipline of systems engineering will become a more important part of the entire system lifecycle. The scope of this thesis is to apply model-based system engineering principles to the system architecture of a system of systems, and to utilize behavior modeling capabilities to conduct an analysis of alternatives for a realistic design reference mission; the work in this thesis is based around a search and rescue mission.

Two models of the search and rescue system of systems were prepared utilizing two model-based system engineering approaches and tools. For functional flow the Innoslate tool (from Spec Innovations) was used, and for event-driven the Monterey Phoenix Analyzer tool (from Naval Postgraduate School) was utilized. The application of both approaches illustrated how difficult it is to model a system of systems, and this examination uncovered opportunities to improve both approaches. The ability to allow an asset to asynchronously proceed through a scenario would improve the flexibility of Innoslate. To improve the utility of Monterey Phoenix Analyzer for analyses of alternatives, the capability to automatically input the characteristics for assets should be incorporated.

THIS PAGE INTENTIONALLY LEFT BLANK

TABLE OF CONTENTS

I.	INTRODUCTION.....	1
	A. OVERVIEW	1
	B. RESEARCH QUESTIONS.....	2
	C. RESEARCH METHODOLOGY	3
II.	LITERATURE REVIEW	5
	A. MODELING BACKGROUND.....	6
	1. Object-Oriented Modeling	10
	2. System-of-Systems Modeling	11
	B. BEHAVIOR PREDICTION MODELING	13
	1. Functional Flow.....	13
	2. Event-Driven	14
III.	METHODOLOGY	17
	A. PROBLEM DEFINITION	17
	B. CASE STUDY: SAR MISSION.....	18
	1. SAR Mission Overview.....	18
	2. Operational Scenario Overview.....	19
	3. Design Reference Mission.....	20
	4. Operational Situations.....	21
	5. Mission Narrative.....	21
	6. Command Structure	22
	C. CONSTRAINTS AND ASSUMPTIONS	23
	D. DEFINITION OF ALTERNATIVES	23
	E. TOOL CHOICE.....	29
	1. Functional Flow—Innoslate.....	29
	2. Event-Driven—Monterey Phoenix	29
	F. MODEL STRUCTURE.....	30
	1. Proposed Architecture.....	31
	2. Performance Prediction.....	36
	a. <i>Innoslate—LML Action Diagram</i>	<i>36</i>
	b. <i>Monterey Phoenix.....</i>	<i>39</i>
IV.	RESULTS	41
	A. FUNCTIONAL FLOW PERFORMANCE PREDICTION	41
	B. EVENT-DRIVEN PERFORMANCE PREDICTION.....	44
	1. Initial Model Refinements	44
	2. Final Refinements	47
	C. SUMMARY	53
V.	CONCLUSIONS	55
	A. RECOMMENDATIONS.....	55
	B. FUTURE WORK	57
APPENDIX A. FUNCTION PARAMETERS FOR ALTERNATIVES.....		59

APPENDIX B. MONTEREY PHOENIX SAR SOS MODEL CODE.....65
APPENDIX C. INNOSLATE SIMULATION RESULTS.....70
APPENDIX D. MONTEREY PHOENIX MODEL INITIAL EVENT TRACES.....73
**APPENDIX E. MONTEREY PHOENIX SAR SOS REVISED MODEL CODE
WITH SEARCH LOOP IMPLEMENTED.....79**
**APPENDIX F. MONTEREY PHOENIX SAR SOS MODEL CODE WITH
SEARCH LOOP AND SAR_ASSETS SET IMPLEMENTED.....85**
LIST OF REFERENCES.....93
INITIAL DISTRIBUTION LIST97

LIST OF FIGURES

Figure 1.	INCOSE MBSE roadmap (from Friedenthal and Sampson 2015).	6
Figure 2.	Example FFBD (from Kustere 2006).	8
Figure 3.	Example EFFBD in Vitech CORE (from Giammarco 2014a, 27).	8
Figure 4.	Example IDEF0 (from Giammarco 2014a, 11) and sequence diagram (from Giammarco 2014a, 27).	9
Figure 5.	Example of a simple finite-state machine (after Lavagno, Martin and Selic 2003, 6).	10
Figure 6.	Pier-to-peer micro-pattern (after Lavagno, Martin and Selic 2003, 173).	12
Figure 7.	Container micro-pattern illustration (left) and UML representation (right) (after Lavagno, Martin and Selic 2003, 174–175).	12
Figure 8.	Layering micro-pattern illustration (after Lavagno, Martin and Selic 2003, 176).	12
Figure 9.	Operational concept for a SAR SOS (from Giammarco, Whitcomb and Hunt 2015, 5).	19
Figure 10.	Generalized SAR mission layered control architecture (after Lavagno, Martin and Selic 2013).	23
Figure 11.	MH-60S Helicopter (from Sikorski Aircraft Corporation 2012).	24
Figure 12.	Fire Scout MQ-8B (from Northrup Grumman Corporation 2015).	26
Figure 13.	Examples of UUVs (Kongsberg 2015; Virginia Tech 2011).	27
Figure 15.	Sequence diagram for SAR SOS concept from Innoslate.	31
Figure 16.	Functional decomposition for SAR SOS concept.	33
Figure 17.	Second-level functional decomposition illustrating the individual SAR assets that are part of the SAR SOS.	34
Figure 18.	Individual SAR asset subsystem level functional decomposition (after Giammarco 2015b).	35
Figure 19.	LML action diagram for SAR SOS concept in Innoslate.	37
Figure 20.	Example Innoslate discrete event simulation timeline.	41
Figure 21.	Event Trace 1, no SAR mission.	45
Figure 22.	Event Trace 5, full SAR Mission with PID recovery.	46
Figure 23.	Event Trace 12.	48
Figure 24.	Event Trace 23.	49
Figure 25.	Dual SAR_Asset event trace with PID rescue.	51
Figure 26.	Dual SAR_Asset detailed view.	52
Figure 27.	Event Trace 1.	73
Figure 28.	Event Trace 2.	73
Figure 29.	Event Trace 3.	74
Figure 30.	Event Trace 4.	75
Figure 31.	Event Trace 5.	76
Figure 32.	Event Trace 6.	77

THIS PAGE INTENTIONALLY LEFT BLANK

LIST OF TABLES

Table 1.	MH-60 Parameters (from Hunt 2015; from COMNAVAIR 2012; from Sikorski 2012).....	25
Table 2.	Fire Scout MQ-8B Parameters (from COMNAVAIR n.d.).....	26
Table 3.	Notional UUV Parameters (from Virginia Tech 2011)	27
Table 4.	Notional USV Parameters.....	28
Table 5.	Innoslate Model Results.....	42
Table 6.	Average mission time by alternative and per OPSIT distance.	43
Table 7.	Function parameters for the Helicopter and UAV alternatives (from Hunt 2015; from COMNAVAIR 2012; from Sikorski 2012; from COMNAVAIR n.d.).....	60
Table 8.	Function parameters for the UUV and USV alternatives (from Virginia Tech 2011).	62

THIS PAGE INTENTIONALLY LEFT BLANK

LIST OF ACRONYMS AND ABBREVIATIONS

AOA	Analysis of Alternatives
AOR	Area of Responsibility
AUV	Autonomous Underwater Vehicle
C2	Command and Control
C4ISR	Command, Control, Communications, Computers, Intelligence, Surveillance and Reconnaissance
DOD	Department of Defense
DODAF	Department of Defense Architecture Framework
DRM	Design Reference Mission
EFFBD	Enhanced Functional Flow Block Diagram
FFBD	Functional Flow Block Diagram
HSC	Helicopter Sea Combat
HSM	Helicopter Maritime Strike
IDEF0	Integrated Definition for Function Modeling
INCOSE	International Council on Systems Engineering
IT	Information Technology
LKL	Last Known Location
LML	Life cycle Modeling Language
MBSE	Model Based Systems Engineering
MDA	Model Driven Architecture
MP	Monterey Phoenix
COMNAVAIR	Naval Air Systems Command
NPS	Naval Postgraduate School
OMG	Object Management Group
OO	Object Oriented
OPSIT	Operational Situation
OSA	Other Search and Rescue Assets
OSC	On-Scene Commander
OV-1	Operational View One
PID	Person(s) in Distress

RHIB	Rigid Hull Inflatable Boat
RTB	Return to Base
SAR	Search and Rescue
SE	System Engineering
SITREP	Situation Report
SOS	Systems of Systems
SRU	Search and Rescue Unit
SysML	System Modeling Language
UAV	Unmanned Aerial Vehicle
UML	Unified Modeling Language
USCG	United State Coast Guard
USV	Unmanned Surface Vehicle
UUV	Unmanned Underwater Vehicle

EXECUTIVE SUMMARY

As technology continues to advance at an increasingly rapid pace and systems become more complex, evolving into systems of systems (SOS), the discipline of systems engineering (SE) will become a more important part of the entire system life cycle, not just in the design phase. As SE becomes integral to the successful execution of system design, product fielding, operations and sustainment, the teams responsible for executing the development effort and managing the system over its useful life are becoming highly diverse, multidisciplinary, and geographically distributed. These factors make keeping open lines of communication, maintaining requirements traceability, capturing system knowledge and sharing ever more important (Murray 2012). Due to these complications, the SE community has been steadily moving toward implementing model-based systems engineering (MBSE) as a replacement for the traditional document-based SE approach. MBSE helps facilitate and improve the application of the SE principles in the increasingly complex and diverse environment (INCOSE 2007).

This thesis applies MBSE principles to the system architecture of an SOS and utilizes behavior-modeling capabilities found in MBSE tools to conduct an analysis of alternatives (AOA) for a realistic design reference mission (DRM) for that SOS. This analysis is done by answering two questions:

1. How do the performance predictions for SOS vary between the two MBSE modeling methodologies: functional flow oriented and event-driven?
2. Can unmanned vehicles/systems be utilized effectively to conduct or augment Search and Rescue (SAR) operations?

The definition of a SOS is “a set or arrangement of systems that results when independent and task-oriented systems are integrated into a larger systems construct that delivers unique capabilities and functions in support of missions that cannot be achieved by individual systems alone” (Vaneman and Jaskot 2013, 491). This makes the development of the model of the SOS architecture even more important as managing the complexity of the problem becomes more and more difficult.

The context for answering the research questions asked in this thesis is the SAR mission and the associated SOS required to execute the SAR mission. For this thesis the goal for the SAR mission is to “minimize the loss of life, injury, and property damage or loss at sea by finding or rendering aid to those in distress” (Contag et al. 2015, Chapter 1). Based on the *National Search and Rescue Plan of the United States* (United States, 2007), the lead coordinating SAR organization has the right to recruit support from available SAR assets without any prior notice. This means that all U.S. military, U.S. Coast Guard, commercial and civilian vessels and aircraft in region where the SAR situation is occurring—the area of responsibility (AOR)—could become part of the SAR SOS. Based on this, the SAR SOS command structure can be described as follows: Command and Control has overarching command of the SAR Mission and delegates control of the actual search execution to a local commander, the On-Scene Commander (OSC); the OSC is the responsible for the allocation and direction of the available SAR Assets to execute the mission. This proposed command and control structure is illustrated utilizing the micro-patterns from *UML for Real: Design of Embedded Real-Time Systems* (Lavagno, Martin and Selic 2003) in Figure 1.




Figure 1. Generalized SAR Mission layered control architecture (after Lavagno, Martin and Selic 2013).

This proposed architecture structure, along with the mission narrative that was developed from the SAR DRM, was used to prepare two models of the SAR SOS utilizing two MBSE approaches and tools chosen for use in this thesis. For the functional flow model, Innoslate, a tool developed by Spec Innovations was chosen to be utilized. Innoslate is a hybrid modeling system that incorporates both System Modeling Language

and Lifecycle Modeling Language diagrams and concepts. For the event-driven model the Monterey Phoenix (MP) approach, developed at the Naval Postgraduate School, was chosen. Models were prepared in both tools. The Innoslate action diagram was run through discrete event simulations for four SAR Asset alternative platforms in an attempt to prepare performance predictions for use in an AOA. The MP model was executed to provide all of the possible event traces (use cases) for the SAR Mission.

The work done in this thesis was not able to fully answer the two research questions being asked, but the results provided insight on what needs to be done to do so, moving forward. For Innoslate, the main difficulty was with modeling concurrent behaviors between assets to show teamwork within the SOS. It would be very valuable for modeling SOS if an additional decision construct was included in the available library of functions and constructs that could integrate the outputs of several assets while still allowing for each asset to proceed through the mission without waiting for each of the other assets to complete the previous function. With MP, the limiting factor is the manual application of the system parameters. To do this manually potentially limits the accuracy of the AOA being derived from the model developed event traces due to the added opportunity to introduce human error. The ability to incorporate the parameters of the systems and the environment directly into the model would allow for the event traces to begin to fully describe all possible scenarios based on the assets available and the environment being considered.

Even with the limitations to the modeling tools, the question of whether or not unmanned vehicles can be useful for a SAR mission has been partially answered by the Innoslate model. The model results showed that unmanned systems can be useful in the execution of a SAR Mission, but based on the platforms considered in this thesis they cannot be utilized as the only platform executing the SAR mission. It is expected that unmanned systems will positively augment the performance of conventional platforms in the execution of a SAR Mission but in order to prove this with modeling the additional capabilities will need to be incorporated into the tools.

REFERENCES

- Contag, George, Kristin Giammarco, Spencer Hunt, C. Johnston, K. Laing, K. Mastran, J. Pabon, N. Quijano, E. Rosenberg, M. Stevens, K. Tomasino, J. Tonello and Clifford Whitcomb. 2015. "A Lab Manual for Systems Architecting and Analysis." Chapter 1 and Chapter 2. Naval Postgraduate School, Department of Systems Engineering.
<http://wiki.nps.edu/pages/viewpage.action?pageId=437387266>.
- INCOSE Technical Operations. 2007. *Systems Engineering Vision 2020*, version 2.03. Seattle, WA: International Council on Systems Engineering, Seattle, WA, INCOSE-TP-2004-004-02.
http://oldsite.incose.org/ProductsPubs/pdf/SEVision2020_20071003_v2_03.pdf.
- Lavagno, Luciano, Grant Martin, Bran Selic. 2003. *UML for Real: Design of Embedded Real-Time Systems*. Dordrecht, Netherlands: Kluwer Academic Publishers.
<http://site.ebrary.com.libproxy.nps.edu/lib/nps/reader.action?ppg=5&docID=10069615&tm=1437511359486>.
- Murray, Julia. 2012. *Model Based Systems Engineering (MBSE) Media Study*.
<http://www.syse.pdx.edu/program/portfolios/julia/MBSE.pdf>.
- Vaneman, Warren K. and Roger D. Jaskot. 2013. "A Criteria-Based Framework for Establishing System of Systems Governance." *Proceedings of the 7th Annual Systems Conference (SysCon)*, IEEE International: Orlando, FL (April): 491 - 496. <http://dx.doi.org/10.1109/SysCon.2013.6549927>.
- United States, 2007. *National Search and Rescue Plan of the United States*. United States Coast Guard Office of Search and Rescue (CG-SAR). 2015.
[http://www.uscg.mil/hq/cg5/cg534/manuals/Natl_SAR_Plan\(2007\).pdf](http://www.uscg.mil/hq/cg5/cg534/manuals/Natl_SAR_Plan(2007).pdf).

ACKNOWLEDGMENTS

I sincerely thank Doctor Kristin Giammarco for the opportunity to work an application of modeling that was not only mentally challenging and fun, but also provided me a way to apply some of my own experiences into the thesis. The thesis process was difficult and at times painful, but the modeling applications were something that I thoroughly enjoyed working through and are something that I hope I will be able to apply moving forward in my career.

I would also like to thank LT Spencer Hunt for his patience in answering all of my Search and Rescue questions and for providing me with an excellent starting point for my work with the design reference mission. Without his help, I would have been stuck much longer trying to understand how things work in the real world.

I also sincerely thank Doctor Mikhail Auguston for his tutoring and coding assistance with Monterey Phoenix. Without his time answering all my questions and helping to massage the model code, I would never have gotten as far as I did in such a short time. I very much enjoyed learning how to understand this modeling method.

Last but not least, I would like to thank my family for all the patience and moral support that I have needed over the course of this two-year master's program. I would also like to especially thank my father, Mr. Ronald Steward, for being my first proofreader and for providing his insights on the historical side of MBSE from his own experiences.

THIS PAGE INTENTIONALLY LEFT BLANK

I. INTRODUCTION

This document will present the work done in this thesis in five chapters. The scope of the thesis will be presented in this chapter. The literature review will be presented in Chapter 2. Based on the information the methodology executed in this thesis will be discussed in Chapter 3. The results of the work done by following the methodology and the discussion of these results will be covered in Chapter 4, and final recommendations and future work will be covered in the conclusion, Chapter 5. Additional detailed references can be found in the Appendices.

A. OVERVIEW

As technology continues to advance at an increasingly rapid pace and systems become more complex, evolving into systems of systems (SOS), the discipline of systems engineering (SE) will become a more important part of the entire system life cycle, not just in the design phase. This becomes even more apparent as the time available for system development continues to decrease due to customer demand (Ramos, Ferreira, and Barceló 2011). As SE becomes integral to the successful execution of system design, product fielding, operations and sustainment, the teams responsible for executing the development effort and managing the system over its useful life are becoming highly diverse, multidisciplinary, and geographically distributed. These factors make keeping open lines of communication, maintaining requirements traceability, capturing system knowledge and sharing ever more important (Murray 2012). Due to these complications, the SE community has been steadily moving toward implementing model-based systems engineering (MBSE) as a replacement for the traditional document-based SE approach. MBSE helps facilitate and improve the application of the SE principles in the increasingly complex and diverse environment (INCOSE 2007).

This thesis applies MBSE principles to the system architecture of a SOS and utilizes behavior-modeling capabilities found in MBSE tools to conduct an analysis of alternatives (AOA) for a realistic design reference mission (DRM) for that SOS. This case study evaluates technical performance of three types of unmanned systems/vehicles

against the conventional manned helicopter in a search and rescue (SAR) operational scenario. Additionally, two different MBSE modeling methodologies (functional flow and event-driven) are compared. The goal of this effort is to demonstrate how the architecture and behavior MBSE approaches can be used to prepare performance predictions as part of an AOA, and to compare and contrast the process and results obtained utilizing two current modeling schemes.

This research is enabled by another Naval Postgraduate School (NPS) Joint Executive Systems Engineering Management (SEM-PD21) student, Spencer Hunt. Hunt's work, "Model-Based Systems Engineering in the Execution of Search and Rescue Operations" (2015), focuses on the modeling of the DRM baseline: the execution of the SAR mission by U.S. Navy, U.S. Coast Guard (USCG) air and surface assets. The work for this thesis, however, focuses on being able to integrate the three types of unmanned systems into the SAR mission:

1. Unmanned Aerial Vehicles (UAVs)
2. Unmanned Underwater Vehicles (UUVs)
3. Unmanned Surface Vehicles (USVs)

B. RESEARCH QUESTIONS

This thesis applied the MBSE processes and the SAR DRM to answer the following two research questions:

1. How do the performance predictions for SOS vary between the two MBSE modeling methodologies: functional flow oriented and event-driven?
2. Can unmanned vehicles/systems be utilized effectively to conduct or augment SAR operations?

Models and analysis show that unmanned vehicles can be utilized for SAR operations; however, the model results aim to determine to what extent and under what limitations. Additionally, it was expected that the comparison of the modeling methodologies would help determine the current strengths and weaknesses of the methodologies and modeling tools that support their execution.

C. RESEARCH METHODOLOGY

The focus of the work done for this thesis was to develop and model the architecture of an SOS in order to compare the two modeling methodologies: functional flow and event-driven. Two MBSE tools were used to implement the methodologies for the chosen DRM: the SAR mission. For the functional flow modeling Innoslate, a tool developed by Spec Innovations for functional flow modeling, was used. To implement the event-driven methodology Monterey Phoenix (MP), an approach and tool currently in development at NPS, was utilized. The Innoslate model was used to conduct a preliminary AOA based on the behavior predicted for a baseline SAR Asset, the conventional manned helicopter, and three possible unmanned system alternatives: the UAV, UUV and USV. The MP model works differently from the functional flow model and provides an exhaustive set of use cases based on the model logic. The resultant use cases were then analyzed to determine if the model was accurately representing the behavior of the SAR SOS. The results of both models were then analyzed both to answer the research questions defined in the previous section, and also to determine the current state of both methods when applied to SOS modeling. Strengths and weaknesses of both tools were identified and future work was proposed to improve the ability of both tools to model SOS problems.

THIS PAGE INTENTIONALLY LEFT BLANK

II. LITERATURE REVIEW

The Department of Defense (DOD) has long been pushing for a more integrated and MBSE approach once it became clear that information technology (IT) systems were going to become the framework for most future systems (Buede 2009). To address this need, the U.S. DOD Architecture Framework (DODAF) was developed into a requirement for DOD systems being developed. The DODAF was initially created to support Command, Control, Communications, Computers, Intelligence, Surveillance and Reconnaissance (C4ISR) applications in the mid-1990s (Buede 2009). Because these systems are SOS by definition, they required careful consideration during system development to define the robust systems architectures needed to make the C4ISR systems functional. As it became apparent that very few DOD systems would remain standalone (without a requirement for connectivity between users and/or operational commands), the DOD started to push for the utilization of DODAF for all development efforts (Buede 2009; Ramos, Ferreira and Barceló 2011).

The International Council on Systems Engineering (INCOSE) definition of MBSE “is the formalized application of modeling to support system requirements, design, analysis, verification and validation activities beginning in the conceptual design phase and continuing throughout development and later life cycle phases” (INCOSE 2007, 15). The goal for the application of MBSE is to create and utilize the overarching models as an integrated part of the SE processes, allowing for a continued focus on high-level system architecture management throughout the system lifecycle. Technology and modeling languages continue to improve and standards are being developed to increase the interoperability of MBSE tools (Murray 2012; INCOSE 2007). As the SE community becomes more comfortable with utilizing MBSE methods, the models will begin to move past the role of supporting engineering models and will begin to be utilized more for “predictive and effects-based modeling” (INCOSE 2007, 23). The INCOSE MBSE path of growth, as described in the INCOSE System Engineering Vision 2020 (2007, 23), is shown in Figure 1. Within the bracket in the lower right corner of Figure 1, are the

various applications and areas in the system life cycle that INCOSE believes MBSE can provide inputs to and support as the MBSE capability continues to grow through 2025.

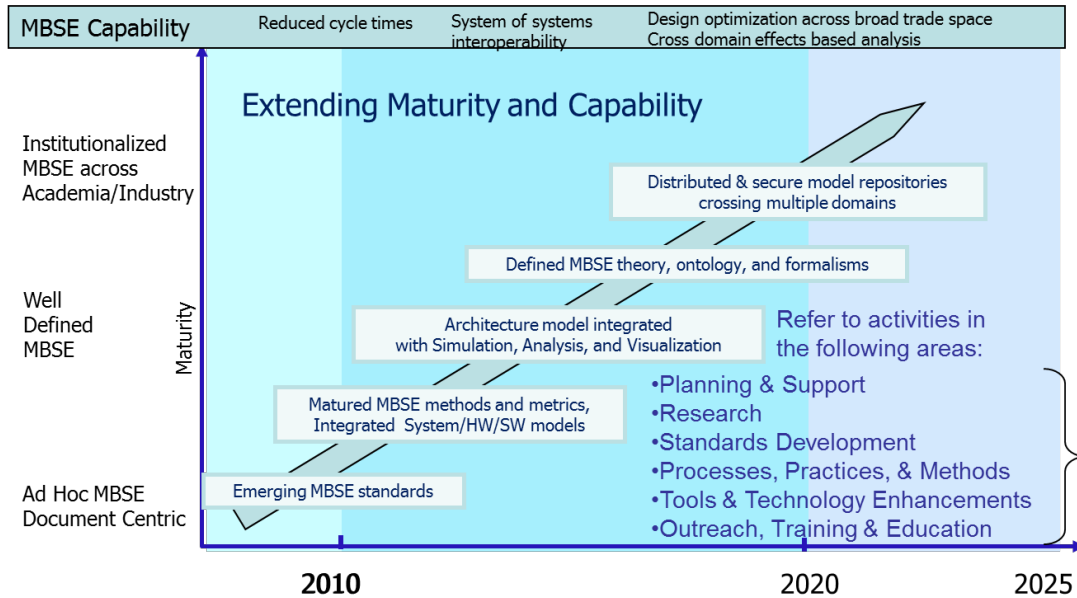


Figure 1. INCOSE MBSE roadmap (from Friedenthal and Sampson 2015).

A. MODELING BACKGROUND

The definition of a model is a “is a representation of a selected part of the world, the domain of interest, that captures the important aspects, from a certain point of view, simplifying or omitting the irrelevant features” (Ramos, Ferreira, and Barceló 2011, 103). Based on this definition, the purpose of a model, in any engineering field, is to help the engineer/designer to better understand the system they are working on and to help the engineer/designer to identify any problems with the system architecture before the full system is built (Lavagno, Martin and Selic 2003). A model for engineering purposes can be a physical representation of a system, technical drawings or almost anything that represents the final system describing or illustrating the system in a way useful to the user. The user of the model can be the design engineer, stakeholders and requirements generators, the end user of the system, and the list can go on. The goal is to link the concept or design for the system to the implementation of the real system in a way that provides useful information for all parties (Vitech 2011).

A good model needs to be able to describe a system accurately without the addition of extra details that are not relevant to the area of concern in the system design, or the domain in which the system or systems will be operating (Lavagno, Martin, Selic, 2003). This can be especially difficult, as oversimplification and poor assumptions can be detrimental to the accuracy of the system model, so careful consideration must be made when determining which information to omit and what should be kept even if it could potentially complicate things. Additionally, the model must be in a form that is easily understood by a wide range of audiences and provide insights and data on the system properties or performance that is of interest to all stakeholders in the system design and implementation.

Systems Engineering is an interesting discipline because it applies to the full life cycle of a system, which makes the area of responsibility highly interdisciplinary, and this means that SE models have to be understandable by all the engineering and logistic disciplines that will be involved with the system throughout its useful life (Alford 1992). In addition, the goal of SE is to start with the customer requirement, the problem, and define the architecture to solve that problem without specifying a solution; this process can be called “designing by allocation,” which is unique to SE (Alford 1992, 1). Therefore, modeling for SE applications has some unique requirements as needs to integrate the modeling done by many other disciplines into one model to ensure traceability and to reduce the possibility of human error of manually attempting to capture and trace errors or changes in a document-based SE process.

Modeling for SE began with the development of standardized conceptual modeling schemes to capture the activities or processes that are needed for the system to execute the required operations assigned to it. Diagrams were developed to graphically represent this information for stakeholders and the engineers working on the system development, the most classic system description utilized in SE is the functional flow block diagrams (FFBDs). The FFBDs were developed in the 1950s and are representations of systems utilized by systems engineers to show the system functions in order of execution (Ramos, Ferreira and Barceló 2011; Auguston 2014; Buede 2009). An

example of a FFBD is shown in Figure 2, illustrating the sequential flow of each function, one right after the other, through time.

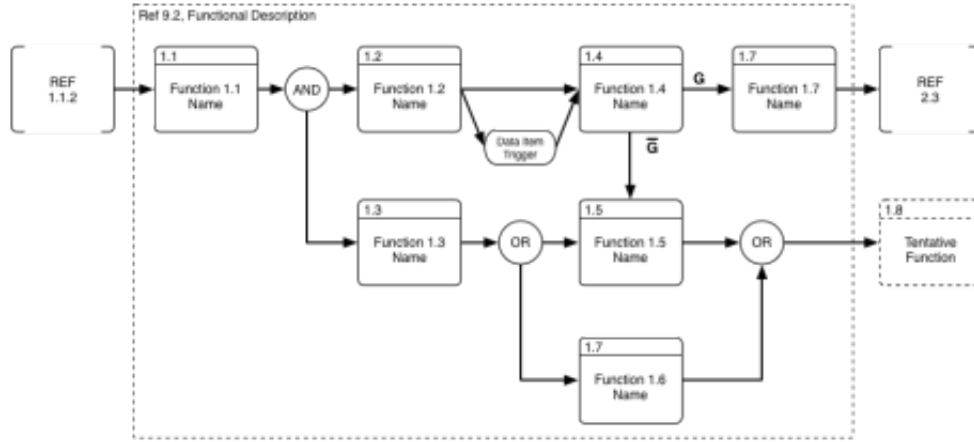


Figure 2. Example FFBD (from Kustere 2006).

As systems became more complex, enhanced FFBDs (EFFBDs) were developed to show the flow of information from one function to the other; it shows how each function influences the follow-on functions either as input, output or as a required trigger for the following function or functions (Giammarco and Auguston 2013). An example EFFBD built in the Vitech CORE modeling tool from the “SE4150 System Architecture and Design Lab Manual” (Giammarco 2014a) can be seen in Figure 3.

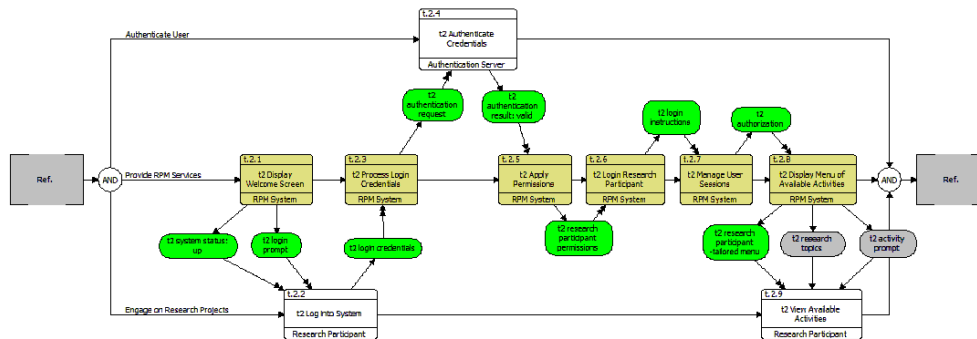


Figure 3. Example EFFBD in Vitech CORE (from Giammarco 2014a, 27).

In comparison to the FFBD from Figure 2, where only functional blocks are shown one, Function 1.2, right after the other, Function 1.3, an addition of inputs, outputs, and triggers for the functions are shown as the green ovals in Figure 3. These inputs, outputs, and triggers provide additional information on what the system must do before it can proceed to the next step, the next function.

In addition to EFFBDs, other architecture views were developed to provide more detail and to allow for further functional and physical decomposition of the system. Two of these diagrams are shown in Figure 4.

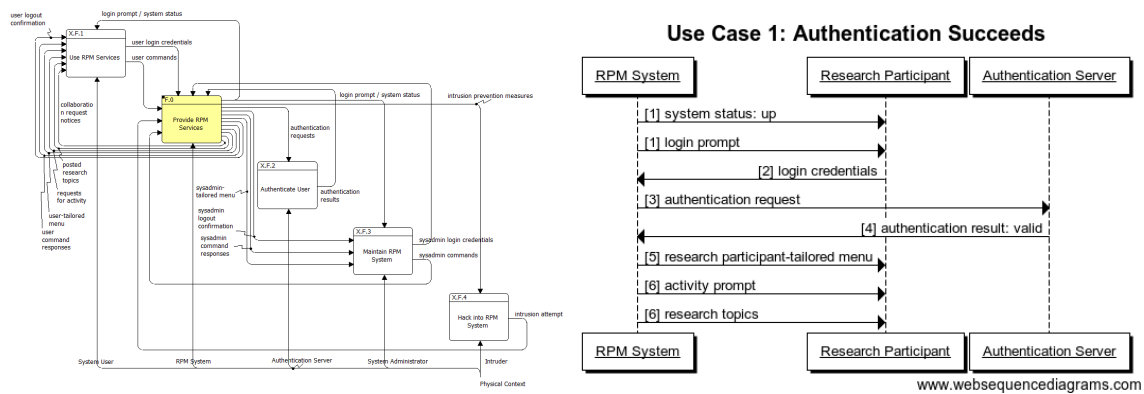


Figure 4. Example IDEF0 (from Giammarco 2014a, 11) and sequence diagram (from Giammarco 2014a, 27).

The left diagram is the integrated definition for functions modeling (IDEF0), and the right diagram is an example sequence diagram for a system. Both of these diagrams begin to link the physical components or subsystems to the functions that the system has to be able to accomplish in order to meet the defined mission requirements. The sequence diagram is used to describe the sequence of events being executed between system components to perform an operation or the sequence of events being conducted between systems and the environment in a SOS situation. For a larger sequence diagram see Figure 15 later in this document. The IDEF0, on the other hand, is used to map the functional interactions between the components or systems (in a SOS situation). For a larger example of an IDEF0 see Figure 17. All of these architecture diagrams were useful in describing the system, but in order to provide the ability to analyze the

performance of the system or to identify problems within the proposed architectures, the models had to be transformed from documentation into a dynamic form that allows for the study of the system inputs, outputs and performance.

1. Object-Oriented Modeling

In software development, due to the inherent nature of software where it lacks any physical representation and is only textual logic constructs, the software developers needed a way to model and verify their logic prior to implementing it in a development language similar to C and C++. This modeling began with the use of state machine diagrams, Figure 5, which allows the developer to visually display the logic of the functions that the software code will have to execute. Utilizing the state machine to refine the logic of the code allowed the software designers to “move incrementally from a simplified and highly abstract model of the software to its final fully specified form without having to change the notation, the implementation medium, the tools, or the method of work” (Lavagno, Martin, and Selic 2003, 7). This process allowed for the evolution of the software model to its final state and became called model-driven development. These individual functions that were being modeled in the state machines became known as the “objects” in the object oriented (OO) software development. Not only were these “objects” easier to verify and validate, but once they were, they could be put into a library of basic functions for software developers to pull out and reuse whenever needed.

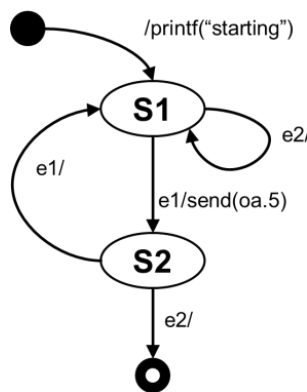


Figure 5. Example of a simple finite-state machine (after Lavagno, Martin and Selic 2003, 6).

As model-driven development became more standardized the Object Management Group (OMG) developed the Model-Driven Architecture (MDA), a technology standard aimed at providing a platform/tool/vendor neutral approach for developing and executing software architectures (Lavagno, Martin and Selic 2003; OMG 2015a). Not only does a standardized architecture approach allow for the interoperability between software packages/systems, but it also makes it much easier to reuse well developed architectures for follow on development efforts (OMG 2015b; Giammarco 2014b). OMG developed the Unified Modeling Language (UML) standard to support the MDA and to provide software developers with a way to “specify, visualize, and document models of software systems, including their structure and design” (OMG 2015b) utilizing the OO structures of class and structure.

The MDA and UML methods were so successful and widely applied for software development that INCOSE determined that to support their MBSE Roadmap, Figure 1, the SE community needed a standard to structure MBSE implementation for the SE community. INCOSE worked with OMG to develop the Systems Modeling Language (SysML) (Ramos, Ferreira, and Barceló 2011). The first SysML specification OMG SysML v1.0 was released in September 2007, and took a subset of concepts from UML 2 and tailored them for the SE application (OMG 2015c). The SysML language provides a way to graphically model “system requirements, behavior, structure and parametrics” (OMG 2015c). The SysML language leveraged the OO structure and defined where each function is modeled as a separate “object” with all the related inputs and outputs, these objects are then linked to one another with those inputs and outputs. The current version of the SysML standard is v1.4 which was accepted in March 2014, but is still in the Beta version and the final release is in process (OMG 2015c).

2. System-of-Systems Modeling

The definition of a SOS is “a set or arrangement of systems that results when independent and task-oriented systems are integrated into a larger systems construct that delivers unique capabilities and functions in support of missions that cannot be achieved by individual systems alone” (Vaneman and Jaskot 2013, 491). This makes the

development of the model of the SOS architecture even more important as managing the complexity of the problem becomes more and more difficult.

In software development with UML, software architectures can be developed based on a combination of just three “micro-patterns” (Lavagno, Martin and Selic 2003, 172). The most standard seen in all models is called a peer-to-peer interaction where two or more standalone entities collaborate to get their tasks done, as in Figure 6. The second is a container micro-pattern where a “part” (Lavagno, Martin and Selic 2003, 174) or parts are housed inside a container. The parts feed the function of the container and the container keeps the parts from having to interact with the environment; the container handles the interaction with the surrounding environment as shown in Figure 7. The third and final micro-pattern is the layer, illustrated in Figure 8. What the layer construct allows for is the dependency of the two layers, the upper layer cannot exist without the lower layer, but the lower layer can exist without the upper (Lavagno, Martin and Selic 2003, 176).



Figure 6. Peer-to-peer micro-pattern (after Lavagno, Martin and Selic 2003, 173).

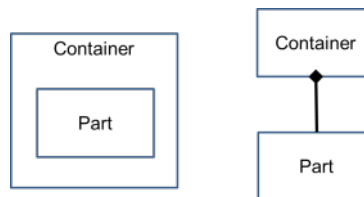


Figure 7. Container micro-pattern illustration (left) and UML representation (right) (after Lavagno, Martin and Selic 2003, 174–175).




Figure 8. Layering micro-pattern illustration (after Lavagno, Martin and Selic 2003, 176).

The concept of micro-layers can be applied to the architectures of SOS especially with the idea of control being applied between the actors in the architecture. Controls are applied in software systems to do many tasks such as: determining what resource should do what, monitoring for failures and determining how to manage those failures to not impact the performance of the system as a whole (Lavagno, Martin and Selic 2003). The idea of controls can be especially powerful when applied to the development of SOS architectures since in a SOS there are always a chain of command (layers) that provides direction (control) to the subordinate systems in that specific layer. Without control layers incorporated into the model, there will be no way to capture key actions within the SOS. In “Trends in Computer-Based Systems Engineering” (White et al. 1992), these key actions can include:

- allocates resources to address the problem
- determines with resources will receive what data and will execute which functions
- determines performance allocations
- responds to fault detection and recovery (White et al. 1992)

B. BEHAVIOR PREDICTION MODELING

The main concern during system design is whether or not the system will operate and execute the necessary functions to perform the designed actions necessary within the operational environment; this brings to the fore why behavior and accurate architecture models are so important (Auguston 2014). The use of these models begin to address the challenge of understanding and predicting flaws in the architecture design as early in the system life cycle as possible to reduce the cost and impact of correcting these defects (Giammarco 2014b); this especially true since fixing the problems with the architecture after the system design phase can be cost “from 10 to 10,000 time more” (Alford 1992, 5).

1. Functional Flow

One of the applications of SysML and object oriented modeling is to apply the functional flow analysis described in the EFFBDs and in the SysML Activity diagram to execute performance predictions by running simulations from the activity diagrams

developed as part of the model. This method focuses on assigning actions to individual assets, which could be various systems in a SOS or subsystems in an individual system, and then defining parameters for each function/action that will be executed by the system or SOS. Once these parameters are defined, a time-based discrete event simulation can be run to estimate the performance of the system or SOS. Once the model is verified and is providing accurate results based on a known operational situation (OPSIT) then the parameters for the functions of each asset can be changed to either:

1. Conduct an AOA for various system components/subsystems or to compare possible system choices as a part of a SOS analysis.
2. Conduct design trade off analysis to determine levels of performance required to meet the design parameters and requirements.

There are many tools available to systems engineers to prepare deterministic models and conduct performance prediction analyses. The choice on which to use is based on the availability of the tool, the type of SE methodology the model is based on (such as top down, spiral, or onion) and the language being used for the model (SysML, UML or others).

2. Event-Driven

Event-driven behavior modeling differs from functional flow modeling previously discussed because this approach focuses on the system components and the interactions between these individual components on a higher, more abstract level where the behaviors of the individual system components are modeled separately from the interactions between these components (Giammarco and Auguston 2013; Acheson, Dagli and Kilicay-Ergin 2013; Auguston 2014; Giammarco, Farah-Stapleton and Auguston 2015). This separation of component behavior from interactions simplifies the model and allows for all the components to interact with each other and their environment as defined by the logic of the interactions. This allows the model to determine system behaviors in general instead of linked to specific use cases that have been developed by the model developer (Auguston 2014; Giammarco, Farah-Stapleton and Auguston 2015).

In MP (Auguston 2014; Giammarco, Farah-Stapleton and Auguston 2015), the NPS developed event-driven capability, decoupling the model from specific use cases

provides a huge benefit as the model itself will develop the use cases automatically as “event traces,” meaning that the analysis for the system can be done on all logical scenarios and provides a way to see emergent system behavior that may have been hidden otherwise (Giammarco, Farah-Stapleton and Auguston 2015; Paulo 2015). The generation of the event traces makes it easier to identify critical paths in the architecture design by manually applying event timing estimates and durations to the event traces generated by MP (Auguston 2014). This allows for a comparison of component utilization in the system since all of the possible use cases are identified and only the individual component performance timings would need to be mapped to each trace.

This type of modeling is especially useful and applicable for SOS applications due to the decoupling of the behaviors from the interactions. Due to the nature of the MP application of event-driven modeling, it allows for the decoupling of the behavior of each system from the other systems that make up the SOS and only links the systems together with their interactions (Giammarco, Farah-Stapleton and Auguston 2015). This allows for a more accurate description of how systems work together in an SOS situation. It also makes the model more flexible to change and modification if design parameters need to be altered or if it is desirable to swap out systems completely as part of an AOA or due to obsolescence issues.

THIS PAGE INTENTIONALLY LEFT BLANK

III. METHODOLOGY

The methodology used for the modeling and analysis done for this thesis initially followed the structure outlined in “A Lab Manual for Systems Architecting and Analysis” (Giammarco 2015a), and incorporated several MBSE and SE methodologies that were found in articles read in compilation of the literature review (Giammarco 2014b; Ramos, Ferreira, and Barceló 2011). The overarching steps of this methodology are:

1. Define and clearly state the problem to be solved.
2. Define the case study.
3. Define and document constraints.
4. Propose potential alternatives to be modeled.
5. Choose modeling tools.
6. Prepare model(s) in chosen tools.
7. Verify model outputs with the case study scenario.
8. Iterate the model with parameters for chosen alternatives.
9. Analyze results as an AOA and a comparison between the modeling methodologies.
10. Document observations and provide conclusions and recommendations for future work.

A. PROBLEM DEFINITION

The questions being addressed in this thesis were discussed in Chapter I; however, they are summarized in this section. The two research questions considered in this thesis are:

1. How do the performance predictions for SOS vary between the MBSE modeling methodologies: functional flow oriented and event oriented?
2. Can unmanned vehicles/systems be utilized effectively to conduct or augment SAR operations?

This means that there are two problems being addressed here. The first is to determine if there is a better MBSE methodology and modeling tool to use for complicated SOS applications. In order to reach an answer for this question, a case study had to be chosen to be applied to each MBSE tool. For “A Lab Manual for Systems Architecting and Analysis” (Giammarco 2015a), the SAR mission was chosen as the case study to model; therefore, it will also be used for this thesis. Using the SAR mission as a case study

provides an opportunity for modeling to answer the question: Can unmanned vehicles improve the performance of the SOS required in the execution of the SAR mission?

B. CASE STUDY: SAR MISSION

As discussed in the literature review, once the problem being solved by the system or SOS is defined, the next step is to provide context for the problem. This context is the operational scenario, the DRM, which will be used in the model as the backdrop for the performance predictions of the system. The DRM and associated OPSITs will be utilized to validate the model and provide the setting for the AOA being done with the unmanned vehicles/systems.

1. SAR Mission Overview

For this thesis the goal for the SAR mission is to “minimize the loss of life, injury, and property damage or loss at sea by finding or rendering aid to those in distress” (Contag et. al 2015, Chapter 1). In order to accurately describe the architecture for a SAR mission, all aspects of the operation have to be considered, and they will include:

- the parties in distress and needing rescue
- the group(s) responsible for planning, coordination and execution of the search and rescue evolution
- the assets utilized for the actual search and/or rescue.

Based on the *National Search and Rescue Plan of the United States* (United States, 2007), the lead coordinating SAR organization has the right to recruit support from available SAR assets without any prior notice. This means that all U.S. military, USCG, commercial and civilian vessels and aircraft in region where the SAR situation is occurring—the area of responsibility (AOR)—could become part of the SAR SOS. In addition, if unmanned vehicles are found to be available and their capabilities deemed useful to augment the SAR SOS they could also be added to the pool of available search assets.

2. Operational Scenario Overview

Based on the general description of a SAR mission, the operational concept can be illustrated in the DODAF high level concept graphic, operational view one (OV-1), shown in Figure 9.

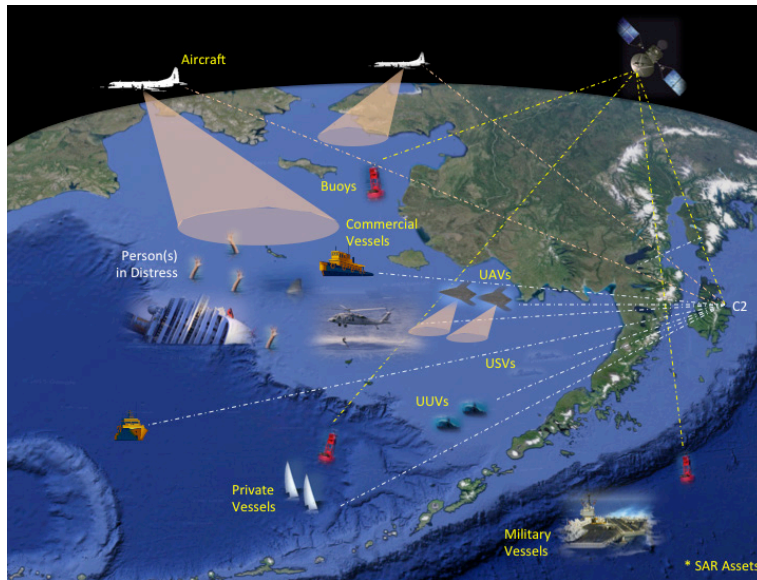


Figure 9. Operational concept for a SAR SOS (from Giammarco, Whitcomb and Hunt 2015, 5).

Based on the overview shown in the OV-1 the actors required to conduct the SAR mission were defined in “An Instructional Design Reference Mission for Search and Rescue Operations” (Giammarco, Whitcomb and Hunt 2015) and are the following:

1. The physical environment where the SAR mission will be executed, also called the AOR
2. The party in distress requiring the rescue, persons in distress (PID)
3. The command and control (C2) center which will coordinate and direct the overarching SAR mission execution
4. The available SAR Assets which can also be called the SAR units (SRU). As illustrated in the OV-1, these can include any of the following: military/commercial/civilian vessels, military/commercial/ civilian aircraft, UAVs, UUVs and USVs.

During the course of the model development one additional actor was introduced by Hunt, the On Scene Commander (OSC). According to Hunt, at the search area, a local

commander is appointed to coordinate the rescue operations between all the available on scene SAR Assets (Spencer Hunt, 17 April 2015, email message to Kristin Giammarco). The OSC is typically located on one of the manned SAR assets and will prepare the search plan and direct the SAR Assets on their roles and responsibilities during the search.

These five actors will be utilized as the high level assets in the model of the SAR SOS architecture. The application and use of these assets is further described in the DRM and associated OPSITs.

3. Design Reference Mission

A DRM is necessary to provide a bounded space for which to allow the model to be developed and analyzed. If the DRM is too broad or complicated the model could become unmanageable; the excessive complexity will hinder the ability to find any errors and will make it more difficult to verify and validate the model. To begin with developing a DRM, a capability needs statement has been chosen first: “Civilian and defense agencies need a cost-effective means to search large areas of ocean and over-land terrain in various environmental conditions in order to locate wreckage and survivors in the shortest time possible” (Giammarco, Whitcomb and Hunt 2015, 11).

To keep consistency and to preserve the ability to integrate the models developed in this thesis with the model Hunt prepared for his thesis, “Model-Based Systems Engineering in the Execution of Search and Rescue Operations” (2015), the DRM used for this thesis, was developed by Hunt. To keep the scope of the model and DRM to a reasonable level, while still providing enough variation between missions to provide the model with variation in the inputs, Hunt defined two OPSITs that will be the basis for the missions modeled: (1) man overboard and (2) downed aircraft. To keep in the spirit of the capability needs statement including both military and civilian applications for SAR, Hunt defined both a U.S. Navy SAR OPSIT and a civilian scenario for each of the two OPSITs. This gave Hunt four OPSITs to utilize in his modeling, and they were the starting point for the OPSITs used in this thesis; however, additional simplifications and

generalizations were incorporated to provide a simpler comparison for the alternatives being considered in the AOA.

4. Operational Situations

Hunt's DRM (2015) described two overarching OPSITS with a total of four breakout OPSITS. These OPSITs have been further simplified for the model in this thesis into three OPSITs: (a) Near-Shore Rescue, (b) Medium-Distance Rescue and (c) Long-Range Rescue. These three distances were chosen to be able to show the full range of SAR missions and to provide the alternatives a range of missions to be compared. This is important due to the large variation in capability between the available unmanned platforms; using only one search scenario would not fully show the flexibility or limitations of the alternatives being considered.

Near-Shore Rescue OPSIT: The near-shore rescue OPSIT is a simplification of the U.S. Navy downed aircraft scenario where the helicopters and/or other SAR assets are in the vicinity. In this case, all SAR assets will be 10 nautical miles (nm) from the initial search area. This operational scenario would also apply to any recreational boating and/or swimming SAR situations.

Medium-Distance Rescue OPSIT: The medium-distance rescue OPSIT is a simplification of the U.S. Navy man overboard scenario. In this instance the SAR assets will be starting 35nm from the initial search area. This distance could also be applicable to any U.S. Navy littoral exercise or training accidents.

Long-Range Rescue OPSIT: The long-range rescue OPSIT is a simplification of the civilian man overboard and downed aircraft scenarios. For this OPSIT, the SAR asset will be located 200nm away from the initial search area.

5. Mission Narrative

The mission narrative that was used for this thesis was based on the initial narrative found in the "An Instructional Design Reference Mission for Search and Rescue Operations" (Giammarco, Whitcomb and Hunt 2015); however, as the work on the architecture continued, the narrative was expanded by Hunt. To continue to ensure

consistency between models, the revised narrative was utilized for this thesis. In Hunt's thesis, "Model-Based Systems Engineering in the Execution of Search and Rescue Operations," he defined the narrative to be:

- Command and control (C2) either receives a distress signal from a person in distress (PID) or is notified of a missing person or vessel.
- If the general location information falls outside of the C2's area of responsibility (AOR), the mission is assigned to the appropriate entity. If the general location is within the C2's AOR, C2 initiates SAR protocol and passes mission information to available assets.
- Search and rescue units (SRUs) deploy to the search area as assigned by C2 and attempt to contact the PID or the missing person or vessel. If contact is made, SRU(s) requests a precise location and situation report (SITREP). If no contact is made, SRU(s) will periodically try again.
- Upon reaching the search area, datum or last known location (LKL), SRU(s) initiates a search pattern based on the mission situation to include environmental conditions, available assets, crew composition and time on station.
- SRU(s) conducts the search plan, scanning the environment for any signs of the PID or vessel and provides regular SITREPs to C2 and other SAR assets (OSA).
- If an SRU spots an object of interest, the SRU maneuvers for a closer inspection. If the object of interest appears to be wreckage, the SRU notifies OSA and C2 of the situation. If object of interest appears to be a PID, then the SRU notifies C2 and OSA and maneuvers to rescue or coordinates with another SRU to make the pickup. If the object of interest is not related to the SAR mission, the SRU resumes the search pattern until spotting another object of interest or conditions are reached for a return to base (RTB).
(2015, 27–28)

6. Command Structure

As discussed in Section 2.A.2, the command structure of the SOS is an important input into the architecture construct, and based on the narrative the proposed command layering for the SAR Mission should be considered to be structured where:

- The C2 asset has overarching command of the SAR Mission it provides direction (control) to the local commander, the OSC.
- The OSC asset has overarching command to execute the local SAR mission with control of the SAR Assets: allocation of the SAR Assets, directing them where to conduct the search if the search area has been parsed into individual sectors, monitor search failures and implement back-up plans.

This proposed command and control structure is illustrated utilizing the micro-patterns from *UML for Real: Design of Embedded Real-Time Systems* (Lavagno, Martin and Selic 2003) in Figure 10.

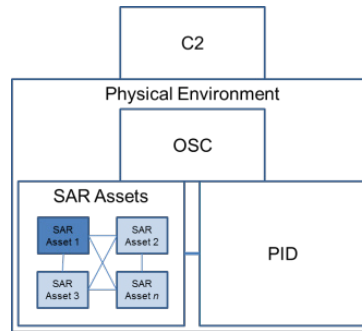


Figure 10. Generalized SAR mission layered control architecture (after Lavagno, Martin and Selic 2013).

C. CONSTRAINTS AND ASSUMPTIONS

Constraints

- Only one conventional SAR asset will be modeled, the manned helicopter; USCG/Navy ships, other military aircraft, civilian aircraft and boats will not be modeled as alternatives.
- There are many different available types of each unmanned system being considered; however, only one generalized solution for each platform will be modeled.
- The OSC can be located on the SAR Assets; however, the model will represent the OSC a separate entity from the SAR units.

Assumptions

- The SAR assets will be departing from the same location for each OPSIT: initial distance traveled will be constant.
- Weather conditions will not be included in this set of simulations.
- The SAR missions being done for the three OPSITs will all be taking place over water to allow for the utilization of the UUV and USV alternatives for all OPSITs. No overland rescues will be considered in this thesis.

D. DEFINITION OF ALTERNATIVES

Utilizing the mission narrative from the section 3.B, and the assumptions and constraints defined in Section 3.C, the model for the SAR SOS case study can be built;

however, in order to execute the performance prediction simulations and AOA, the alternatives being considered have to be defined. For this AOA, four alternative solutions will be modeled. The manned helicopter will be used as the baseline for the analysis and one notional platform will be utilized for each of the proposed unmanned vehicle solutions.

Baseline: Helicopter

The helicopter parameters for the model will be based on the U.S. Navy Helicopter Sea Combat (HSC) and Helicopter Maritime Strike (HSM) platforms the Sikorski MH-60R/S Seahawk as both are utilized for combat SAR operations. Both helicopters are based on the same airframe, their sensor suites and weapons systems vary due to their different mission sets. The MH-60S variant is shown in Figure 11.



Figure 11. MH-60S Helicopter (from Sikorski Aircraft Corporation 2012).

The parameters that will be changing between platforms include: speed, search coverage, and others (defined for the MH-60 in Table 1). All the parameters except speed and travel distance were defined by Hunt (2015) in his thesis. All of the parameters used for the model can be found in Appendix A, Tables 7 and 8.

Table 1. MH-60 Parameters (from Hunt 2015; from COMNAVAIR 2012; from Sikorski 2012)

Parameter		Mean Value
Lead Time to Depart Base	Mean	30 min
	Distribution	Normal
	σ^*	5 min
Travel Speed To AOR	Mean	120 knots
	Distribution	Normal
	σ for Travel Distance	
	Near Shore	5 min
	Medium Distance	5 min
	Long Range	15 min
Initial Scan	Mean	0.07 min
	Distribution	Exponential
Ability to Conduct Rescue		YES
Rescue Maneuver	Mean	0.1 min
	Distribution	Exponential
Travel Speed From AOR	Mean	120 knots
	Distribution	Normal
	σ for Travel Distance	
	Near Shore	5 min
	Medium Distance	5 min
	Long Range	15 min

* σ = Standard Deviation

Option 1: Unmanned Aerial Vehicle

The Northrup Grumman MQ-8B variant of the U.S. Fire Scout UAV, Figure 12, was chosen to as the example for the AUV alternative that will be modeled for the SAR DRM OPSITs. The MQ-8B was chosen as the solution over other hand thrown or man portable drone type UAVs due to the nature of the mission where higher speeds and ranges are required. In addition, even though currently the MQ-8B cannot execute the actual rescue component of the mission, a UAV of this size would be required if such a capability was developed in the future. The parameters for the MQ-8B that will be utilized in the model are shown in Table 2 and were retrieved from a Naval Air Systems Command (COMNAVAIR) specification sheet for the MQ-8B and the much larger follow on variant the MQ-8C (2015).



Figure 12. Fire Scout MQ-8B (from Northrup Grumman Corporation 2015).

Table 2. Fire Scout MQ-8B Parameters (from COMNAVAIR n.d.)

Parameter		Mean Value
Lead Time to Depart Base	Mean	20 min
	Distribution	Normal
	σ	5 min
Travel Speed To AOR	Mean	85 knots
	Distribution	Normal
	σ for Travel Distance	
	Near Shore	5 min
	Medium Distance	10 min
Initial Scan	Long Range	15 min
	Mean	2 min
Ability to Conduct Rescue		NO
Travel Speed From AOR	Distribution	Exponential
	Mean	85 knots
	Distribution	Normal
	σ for Travel Distance	
	Near Shore	5 min
Medium Distance	10 min	
	Long Range	20 min

Option 2: Unmanned Underwater Vehicle

UUVs in general are slow moving vehicles. Even the fastest variants, the torpedo shape, Figure 13, rarely exceed a speed of 10 knots or have a very short mission duration capability due to their high-speed capability. This low speed or short mission time will be a hindrance for the SAR DRM, especially for the longer range OPSITs; however, to keep from ruling out this type of vehicle without modeling, a vehicle based on the Virginia Tech High Speed Autonomous Underwater Vehicle (AUV) (2011), which has a high-

speed of greater than 15 knots will be utilized as the UUV alternative in the model. The parameters utilized in the model for the UUV alternative are listed in Table 3 and are derived from the author’s personal experience with UUVs and based on the speed for the High Speed AUV (Virginia Tech 2011).



Figure 13. Examples of UUVs (Kongsberg 2015; Virginia Tech 2011).

Table 3. Notional UUV Parameters (from Virginia Tech 2011)

Parameter		Mean Value
Lead Time to Depart Base	Mean	20 min
	Distribution	Normal
	σ	10 min
Travel Speed To AOR	Mean	15 knots
	Distribution	Normal
	σ for Travel Distance	
	Near Shore	10 min
	Medium Distance	15 min
Initial Scan	Long Range	30 min
	Mean	20 min
Ability to Conduct Rescue	Distribution	Exponential
	NO	
Travel Speed From AOR	Mean	15 knots
	Distribution	Normal
	σ for Travel Distance	
Travel Speed From AOR	Near Shore	10 min
	Medium Distance	15 min
	Long Range	30 min

Option 3: Unmanned Surface Vehicle

Based on author’s experience with USVs and due to the nature of the mission where higher speeds and ranges are required and the ability to conduct rescue operations would be preferable, a full size boat USV variant, Figure 14, will be the basis for the USV modeled. The parameters utilized in the model for the USV alternative are listed in

Table 4 and are derived from the author’s personal experience with 7–11m rigid hull inflatable boat (RHIB) USVs.



Figure 14. Examples of commercial USVs (from 5G International Inc. n.d.; naval-technology.com 2015).

Table 4. Notional USV Parameters

Parameter		Mean Value
Lead Time to Depart Base	Mean	20 min
	Distribution	Normal
	σ	10 min
Travel Speed To AOR	Mean	30 knots
	Distribution	Normal
	σ for Travel Distance	
	Near Shore	5 min
	Medium Distance	15 min
	Long Range	20 min
Initial Scan	Mean	5 min
	Distribution	Exponential
Ability to Conduct Rescue		YES
Rescue Maneuver	Mean	5 min
	Distribution	Exponential
Travel Speed From AOR	Mean	20 knots
	Distribution	Normal
	σ for Travel Distance	
	Near Shore	5 min
	Medium Distance	15 min
	Long Range	30 min

E. TOOL CHOICE

1. Functional Flow—Innoslate

At the NPS, two main MBSE tools have been utilized in the SE curriculum: Vitech CORE and Spec Innovations Innoslate. For the work being done in this thesis Innoslate was the tool chosen to be utilized for the functional flow modeling. Innoslate is a tool developed by Spec Innovations as a tool for the company to use internally for their own MBSE applications (Spec Innovations 2015). Spec Innovations wanted Innoslate to be able to integrate all of the utilities that previously they had needed multiple tools to support. They designed Innoslate to be able to support the full system development life cycle by providing a web based means of requirements and configuration management, modeling the physical and behavior aspects of a system, simulations of system behavior, be able to support the requirements of DODAF, and an easy to use interface that promotes collaboration between users (Spec Innovations 2015).

In addition to incorporating all of the SysML diagrams, Spec Innovations has also integrated two lifecycle modeling language (LML) diagrams into the capabilities of Innoslate: Action (analogous to the SysML Activity) and Asset. One of the main differences with LML based models is that decision points are assigned as functions rather than as separate constructs. This allows for reducing the randomization of decisions in the model flow. This hybrid approach to object and functional analysis aspires to providing more realistic results without added levels of complexity (Dam 2015).

2. Event-Driven—Monterey Phoenix

At NPS an event-driven based approach is currently in collaborative development between the Computer Science and SE departments, and the MP approach will be used in this thesis. Monterey Phoenix is different from all other modeling approaches because it decouples the system behavior and system interactions. This is especially important for SOS applications, since per the SOS definition in section 2.B, the individual systems should be independent from one another; the interactions between the systems are what create the SOS scenario (Giammarco, Farah-Stapleton and Auguston 2014). This

decoupling makes it much easier to scale the model, allows the systems to more easily interact with one another and the environment and allows for events to take place concurrently (Auguston 2014).

Probably the most important thing that this decoupling and careful generalization does is that it removes the requirement for the model architect from needing to build exhaustive use cases; the MP algorithm builds the use cases automatically. Due to the structure of MP, the model determines all the possible scenarios that can take place based on the interactions and system behavior. These possible scenarios are provided as event traces and the model will produce all the possible scenarios that can logically take place up to a defined scope limit (Auguston 2014). For complex SOS architectures and/or missions, this facet of MP is very helpful since it automatically generates a “super set” (Giammarco, Farah-Stapleton and Auguston 2014) of use cases rather than the human model developer having to define the use cases individually. These event traces are then utilized to further analyze the behavior of the system(s) being modeled.

F. MODEL STRUCTURE

The treatment of the SAR mission as an SOS application has already been introduced; however, the reason for this is that not only are the C2 and OSC their own systems, but the SAR assets by definition are multiple systems working together. Treating the SAR mission as an SOS is also critical if there is any hope of modeling multiple platforms working together: more than one helicopter, more than one UAV/UUV/USV or some combination of all four platforms. While in this thesis other USCG, military and civilian vessels and aircraft are not being incorporated into the analysis, if the model is structured correctly, in the future these additional assets should be able to be added easily and a wide web of assets should be able to work together.

The illustrations of the system diagrams in this section will be from the Innoslate model. Once the model architecture is developed and the action diagram and event traces are prepared, the Innoslate and MP models will be compared in the Results chapter to provide feedback on what additional views should be added to MP to make the model/simulation outputs more flexible and useful for system architects and engineers.

1. Proposed Architecture

In the OV-1 the overarching architecture and generalized asset definitions were presented; see Figure 9. Then, based on the DRM and OPSITs the mission narrative was developed, and a command and control structure was proposed in Figure 10. Using the mission narrative from Section 3.B.5, the sequence of events can be entered into the model and for Innoslate displayed in a sequence diagram, Figure 15.

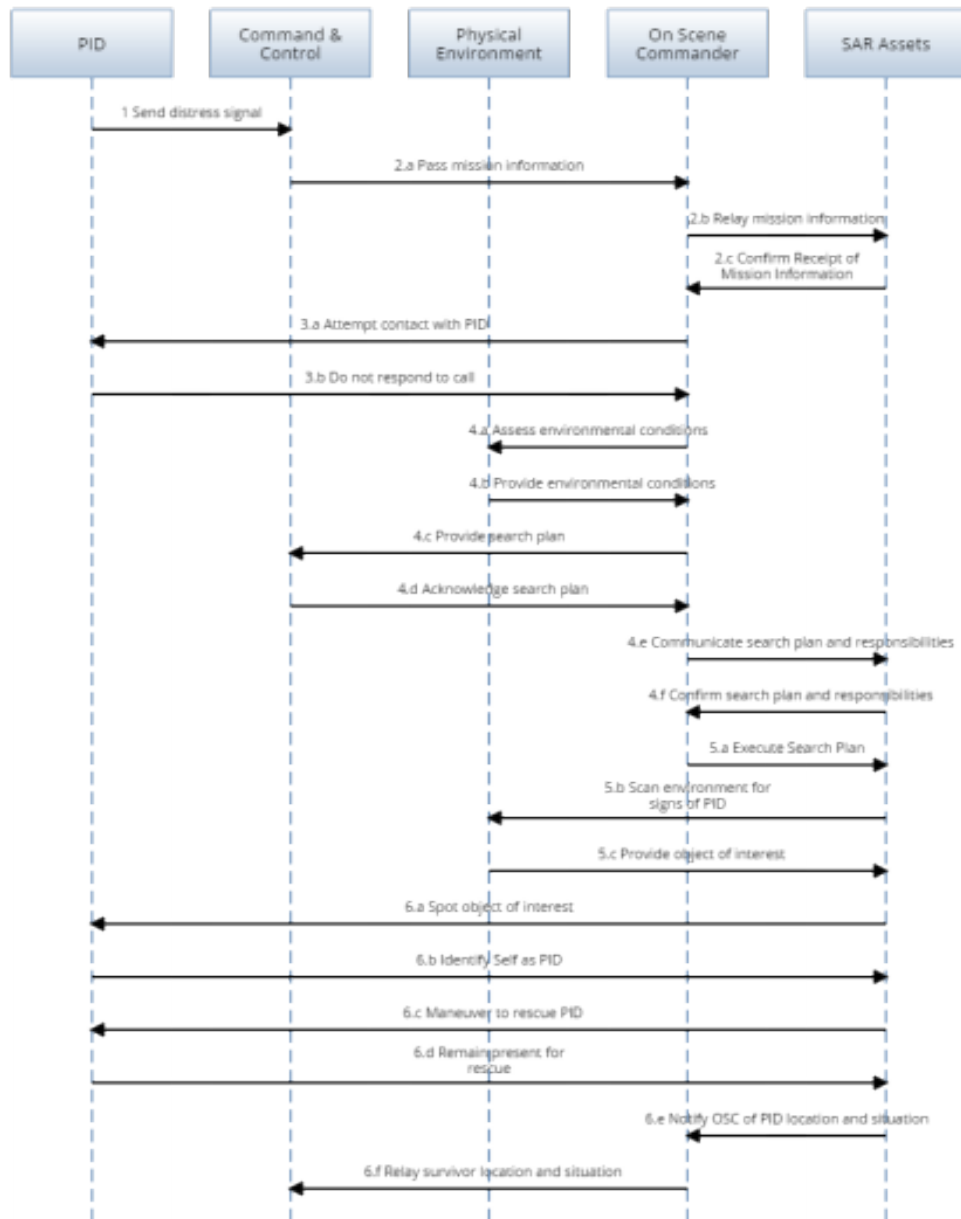


Figure 15. Sequence diagram for SAR SOS concept from Innoslate.

The sequence diagram shows on the very high level of the narrative how each participant/asset in the SAR mission interacts with the others. This sequence of events provides the initial framework to base further development of the detailed actions and activities that have to take place in order to be able to execute the SAR mission. It is important to note that the sequence diagram in Figure 15 shows the sequence of events if there is a capability to rescue the PID. Additional sequence diagrams would be required to fully illustrate other scenarios where the PID cannot be rescued or if the OSC calls in another SRU to conduct the rescue.

The next step in building the model is to begin mapping the functions to the physical assets participating in the SAR mission. The first functional decomposition is done in the form of the IDEF0 diagram Figure 16. To prepare the IDEF0 each high level asset is assigned their highest level function:

- C2: provide command and control
- PID: perform survival activities, shown in Figure 16 as the green block
- OSC: orchestrate SAR mission, shown in Figure 16 as the red block
- Physical Environment: provide environmental feedback
- SAR Assets: execute SAR mission plan, shown in Figure 16 as the blue block

These high level functions are then mapped to all the inputs, outputs and triggers required for each asset to interact with all of the others. Attempts were made in the generation of the IDEF0 to keep the structure, inputs and outputs similar to Hunt's model (2015) to keep the operational validity. Too much deviation from Hunt's system structure would reduce the applicability of the model in this thesis to the way the SAR mission is executed in the real world. Once all the functions are allocated to the respective assets, the functions for the asset of interest begin to be decomposed to start linking them back to the sub-systems and physical components. Since "SAR Assets" actually represents an aggregate of all the available SAR assets, it has to be decomposed into the individual assets mapping all the input, output and trigger functions to each asset. In Innoslate the decomposition was done with four possible SAR assets to allow for the model to incorporate all four system alternatives.

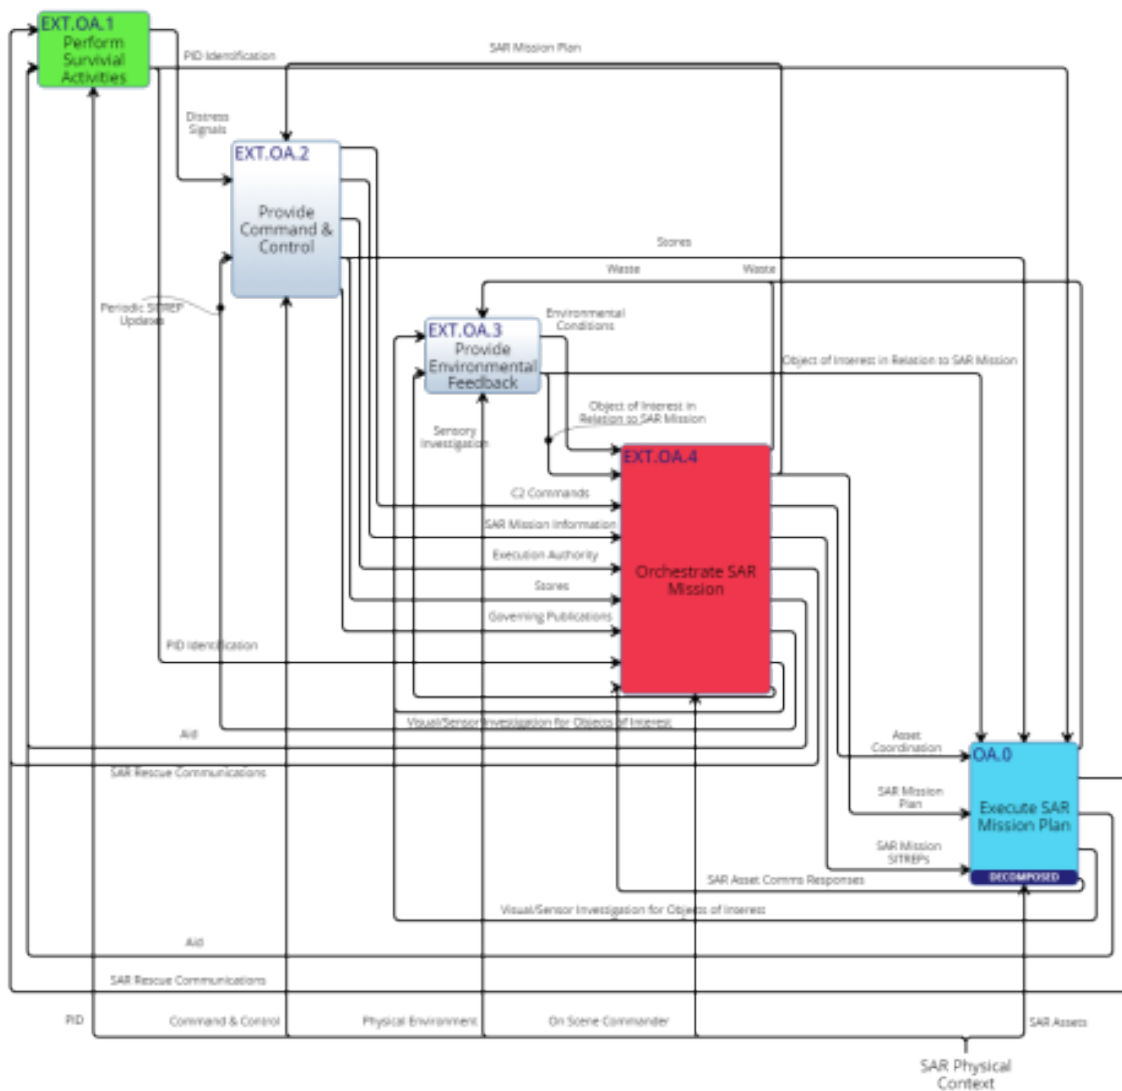


Figure 16. Functional decomposition for SAR SOS concept.

Figure 17 shows the inputs coming into each asset from the left (e.g., stores are the furthest inputs on the left of the diagram), the triggers come in from the top (e.g., the first is the SAR Mission Plan), and all the outputs generated by the SAR assets come out of each asset and head off to the right (e.g., Aid and Waste). The SAR assets were chosen to be decomposed further in this model due to the interest in comparing alternatives for the SAR assets; however, any of the other functional assets could also be decomposed further if that was of interest. The next step is to map each individual SAR Asset to the functions it is responsible for, Figure 18.

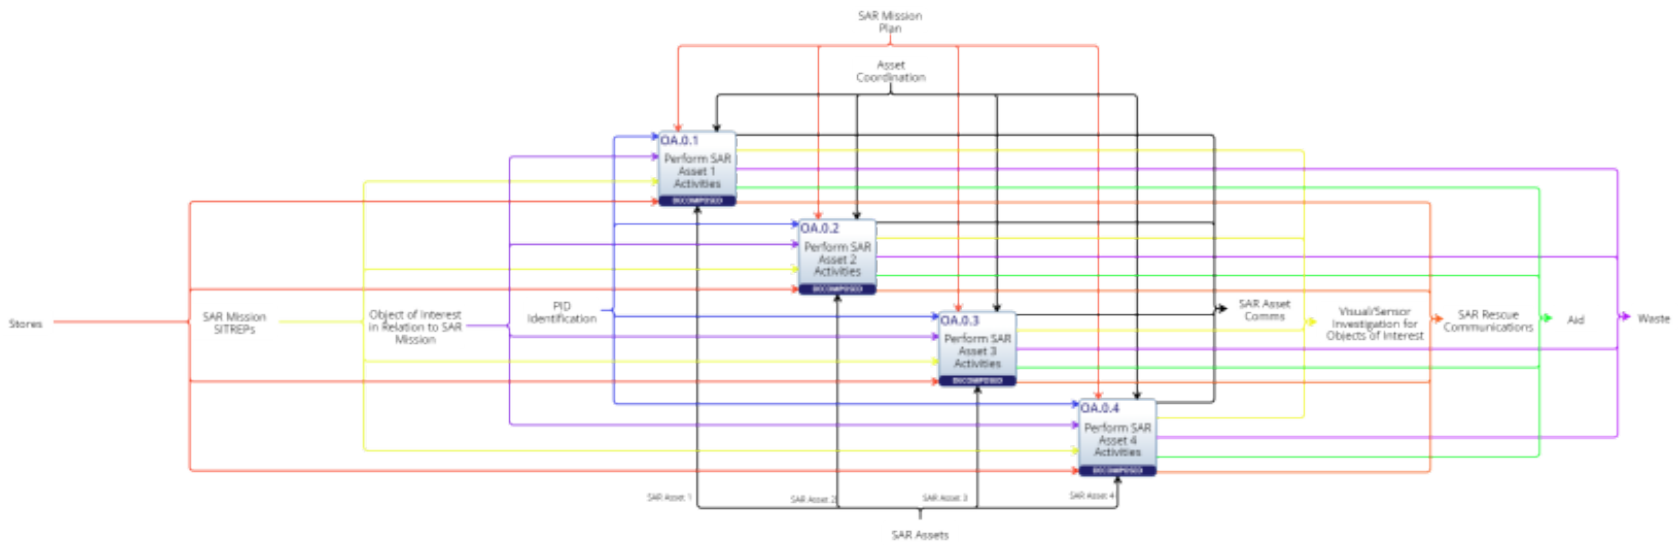


Figure 17. Second-level functional decomposition illustrating the individual SAR assets that are part of the SAR SOS.

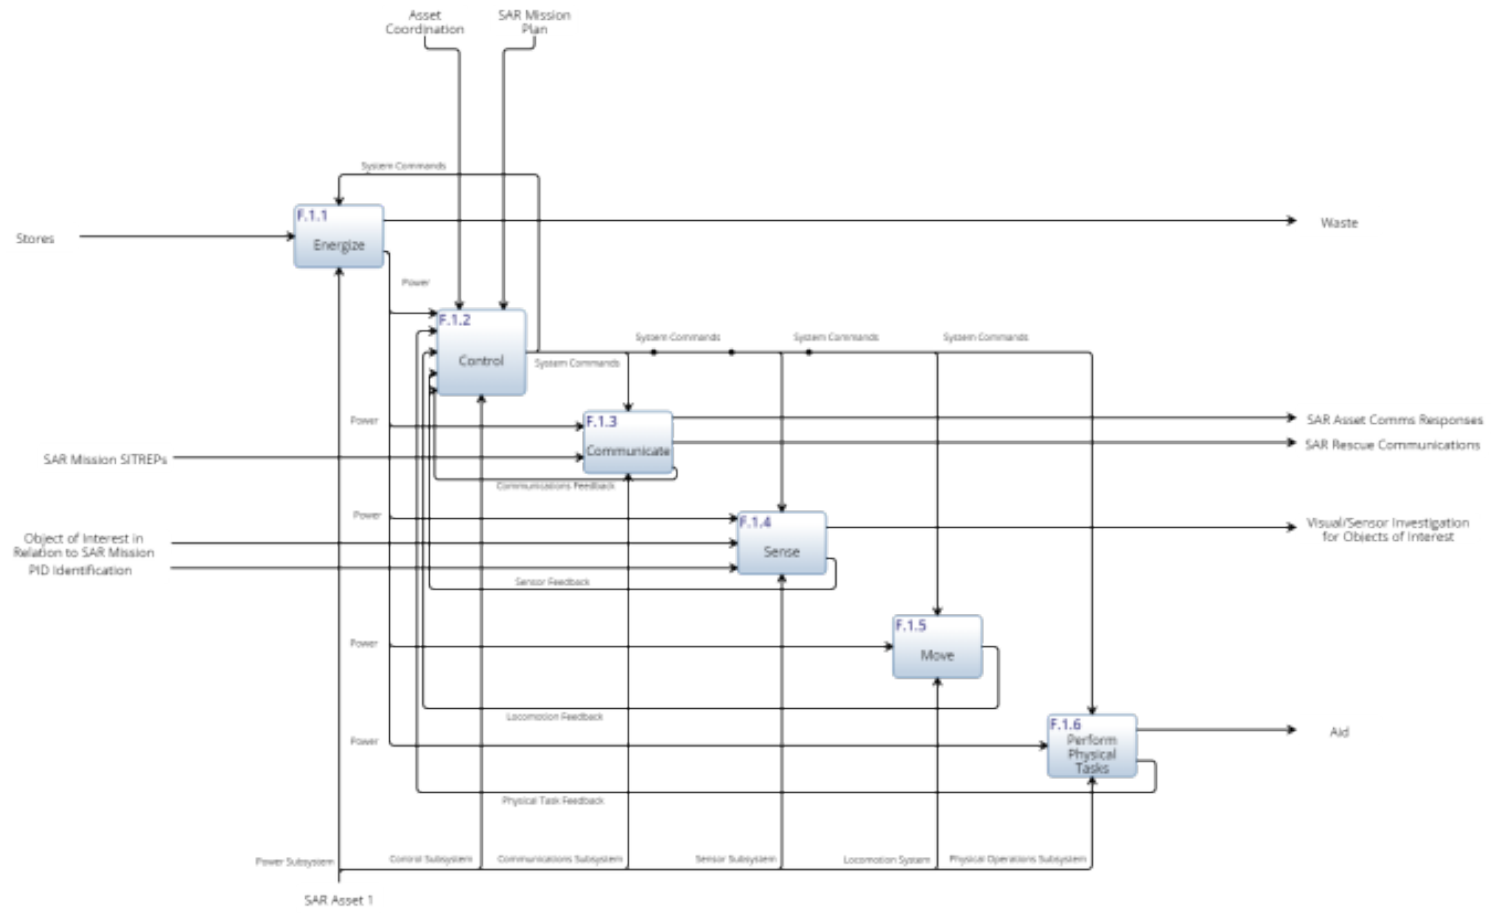


Figure 18. Individual SAR asset subsystem level functional decomposition (after Giammarco 2015b).

In this model, Figure 18, each SAR asset was decomposed into six subsystems:

1. Power
2. Control
3. Communications
4. Sensor
5. Locomotion
6. Physical operations

These subsystems were mapped again to the same inputs, outputs and triggers as were applied to the system in Figures 17 and 18, additionally the input, output and trigger functions were also mapped between each of the subsystems.

2. Performance Prediction

Now that the SOS and the SAR Asset decompositions were prepared, the final step in the model preparation is to develop the portion of the model that will be utilized to execute the system behavior simulations that will be utilized for the performance predictions.

a. Innoslate—LML Action Diagram

In Innoslate the LML action diagram was utilized as the basis for the performance predictions. The sequence diagram, Figure 15, and IDEF0, Figure 16, are the main basis for populating the functions in the action diagram. In addition to the functions from the sequence diagram, additional details from the mission narrative are captured in the action diagram, Figure 19. The functions to be executed are assigned to each of the five high level assets, the horizontal branches, and the functions are linked from asset to asset by input/output structures, the green parallelograms shown in Figure 19. In addition to the standard sequential functions, the model also utilized two of the LML decision point functions: the OR and SYNC.

The OR function was used in the OSC branch to allow this architecture to integrate the possible functions of multiple alternatives in to one action diagram to allow for reusability. For the SAR mission, not all the alternatives being considered for the SAR Asset can execute an actual physical rescue of the PID. Only the manned helicopter and USV platforms have the ability currently to execute a rescue of the PID.

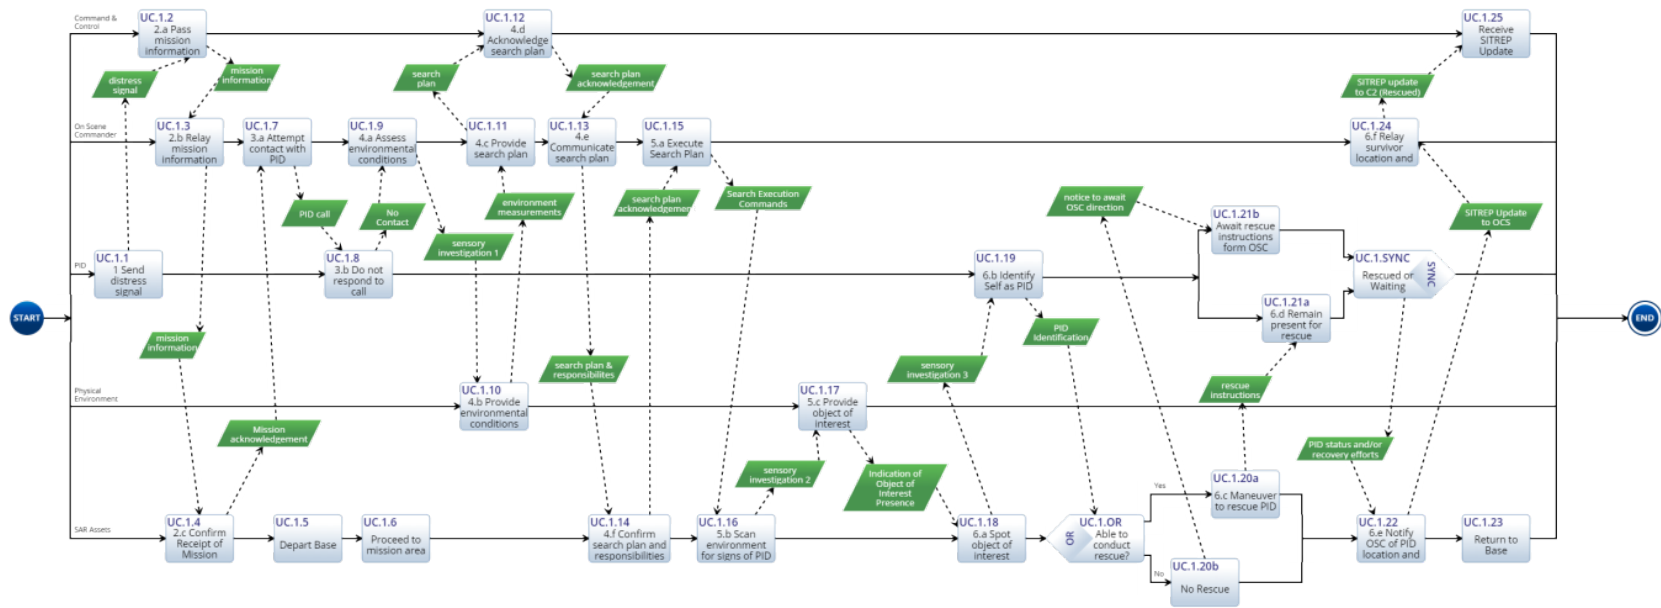


Figure 19. LML action diagram for SAR SOS concept in Innoslate.

The SYNC functions were used to coordinate the pairs of corresponding actions for the SAR Assets and PID if a rescue was able to be done with the SAR Asset being modeled or if the PID had to wait for another rescue asset to be assigned by the OSC. The action diagram was then populated with parameters for the functions, Tables 8 and 9 in the Appendix, and then a discrete event simulation was run for each set of parameters for each OPSIT and SAR Asset alternative. Since the simulation results are random based on the parameter distributions, each simulation was executed fifty times to provide a set of numbers that could be averaged to provide a better approximation instead of just one point value if the simulation was only ran once.

Two important notes for the model that was built in Innoslate:

1. First, no way was found to implement concurrent and asynchronous actions within the SAR asset branch to show the participation of multiple assets –all the branches must complete their actions synchronously before moving on to the next step.
2. The second is related to the first: if there was a way to implement multiple SAR Assets, there is no way to implement the layered control structure illustrated in Figure 11.

To expand on issue one, there is a way to show multiple participants/assets in an asset branch in Innoslate, and this is done through the use of nested AND branches. Unfortunately, this device would require that each sub-branch finish the execution their respective functions before the timeline could move on to the next function after the AND branch concludes. In some instances this would not be a problem, but the case of a SOS where the SAR Assets will be working as a team, based on the search plan and direction provided by the OSC, and the SAR Assets will need to be working concurrently and asynchronously (performing their respective functions at different times) and the mission should not be delayed due to a delay in the arrival of one of the SAR units or a longer required time to do the initial search. The way the SOS should work is that all the units would continue to the next function once one of the SAR Assets successfully completed each function or in whatever pattern the OSC directs.

For the second limitation, the layered control for the OSC over the SAR Assets is critical for being able to model the decision structure of how the OSC would allocate the resources available to optimize the SAR mission execution. For example, the OSC would

direct the SAR Assets for various areas of the AOR to provide as much search coverage area as possible at the start of the mission, additionally the OSC would direct the SAR Assets as they arrive, the OSC would not wait to start the mission until all the SAR Asset are in place. In addition, the model should be able to determine which SAR Assets have the capability to provide the best performance for executing each function, or determine which combination of available assets should be used to reduce mission time. For example, potentially the UAV may be the best initial search tool, but even if the UAV finds the PID first, another asset: the USV, manned helicopter, or USCG vessel, would need to be sent out to conduct the physical rescue or recovery of the PID.

b. Monterey Phoenix

The differences between MP and Innoslate can be inferred from the descriptions of both tools in Sections 2.B and 3.E but they are quickly summarized here now that an example has been modeled in each. The first is that MP will generate all possible use cases based on the logic of the model instead of requiring the model designer to prepare a set of use cases to validate the model against. This is very advantageous for two reasons:

1. Problems and flaws in the model can be determined by reviewing the use cases. If there is missing logic the model will generate event traces that are not realistic and this can be used to correct and refine the model.
2. As stated in the literature review, having the model designer manually generate the use cases can introduce error into the model, or if a use case is missed and that is the problematic scenario, the system architecture can be deemed ready for implementation with a serious problem that will not be identified until after the system is built.

In addition to generating the use cases, it has been demonstrated in the MP literature (Auguston 2014) that this approach allows for concurrent and parallel execution of events by various assets. Being able to model concurrent and asynchronous events allows the model to more accurately describe the system and therefore the system performance.

One limitation of MP as compared with Innoslate is that the current version of MP does not allow for the application of system parameters (event attributes) into the model. The mission time and critical paths (Auguston 2014) can still be calculated, but they must

be manually calculated from the model generated event traces. This limitation will make it difficult to utilize the MP event traces to conduct the analysis of alternative between the four proposed SAR Asset platforms.

The initial MP model for the SAR Mission was prepared by Professor Kristin Giammarco based on Hunt's mission narrative. Giammarco prepared the model as an instructional aid to provide a starting point for the analysis; MP is fairly simple in structure, but it still requires some exposure and understanding before changes are easy to make. With the starting point provided in the sample code, the author was able to get a general understanding of MP and the grammar structure of the model in order to incorporate additional functions to model the flow of activities described in the mission narrative, Section III.B.5 and the sequence diagram, Figure 15. The full MP code can be found in Appendix B.

In the MP code, Appendix B, the assets from the proposed architecture: C2, OSC, Physical Environment, PID and SAR Assets were all assigned their own ROOT, which may be considered as an agent. These roots were then assigned required events/actions, inputs and outputs. Another major difference with MP vs. Innoslate is that it is fairly easy to model alternative outcomes in MP. For example, to start off each ROOT, there is a choice for the model, "Do all of the assets do their normal operations or participate in the SAR Mission?" In another case for the Physical Environment, there is now the option to allow the SAR Assets to find something not related to the SAR Mission, find wreckage or find the PID. All of these alternatives help define the possible event traces, use cases for the SAR Mission in the most general of terms.

Once all the events/actions, inputs and outputs are defined, the interactions between these functions are defined utilizing COORDINATE compositions and PRECEDE relations, the second half of the code. These actions define the sequence in which these functions in the roots should be interleaved and executed to move through a logical progression of events. The SHARE ALL composition defines which actions have to occur within both ROOTS in order to keep conflicting actions from being allowed in the model. Once all these interactions are defined the code is compiled, and the event traces are generated, the use case inspections can begin.

IV. RESULTS

This chapter will discuss the results obtained from both models developed for this thesis. The Innoslate model results and observations based will be covered first. The second half of this chapter will review the MP results; a discussion of the model refinements that were required due to the initial observations and results will be covered in detail.

A. FUNCTIONAL FLOW PERFORMANCE PREDICTION

As described in the Methodology chapter, the Innoslate model action diagram, Figure 20, was updated with a set of parameters for each of the functions, Tables 7 and 8 which can be found in Appendix A, and a discrete event simulation was run for each of these parameter sets. The event simulation timeline, Gantt chart format, for the helicopter near shore OPSIT is shown as an example in Figure 21 just to provide a visualization of how the logic of the model has the system flow from one function to the next. The Gantt chart output from Innoslate is very similar to that of Microsoft Project.

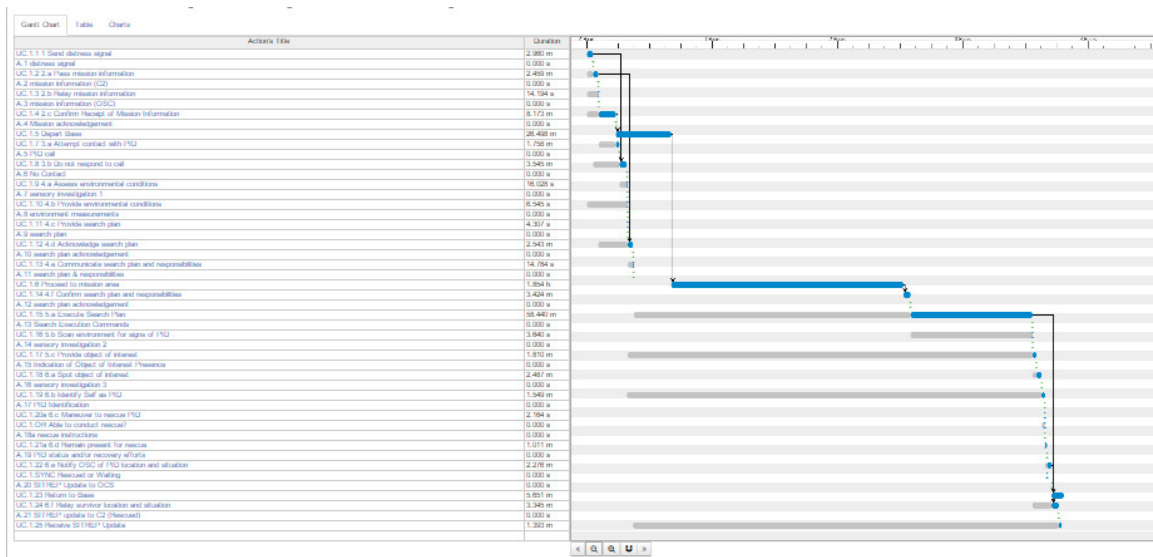


Figure 20. Example Innoslate discrete event simulation timeline.

The mission time results of the first three simulations for each OPSIT and alternative, of the 50 that were run, are listed in Table 5, to give an example of the results that were seen. The data from all 50 runs can be seen in Appendix C. The average results for each alternative and OPSIT, based on the 50 simulations, are listed in Table 6. Based on the initial numbers of the total mission time, it appears the UAV provides the best support for the near shore and medium distance OPSITs with the helicopter in second place. It is important to note that the UAV cannot conduct the physical rescue of the PID, so this would not be a full solution to the SAR mission for these two OPSITs, but it could be a good augmentation tool that would not hinder the SAR mission execution timeline.

Table 5. Innoslate Model Results

	Near-Shore		Medium-Distance		Long-Range	
	hrs	min	hrs	min	hrs	min
Helicopter	2	18.29	3	25.43	6	18.17
	2	9.67	2	29.73	5	22.30
	2	24.90	3	7.97	5	55.97
UAV	1	50.18	2	34.73	5	58.25
	1	50.32	2	35.38	6	49.25
	1	47.13	2	51.33	6	24.60
UUV	3	15.53	7	2.00	28	24.08
	3	26.38	6	5.80	27	39.87
	2	45.47	6	27.83	28	28.60
USV	3	16.22	4	49.28	18	21.45
	3	3.05	5	20.22	18	30.37
	2	57.47	5	40.32	17	48.40

The results in Table 6 show that the UUV and USV as standalone SAR Assets are much slower than the helicopter and UAV; in a situation where time is of the essence, they would not be usable alternatives. For the long-range OPSIT event, the helicopter takes too long to reach the initial search area for this to be the best solution. Additional alternatives would have to be considered for a scenario where the travel distance is on the order of 200nm.

Table 6. Average mission time by alternative and per OPSIT distance.

	Near-Shore		Medium-Distance		Long-Range	
	hrs	min	hrs	min	hrs	min
Helicopter	2	17.68	3	1.04	5	52.14
UAV	1	49.21	2	40.48	6	24.03
UUV	3	9.13	6	31.87	28	10.85
USV	3	5.57	5	16.61	18	13.41

After the initial cursory look at the results, a closer examination of the timelines, the Gantt charts for each solution, each of the simulations run showed that even for the shorter transit distance OPSITs: near shore and medium distance, there was an extended delay in the initiation of the SAR Asset portion of the search, functions starting at “Scan environment for signs of PID” and onward, due to the fact that the model ran the OSC action “Execute Search Plan” was consistently showing as requiring 60 minutes \pm 10 minutes to execute as defined by the parameter assigned to this action, Tables 7 and 8 found in Appendix A. In discussions with Hunt this initial parameter definition was to show that searches typically take an hour to execute until a trace of the PID is found. However, in reality the SAR Assets are conducting their actions: arriving, scanning the environment for objects of interest concurrently as part of executing the search plan. In functional flow models, there is a way to execute actions concurrently and that is by using an AND construct. The difficulty arises in that an AND construct is nested within an asset line and does not apply among various assets. This means that an AND construct could be used to show multiple SAR Assets doing the same search functions concurrently, but cannot be used to allow for the OSC and SAR asset actions to happen concurrently in a coordinated manner. This limitation to the model adds an artificial delay for the helicopter and AUV for the two OPSITs where they can reach the initial search location in in under an hour: the near shore and medium distance rescue.

As mentioned, the UAV showed to be the best solution for the near shore and medium distance OPSITs; however, there are current limitations for the UAVs to execute the actual rescue of the PID. If the UAV was one of the available SAR Assets, it would need to work with one of the other assets that is able to conduct a rescue: the manned

helicopter or the USV. Since the model was built for a SOS architecture, the plan was to execute a simulation utilizing each of the alternatives to see the best way to integrate the unmanned vehicles with the manned helicopter. As discussed in the previous paragraph, concurrent actions can be shown in a functional flow model using the AND construct; however, there is no straightforward way to define the logic of the decision function to choose the best alternative(s) for each action to optimize the execution of the mission. Due to this limitation, the model where all four assets types executed the mission together was not attempted in Innoslate.

B. EVENT-DRIVEN PERFORMANCE PREDICTION

At the end of the Methodology chapter, the MP model development for the SAR Mission was discussed. The last step was to compile the code to produce the event traces for all the possible use cases based on the logic provided in the code. As mentioned in Section 3.E.1.b, the initial MP code was provided as a starting point, and the output of that original model code produced eight event traces, but some of the traces were outcomes that could not happen in the real world. The main two discrepancies were:

1. The model only showed the OSC returning to base. The local commander should not be able to leave the scene without also providing direction to the SAR Assets to RTB as well.
2. There were several event traces where there were no SITREPs sent to the OSC or C2. This would never happen in the real world, regardless what is going wrong in the mission, SITREPs should always be sent.

1. Initial Model Refinements

The model code was modified to correct these deficiencies, and six event traces were produced. The final code for the model can be found in Appendix B. The general description of the event traces are:

1. All assets continue executing normal operations; there is no SAR Mission, Figure 21.
2. SAR Mission initiates; SAR Assets conduct search but no objects of interest are found; SAR assets continue to scan but OSC aborts mission and all Assets RTB.
3. SAR Mission initiates; SAR Assets conduct search and find an object of interest; the object of interest is determined not to be related to the SAR, so the OSC aborts mission and all Assets RTB.

4. SAR Mission initiates; SAR Assets conduct search and find an object of interest; the object of interest is determined to be wreckage so the OSC aborts mission and all Assets RTB.
5. SAR Mission initiates; SAR Assets conduct search and find an object of interest; the object of interest is determined to be the PID; SAR Assets provides PID SITREP to OSC; PID is rescued; OSC concludes mission and all assets RTB, Figure 22.
6. SAR Mission initiates; SAR Assets conduct search and find an object of interest; the object of interest is determined to be the PID; SAR Assets provides PID SITREP to OSC; PID *NOT* rescued; OSC concludes mission and all assets RTB.

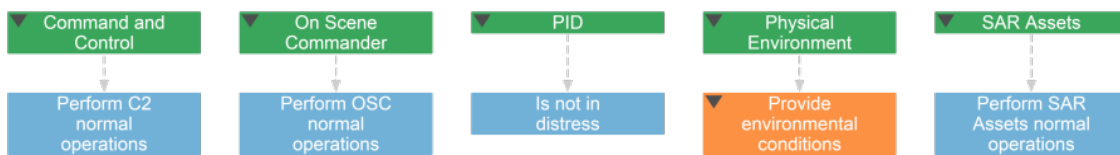


Figure 21. Event Trace 1, no SAR mission.

At the time of this writing, the current MP prototype tool requires the event traces to manually be mapped to mission execution timings (Auguston 2014); there is currently no way to enter the event and asset definitions or parameters into the model directly to generate performance predictions for each event trace. As can be expected these manual calculations will quickly become cumbersome and potentially complicated for a complex SOS. Additionally, as mentioned previously, the current MP model requires additional capabilities to fully model the SAR SOS. The ability to incorporate the available SAR assets and their respective capabilities to allow for MP to provide additional event traces based on the best combination of the available assets could be incorporated into the algorithm. If this type of capability cannot be added into MP, a Gantt chart type output, similar to what Innoslate provides, Figure 20, could prove helpful in adding the event timings manually.

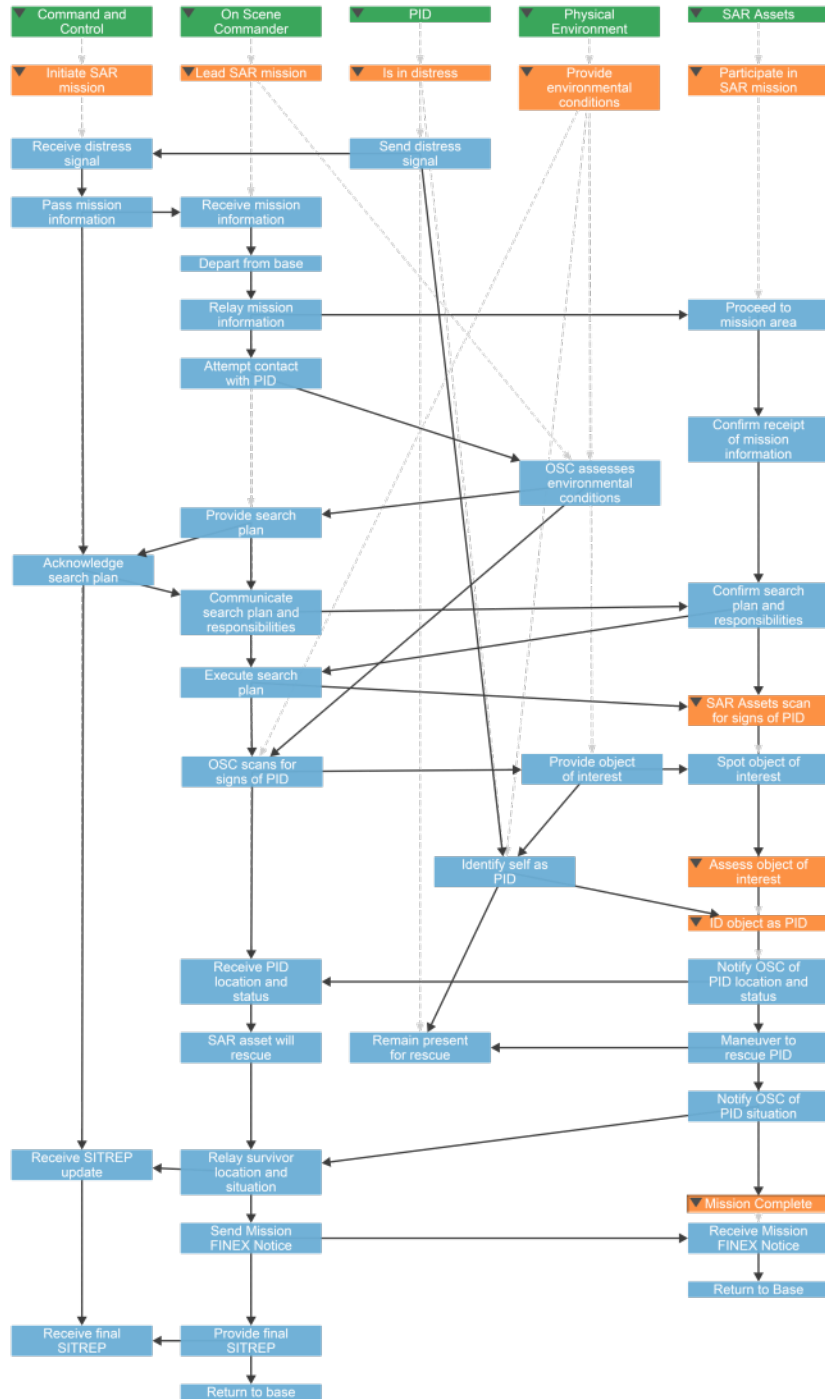


Figure 22. Event Trace 5, full SAR Mission with PID recovery.

2. Final Refinements

The first improvement was to expand the number of objects of interest the SAR Assets could find. The previously discussed version of the model, only allows the SAR Assets to find one object of interest, and if that object is not the PID, then the mission is aborted. In reality, after the first object of interest is found not be the PID, the OSC would redirect the individual SAR asset that found the object of interest to continue searching; to finish searching the sector it was responsible for or moving that asset to search another sector or to support another SAR Asset. This cycle should continue until the SAR SOS finds the PID or runs out of mission time (such as low battery, low fuel, and crew rest).

The search loop was added to the model with the assistance of Professor Mikhail Auguston. No restrictions were set on the number of loops allowed in the code; instead the limitations were set by the scope selection in MP. With a scope of one, nine event traces were generated without the SAR Assets acquiring more than one target, since only one iteration of the code was allowed by the scope; however, when the scope was set to two, 46 event traces were generated. The full code for this version of the model can be found in Appendix E. Due to the high number of traces, the event traces will not be included in an appendix as part of this thesis; however, the code in Appendix E can be uploaded into the MP online public compiler: firebird.nps.edu, and executed to view all of the traces.

Two examples showing the loop through finding multiple targets are shown in the following figures. Event trace 12, Figure 23, shows the SAR Assets finding an object not related to SAR initially and then finding wreckage; event trace 23, Figure 24, shows the SAR Assets finding an object not related to SAR and then finding the PID. In these event traces, to have MP run the SAR Assets through more than two objects of interest, the person running the model will just keep increasing the scope to keep viewing the expanded results based on the number of iterations being run though the code.

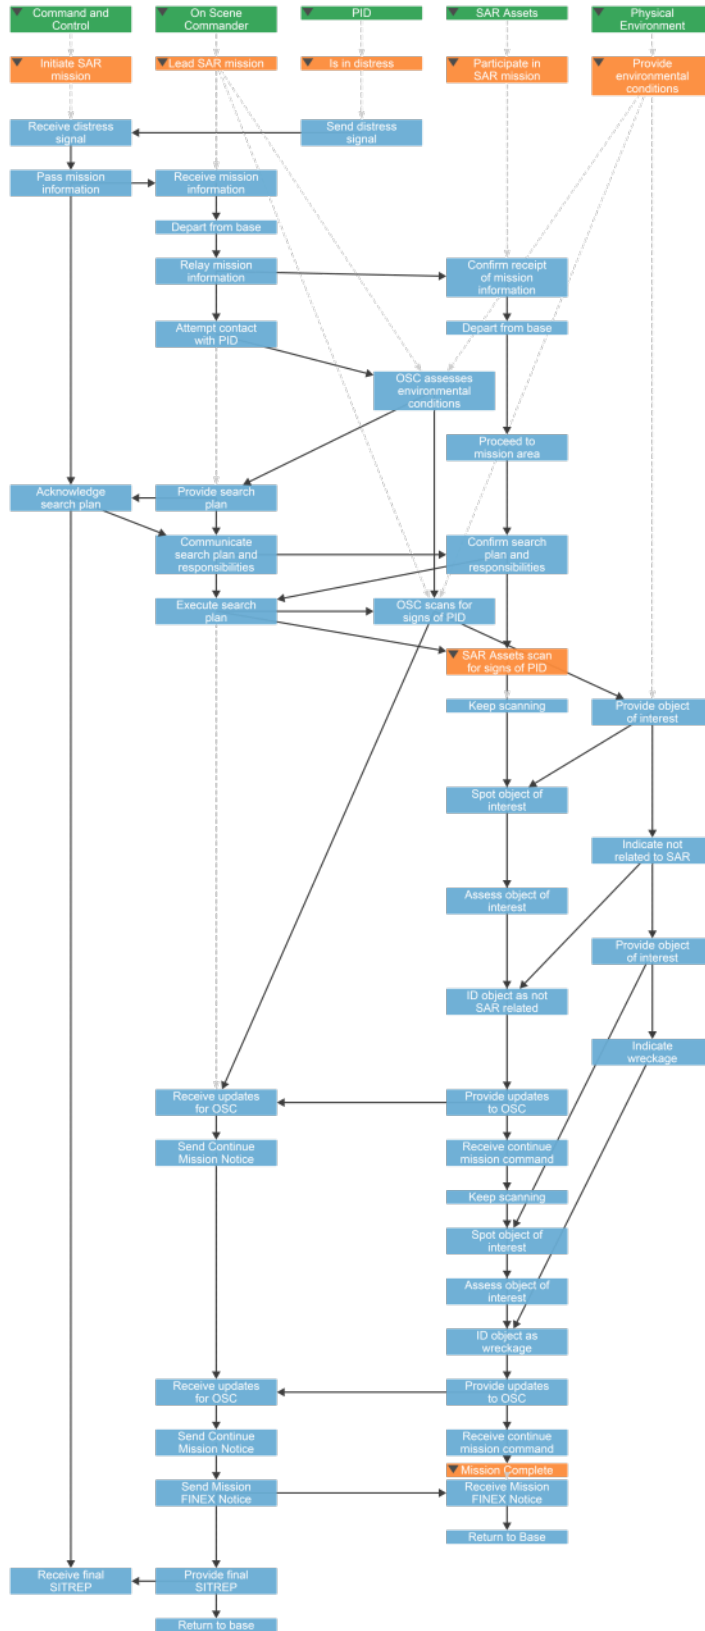


Figure 23. Event Trace 12.

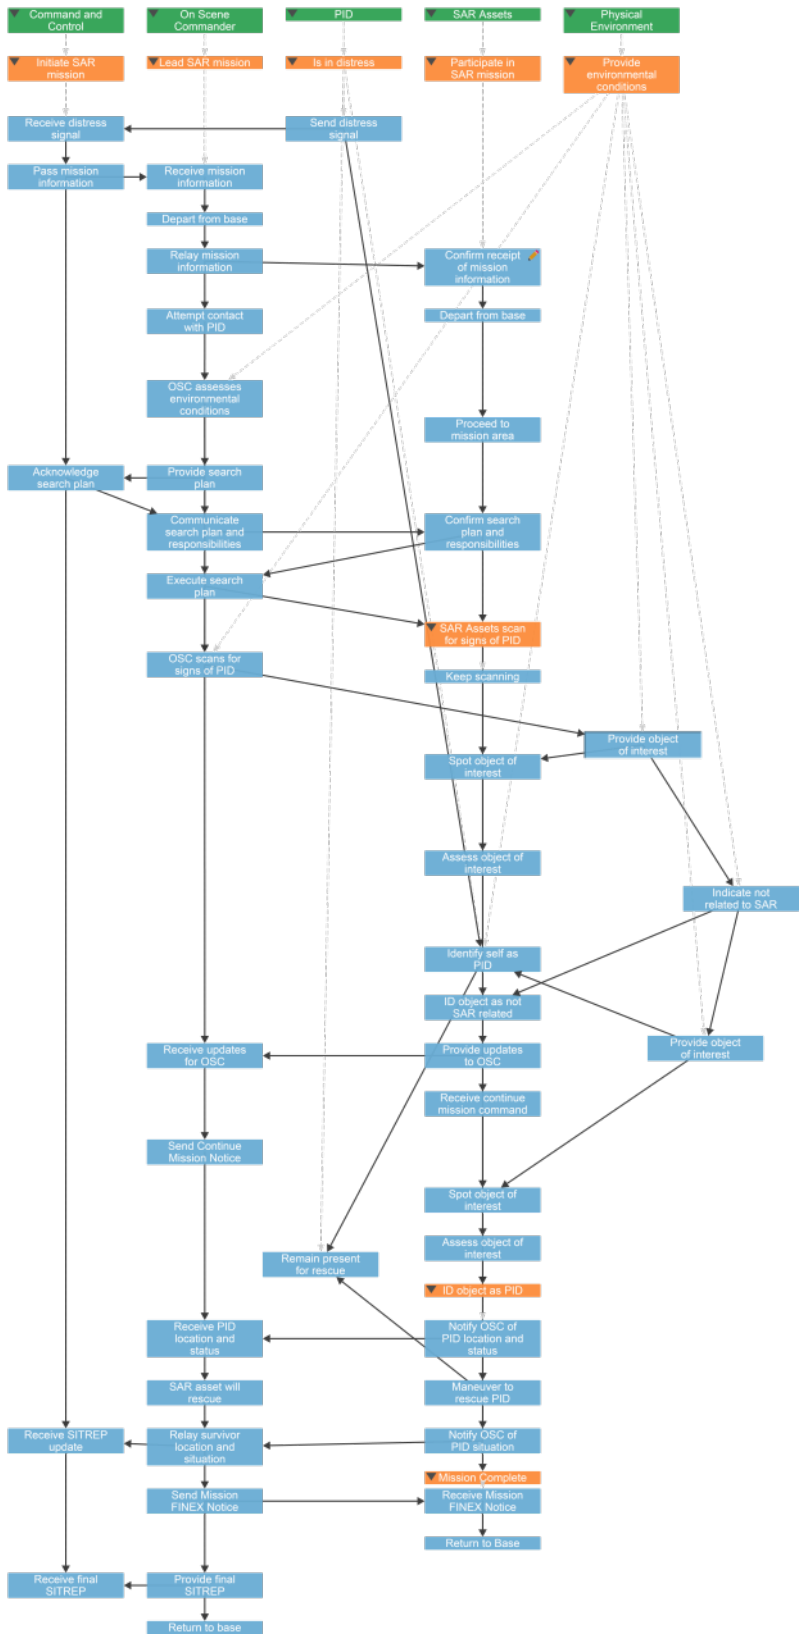


Figure 24. Event Trace 23.

The second improvement to the model was the ability to begin to show the behavior of the individual SAR Asset grouped under the parent SAR Assets. This was done by defining the SAR Assets ROOT as a set composed of the individual SAR assets. This was done utilizing the following MP syntax:

```
ROOT SAR_Assets: { + SAR_Asset + };
```

then the SAR_Asset was utilized to define all actions formerly within the SAR_Assets ROOT. The other change to the code was the addition of the *un-synchronized* COORDINATE <!>. This asynchronous coordination allows for the individual SAR Asset(s) to execute the same functions concurrently but unlike with the Innoslate model, without needing to be executed at the same time.

The number of the individual SAR_Asset(s) can be set utilizing the scope setting in MP, or by adding a number of requested instances to override the general scope. In order to test the set of assets, the set was fixed at two assets utilizing the following MP syntax:

```
ROOT SAR_Assets: { + <1..2> SAR_Asset + };
```

With this addition of individual assets and the asynchronous coordination (see Appendix F for the full code), MP generates 24 event traces at scope 1 that begin to show the individual SAR_Asset(s) working together. Figure 25 shows an event trace where the PID is found and rescued by the two SAR_Asset(s) in the mission. Since the scope was set to one for this run, there are not multiple targets found by the two SAR_Asset(s) executing this search. It was expected that if the model scope was set to two or higher, the two assets should find multiple targets of interest; however, the connection with the firebird.nps.edu server currently times out before the scope 2 results on this model are delivered. Solutions for the MP Analyzer prototype to serve larger models over the internet could be investigated, as well as modeling methodology improvements to reduce the weight of the model and resulting traces.

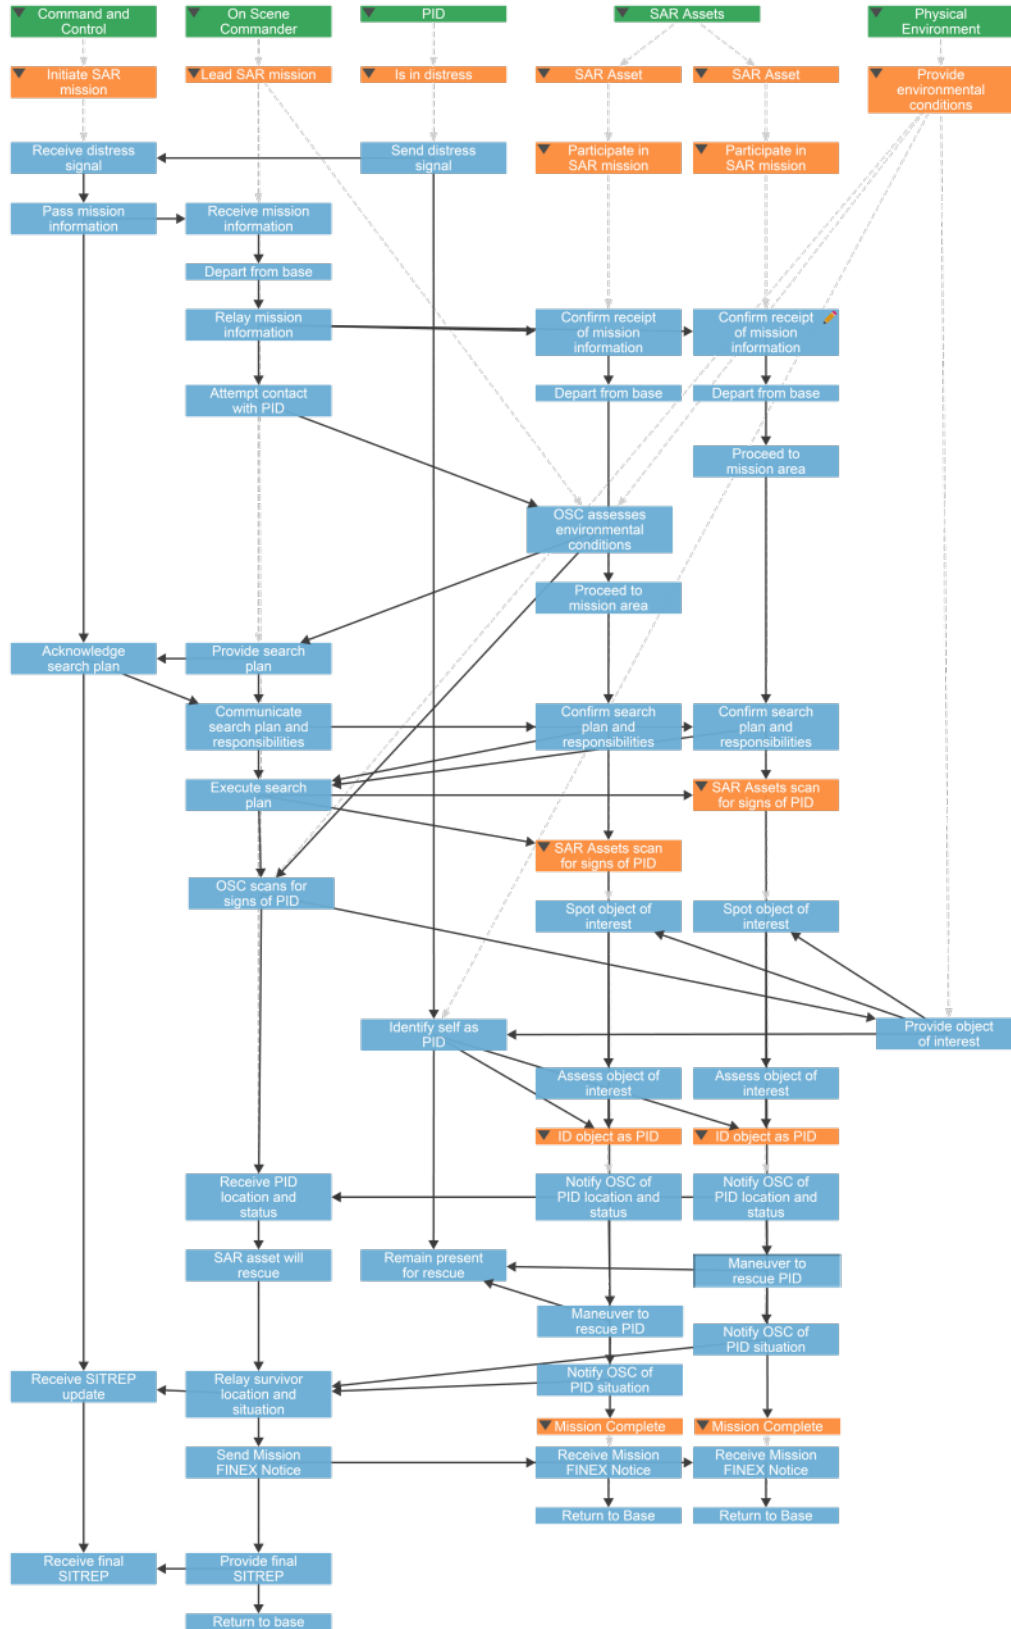


Figure 25. Dual SAR_Asset event trace with PID rescue.

Even with all of the asynchronous COORDINATE <!> compositions in the code shown in Appendix F, the SAR_Asset(s) do still seem to be coupled in all of the actions linking them to the OSC and Physical Environment. This means that both SAR_Asset(s) find the same type of object of interest: not related to SAR, wreckage or the PID, they both go to execute the rescue or not. This behavior is highlighted in Figure 26, a closer view from Figure 25. The section of the event trace shows that both SAR_Asset(s) find the PID, both notify the OSC, and both maneuver to rescue the PID.

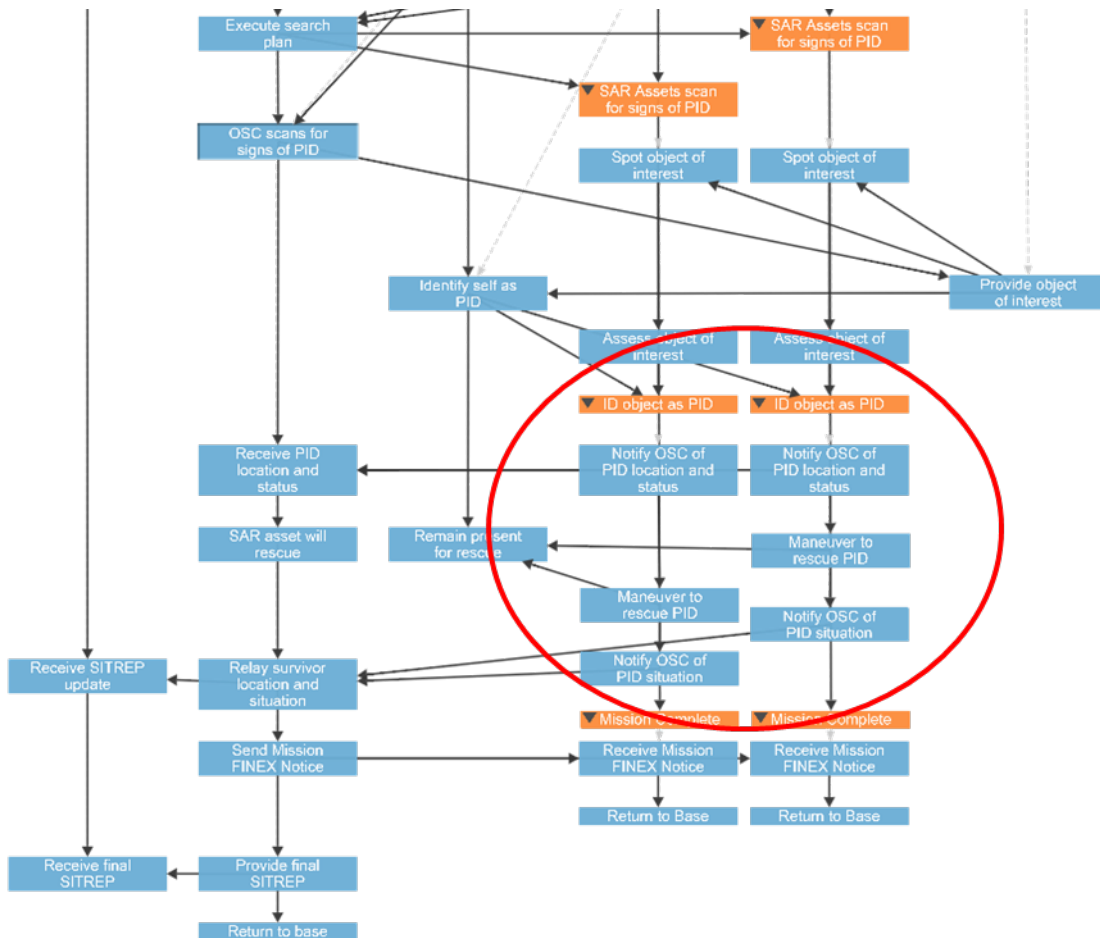


Figure 26. Dual SAR_Asset detailed view.

This type of behavior is realistic and would be expected for specific event traces; however, the author has observed that event traces that show scenarios where one SAR_Asset finds the PID while the second finds nothing and continues searching, or that

one SAR_Asset executes the rescue while the SAR_Asset continues to search, are not generated by this MP model.

The fact that MP showed this behavior, or the lack of the expected behaviors, in the generated event traces is an illustration of the value added of the MP approach; MP provides a way to identify unwanted system behaviors contained within the model logic that is being built for the system, or system of systems. As previously discussed in Section 3.E.2, other executable modeling systems require the model builder or user to develop individual use cases that will test the system model to find errors or unwanted behaviors. Not only does this take time, but it is also very difficult for a human to capture all the possible scenarios where something may cause the system to behave strangely. MP provides automation for the modeler by generating all the possible scenarios that can happen based on what was specified in the model, treating system behaviors and system interactions as separate concerns. The review of all of the generated traces for errors or unwanted behaviors still take time, but it is much easier to spot a mistake in a graphical representation of the system behavior than it is without such visualizations.

C. SUMMARY

This chapter reviewed the results of the two models of the SAR Mission and discussed the performance of the models based on what was desired as the outputs. Initial discussion on model improvements was presented and is summarized in the following and final chapter.

THIS PAGE INTENTIONALLY LEFT BLANK

V. CONCLUSIONS

The two research questions asked by this thesis were:

1. How do the performance predictions for SOS vary between the two MBSE modeling methodologies: functional flow oriented and event-driven?
2. Can unmanned vehicles/systems be utilized effectively to conduct or augment SAR operations?

The work done in this thesis is not able to answer these two questions fully but started a process to answer these questions. Neither of the tools used for the two modeling approaches utilized in this thesis, Innoslate for functional flow and MP for event oriented, are currently equipped to fully model a SOS. In order to make both tools better able to handle SOS modeling needs, some additional capabilities could be added.

A. RECOMMENDATIONS

For Innoslate, the main difficulty was with modeling concurrent behaviors between assets to show teamwork within the SOS. It would be very valuable for modeling SOS if Innoslate had the capability to allow each asset to proceed through the mission asynchronously, without waiting for each of the other assets to complete its previous function. Another way to implement this type of structure/methodology could be by moving away from the standard “swim lane” diagrams that are limiting the amount of interaction among the various assets. If a less rigid methodology could be implemented, the more asynchronous interactions between the assets may be able to be modeled in the functional flow model. Even if the model was still not able to optimize the utilization of available SAR Assets, the model outputs could still be used to conduct AOA for the SOS based on use case combinations created by the model users. Based on the application of the SysML and LML in Innoslate, it seems to be appropriate to utilize more fully the UML concepts from software development, especially something similar to the three “micro-patterns” that were discussed in *UML for Real: Design of Embedded Real-Time Systems* (Lavagno, Martin and Selic 2003, 172). This type of modeling hierarchy is already in existence and the application to systems engineering applications will be key to accurately modeling SOS architectures.

With MP, the limiting factor is the manual application of the system parameters. To do this manually potentially limits the accuracy of the AOA being derived from the model developed event traces due to the added opportunity to introduce human error. The ability to incorporate the parameters of the systems and the environment directly into the model would allow for the event traces to begin to describe more fully all possible scenarios based on the assets available and the environment being considered. This capability will also allow for users to search the generated scenarios for the best solution out of the possible alternatives. Without this capability or a way to automate this capability with inputs from MP, there is a limit to the types of analyses questions that can be answered with just the event traces generated by MP. In addition to this increased capability for the model, three additional recommendations can be made for improving the performance of the MP Analyzer. The first two are linked to the firebird.nps.edu server timeouts that were observed when running the SAR model at the scopes of two and higher. A solution should be considered to allow the MP Analyzer prototype to better serve larger models over the internet, or improvements to the modeling methodology could be developed to reduce the weight of the model and the resulting traces. The second is to incorporate better graphical visualizations into MP to allow for the better capture of the precedence relationships in a more visually appealing manner and without the requirement for manual manipulation of the event traces.

Even with the limitations to the modeling tools, the question of whether or not unmanned vehicles can be useful for a SAR mission has been partially answered by the Innoslate model. The results of the Innoslate model showed that the UAV could be a very useful search tool that may be capable of shortening mission times; however due to the current lack of rescue capability, the UAV would have to be paired with another type of system that was recovery capable in order for the SAR mission to be completed successfully. The USV alternative is capable of conducting rescue operations; however due to limitation on transit speed, it is not a suitable choice for searches conducted at far-range distances. The USV alternative could not be utilized for these missions without a way to compensate for the late arrival, either by delivery by a faster mode of transport or timing the arrival to support PID rescue not the search. These results show that unmanned

systems will be able to positively augment the performance of conventional platforms: manned helicopters, U.S. Navy or USCG vessels, for a SAR Mission, but in order to prove this with modeling, the additional capabilities discussed will need to be incorporated into the tools. Until then, neither modeling approach can presently provide the necessary information to fully answer the analysis of alternatives question.

B. FUTURE WORK

In addition to the improvements previously suggested for both modeling tools, the models from this and Hunt's thesis (2015) will be merged to create an integrated SOS model that will be ready for integration into the Lab Manual for the NPS SE4150 System Architecture and Design class as the DRM and example.

For Innoslate, the ability to model the SOS is limited by the lack of concurrent and asynchronous actions and interactions between the various assets performing the mission being modeled. If a way to perform concurrent/asynchronous actions was added into the decision structure library or better methodological employment of existing constructs it would allow for a better SOS modeling capability. Additionally, the ability to provide the model with more definitive decision points would also be helpful. Similar to the improvements being suggested for MP, if a capability was added to provide the model with the information on each system in a way to allow for the logic of the model to decide which SAR Asset should execute which part of the system actions (search or rescue in this thesis), that would reduce the likelihood that unneeded constraints and human bias is skewing the results of the model or AOA.

As previously mentioned, the ability to provide the MP model with the characteristics/attributes of the agents/roots/assets would be of significant benefit the users of MP because this would allow for a better way to integrate the actual system performance prediction into the model. The ability to provide the model with actual performance parameters for the systems being modeled, or even mission parameters like AOR related information: weather, travel distance, and search area size, could potentially allow for the model to make decisions on how to best utilize the assets available. The MP model could answer questions on how to optimize the mission, or feed the MP generated

event traces into a tool designed for this type of optimization analysis, since operations can be conducted concurrently determining how to allocate the available resources to provide the largest coverage area for the search over the full AOR, and potentially answering many other operational questions. While automatic OPSIT generation for the given architecture is valuable in its own right, the ability to include performance requirements and system specifics will allow for the development of far more thorough analyses of alternatives.

APPENDIX A. FUNCTION PARAMETERS FOR ALTERNATIVES

SEE FOLLOWING PAGE

Table 7. Function parameters for the Helicopter and UAV alternatives (from Hunt 2015; from COMNAVAIR 2012; from Sikorski 2012; from COMNAVAIR n.d.).

Description	UC.1 Helicopter				UC.2 UAV			
	Distribution	Mean μ , min	STD Dev. σ , min	Lambda λ	Distribution	Mean μ , min	STD Dev. σ , min	Lambda λ
Send Distress Signal	Exp	2.00		0.5	Exp	2.00		0.5
Pass mission information	Exp	3.03		0.33	Exp	3.03		0.33
Relay mission information	Exp	1.00		1	Exp	1.00		1
Confirm receipt of mission information	Exp	5.00		0.2	Exp	5.00		0.2
Depart from base	Normal	30.00	5		Normal	20.00	5	
Proceed to mission area (Near Shore, 10 nm)	Normal	10.00	5		Normal	7.06	5	
Proceed to mission area (Med Distance, 35 nm)	Normal	17.50	5		Normal	24.71	10	
Proceed to mission area (Long Range, 200 nm)	Normal	100.00	15		Normal	141.18	15	
Attempt contact with PID	Exp	0.50		2	Exp	0.50		2
Do not respond to call	Exp	5.00		0.2	Exp	5.00		0.2
Assess environmental conditions	Exp	0.07		15	Exp	0.07		15
Provide environmental conditions	Exp	0.10		10	Exp	0.10		10
Provide search plan	Exp	0.20		5	Exp	0.20		5
Acknowledge search plan	Exp	5.00		0.2	Exp	5.00		0.2
Communicate search plan and responsibilities	Exp	0.50		2	Exp	0.50		2
Confirm search plan and responsibilities	Exp	2.00		0.5	Exp	2.00		0.5
Conduct search plan	Normal	60.00	10		Normal	60.00	10	
Scan environment for signs of PID	Exp	0.07		15	Exp	2.00		0.5

Description	UC.1 Helicopter				UC.2 UAV			
	Distribution	Mean μ , min	STD Dev. σ , min	Lambda λ	Distribution	Mean μ , min	STD Dev. σ , min	Lambda λ
Provide object of interest	Exp	5.00		0.2	Exp	5.00		0.2
Spot object of interest	Exp	3.03		0.33	Exp	3.03		0.33
Identify self as PID	Exp	2.00		0.5	Exp	2.00		0.5
Able to conduct rescue?	Value	YES			Value	NO		
Maneuver to rescue PID	Exp	0.10		10	Exp	5.00		0.2
No Rescue	Exp	0.50		2	Exp	0.50		2
Remain present for rescue	Exp	5.00		0.2	Exp	5.00		0.2
Await rescue instructions from OSC	Exp	5.00		0.2	Exp	5.00		0.2
Rescued or Waiting	Value	0.00			Value	0.00		
Notify OSC of PID location and situation	Exp	2.00		0.5	Exp	2.00		0.5
Return to Base (Near Shore, 10nm)	Normal	5.00	1.5		Normal	7.06	5	
Return to Base (Med Distance, 35nm)	Normal	17.50	5		Normal	24.71	10	
Return to Base (Long Range, 200nm)	Normal	100.00	15		Normal	141.18	20	
Relay survivor location and situation	Exp	2.00		0.5	Exp	2.00		0.5
Receive SITREP update	Exp	5.00		0.2	Exp	5.00		0.2

Table 8. Function parameters for the UUV and USV alternatives (from Virginia Tech 2011).

Description	UC.3 UUV				UC.4 USV			
	Distribution	Mean μ , min	STD Dev. σ , min	Lambda λ	Distribution	Mean μ , min	STD Dev. σ , min	Lambda λ
Send Distress Signal	Exp	2.00		0.5	Exp	2.00		0.5
Pass mission information	Exp	3.03		0.33	Exp	3.03		0.33
Relay mission information	Exp	1.00		1	Exp	1.00		1
Confirm receipt of mission information	Exp	5.00		0.2	Exp	5.00		0.2
Depart from base	Normal	20.00	10		Normal	20.00	10	
Proceed to mission area (Near Shore, 10 nm)	Normal	40.00	10		Normal	20.00	5	
Proceed to mission area (Med Distance, 35 nm)	Normal	140.00	15		Normal	70.00	15	
Proceed to mission area (Long Range, 200 nm)	Normal	800.00	30		Normal	400.00	20	
Attempt contact with PID	Exp	0.50		2	Exp	0.50		2
Do not respond to call	Exp	5.00		0.2	Exp	5.00		0.2
Assess environmental conditions	Exp	0.07		15	Exp	0.07		15
Provide environmental conditions	Exp	0.10		10	Exp	0.10		10
Provide search plan	Exp	0.20		5	Exp	0.20		5
Acknowledge search plan	Exp	5.00		0.2	Exp	5.00		0.2
Communicate search plan and responsibilities	Exp	0.50		2	Exp	0.50		2
Confirm search plan and responsibilities	Exp	2.00		0.5	Exp	2.00		0.5
Conduct search plan	Normal	60.00	10		Normal	60.00	10	
Scan environment for signs of PID	Exp	20.00		0.05	Exp	5.00		0.2
Provide object of interest	Exp	5.00		0.2	Exp	5.00		0.2
Spot object of interest	Exp	3.03		0.33	Exp	3.03		0.33

Description	UC.3 UUV				UC.4 USV			
	Distribution	Mean μ , min	STD Dev. σ , min	Lambda λ	Distribution	Mean μ , min	STD Dev. σ , min	Lambda λ
Identify self as PID	Exp	2.00		0.5	Exp	2.00		0.5
Able to conduct rescue?	Value	<i>NO</i>			Value	<i>YES</i>		
Maneuver to rescue PID	Exp	15.00		0.0667	Exp	5.00		0.2
No Rescue	Exp	0.50		2	Exp	0.50		2
Remain present for rescue	Exp	5.00		0.2	Exp	5.00		0.2
Await rescue instructions from OSC	Exp	5.00		0.2	Exp	5.00		0.2
Rescued or Waiting	Value	0.00			Value	0.00		
Notify OSC of PID location and situation	Exp	2.00		0.5	Exp	2.00		0.5
Return to Base (Near Shore, 10nm)	Normal	40.00	10		Normal	30.00	5	
Return to Base (Med Distance, 35nm)	Normal	140.00	15		Normal	105.00	15	
Return to Base (Long Range, 200nm)	Normal	800.00	30		Normal	600.00	30	
Relay survivor location and situation	Exp	2.00		0.5	Exp	2.00		0.5
Receive SITREP update	Exp	5.00		0.2	Exp	5.00		0.2

THIS PAGE INTENTIONALLY LEFT BLANK.

APPENDIX B. MONTEREY PHOENIX SAR SOS MODEL CODE

```
/* Actors */

SCHEMA WideRangeSearch

ROOT Command_and_Control: ( Perform_C2_normal_operations |
                             Initiate_SAR_mission );

Initiate_SAR_mission: Receive_distress_signal
                      Pass_mission_information
                      Acknowledge_search_plan
                      [ Receive_SITREP_update ]
                      Receive_final_SITREP;

ROOT On_Scene_Commander: ( Perform_OSC_normal_operations |
                             Lead_SAR_mission );

Lead_SAR_mission: Receive_mission_information
                  Depart_from_base
                  Relay_mission_information
                  Attempt_contact_with_PID
                  OSC_assesses_environmental_conditions
                  Provide_search_plan
                  Communicate_search_plan_and_responsibilities
                  OSC_scans_for_signs_of_PID
                  (* Receive_updates_for_OSC *)
                  [ Receive_PID_location_and_situation
                    Send_PID_Rescue_Instructions
                    Relay_survivor_location_and_situation ]
                  Send_Mission_FINEX_Notice
                  Provide_final_SITREP
                  Return_to_base;

ROOT PID: ( Is_not_in_distress | Is_in_distress );

Is_in_distress: Send_distress_signal
                [Identify_self_as_PID
                 Receive_PID_Rescue_Instructions
                 Remain_present_for_rescue];

ROOT Physical_Environment: ( + Provide_environmental_conditions +
                              );

Provide_environmental_conditions: [
OSC_assesses_environmental_conditions ]
                                  [ OSC_scans_for_signs_of_PID
                                  ]
                                  (* Provide_object_of_interest
```



```

        ( Indicate_not_related_to_SAR |
          Indicate_wreckage |
          Identify_self_as_PID ) *);

ROOT SAR_Assets: ( Perform_SAR_Assets_normal_operations | Participate_in_SAR_mission );

Participate_in_SAR_mission: Proceed_to_mission_area
                             Confirm_receipt_of_mission_information
                             Confirm_search_plan_and_responsibilities
                             ( + SAR_Assets_scan_for_signs_of_PID + )
                             ( Mission_Complete );

SAR_Assets_scan_for_signs_of_PID:
  ( Spot_object_of_interest Assess_object_of_interest |
    Keep_scanning );

Assess_object_of_interest:
  ( ID_object_as_not_SAR_related Provide_updates_to_OSC |
    ID_object_as_wreckage Provide_updates_to_OSC | ID_object_as_PID );

ID_object_as_PID: Notify_OSC_of_PID_location_and_situation
                  Maneuver_to_rescue_PID;

Mission_Complete: Receive_Mission_FINEX_Notice
                  Return_to_Base;

/* Interactions */

COORDINATE $a: Send_distress_signal FROM PID,
            $b: Receive_distress_signal FROM Command_and_Control
            DO ADD $a PRECEDES $b; OD;

COORDINATE $a: Pass_mission_information FROM Command_and_Control,
            $b: Receive_mission_information FROM On_Scene_Commander

```

```

DO ADD $a PRECEDES $b; OD;

COORDINATE $a: Relay_mission_information FROM On_Scene_Commander,
           $b: Proceed_to_mission_area FROM SAR_Assets
DO ADD $a PRECEDES $b; OD;

COORDINATE $a: Confirm_receipt_of_mission_information FROM SAR_Assets,
           $b: Attempt_contact_with_PID FROM On_Scene_Commander
DO ADD $a PRECEDES $b; OD;

On_Scene_Commander, Physical_Environment SHARE ALL OSC_assesses_environmental_conditions;

COORDINATE $a: Provide_search_plan FROM On_Scene_Commander,
           $b: Acknowledge_search_plan FROM Command_and_Control
DO ADD $a PRECEDES $b; OD;

COORDINATE $a: Acknowledge_search_plan FROM Command_and_Control,
           $b: Communicate_search_plan_and_responsibilities FROM On_Scene_Commander
DO ADD $a PRECEDES $b; OD;

COORDINATE $a: Communicate_search_plan_and_responsibilities FROM On_Scene_Commander,
           $b: Confirm_search_plan_and_responsibilities FROM SAR_Assets
DO ADD $a PRECEDES $b; OD;

On_Scene_Commander, Physical_Environment SHARE ALL OSC_scans_for_signs_of_PID;

COORDINATE $a: Provide_object_of_interest FROM Physical_Environment,
           $b: Spot_object_of_interest FROM SAR_Assets
DO ADD $a PRECEDES $b; OD;

COORDINATE $a: Indicate_not_related_to_SAR FROM Physical_Environment,
           $b: ID_object_as_not_SAR_related FROM SAR_Assets
DO ADD $a PRECEDES $b; OD;

COORDINATE $a: Indicate_wreckage FROM Physical_Environment,
           $b: ID_object_as_wreckage FROM SAR_Assets

```

DO ADD \$a PRECEDES \$b; OD;

PID, Physical_Environment SHARE ALL Identify_self_as_PID;

COORDINATE	\$a: <u>Identify_self_as_PID</u> \$b: <u>ID_object_as_PID</u> DO ADD \$a PRECEDES \$b; OD;	FROM PID , FROM SAR_Assets
COORDINATE	\$a: <u>Maneuver_to_rescue_PID</u> \$b: <u>Remain_present_for_rescue</u> DO ADD \$a PRECEDES \$b; OD;	FROM SAR_Assets , FROM PID
COORDINATE	\$a: <u>Provide_updates_to_OSC</u> \$b: <u>Receive_updates_for_OSC</u> DO ADD \$a PRECEDES \$b; OD;	FROM SAR_Assets , FROM On_Scene_Commander
COORDINATE	\$a: <u>Notify_OSC_of_PID_location_and_situation</u> \$b: <u>Receive_PID_location_and_situation</u> DO ADD \$a PRECEDES \$b; OD;	FROM SAR_Assets , FROM On_Scene_Commander
COORDINATE	\$a: <u>Relay_survivor_location_and_situation</u> \$b: <u>Receive_SITREP_update</u> DO ADD \$a PRECEDES \$b; OD;	FROM On_Scene_Commander , FROM Command_and_Control
COORDINATE	\$a: <u>Provide_final_SITREP</u> \$b: <u>Receive_final_SITREP</u> DO ADD \$a PRECEDES \$b; OD;	FROM On_Scene_Commander , FROM Command_and_Control
COORDINATE	\$a: <u>Send_Mission_FINEX_Notice</u> \$b: <u>Receive_Mission_FINEX_Notice</u> DO ADD \$a PRECEDES \$b; OD;	FROM On_Scene_Commander , FROM Command_and_Control
COORDINATE	\$a: <u>Send_PID_Rescue_Instructions</u> \$b: <u>Receive_PID_Rescue_Instructions</u> DO ADD \$a PRECEDES \$b; OD;	FROM On_Scene_Commander , FROM PID

THIS PAGE INTENTIONALLY LEFT BLANK

APPENDIX C. INNOSLATE SIMULATION RESULTS

Run #	UC.1 Helo			UC.2 UAV			UC.3 UUV			UC.4 USV		
	Near	Med	Far	Near	Med	Far	Near	Med	Far	Near	Med	Far
1	2.557	3.662	5.420	2.522	2.254	5.979	3.053	6.353	27.688	3.060	5.020	18.366
2	2.403	2.596	6.353	2.072	2.687	6.147	3.778	7.371	29.839	3.215	5.962	18.217
3	2.293	2.830	5.019	1.956	2.307	7.038	3.209	6.876	28.919	3.462	5.658	17.631
4	2.229	2.628	4.896	2.125	3.635	6.506	3.026	7.089	30.300	3.454	4.729	18.956
5	2.156	2.668	5.217	1.919	2.865	6.479	2.808	7.007	28.283	3.154	4.911	17.916
6	2.131	2.293	5.187	2.471	2.893	6.325	3.648	6.254	28.743	3.454	4.939	18.591
7	2.734	2.764	5.758	2.025	2.556	6.857	3.790	7.043	29.168	2.784	5.076	19.160
8	2.616	2.904	6.262	2.694	2.829	6.001	2.972	7.541	30.058	3.026	3.888	18.253
9	2.397	2.439	5.512	1.951	2.870	6.855	2.522	6.794	27.198	3.100	4.611	18.505
10	2.579	2.503	5.440	2.429	2.300	6.723	3.325	7.059	28.963	2.888	4.586	17.801
11	2.631	2.524	5.162	2.274	2.797	5.975	3.444	5.727	27.821	2.958	4.764	19.399
12	2.875	2.813	5.899	2.383	2.758	6.409	3.045	7.148	29.310	2.955	5.349	18.818
13	2.684	2.392	6.174	2.636	2.529	6.046	3.737	6.982	27.975	3.044	4.958	18.569
14	3.427	2.279	5.707	2.496	2.504	6.455	3.040	6.765	30.330	3.116	5.326	18.515
15	2.413	2.757	5.629	1.896	3.447	6.294	3.871	6.957	29.491	3.056	4.800	19.101
16	2.518	3.269	5.809	2.112	2.574	6.271	4.984	6.347	30.293	3.103	5.064	18.451
17	2.668	2.822	5.433	3.033	3.218	6.120	3.210	6.929	29.208	3.003	5.457	18.622
18	2.784	2.756	5.786	1.964	2.566	7.202	2.814	6.576	28.946	3.299	4.894	18.858
19	2.449	2.851	5.390	2.230	2.470	6.814	3.499	6.174	28.376	3.182	4.696	19.185
20	2.220	2.479	5.208	2.195	3.173	6.156	3.924	6.179	28.766	2.956	4.192	18.415
21	2.418	2.997	5.333	2.447	2.881	6.198	4.431	6.041	28.024	3.247	4.191	19.316
22	2.583	2.793	4.827	1.856	2.888	7.639	3.896	6.075	28.782	3.130	5.214	19.345
23	2.097	3.513	5.638	2.350	2.340	5.983	3.089	7.139	28.129	2.972	4.325	18.347
24	2.657	3.166	5.384	1.753	2.479	6.699	3.574	6.623	28.956	5.997	5.569	18.568

Run #	UC.1 Helo			UC.2 UAV			UC.3 UUV			UC.4 USV		
	Near	Med	Far	Near	Med	Far	Near	Med	Far	Near	Med	Far
25	2.589	2.791	5.543	2.405	2.752	5.897	4.616	7.279	27.823	2.968	5.158	18.191
26	3.615	2.633	5.611	2.288	2.986	6.253	5.897	7.275	28.688	3.167	4.774	18.579
27	2.588	2.726	5.211	2.063	2.563	6.183	2.775	6.401	27.738	2.812	4.565	19.039
28	2.466	2.989	4.679	2.046	2.408	6.168	3.534	6.530	27.778	3.096	4.884	18.911
29	2.766	2.710	5.520	2.401	2.814	5.293	3.905	7.489	30.004	2.939	4.948	18.592
30	2.878	2.353	6.239	2.249	2.724	7.027	3.309	7.217	27.541	3.076	5.226	18.616
31	2.346	3.008	6.103	2.741	3.676	6.735	2.634	7.064	30.206	2.843	5.179	18.263
32	2.379	2.954	5.872	2.218	3.174	6.904	2.805	7.111	28.205	2.739	4.119	18.263
33	2.948	3.085	5.426	3.015	3.181	5.969	5.998	7.632	28.178	2.864	4.690	17.710
34	2.766	3.047	5.378	2.172	3.115	7.094	3.689	6.964	28.257	3.069	4.867	18.230
35	1.744	2.789	5.491	2.363	2.469	6.625	3.836	5.745	3.055	2.713	4.992	18.009
36	2.906	2.417	5.487	1.896	2.873	6.659	2.977	6.635	28.870	3.234	4.323	20.168
37	2.590	2.994	5.127	2.389	3.244	7.452	4.119	7.461	29.070	2.933	4.341	19.106
38	2.046	2.609	5.199	2.571	2.422	5.303	3.520	6.470	28.203	2.906	5.056	18.907
39	2.576	2.981	6.097	2.094	2.989	6.322	3.815	6.741	28.898	2.764	4.955	18.295
40	2.464	2.323	5.636	2.174	2.789	7.318	3.124	6.256	29.138	3.112	5.612	19.685
41	2.576	2.370	5.312	2.842	2.480	6.411	3.608	8.492	29.328	2.932	4.182	18.493
42	2.410	2.193	5.844	2.341	2.424	6.204	2.654	7.448	29.443	3.514	5.038	19.979
43	2.392	2.754	4.894	2.105	2.948	5.894	3.044	7.421	28.013	3.660	5.426	19.137
44	2.465	2.686	5.459	2.164	2.874	6.542	4.008	7.058	29.799	3.083	5.396	18.860
45	2.429	2.557	6.083	2.520	3.343	6.199	4.110	6.940	30.625	3.655	4.470	18.860
46	2.218	2.571	5.616	2.136	3.324	6.583	4.589	7.749	26.985	3.881	5.043	18.650
47	2.594	2.219	5.545	2.346	2.363	5.946	3.215	6.162	27.858	2.808	4.861	18.472
48	2.482	3.689	5.054	2.581	3.132	7.038	3.478	6.969	27.801	2.831	4.254	18.443
49	2.222	2.793	5.820	2.690	2.338	6.592	3.316	6.384	27.946	2.762	4.916	17.716
50	2.313	2.987	5.003	2.293	3.202	5.951	3.392	6.482	28.143	2.984	4.773	18.613

Run #	UC.1 Helo			UC.2 UAV			UC.3 UUV			UC.4 USV		
	Near	Med	Far	Near	Med	Far	Near	Med	Far	Near	Med	Far
MEAN	2.526	2.758	5.514	2.309	2.808	6.435	3.573	6.848	28.223	3.139	4.885	18.654
STDDEV	0.315	0.337	0.394	0.292	0.362	0.494	0.729	0.548	3.740	0.484	0.442	0.542
STDDEV, Min	18.887	20.229	23.632	17.519	21.731	29.647	43.734	32.877	224.412	29.034	26.515	32.548

APPENDIX D. MONTEREY PHOENIX MODEL INITIAL EVENT TRACES

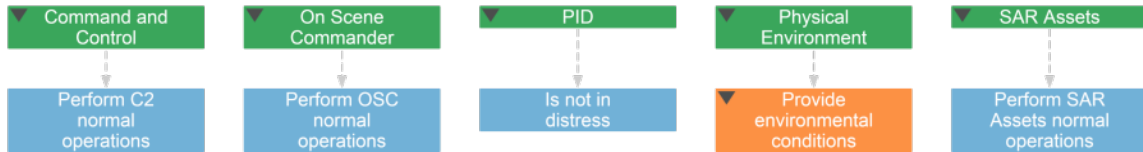


Figure 27. Event Trace 1.

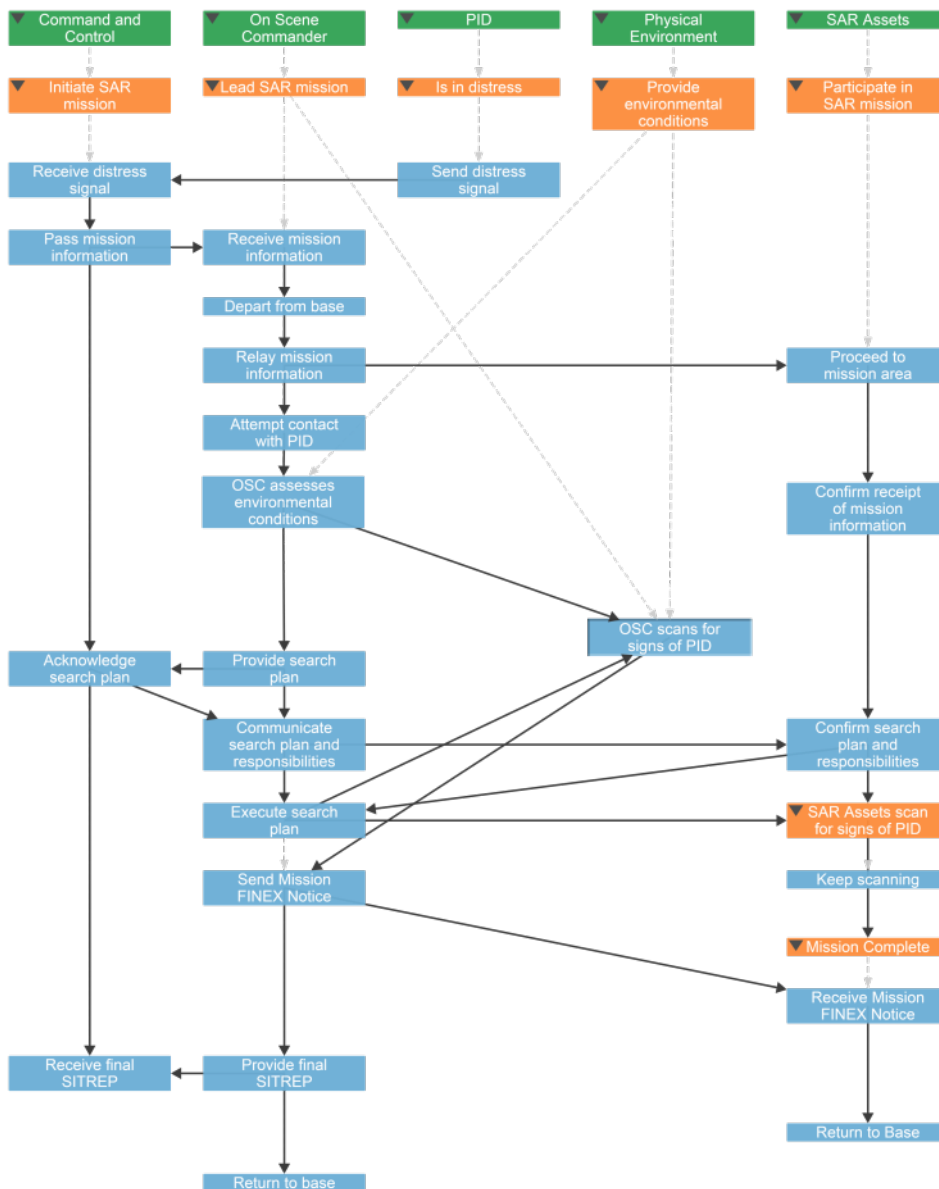


Figure 28. Event Trace 2.

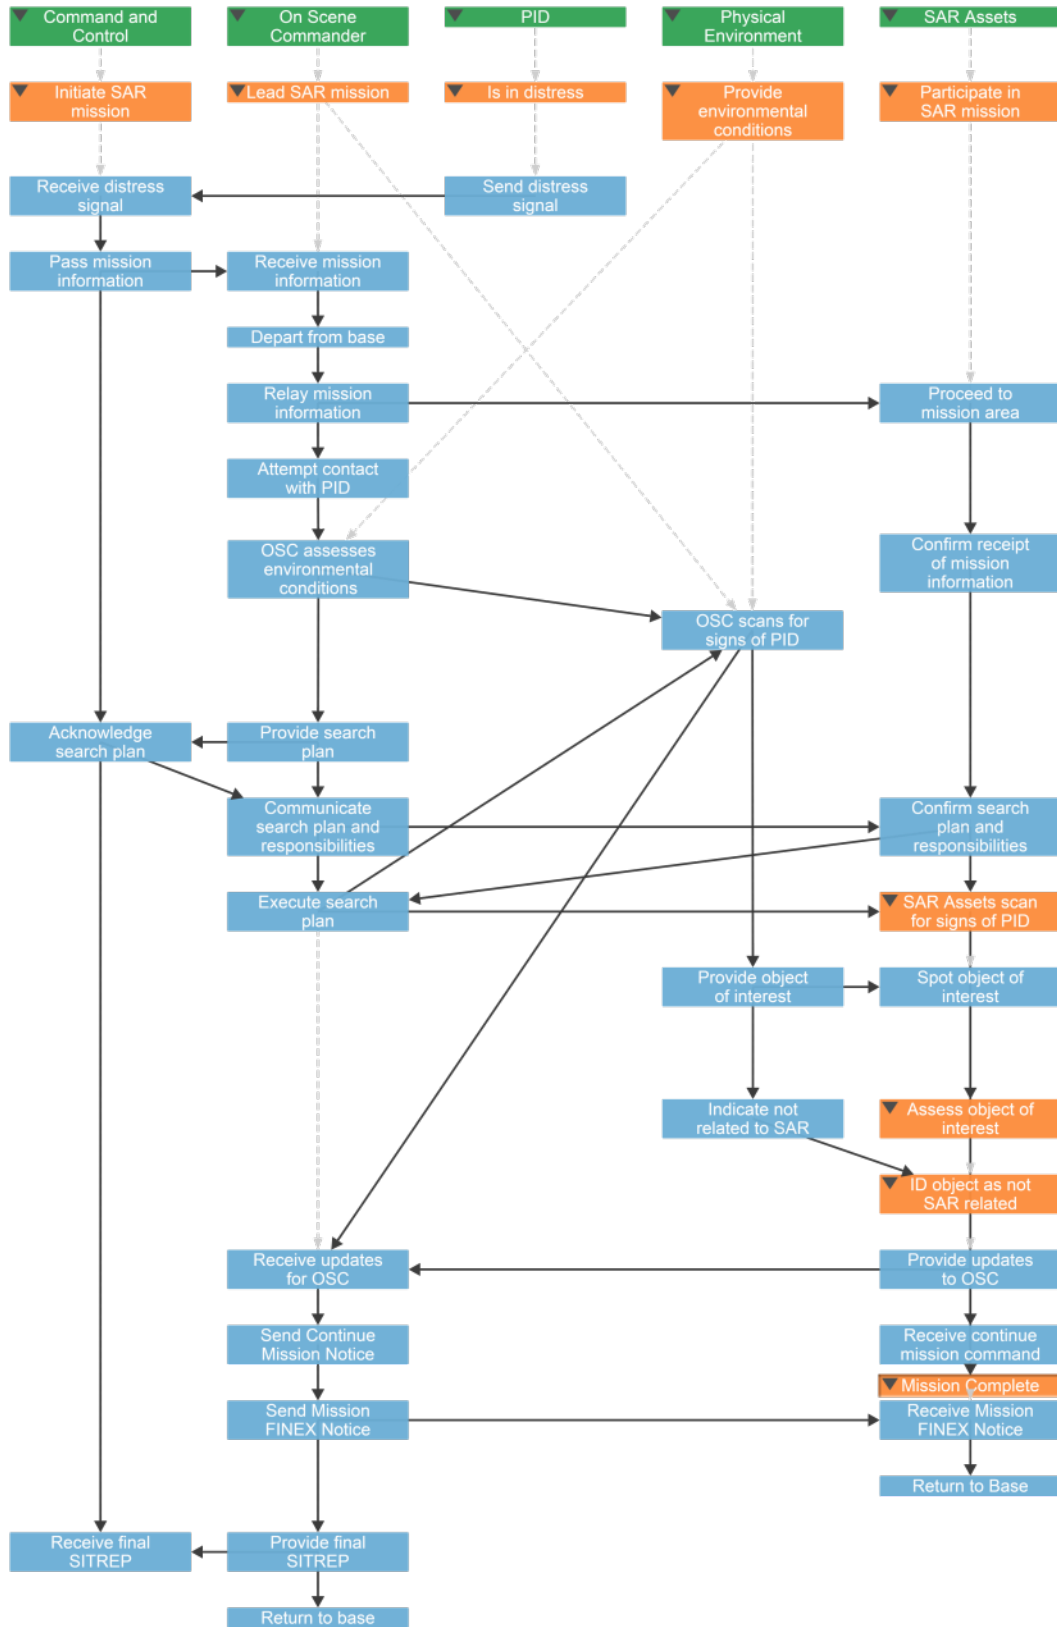


Figure 29. Event Trace 3.

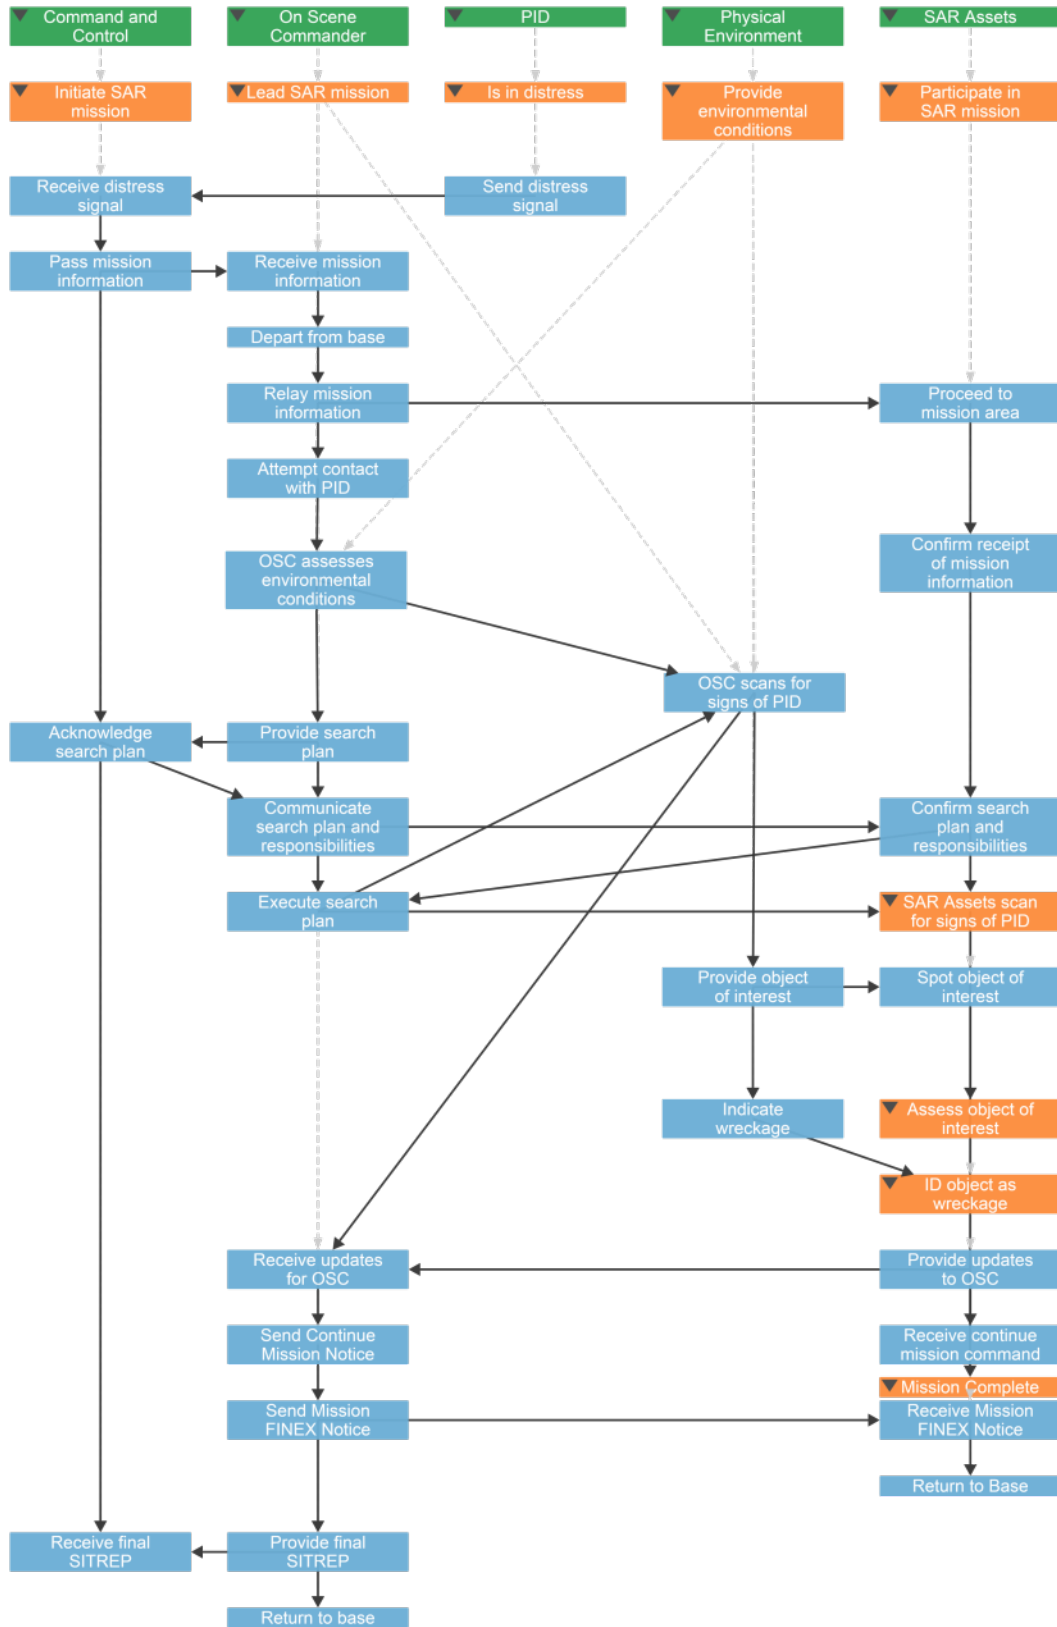


Figure 30. Event Trace 4.

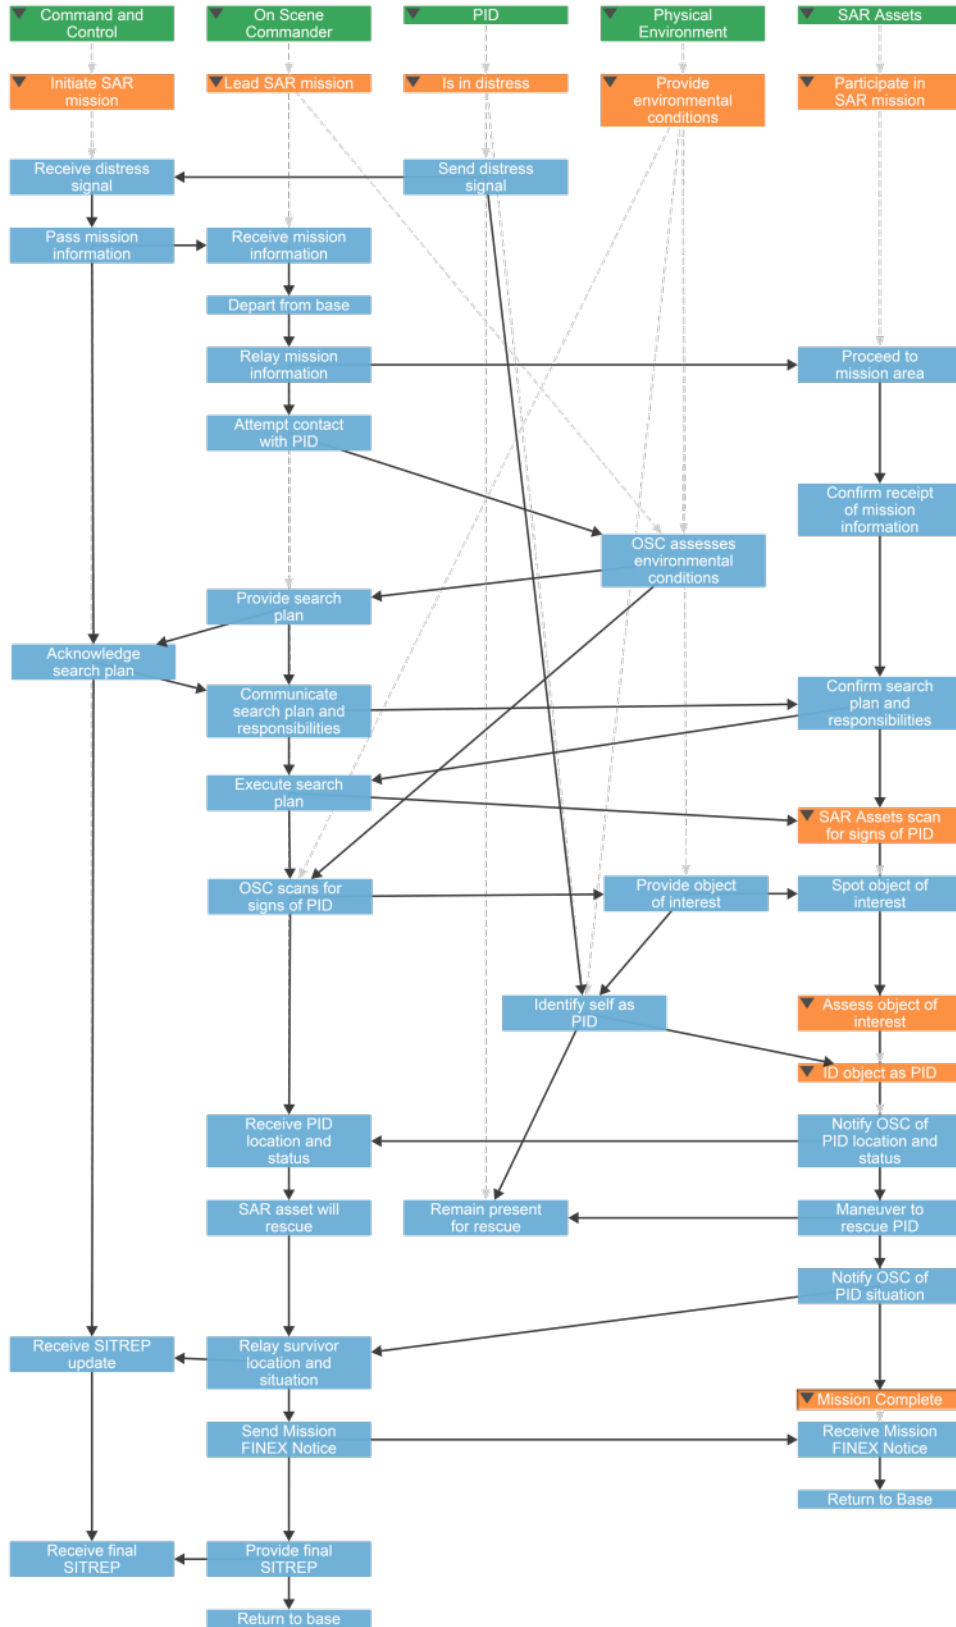


Figure 31. Event Trace 5.

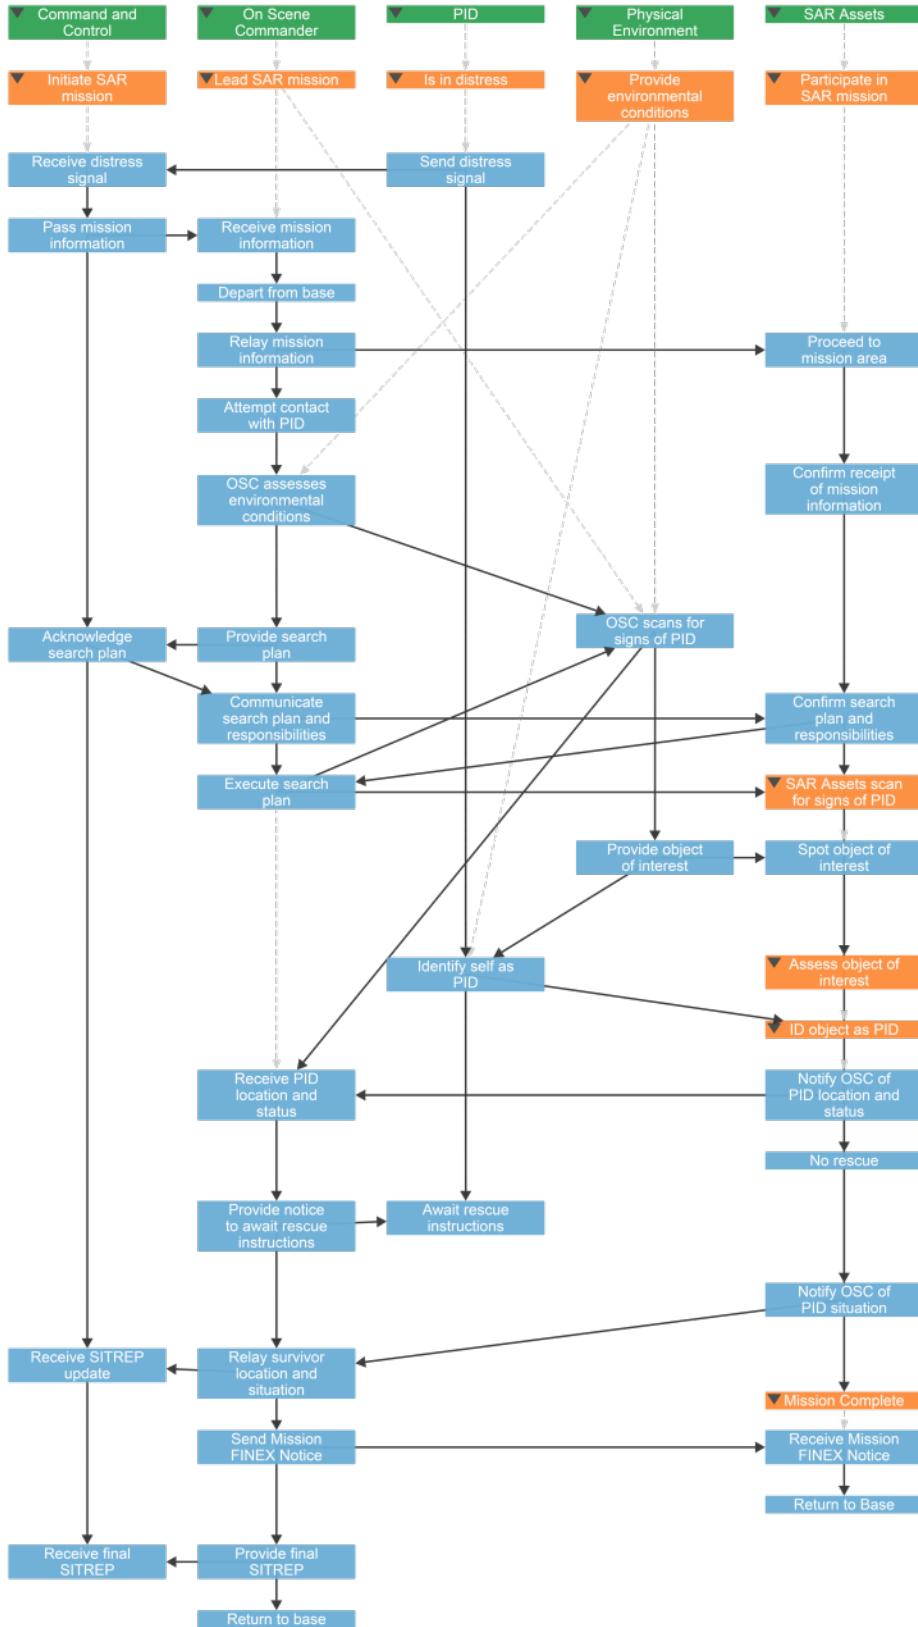


Figure 32. Event Trace 6.

THIS PAGE INTENTIONALLY LEFT BLANK

**APPENDIX E. MONTEREY PHOENIX SAR SOS REVISED MODEL
CODE WITH SEARCH LOOP IMPLEMENTED**

SEE FOLLOWING PAGE

```

/* Actors */

SCHEMA WideRangeSearch

ROOT Command_and_Control: ( Perform_C2_normal_operations |
                             Initiate_SAR_mission );

Initiate_SAR_mission: Receive_distress_signal
                       Pass_mission_information
                       Acknowledge_search_plan
                       [ Receive_SITREP_update ]
                       Receive_final_SITREP;

ROOT On_Scene_Commander: ( Perform_OSC_normal_operations |
                             Lead_SAR_mission );

Lead_SAR_mission:      Receive_mission_information
                       Depart_from_base
                       Relay_mission_information
                       Attempt_contact_with_PID
                       OSC_assesses_environmental_conditions
                       Provide_search_plan
                       Communicate_search_plan_and_responsibilities
                       Execute_search_plan
                       OSC_scans_for_signs_of_PID
                       (* Receive_updates_for_OSC Send_Continue_Mission_Notice *)
                       [ Receive_PID_location_and_status
                         ( SAR_asset_will_rescue | Provide_notice_to_await_rescue_instructions )
                         Relay_survivor_location_and_situation ]
                       Send_Mission_FINEX_Notice
                       Provide_final_SITREP
                       Return_to_base;

/* interactions */

COORDINATE $a: Pass_mission_information FROM Command_and_Control,

```

```

    $b:  Receive_mission_information    FROM  On_Scene_Commander
        DO ADD $a PRECEDES $b; OD;

COORDINATE  $a:  Provide_search_plan          FROM  On_Scene_Commander,
    $b:  Acknowledge_search_plan          FROM  Command_and_Control
        DO ADD $a PRECEDES $b; OD;

COORDINATE  $a:  Acknowledge_search_plan          FROM  Command_and_Control,
    $b:  Communicate_search_plan_and_responsibilities  FROM  On_Scene_Commander
        DO ADD $a PRECEDES $b; OD;

COORDINATE  $a:  Relay_survivor_location_and_situation    FROM  On_Scene_Commander,
    $b:  Receive_SITREP_update                          FROM  Command_and_Control
        DO ADD $a PRECEDES $b; OD;

COORDINATE  $a:  Provide_final_SITREP          FROM  On_Scene_Commander,
    $b:  Receive_final_SITREP                FROM  Command_and_Control
        DO ADD $a PRECEDES $b; OD;

/*-----*/

ROOT  PID:      (  Is_not_in_distress  |
                  Is_in_distress  );

Is_in_distress:  Send_distress_signal
[Identify_self_as_PID
  (  Remain_present_for_rescue  |  Await_rescue_instructions  ) ] ;

/* interactions */

COORDINATE  $a:  Send_distress_signal          FROM  PID,
    $b:  Receive_distress_signal          FROM  Command_and_Control
        DO ADD $a PRECEDES $b; OD;

COORDINATE  $a:  Provide_notice_to_await_rescue_instructions    FROM  On_Scene_Commander,
    $b:  Await_rescue_instructions          FROM  PID

```



```

DO ADD $a PRECEDES $b; OD;

/*-----*/

ROOT SAR_Assets: ( Perform_SAR_Assets_normal_operations |
                  Participate_in_SAR_mission );

Participate_in_SAR_mission: Confirm_receipt_of_mission_information
                             Depart_from_base
                             Proceed_to_mission_area
                             Confirm_search_plan_and_responsibilities
                             SAR_Assets_scan_for_signs_of_PID
                             Mission_Complete;

SAR_Assets_scan_for_signs_of_PID:
( * Keep_scanning
  [Spot_object_of_interest
   Assess_object_of_interest
   ( ID_object_as_not_SAR_related | ID_object_as_wreckage )
   Provide_updates_to_OSC
   Receive_continue_mission_command] *)
[ Spot_object_of_interest
  Assess_object_of_interest
  ID_object_as_PID ];

ID_object_as_PID: Notify_OSC_of_PID_location_and_status
                  ( Maneuver_to_rescue_PID | No_Rescue )
                  Notify_OSC_of_PID_situation;

Mission_Complete: Receive_Mission_FINEX_Notice
                  Return_to_Base;

/* interactions */

COORDINATE $a: Relay_mission_information FROM On_Scene_Commander,
           $b: Confirm_receipt_of_mission_information FROM SAR_Assets

```

```

DO ADD $a PRECEDES $b; OD;

COORDINATE $a: Communicate_search_plan_and_responsibilities FROM On_Scene_Commander,
           $b: Confirm_search_plan_and_responsibilities FROM SAR_Assets
           DO ADD $a PRECEDES $b; OD;

COORDINATE $a: Confirm_search_plan_and_responsibilities FROM SAR_Assets,
           $b: Execute_search_plan FROM On_Scene_Commander
           DO ADD $a PRECEDES $b; OD;

COORDINATE $a: Execute_search_plan FROM On_Scene_Commander,
           $b: SAR_Assets_scan_for_signs_of_PID FROM SAR_Assets
           DO ADD $a PRECEDES $b; OD;

COORDINATE $a: Identify_self_as_PID FROM PID,
           $b: ID_object_as_PID FROM SAR_Assets
           DO ADD $a PRECEDES $b; OD;

COORDINATE $a: Maneuver_to_rescue_PID FROM SAR_Assets,
           $b: Remain_present_for_rescue FROM PID
           DO ADD $a PRECEDES $b; OD;

COORDINATE $a: Provide_updates_to_OSC FROM SAR_Assets,
           $b: Receive_updates_for_OSC FROM On_Scene_Commander
           DO ADD $a PRECEDES $b; OD;

COORDINATE $a: Notify_OSC_of_PID_location_and_status FROM SAR_Assets,
           $b: Receive_PID_location_and_status FROM On_Scene_Commander
           DO ADD $a PRECEDES $b; OD;

COORDINATE $a: Notify_OSC_of_PID_situation FROM SAR_Assets,
           $b: Relay_survivor_location_and_situation FROM On_Scene_Commander
           DO ADD $a PRECEDES $b; OD;

COORDINATE $a: Send_Mission_FINEX_Notice FROM On_Scene_Commander,
           $b: Receive_Mission_FINEX_Notice FROM SAR_Assets

```

```

DO ADD $a PRECEDES $b; OD;

/*-----*/

ROOT Physical_Environment: ( * Provide_environmental_conditions * );

Provide_environmental_conditions:      OSC_assesses_environmental_conditions
                                       OSC_scans_for_signs_of_PID
                                       (* Provide_object_of_interest
                                       ( Indicate_not_related_to_SAR |
                                       Indicate_wreckage |
                                       Identify_self_as_PID ) *);

/* Interactions */

On_Scene_Commander, Physical_Environment SHARE ALL OSC_scans_for_signs_of_PID;

COORDINATE   $a: Provide_object_of_interest           FROM Physical_Environment,
              $b: Spot_object_of_interest            FROM SAR_Assets
              DO ADD $a PRECEDES $b; OD;

COORDINATE   $a: Indicate_not_related_to_SAR         FROM Physical_Environment,
              $b: ID_object_as_not_SAR_related       FROM SAR_Assets
              DO ADD $a PRECEDES $b; OD;

COORDINATE   $a: Indicate_wreckage FROM Physical_Environment,
              $b: ID_object_as_wreckage FROM SAR_Assets
              DO ADD $a PRECEDES $b; OD;

PID, Physical_Environment SHARE ALL Identify_self_as_PID;

On_Scene_Commander, Physical_Environment SHARE ALL OSC_assesses_environmental_conditions;

```

**APPENDIX F. MONTEREY PHOENIX SAR SOS MODEL CODE
WITH SEARCH LOOP AND SAR_ASSETS SET IMPLEMENTED**

SEE FOLLOWING PAGE

```

/* Actors */
SCHEMA WideRangeSearch

ROOT Command_and_Control: ( Perform_C2_normal_operations | Initiate_SAR_mission );

Initiate_SAR_mission: Receive_distress_signal
                      Pass_mission_information
                      Acknowledge_search_plan
                      [ Receive_SITREP_update ]
                      Receive_final_SITREP;

ROOT On_Scene_Commander: ( Perform_OSC_normal_operations | Lead_SAR_mission );

Lead_SAR_mission:    Receive_mission_information
                    Depart_from_base
                    Relay_mission_information
                    Attempt_contact_with_PID
                    OSC_assesses_environmental_conditions
                    Provide_search_plan
                    Communicate_search_plan_and_responsibilities
                    Execute_search_plan
                    OSC_scans_for_signs_of_PID
                    (* Receive_updates_for_OSC Send_Continue_Mission_Notice *)
                    [ Receive_PID_location_and_status
                      ( SAR_asset_will_rescue | Provide_notice_to_await_rescue_instructions )
                      Relay_survivor_location_and_situation ]
                    Send_Mission_FINEX_Notice
                    Provide_final_SITREP
                    Return_to_base;

/* interactions */
COORDINATE $a: Pass_mission_information FROM Command_and_Control,
           $b: Receive_mission_information FROM On_Scene_Commander
           DO ADD $a PRECEDES $b; OD;

COORDINATE $a: Provide_search_plan FROM On_Scene_Commander,

```

```

    $b: Acknowledge_search_plan FROM Command_and_Control
        DO ADD $a PRECEDES $b; OD;

COORDINATE $a: Acknowledge_search_plan FROM Command_and_Control,
    $b: Communicate_search_plan_and_responsibilities FROM On_Scene_Commander
        DO ADD $a PRECEDES $b; OD;

COORDINATE $a: Relay_survivor_location_and_situation FROM On_Scene_Commander,
    $b: Receive_SITREP_update FROM Command_and_Control
        DO ADD $a PRECEDES $b; OD;

COORDINATE $a: Provide_final_SITREP FROM On_Scene_Commander,
    $b: Receive_final_SITREP FROM Command_and_Control
        DO ADD $a PRECEDES $b; OD;

/*-----*/
ROOT PID: ( Is_not_in_distress | Is_in_distress );

Is_in_distress: Send_distress_signal
    [Identify_self_as_PID ( Remain_present_for_rescue | Await_rescue_instructions )
    ] ;

/* interactions */
COORDINATE $a: Send_distress_signal FROM PID,
    $b: Receive_distress_signal FROM Command_and_Control
        DO ADD $a PRECEDES $b; OD;

COORDINATE $a: Provide_notice_to_await_rescue_instructions FROM On_Scene_Commander,
    $b: Await_rescue_instructions FROM PID
        DO ADD $a PRECEDES $b; OD;

/*-----*/
ROOT SAR_Assets: { + <1..2> SAR_Asset +};

SAR_Asset: ( Perform_SAR_Assets_normal_operations | Participate_in_SAR_mission );

```

```

Participate_in_SAR_mission: Confirm_receipt_of_mission_information
                             Depart_from_base
                             Proceed_to_mission_area
                             Confirm_search_plan_and_responsibilities
                             SAR_Assets_scan_for_signs_of_PID
                             Mission_Complete;

```

```

SAR_Assets_scan_for_signs_of_PID:
( * Keep_scanning
  [Spot_object_of_interest
   Assess_object_of_interest
   ( ID_object_as_not_SAR_related | ID_object_as_wreckage )
   Provide_updates_to_OSC
   Receive_continue_mission_command] *)
[ Spot_object_of_interest
  Assess_object_of_interest
  ID_object_as_PID ];

```

```

ID_object_as_PID:  Notify_OSC_of_PID_location_and_status
                   ( Maneuver_to_rescue_PID | No_Rescue )
                   Notify_OSC_of_PID_situation;

```

```

Mission_Complete: Receive_Mission_FINEX_Notice
                   Return_to_Base;

```

```

/* interactions */

```

```

COORDINATE <!!> $a: SAR_Asset FROM SAR_Assets
DO COORDINATE $p: Relay_mission_information FROM
On_Scene_Commander,
$b: Confirm_receipt_of_mission_information FROM $a
DO ADD $p PRECEDES $b; OD;
OD;

```

```

COORDINATE <!!> $a: SAR_Asset FROM SAR_Assets
DO COORDINATE $p: Communicate_search_plan_and_responsibilities FROM
On_Scene_Commander,

```

```

                                $b: Confirm_search_plan_and_responsibilities      FROM $a
DO ADD $p PRECEDES $b; OD;
OD;

COORDINATE <!!>  $a:  SAR_Asset                                          FROM SAR_Assets
DO COORDINATE   $p:  Confirm_search_plan_and_responsibilities      FROM $a,
                $b:  Execute_search_plan                          FROM
                On_Scene_Commander
DO ADD $p PRECEDES $b; OD;
OD;

COORDINATE <!!>  $a:  SAR_Asset                                          FROM SAR_Assets
DO COORDINATE   $p:  Execute_search_plan                          FROM
                On_Scene_Commander,
                $b:  SAR_Assets_scan_for_signs_of_PID FROM $a
DO ADD $p PRECEDES $b; OD;
OD;

COORDINATE <!!>  $a:  SAR_Asset                                          FROM SAR_Assets
DO COORDINATE <!!>  $p:  Identify_self_as_PID                      FROM PID,
                $b:  ID_object_as_PID                            FROM $a
DO ADD $p PRECEDES $b; OD;

COORDINATE <!!>  $a:  SAR_Asset                                          FROM SAR_Assets
DO COORDINATE <!!>  $p:  Maneuver_to_rescue_PID                    FROM $a,
                $b:  Remain_present_for_rescue                  FROM PID
DO ADD $p PRECEDES $b; OD;
OD;

COORDINATE <!!>  $a:  SAR_Asset                                          FROM SAR_Assets
DO COORDINATE   $p:  Provide_updates_to_OSC                      FROM $a,
                $b:  Receive_updates_for_OSC                    FROM
                On_Scene_Commander
DO ADD $p PRECEDES $b; OD;
OD;

```



```

COORDINATE <!!> $a: SAR_Asset FROM SAR_Assets
DO COORDINATE <!!> $p: Notify_OSC_of_PID_location_and_status FROM $a,
                   $b: Receive_PID_location_and_status FROM
                   On_Scene_Commander
DO ADD $p PRECEDES $b; OD;
OD;

COORDINATE <!!> $a: SAR_Asset FROM SAR_Assets
DO COORDINATE <!!> $p: Notify_OSC_of_PID_situation FROM $a,
                   $b: Relay_survivor_location_and_situation FROM
                   On_Scene_Commander
DO ADD $p PRECEDES $b; OD;
OD;

COORDINATE <!!> $a: SAR_Asset FROM SAR_Assets
DO COORDINATE $p: Send_Mission_FINEX_Notice FROM
On_Scene_Commander,
                   $b: Receive_Mission_FINEX_Notice FROM SAR_Assets
DO ADD $p PRECEDES $b; OD;
OD;

/*-----*/

ROOT Physical_Environment: ( * Provide_environmental_conditions * );

Provide_environmental_conditions: OSC_assesses_environmental_conditions
OSC_scans_for_signs_of_PID
(* Provide_object_of_interest
( Indicate_not_related_to_SAR |
Indicate_wreckage |
Identify_self_as_PID ) *);

/* Interactions */

On_Scene_Commander, Physical_Environment SHARE ALL OSC_scans_for_signs_of_PID;

COORDINATE <!!> $a: SAR_Asset FROM SAR_Assets

```

```

DO COORDINATE <!!> $p: Provide_object_of_interest FROM
Physical_Environment,
$b: Spot_object_of_interest FROM $a
DO ADD $p PRECEDES $b; OD;
OD;

COORDINATE <!!> $a: SAR_Asset FROM SAR_Assets
DO COORDINATE <!!> $p: Indicate_not_related_to_SAR FROM
Physical_Environment,
$b: ID_object_as_not_SAR_related FROM $a
DO ADD $p PRECEDES $b; OD;
OD;

COORDINATE <!!> $a: SAR_Asset FROM SAR_Assets
DO COORDINATE <!!> $p: Indicate_wreckage FROM
Physical_Environment,
$b: ID_object_as_wreckage FROM $a
DO ADD $p PRECEDES $b; OD;
OD;

PID, Physical_Environment SHARE ALL Identify_self_as_PID;

On_Scene_Commander, Physical_Environment SHARE ALL OSC_assesses_environmental_conditions;

```

THIS PAGE INTENTIONALLY LEFT BLANK

LIST OF REFERENCES

- 5G International Inc. n.d. "2015 Model Line Up of Robotic Unmanned Surface Vessels (USVs)." Accessed 01 July 2015. <http://www.5gmarine.com/unmanned-surface-vessels-usvs/>.
- Acheson, Paulette, Cihan Dagli, and Nik Kilicay-Ergin. 2013. "Model Based Systems Engineering for System of Systems Using Agent-based Modeling." *Procedia Computer Science* 16, *Conference on Systems Engineering Research (CSER'13)*, edited by Christian J.J. Paredis, Carlee Bishop, and Douglas Bodner, 11–19, March 19–22. Atlanta, GA: Elsevier B.V.
<https://dx.doi.org/doi:10.1016/j.procs.2013.01.002>.
- Auguston, Mikhail. 2014. *Behavior Models for Software Architecture* (NPS-CS-14-003). Monterey, CA: Naval Postgraduate School. <http://hdl.handle.net/10945/43851>.
- Baker, Loyd, Paul Clemente, Bob Cohen, Larry Permenter, Byron Purves, and Pete Salmon. 1996. "Model Driven System Design Working Group: Foundational Concepts for Model Driven System Design." *INCOSE International Symposium Vol. 6*, 1179–1185. <http://dx.doi.org/10.1002/j.2334-5837.1996.tb02139.x>
- Buede, Dennis. M. 2009. *The Engineering Design of Systems: Models and Methods*. 2nd ed. Hoboken, NJ: John Wiley & Sons.
- Commander, Naval Air Systems Command. 2012. "MH-60S Seahawk." NAVAIR Aircraft and Weapons.
<http://www.navair.navy.mil/index.cfm?fuseaction=home.displayPlatform&key=A1C74EA2-3917-416B-81C6-9CEB537C0594>.
- Commander, Naval Air Systems Command. N. n.d. "MQ-8 Fire Scout." NAVAIR Aircraft and Weapons. Accessed 01 July 2015.
<http://www.navair.navy.mil/index.cfm?fuseaction=home.display&key=8250AFB-A-DF2B-4999-9EF3-0B0E46144D03>.
- Contag, George, Kristin Giammarco, Spencer Hunt, C. Johnston, K. Laing, K. Mastran, J. Pabon, N. Quijano, E. Rosenberg, M. Stevens, K. Tomasino, J. Tonello and Clifford Whitcomb. 2015. "A Lab Manual for Systems Architecting and Analysis." Chapter 1 and Chapter 2. Naval Postgraduate School, Department of Systems Engineering.
<https://wiki.nps.edu/pages/viewpage.action?pageId=437387266>,
<https://wiki.nps.edu/pages/viewpage.action?pageId=437387276>.
- Dam, Steven H. 2015. "Decision Points in Model-Based Systems Engineering (MBSE) Analyses" (SPEC Innovations Whitepaper). Manassas, VA: SPEC Innovations.
<http://www.specinnovations.com/resources/decision-points-in-mbse-analyses>.

- Friedenthal, Sanford, Mark Sampson. 2015. "Model-based Systems Engineering (MBSE) Initiative Overview." INCOSE. Accessed 12 July 2015.
http://www.omgwiki.org/MBSE/lib/exe/fetch.php?media=wiki:mbse_initiative_overview-111209.pptx.
- Hunt, Spencer S. 2015. "Model-Based Systems Engineering in the Execution of Search and Rescue Operations." Master's thesis, Naval Postgraduate School.
- INCOSE Technical Operations. 2007. *Systems Engineering Vision 2020*, version 2.03 (INCOSE-TP-2004-004-02). Seattle, WA: International Council on Systems Engineering,
 Seattle.http://oldsite.incose.org/ProductsPubs/pdf/SEVision2020_20071003_v2_03.pdf.
- Giammarco, Kristin M. 2014a. *SE4150 System Architecture and Design Lab Manual*. Monterey, CA. Naval Postgraduate School.
- . 2014b. "A formal method for assessing architecture model and design maturity using domain-independent patterns." *Procedia Computer Science* 28, *Conference on Systems Engineering Research (CSER 2014)*. Edited by Azad M. Madni, Barry Boehm, Michael Sievers, and Marlee Wheaton, 555–564, March 21–22. Redondo Beach, CA: Elsevier B.V.
- . 2015a. "A Lab Manual for Systems Architecting and Analysis." Naval Postgraduate School, Department of Systems Engineering.
<https://wiki.nps.edu/display/MP/Lab+Manual>
- . 2015b. "A Lab Manual for Systems Architecting and Analysis." Chapter 4. Naval Postgraduate School, Department of Systems Engineering.
<https://wiki.nps.edu/display/MP/Chapter+4%3A+Creating+Abstract+Functional+Views+of+the+Architecture>.
- . 2015b. "Systems Architecting with Model Based Systems Engineering (MBSE) Automation." Lecture, Engineering Management and Systems Engineering Graduate Seminar, Missouri University of Science and Technology, 22 April 2015.
http://msmovie.mst.edu/public/misc/EMSE/Spring_2015/EMSE_Grad_Seminar_042215-Giammarco.wmv
- Giammarco, Kristin M. and Mikhail Auguston. 2013. "Well, you didn't say *not* to! A Formal Systems Engineering Approach to Teaching an Unruly Architecture Good Behavior." *Procedia Computer Science* 20, *Complex Adaptive Systems, Publication 3*. edited by Cihan H. Dagli, 277–282. Baltimore, MD: Elsevier B.V.
<http://dx.doi.org/doi:10.1016/j.procs.2013.09.273>.
- Giammarco, Kristin M., Monica Farah-Stapleton, and Mikhail Auguston. 2014. "Behavioral Modeling of System Architectures." Lecture, INCOSE System of

- Systems Working Group Webinar, 17 January 2014.
<https://wiki.nps.edu/display/MP/MP+Presentation>.
- Giammarco, Kristin, Clifford Whitcomb, Spencer Hunt. 2015. *An Instructional Design Reference Mission for Search and Rescue Operations*. Naval Postgraduate School, Department of Systems Engineering. Monterey, CA.
- Kable. 2015. "Fleet-Class Common Unmanned Surface Vessel (CUSV), United States of America." [naval-technology.com](http://www.naval-technology.com/projects/fleet-class-common-unmanned-surface-vessel-cusv/). <http://www.naval-technology.com/projects/fleet-class-common-unmanned-surface-vessel-cusv/>.
- Kongsberg. 2015, "REMUS AUVs: 100, 600, 6000." Hydroid, Inc.
[http://www.km.kongsberg.com/ks/web/nokbg0397.nsf/AllWeb/82C0D4915CE64FEAC1257A23002BECC5/\\$file/REMUS-brochure.pdf?OpenElement](http://www.km.kongsberg.com/ks/web/nokbg0397.nsf/AllWeb/82C0D4915CE64FEAC1257A23002BECC5/$file/REMUS-brochure.pdf?OpenElement).
- Kustere. 2006. "Functional Flow Block Diagram (FFBD)." Graffletopia LLC. 2015.
<https://assets.graffletopia.com/production/canvases/146/1983/1400528269/original.png?1400528269>.
- Lavagno, Luciano, Grant Martin, Bran Selic. 2003. *UML for Real: Design of Embedded Real-Time Systems*. Dordrecht, Netherlands: Kluwer Academic Publishers.
<http://site.ebrary.com.libproxy.nps.edu/lib/nps/reader.action?ppg=5&docID=10069615&tm=1437511359486>.
- Murray, Julia. 2012. *Model Based Systems Engineering (MBSE) Media Study*.
<http://www.syse.pdx.edu/program/portfolios/julia/MBSE.pdf>.
- Northrup Grumman Corporation. 2015. "Fire Scout."
http://www.northropgrumman.com/Capabilities/FireScout/PublishingImages/pageImages/ai_Fire_Scout2.jpg, http://www.northropgrumman.com/Photos/pgS_MQ-10027_001.jpg.
- naval-technology.com. 2015. "Fleet-Class Common Unmanned Surface Vessel (CUSV), United States of America." Kable. <http://www.naval-technology.com/projects/fleet-class-common-unmanned-surface-vessel-cusv/>.
- Object Management Group. 2015a. "OMG Model Driven Architecture." Object Management Group, Inc. <http://www.omg.org/mda/>.
- . 2015b. "Introduction To OMG's Unified Modeling Language® (UML®)." Object Management Group, Inc.
http://www.omg.org/gettingstarted/what_is_uml.htm.
- . 2015c. "OMG Systems Modeling Language." Object Management Group, Inc.
<http://www.omgsysml.org>.

- Orgren, Igmarr. 2000. "On Principles for Model-Based Systems Engineering." *System Engineering* 3, no. 1 (2000): 38–49. [http://dx.doi.org/10.1002/\(SICI\)1520-6858\(2000\)3:1<38::AID-SYS3>3.0.CO;2-B](http://dx.doi.org/10.1002/(SICI)1520-6858(2000)3:1<38::AID-SYS3>3.0.CO;2-B).
- Paulo, Eugene. 2015. "Modeling and Simulation (M&S) Overview: Important Terms and Concepts, DOD M&S Governance." Lecture, SE4930 Model-Based Systems Engineering, Naval Postgraduate School, 17 July 2015. <https://cle.nps.edu/xsl-portal/site/31ea0541-378a-4bf1-a44b-c005c43bb2b8/page/c7ff2e49-30f9-4205-a666-ff1e0601836e>.
- Ramos, Anna L., Jose V. Ferreira, and Jaume Barceló. 2011. "Model-Based Systems Engineering: An Emerging Approach for Modern Systems." *IEEE Transactions on Systems, Man, and Cybernetics, Part C: Applications and Reviews* 42, no.1 (January 2012): 101–111. <http://dx.doi.org/10.1109/TSMCC.2011.2106495>.
- Sikorski Aircraft Corporation. "MH-60S." 2012. Lockheed Martin. <http://www.mh-60.com/mh-60s/>, <http://www.mh-60.com/wp-content/gallery/mh-60s/368867.jpg>, <http://www.mh-60.com/wp-content/gallery/mh-60s/130418-n-gc639-354.jpg>.
- Spec Innovations. 2015. *Innoslate*. Accessed 14 July 2015. <https://www.innoslate.com/>.
- United States, 2007. *National Search and Rescue Plan of the United States*. United States Coast Guard Office of Search and Rescue (CG-SAR). 2015. [http://www.uscg.mil/hq/cg5/cg534/manuals/Natl_SAR_Plan\(2007\).pdf](http://www.uscg.mil/hq/cg5/cg534/manuals/Natl_SAR_Plan(2007).pdf).
- Vaneman, Warren K. and Roger D. Jaskot. 2013. "A Criteria-Based Framework for Establishing System of Systems Governance." *Proceedings of the 7th Annual Systems Conference (SysCon)*, IEEE International: Orlando, FL (April): 491 - 496. <http://dx.doi.org/10.1109/SysCon.2013.6549927>.
- Virginia Tech. 2011. "High Speed AUV." Autonomous Systems and Controls Laboratory, Virginia Tech Department of Electrical and Computer Engineering. <http://www.ascl.ece.vt.edu/HSAUV.html>.
- White, Stephanie, Mack Alford, Brian McCay, David Oliver, Colin Tully, Julian Holtzman, C. Stephen Kuehl, David Owens and Allan Willey. 1992. "Trends in Computer-Based Systems Engineering." *Proceedings of the IEEE 1992 International Conference on Computer Design: VLSI in Computers and Processors*, IEEE International: Orlando, FL (October): 12–15. <http://dx.doi.org/10.1109/ICCD.1992.276215>.

INITIAL DISTRIBUTION LIST

1. Defense Technical Information Center
Ft. Belvoir, Virginia
2. Dudley Knox Library
Naval Postgraduate School
Monterey, California