



Citation for published version:

Martinez Hernandez, U, Rubio-Solis, A & Prescott, TJ 2020, 'Learning from sensory predictions for autonomous and adaptive exploration of object shape with a tactile robot', *Neurocomputing*, vol. 328, pp. 127-139.
<https://doi.org/10.1016/j.neucom.2019.10.114>

DOI:

[10.1016/j.neucom.2019.10.114](https://doi.org/10.1016/j.neucom.2019.10.114)

Publication date:

2020

Document Version

Peer reviewed version

[Link to publication](#)

Publisher Rights

CC BY-NC-ND

University of Bath

Alternative formats

If you require this document in an alternative format, please contact:
openaccess@bath.ac.uk

General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

Take down policy

If you believe that this document breaches copyright please contact us providing details, and we will remove access to the work immediately and investigate your claim.

Learning from sensory predictions for autonomous and adaptive exploration of object shape with a tactile robot

Uriel Martinez-Hernandez^{a,*}, Adrian Rubio-Solis^b, Tony J. Prescott^c

^a*Department of Electronic and Electrical Engineering, Faculty of Engineering and Design, University of Bath, Bath, BA2 7AY, UK.*

^b*Department of Automatic Control and Systems Engineering, University of Sheffield, Sheffield, S1 3JD, UK.*

^c*Department of Computer Science and the Sheffield Robotics Laboratory, University of Sheffield, Sheffield, S1 4DP, UK.*

Abstract

Humans use information from sensory predictions, together with current observations, for the optimal exploration and recognition of their surrounding environment. In this work, two novel adaptive perception strategies are proposed for accurate and fast exploration of object shape with a robotic tactile sensor. These strategies called 1) adaptive weighted prior and 2) adaptive weighted posterior, combine tactile sensory predictions and current sensor observations to autonomously adapt the accuracy and speed of active Bayesian perception in object exploration tasks. Sensory predictions, obtained from a forward model, use a novel Predicted Information Gain method. These predictions are used by the tactile robot to analyse ‘what would have happened’ if certain decisions ‘would have been made’ at previous decision times. The accuracy of predictions is evaluated and controlled by a confidence parameter, to ensure that the adaptive perception strategies rely more on predictions when they are accurate, and more on current sensory observations otherwise. This work is systematically validated with the recognition of angle and position data extracted from the exploration of object shape, using a biomimetic tactile sensor and a robotic platform. The exploration task implements the contour following procedure used by humans to extract object shape with the sense of touch. The validation process is performed with the adaptive weighted strategies and active perception alone. The adaptive approach achieved higher angle accuracy (2.8 deg) over active perception (5 deg). The position accuracy was similar for all perception methods (0.18 mm). The reaction time or number of tactile contacts, needed by the tactile robot to make a decision, was improved by the adaptive perception (1 tap) over active perception (5 taps). The results show that the adaptive perception strategies can enable future robots to adapt their performance, while improving the trade-off between accuracy and reaction time, for tactile exploration, interaction and recognition tasks.

Keywords: active and adaptive perception, sensorimotor control, autonomous tactile exploration, Bayesian inference

1. Introduction

Active perception in robotics is related to control strategies for intelligent acquisition of data to reduce uncertainty, which involves processes such as reasoning, decision-making, prediction and control [1]. Active perception in tactile sensing is employed by humans to explore and enhance the perceptual information from an object, through intelligent movements of their hands and fingers [2, 3]. Recent advances in technology have permitted to develop a large variety of biomimetic, small and reliable tactile sensors for robotic platforms with different morphologies. This evolution in sensor technology has enlarged the repertoire of research on active touch with robots that mimic human touch sensing [4].

*Corresponding author

9 Artificial tactile sensors, as in the human sense of touch, provide noisy measurements, which create uncertainty
10 for making decisions and actions [5]. Humans overcome uncertainty by actively sensing their environment, but also
11 by integrating various streams of information simultaneously. In robotics, Bayesian frameworks offer a systematic
12 approach to deal with uncertainty, while defining how to combine multiple information sources to make optimal
13 decisions [6].

14 In this work, first an active perception method is presented, using a Bayesian formulation, to make a tactile robot
15 able to decide where to move next during the exploration of an object. The active perception approach allows the robot
16 to explore better object locations that improve perception accuracy. Previous works have shown that active Bayesian
17 perception, controlling the robot movements by tactile feedback, offers a suitable method for autonomous exploration
18 with various stimuli and sensors [7, 8]. Active perception is validated using a touch sensor to perform the contour
19 following exploratory procedure, commonly employed by humans to extract object shape. In this exploration task
20 the touch sensor makes decisions about where to move next, collecting better information while following the object
21 shape. Second, two strategies called ‘adaptive weighted prior’ and ‘adaptive weighted posterior’, are proposed. These
22 strategies enhance the active perception method by an adaptive integration of tactile sensory predictions and current
23 observations from the exploration task. Preliminary results and initial analysis of the adaptive weighted prior strategy
24 were presented in [9]. Both strategies use a novel adaptive Bayesian perception method, which extend our previous
25 work on sensorimotor control, where learning and control parameters were manually predefined, together with a set
26 of assumptions used for combination of information sources [10]. The adaptive weighted prior and posterior strategies
27 implement a forward model for estimation of sensory predictions, using a Predicted Information Gain (PIG) approach.
28 This predictive approach analyses ‘what would have happened’ if a certain decision ‘would have been made’ at previous
29 decision times. Additionally, these adaptive strategies evaluate the accuracy of their own sensory predictions to adapt
30 the combination of information sources, assigning a larger weight to the more reliable source. This approach ensures
31 the optimal performance and trade-off between perception accuracy and reaction time for robot exploration tasks. The
32 adaptive approach is systematically validated with the recognition of angle and position classes from a contour following
33 exploration task, commonly employed by humans for extraction of object shape. This experiment, implemented with
34 a biomimetic fingertip sensor and an exploratory robotic platform, allows the analysis and comparison of performance,
35 in recognition accuracy and reaction time, of the adaptive strategies and the active perception approach.

36 Overall, the results from all experiments show that the novel adaptive approach provides a high accuracy recognition
37 for angle (2.8 deg) and position (0.18 mm) classes, but also improves the reaction time (1 tap) of the decision-making
38 process. These values contrast with the results from active perception alone (5 deg, 0.18 mm and 5 taps). Furthermore,
39 the adaptive strategies show their capability to improve the trade-off between accuracy and reaction time during the
40 tactile object exploration procedure. These are important features for the development of robots capable of interacting
41 with humans and the surrounding environment, autonomously and safely.

42 The remainder of this article is organised as follows: Section 2 presents the related work on touch sensing and
43 perception. The robot platform, tactile sensor and methods employed are presented in Section 3. Experiments and
44 results are described in Section 4. Finally, discussion and conclusions are shown in Section 5 and Section 6, respectively.

45 2. Related work

46 Traditionally, image processing have been used for analysis and recognition with tactile data [11]. Predefined
47 sequences of tactile contacts and geometric moments were implemented with robotic grippers for object recognition [12,
48 13]. Tactile images and joint angles were employed, together with a five-fingered robotic hand, for shape and object
49 recognition using a fixed number of palpation and grasping movements [14]. Shape extraction and classification,
50 performed with a dexterous robot hand, used an approach based on tactile images and kurtosis [15]. Image processing
51 methods have also been implemented together with algorithms for classification such as Self-Organising Maps (SOM),
52 Artificial Neural Networks (ANN), Principal Component Analysis (PCA), Bag-of-Features models and Fuzzy Logic
53 methods [16, 17, 18, 19]. An advanced control framework for tactile exploration, allowed a robot arm to touch and
54 follow the shape of different objects, using a large planar sensor array, filters and geometrical moments [20]. All these
55 methods showed to be accurate, however, they are constrained by the sensor size, sensor geometry and the requirement
56 to get data from the whole sensor surface. Furthermore, the fixed and predefined sequence of tactile contacts used in
57 these works follows a passive perception approach, which limits the robot capability to explore better object locations
58 to improve perception.

59 Active perception overcomes the limitations of passive perception by making robots able to autonomously explore
60 better object locations to improve perception, as humans do [2, 21]. Tactile robotic platforms, with different mor-
61 phologies, have taken advantage from active perception to decide where to move next in exploration tasks [22, 23, 24].
62 Biomimetic fingertip sensors and robotic hands have been able to perform a variety of tactile tasks, such as contour
63 following, texture recognition, shape extraction and object recognition [25, 26, 27]. These works, based on proba-
64 bilistic frameworks and intrinsic motivation models, permitted the robot hands and fingers to autonomously explore,
65 accumulate evidence from the interaction with the environment, perceive and make decisions about the objects being
66 explored. Active exploration of surfaces has also been studied using touch attention mechanisms implemented with
67 Bayesian methods [28]. This touch attention approach was validated with the autonomous exploration of different
68 objects and materials. Other works have used Bayesian methods for exploration of object shape, extraction of local
69 properties, activity recognition and object localisation combining force and touch sensors [29, 30, 31]. Gaussian Pro-
70 cesses (GP), which are a probabilistic formulation, have been used for autonomous active exploration and recognition
71 of objects using biomimetic tactile sensors, force sensors and geometrical information [22, 32]. In general, probabilistic
72 approaches have demonstrated to be suitable for autonomous robotics, providing flexibility and robustness to deal
73 with sensor limitations, noise and uncertainty observed in the changing environment [7, 33, 34].

74 Normally, humans make decisions based on the combination of multiple streams of information –for instance,
75 predicted and current observations [35]. This combination of information and decision-making processes are crucial to
76 control human movements, performed by the central nervous system (CNS), and ensure accurate motor actions [36, 37].
77 Predicted and current sensor observations, employed for perception and sensorimotor control in [10], allowed a touch
78 sensor to improve its perception accuracy and reaction time during an exploration task. The parameters for prediction
79 of sensory observations were manually set, but also, the combination of information sources was manually controlled
80 using a predefined weighting parameter. Hierarchical multimodal perception showed that fusion of observations, from
81 multiple sensory inputs, was able to achieve better results over the use of individual perceptions [38]. Exploration and
82 learning in robotics have used predictive knowledge-based models of intrinsic motivation, based on the knowledge gained
83 over time and predictions from a learned forward model [27, 39, 40]. Forward models are essential to allow robotic

84 systems to perform autonomous decisions, based on the prediction of the effects from their motor actions [35, 41].
85 Prediction of sensory observations for combination with current measurements was studied in [9], where an initial
86 weight prior strategy was implemented, showing preliminary results in perception accuracy with a robotic sensor.
87 This approach was implemented with a forward model, based on the Predicted Information Gain (PIG) method [42],
88 during a tactile exploration task. Other works employed curiosity-driven models and Predicted Information Gain
89 (PIG) approaches to engage the robot to learn actions and estimate the expected information during an exploration
90 task [43, 44].

91 Previous works have shown that active perception, learning of actions and combination of streams of information
92 improve the robot performance. However, the individual use of these approaches do not maximise the trade-off between
93 accuracy and speed during a robotic task. In this work, a method to predict sensory observations for the adaptation
94 and control of an active tactile exploration is presented in Section 3. This method, based on a probabilistic formulation
95 and Predicted Information Gain method, learns a forward model to estimate sensory predictions and combine current
96 and predicted observations, which are used to adapt the performance of an active perception process. Thus, the
97 proposed adaptive perception approach allows the robot fingertip sensor to actively explore, adapting its decisions and
98 actions, but also to improve the trade-off between perception accuracy and speed, which are important aspects for the
99 development of autonomous and intelligent robots.

100 **3. Methods**

101 *3.1. Biomimetic tactile sensor*

102 A biomimetic fingertip sensor, which is part of the tactile sensory system of the iCub humanoid robot, is used for
103 this research work [45, 46]. This tactile sensory system provides the iCub humanoid robot with capabilities to explore
104 and interact with its environment [47, 48]. The biomimetic tactile sensor resembles the human fingertip with rounded
105 shape and dimensions of 14.5 mm long \times 13 mm wide, as shown in Figures 1A,B,C,D. The iCub fingertip sensor uses
106 an array of twelve tactile elements (taxels of 4 mm diameter each), build with a capacitive technology. The taxels cover
107 the inner core of the fingertip with a flexible printed circuit board (PCB). A 2 mm dielectric layer of silicone foam is
108 placed above the PCB. The flexible and conductive outer layer allows deformations of the surface of sensor, analogous
109 to those that occur with the human fingertip. Sensor measurements from the twelve taxels are read with a sampling
110 rate of 50 Hz and locally digitised with 8 bit resolution (0–255 values). These values are sent to a computer through
111 a CAN-bus for their subsequent processing.

112 The technology used in the iCub fingertip sensor resembles the mechanical and sensory structure of the human
113 fingertip, allowing the study of perception of pressure, curvature and edge orientation [23, 49, 50]. Interestingly, the
114 taxels in the fingertip sensor respond analogously to human mechanoreceptors to brief and sustained response from
115 tactile stimuli.

116 *3.2. Robotic platform*

117 An exploratory robotic platform was built to provide mobility to the fingertip sensor in x -, y - and z -axes. The robot
118 platform is composed of two robots: (1) a Cartesian robot arm (YAMAHA XY-x series) with 2-DoF that provides
119 mobility in the x - and y -axes, and (2) a Mindstorms NXT Lego robot with 1-DoF for sensor mobility along the z axis.

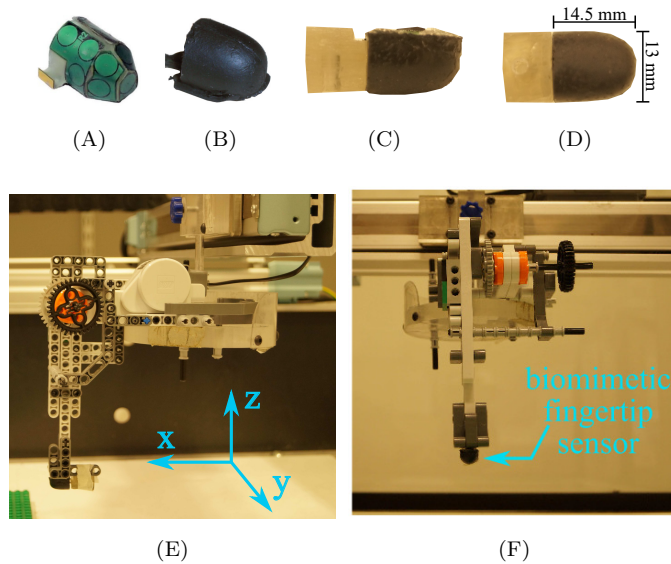


Figure 1: Tactile sensory system and exploratory robotic platform. (A) Flexible PCB and taxels of the iCub fingertip. (B) Fingertip sensor covered with dielectric silicon. (C) Lateral view of the sensor. (D) Dimensions of the biomimetic sensor. (E),(F) Robotic platform for tactile exploration in x -, y - and z -axes.

120 Both, the Cartesian and NXT robots are coupled in a proper manner to generate sensor movements in the x -, y - and
 121 z -axes.

122 The tactile sensor was mounted on the robotic platform for precise positioning movements in the x - and y -axes with
 123 an accuracy of $\approx 20\mu\text{m}$. Even though the reduced capabilities of the NXT robot, it allows to achieve movements along
 124 the z -axis. On the one hand, these robots allow the sensor to perform exploratory procedures. On the other hand,
 125 robot movements are controlled by tactile feedback provided by the biomimetic fingertip sensor. The sensor mounted
 126 on the exploratory platform is shown in Figures 1E,F. The available degrees of freedom of the robotic platform do not
 127 allow rotations along the z -axis of the tactile sensor. Therefore, the fingertip sensor keeps the same orientation during
 128 all the object exploration experiments.

129 In this work, we chose a tactile exploration procedure (EP) based on taps or palpation. This EP reduces the
 130 damage to the sensor that, in contrast, a sliding motion could deteriorate the outer conductive layer after several
 131 repetitions of the experiments. The selected EP also generates an alternative tactile exploration movement, useful for
 132 robotic systems that are not able to slide their sensors. Even though humans typically slide their fingertips during an
 133 exploration procedure, there are situations where they palpate for exploration of a sharp surface and diagnosis through
 134 medical inspection.

135 3.3. Data collection

136 For validation of the accuracy and speed of the active and adaptive tactile perception methods, multiple tactile
 137 datasets composed of angle and position classes were systematically collected and used for contour following exploration
 138 tasks. For tactile stimuli, the surface of a plastic object attached to a table was used. The data were collected with a
 139 palpating procedure over the object along its radius; starting from the flat surface of the object, then passing through
 140 the edge, and finishing on air as shown in Figure 2. Each tap or palpation, with a duration of 2 sec, yielded a dataset of
 141 12×100 pressure measurements (sampling frequency 50 Hz and 12 taxels). The exploration movements were performed

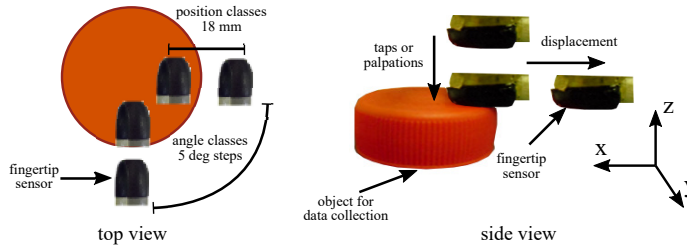


Figure 2: Stimulus used for data collection while tapping on the object along the z axis. Angle and position data are recorded with 5 deg and 0.2mm steps respectively. Two tactile datasets, composed of 72 angle and 18 position classes each, are collected for training and testing the proposed exploration methods.

142 along an 18mm distance with 0.2mm steps, generating a total of 90 taps for each edge orientation. Then, position
 143 classes were formed by grouping 5 taps per class, obtaining a total of 18 position classes of 1mm span each. Forming
 144 groups of 5 taps per class allow the sensor to be actively repositioned to collect more data and improve the accuracy
 145 for recognition of position classes. This approach for grouping the data from the taps performed by the fingertip
 146 sensor has been validated in a previous work on object exploration [10]. The data collection procedure was repeated
 147 at 5 deg orientation steps around the complete plastic object, which provided 72 angle classes. Finally, a large dataset
 148 composed of $72 \text{ angle} \times 18 \text{ position classes} = 1296$ classes was constructed. The complete process was repeated two
 149 times to collect one dataset for training and one dataset for testing. Examples of the data collected from the circular
 150 object, with the sensor orientated of 0 deg, 80 deg and 160 deg along 18mm are shown in Figure 3.

151 The data collected from the fingertip sensor are used for object exploration with a contour following procedure.
 152 For this task, the active perception method, described in Section 3.4, uses the sensor position and angle information
 153 relative to the object contour for the exploration task. First, position information is used for active repositioning of the
 154 sensor, perpendicularly to the object edge, to improve perception accuracy. Second, recognition of the sensor angle,
 155 relative to the object edge, is used to move the sensor to the next exploration position along the object contour. This
 156 active repositioning and recognition process ensures a successful accomplishment of the exploration task as shown in
 157 the experimental results in Section 4.

158 3.4. Active Bayesian perception

159 The intelligent control of sensor movements improves the performance in decision speed and perceptual accuracy
 160 of a robot exploration task. This process, known as active perception, implemented with a Bayesian formulation, has
 161 been validated with different stimuli and various robotic sensors. In this work, the Bayesian formulation uses the
 162 following notation:

- 163 • C , a finite set of perceptual classes with $N_{\text{pairs}} = |C|$. Each perceptual class c_n is composed by a (u_k, v_l) pair,
 164 where u_k with $k = 1, 2, \dots, K$ and v_l with $l = 1, 2, \dots, L$ are position and angle classes, respectively.
- 165 • z , sensor measurements from the biomimetic fingertip sensor.
- 166 • n , denotes a specific class from the set of N_{pairs} angles and position pairs.

167 The Bayesian formulation implements a recursive estimation of the posterior probabilities from the product of the

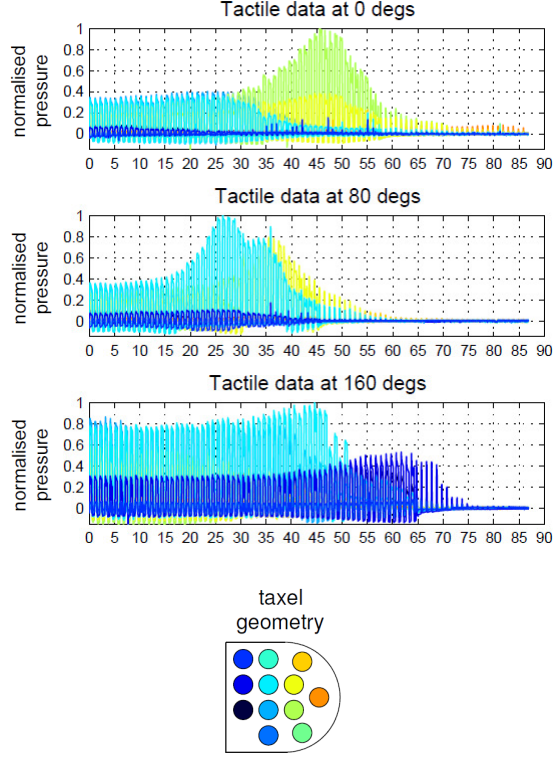


Figure 3: Sample of data collected with the biomimetic fingertip sensor. Datasets for orientation of the fingertip sensor at 0 deg, 80 deg and 160 deg along 18 mm (90 taps) over the plastic object used as stimuli. Normalised pressure measurements from activated taxels are shown by a coloured code.

168 prior probabilities and likelihoods, as follows:

$$P(c_n|z_{1:t}) = \frac{P(z_t|c_n)P(c_n|z_{1:t-1})}{P(z_t|z_{1:t-1})} \quad (1)$$

169 where $P(c_n|z_{1:t})$ and $P(z_t|c_n)$ are the posterior probability and likelihood at exploration time t . $P(c_n|z_{1:t-1})$ is the
 170 prior probability at time $t - 1$. The variable u_k with $K = 18$ represents the position class for each angle class v_l with
 171 $L = 72$. The sensor measurements from each tap or palpation are represented by z .

172 For the initial exploration time, $t = 0$, uniform prior probabilities are assumed, which considers that all classes
 173 N_{pairs} have the same probability, as follows:

$$P(c_n) = P(c_n|z_0) = \frac{1}{N_{\text{pairs}}} \quad (2)$$

174 For time $t > 0$ the prior is updated using the posterior estimated at time $t - 1$. From each tap performed by the
 175 sensor, a time series with $N_{\text{samples}} = N_{\text{taxel}} \times 100$ samples of digitised pressure values are collected, with $N_{\text{taxels}} = 12$.
 176 This information is used to built the nonparametric measurement model based on histograms, which are uniformly
 177 constructed by binning tactile data into bins b with $N_{\text{bins}} = 100$, as follows:

$$P_k(b|c_n) = \frac{h_{kn}(b)}{\sum_{b=1}^{N_{\text{bins}}} h_{kn}(b)} \quad (3)$$

178 where $h_{kn}(b)$ is the sample count in bin b for taxel k over all training data in class c_n . The mean log likelihood of a

179 test tactile contact z_t over all samples and taxels is obtained as follows:

$$\log P(z_t|c_n) = \sum_{k=1}^{N_{\text{taxels}}} \sum_{j=1}^{N_{\text{samples}}} \frac{\log P_k(s_k(j)|c_n)}{N_{\text{samples}}N_{\text{taxels}}} \quad (4)$$

180 where $s_k(j)$ is the sample j in taxel k . Normalised values are ensured with the marginal probabilities conditioned from
 181 previous sensor observations, as follows:

$$P(z_t|z_{1:t-1}) = \sum_{n=1}^{N_{\text{pairs}}} P(z_t|c_n)P(c_n|z_{1:t-1}) \quad (5)$$

182 Each estimated class c_n corresponds to a (u_k, v_l) pair, which denotes the joint probability for position and angle
 183 perceptual classes. Then, individual position and angle beliefs are obtained with the following marginal posteriors:

$$P(u_k|z_{1:t}) = \sum_{l=1}^L P(u_k, v_l|z_{1:t}) \quad (6)$$

$$P(v_l|z_{1:t}) = \sum_{k=1}^K P(u_k, v_l|z_{1:t}) \quad (7)$$

184 where position beliefs are summed over all angle classes, and angles beliefs are summed over all position classes. The
 185 recursive accumulation of evidence stops once a predefined belief threshold is exceeded, to make a decision using the
 186 *maximum a posteriori* (MAP) estimate, as follows:

$$\begin{aligned} &\text{if any } P(v_l|z_{1:t}) > \beta_{\text{threshold}} \text{ then} \\ &\hat{v} = \arg \max_{v_l} P(v_l|z_{1:t}) \end{aligned} \quad (8)$$

187 where \hat{v} is the angle perceived by the fingertip sensor. The belief threshold $\beta_{\text{threshold}} \in [0, 1]$ is used to control the
 188 amount of evidence needed to make a decision. The estimated angle is employed in the contour following task presented
 189 in Section 4.

190 Previous works have shown that the iCub fingertip sensor is able to perceive with higher accuracy towards its
 191 centre [10, 23]. This means that the active perception approach needs to intelligently move the sensor towards its
 192 centre, in order to gradually improve the perception accuracy of the object being explored. Active perception is defined
 193 as the position u_{fix} , the centre of the sensor, which the active control seeks to gradually attain by repositioning the
 194 sensor from an initial random and unknown fingertip location. The sensor movement policy is determined from the
 195 current position estimation, as follows:

$$\hat{u} = \arg \max_{u_k} P(u_k|z_{1:t}) \quad (9)$$

$$u = u + \pi(\hat{u}), \quad \pi(\hat{u}) = u_{\text{fix}} - \hat{u} \quad (10)$$

196 where π and \hat{u} are the movement policy and current estimated position, respectively. The movement policy $\pi(\hat{u})$
 197 updates u , which defines the new position for exploration by the fingertip sensor. The complete perception process is
 198 described by the flowchart in Figure 4A, which groups all processes into layers. The active repositioning of the sensor

199 is repeated and controlled by $\beta_{\text{threshold}}$. Previous works on passive and active tactile sensing have shown that small
 200 belief thresholds, $\beta_{\text{threshold}} \approx 0$, allow robots to respond fast but with low perception accuracy. Conversely, large belief
 201 thresholds, $\beta_{\text{threshold}} \approx 1$, are highly accurate but require large amounts of evidence, increasing the response time.
 202 In Section 3.5 a method for adaptation of the active Bayesian perception process is presented. This method, based
 203 on sensory predictions and combination of information sources, improves the trade-off between accuracy and reaction
 204 time taking the best from both worlds.

205 3.5. Adaptive perception

206 Weighted prior and weight posterior sensorimotor strategies were presented in [10], where the forward model and
 207 combination of information sources were manually controlled to improve the performance of a tactile exploration task.
 208 A preliminary analysis of the weighted prior strategy, with a contour following task, was presented in [9]. In this work,
 209 both the weighted prior and posterior strategies are analysed in detailed and extended by autonomously learning the
 210 forward model and adapting the combination of information sources, and thus, to allow the fingertip sensor to adapt
 211 its performance during the exploration task. This process is achieved with an adaptive Bayesian perception method,
 212 that observes ‘what would have happened’ if a different action ‘would have been made’ at previous decision times. This
 213 approach allows the touch sensor to make predictions about the expected sensory observations for the next exploration
 214 step, which combined with current sensor observations, enables the sensor for adaptation of its perception accuracy
 215 and speed during the object exploration procedure.

216 3.5.1. Adaptive weighted prior strategy

217 This strategy performs a weighted combination of a uniform prior with sensory predictions estimated over time.
 218 The resulting combination is used as the new prior for the beginning of a new decision-making processes performed
 219 by the active Bayesian perception approach, as follows:

$$P_{\text{prior}}(c_n|z_0) = \alpha P_{\text{predict}} + (1 - \alpha)P_{\text{flat}}(c_n) \quad (11)$$

220 where the initial uniformly distributed prior is $P_{\text{flat}}(c_n)$, the predicted probability distribution is P_{predict} , and $P_{\text{prior}}(c_n|z_0)$
 221 is the new prior for the active Bayesian perception. The confidence parameter $\alpha \in [0, 1]$ controls and adapts the contri-
 222 bution of each information source in Equation (11). The confidence parameter is autonomously adapted, based on the
 223 accuracy observed by the sensory predictions, P_{predict} , as described in Section 3.5.4. The use of this adaptive strategy,
 224 together with active Bayesian perception, is shown by the flowchart in Figure 4B.

225 3.5.2. Adaptive weighted posterior strategy

226 This strategy combines the posterior probability with the sensory predictions estimated over time. The resulting
 227 combination is applied at the end of the Bayesian perception process, once the belief threshold $\beta_{\text{threshold}}$ has been
 228 exceeded. This process is performed as follows:

$$P_{\text{posterior}}(c_n|z_{1:t}) = \alpha P_{\text{predict}} + (1 - \alpha)P(c_n|z_{1:t}) \quad (12)$$

229 where the posterior and predicted probability distributions are $P(c_n|z_{1:t})$ and P_{predict} , respectively. The updated
 230 posterior used to make a decision is represented by $P_{\text{posterior}}(c_n|z_{1:t})$. Similar to the weighted prior, the contribution

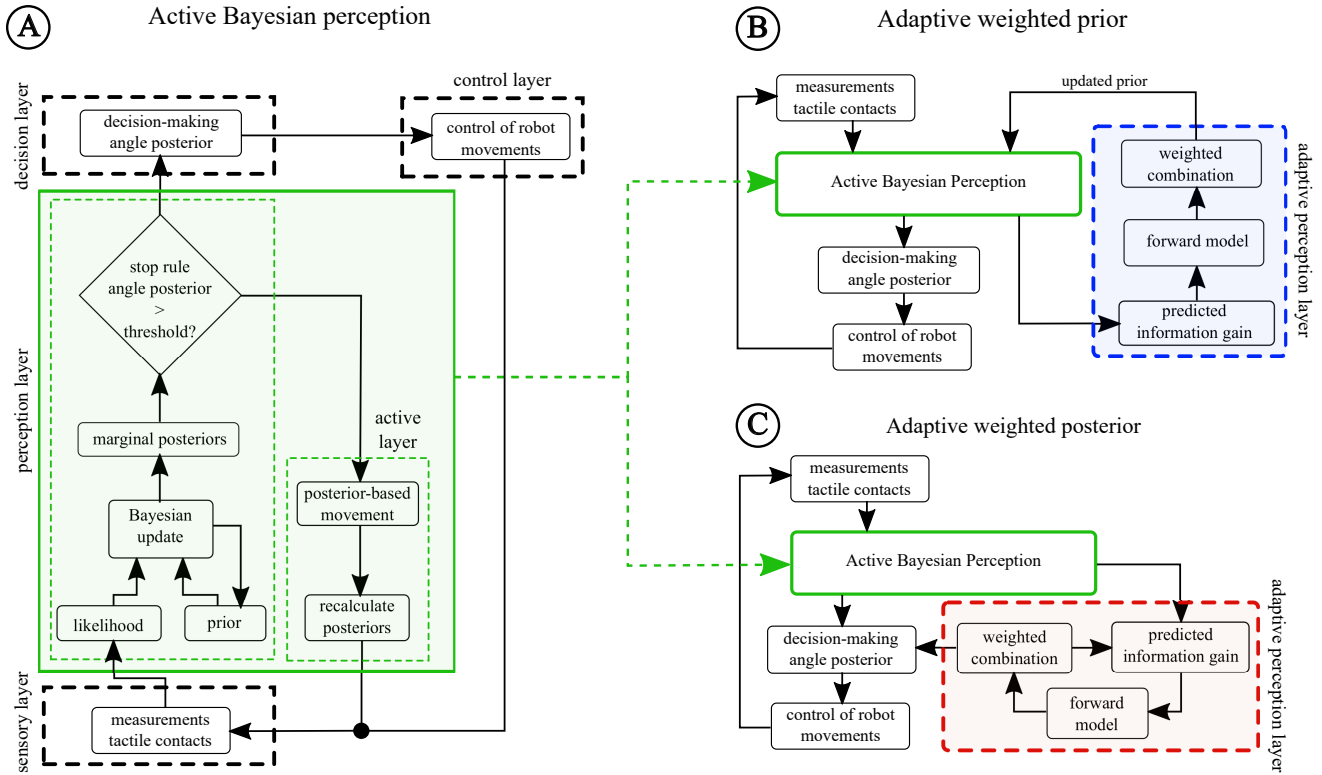


Figure 4: Flowcharts for active perception and adaptive strategies. (A) Active Bayesian perception composed of five layers: *sensory*, *decision*, *control* (black colour boxes), *perception* and *active* (green colour boxes). Perception layer accumulates evidence while actively reposition of the sensor by the active layer. Decision-making, by the decision layer, controls the movements of the robot platform in the control layer. (B) Adaptive weighted prior strategy (blue colour box) extends the active Bayesian perception (green colour box) using sensory predictions and combining them with current observations. This strategy, applied at the beginning of the perception process, impacts on the prior probability. (C) Adaptive weighted posterior (red colour box) allows the active perception to make sensory predictions and combine information streams, but in this case, this strategy takes place at the end of the perception process, impacting the posterior probability.

231 of each information source is controlled by the adaptive confidence parameter α . This adaptive strategy together with
 232 the active Bayesian process is shown in Figure 4C. The predicted probability distribution, P_{predict} , employed by both
 233 the adaptive weighted prior and posterior strategies, is defined by the following forward model:

$$P_{\text{predict}} = P(u_k, v_l + \Delta | z_t) \quad (13)$$

234 where P_{predict} uses the posterior probability distribution to shift the angle classes v_l by a parameter $\Delta = \{1, 2, \dots, L\}$,
 235 with L angles classes. Shifting the angle classes provides an estimation of the sensory observations for the next angle
 236 classes during the exploration process. The approach for learning and adapting the parameter Δ is described in
 237 Section 3.5.3. The approach to adapt the parameter α , used to autonomously control the combination of information
 238 sources, is described in Section 3.5.4. The used of both parameters allows the fingertip sensor to achieve a better
 239 performance and trade-off between accuracy and reaction time during the exploration of an object.

240 3.5.3. Forward model learning

241 Forward models allow robots to predict sensory observations from actions performed at previous time steps. These
 242 models are crucial for the development of autonomous robots capable of learning, adapting and making optimal

243 decisions and actions [35, 41]. The forward model in Equation (13) depends on the learning and adaptation of the
 244 parameter Δ , which is used for prediction of sensory observations for the next angle classes during the exploration task.
 245 This approach allows the fingertip sensor to adaptively combine the predicted or expected sensory observations with
 246 current sensor observations. The learning process is based on a Predicted Information Gain (PIG) approach, which has
 247 been studied for prediction of observations using complete knowledge of the environment [42]. In this work, the PIG
 248 approach has been modified to allow the fingertip sensor to observe ‘what would have happened’ if a certain action
 249 ‘would have been made’ from the previous decision time. This learning and adaptive process extends our previous
 250 work in [10], where the parameter Δ was predefined for all the object exploration process. In the PIG approach, the
 251 parameter $\hat{\Theta}$ denotes the estimated observations from the active Bayesian perception process, while the set of actions
 252 (fingertip movements) and states (angle perceived) is denoted by $a = \{a_1, a_2, \dots, a_L\}$ and $s = \{s_1, s_2, \dots, s_L\}$ with L
 253 number of angle classes. The PIG approach is defined as follows:

$$\text{PIG} = \gamma \sum_{s^*} \hat{\Theta}_{a,s,s^*} \text{D}_{\text{KL}}(\hat{\Theta}_{a,s}^{a,s,s^*} \parallel \hat{\Theta}_{a,s}) \quad (14)$$

254 where the estimated observations for the current state s by choosing action a are denoted by $\hat{\Theta}_{a,s}$. The hypothetical
 255 observations s^* for each action chosen in previous state s are represented by $\hat{\Theta}_{a,s}^{a,s,s^*}$. The hypothetical outcomes
 256 s^* that the perception process would have been provided by choosing action a in state s are denoted by $\hat{\Theta}_{a,s,s^*}$.
 257 This formulation is normalised by the parameter γ . The Kullback-Leibler Divergence (D_{KL}) provides the amount of
 258 information that would have been lost for each action performed at the previous decision time as follows:

$$\text{D}_{\text{KL}}(\hat{\Theta}_{a,s}^{a,s,s^*} \parallel \hat{\Theta}_{a,s}) = \sum_{s^*} \hat{\Theta}_{a,s}^{a,s,s^*} \log \left(\frac{\hat{\Theta}_{a,s,s^*}^{a,s,s^*}}{\hat{\Theta}_{a,s}} \right) \quad (15)$$

259 The result from Equation (14) is used to update the transition matrix, Γ_τ , which is employed to obtain the most
 260 probable shifting value for Δ , as follows:

$$\Gamma_\tau = \eta \Gamma_{\tau-1} \text{PIG} \quad (16)$$

$$\Gamma_\tau = \eta \left(\left(\frac{\tau-1}{\tau} \right) \Gamma_{\tau-1} + \frac{1}{\tau} \right) \text{PIG} \quad (17)$$

261 where the transition matrix at decision time τ and $\tau-1$ are Γ_τ and $\Gamma_{\tau-1}$, respectively. The normalising parameter η
 262 ensures probabilities in $[0, 1]$. In previous works, this approach has been studied for online estimation of parameters
 263 using fixed or constant reward values [51]. Conversely, here we use the PIG measurement as a reward, which takes
 264 adaptive values in $[0, 1]$ according to the decisions and actions made by the perception system. Then, the position of
 265 the largest probability from the transition matrix Γ_τ is assigned to the parameter Δ , as follows:

$$\Delta = \arg \max(\Gamma_\tau) \quad (18)$$

266 The online adaptation of the parameter Δ , used by the forward model in Equation (13), provides the predicted
 267 probability distribution used by both the adaptive weighted prior and posterior strategies. This is an important
 268 improvement over our previous work in [10], where the parameter Δ was manually set to a predefined value for all the
 269 exploration task. The predictions, made by the forward model, need to be assessed to ensure an optimal performance

270 for the weighted combination of information sources. The proposed method for assessment of predictions is described
 271 in Section 3.5.4.

272 3.5.4. Forward model assessment

273 The predictions made by the forward model need to be assessed to obtain an optimal performance during the
 274 object exploration task. The assessment process is used to control the confidence parameter α , used in Equations (11)
 275 and (12), for the adaptive weighted combination of information sources. For this process a Dynamic Bayesian Network
 276 (DBN) is employed, permitting to dynamically control the contribution from the predictions made by the forward
 277 model, according to their accuracy observed over time, as follows:

$$H_\tau = \eta \xi_\tau \quad (19)$$

278 where H_τ contains the angle observations updated from decision time $\tau - 1$ to τ . The normalising factor is represented
 279 by η . The evaluation of predictions from the forward model is performed by ξ_τ , as follows:

$$\xi_\tau = \left(\frac{\tau - 1}{\tau}\right) P_{\text{predict}} + \left(\frac{1}{\tau}\right) P(c_n | z_{1:t}) \quad (20)$$

280 where P_{predict} is the prediction from the forward model and $P(c_n | z_t)$ is the posterior from the Bayesian perception
 281 process, obtained once the belief threshold has been exceeded. The confidence parameter α is updated as follows:

$$\alpha_\tau = \left(\frac{\tau - 1}{\tau}\right) \alpha_{\tau-1} + \left(\frac{1}{\tau}\right) H_\tau(v^*) \quad (21)$$

$$v^* = \arg \max P_{\text{predict}} \quad (22)$$

282 where α_τ is the updated confidence parameter, $\alpha_{\tau-1}$ is the confidence parameter from the previous assessment at
 283 decision time $\tau - 1$, and $H(v^*)$ is the probability of the MAP estimate angle class v^* from the forward model. The
 284 updated parameter α_τ is used in Equations (11) and (12) for controlling the contribution from each information source.
 285 This process ensures the optimal weighting and use of both, the predicted and current sensor observations. Overall,
 286 the proposed adaptive perception method allows the fingertip sensor to autonomously adapt its performance, in order
 287 to achieve the optimal trade-off in perception accuracy and speed during the tactile exploration procedure.

288 Flowcharts in Figure 4 show the processes for active Bayesian perception, and its integration with the adaptive
 289 weighted prior and posterior strategies. In Section 4, these methods are tested using the tactile exploratory platform
 290 presented in Sections 3.1 and 3.2 to perform a contour following exploration procedure.

291 4. Results

292 This section presents the results from the adaptive weighted prior and posterior strategies implemented with a
 293 contour following exploration procedure. Commonly, humans employ this exploration procedure for extraction and
 294 recognition of object shape using their hands and fingers. The experiments were performed using real tactile data
 295 collected from the fingertip sensor and plastic object presented in Section 3.

296 4.1. Active tactile exploration of object shape

297 For the first experiment, active Bayesian perception was implemented to observe the performance in accuracy and
298 reaction time of the sensor to explore, follow and extract the contour of an object. For this task, a circular-shaped
299 object was built using real tactile data previously collected (see Section 3.3), for exploration of object shape in offline
300 mode. The fingertip sensor performed 10,000 repetitions of the exploration process, randomly selecting the initial
301 position for each repetition of the contour following task. Then, after selecting the initial position, the fingertip
302 sensor performed the contour following task using the approach presented in Section 3.4. The set of belief thresholds
303 $\beta_{\text{threshold}} = \{0, 0.05, \dots, 0.99\}$ was used to observe how the amount of evidence accumulated affects the performance
304 of the object exploration task. Figure 5 shows the recognition accuracy of angle and position classes against belief
305 threshold and reaction time. Accurate recognition of angle and position classes is required to allow the fingertip sensor
306 to perceive its location and decide where to move next during the contour following task. Results in Figures 5A,B
307 show that small belief thresholds ($\beta_{\text{threshold}} \approx 0$) do not allow the robot to accumulate enough evidence, which is
308 reflected in the low recognition accuracy for both, angle (43 deg error) and position (7.5 mm error) classes. In this
309 case, the perception system is able to make rapid decisions (1 tap) and performing a fast object exploration. The use
310 of large belief thresholds ($\beta_{\text{threshold}} \approx 0.99$) shows an improvement in accuracy, reducing the recognition error for angle
311 and position classes to 5 deg and 0.18 mm, respectively. However, the reaction time is affected, increasing to 5 and 8
312 the number of sensor contacts needed for recognition of angle and position classes, respectively (Figures 5C,D). The
313 accuracy and reaction time present a gradual and smooth improvement for increasing belief thresholds. With these
314 results it is possible to select the parameter $\beta_{\text{threshold}}$ for the appropriate trade-off between accuracy and speed. The
315 result from the contour following task with a small belief threshold ($\beta_{\text{threshold}} = 0.0$) is show in Figure 6A, where the
316 sensor was not able to extract the object contour accurately. The increment of the belief threshold to $\beta_{\text{threshold}} = 0.5$
317 improves the exploration accuracy, but there are still regions of the object contour that were not accurately recognised
318 by the sensor (Figure 6B). In contrasts, the exploration procedure was successfully performed using a large belief
319 threshold of $\beta_{\text{threshold}} = 0.99$ (Figure 6C).

320 4.2. Adaptive weighted prior strategy

321 The adaptive weighted prior strategy was tested with the contour exploration of a circular-shaped object built
322 with real tactile data. The exploration process was repeated 10,000 times, randomly selecting the initial position for
323 exploration. The results from this adaptive Bayesian perception process are compared with the results from active
324 Bayesian perception alone. The implementation of the adaptive strategy is based on the flowchart in Figure 4B. In
325 this experiment, real tactile data were used for both training and testing phases, and a set of belief thresholds was
326 used to control the performance in accuracy and reaction time of the object exploration as in Section 4.1.

327 The adaptive weighted prior allows the active Bayesian perception to use a non-uniform prior probability, which is
328 learned and adapted based on the observation of decisions and actions made. This approach makes the tactile robot
329 capable of autonomously adapt its perception accuracy and reaction time. The results from this adaptive strategy
330 are shown in Figure 7, where the recognition of angle and position classes, against belief threshold and reaction
331 time, are represented by blue colour curves. For comparison of performance, results from active Bayesian perception
332 are included (green colour curves). The adaptive weighted prior achieved the smallest angle and position errors of
333 2.8 deg and 0.18 mm with $\beta_{\text{threshold}} = 0.5$ and $\beta_{\text{threshold}} = 0.99$, respectively (Figure 7A,B). Angle perception accuracy

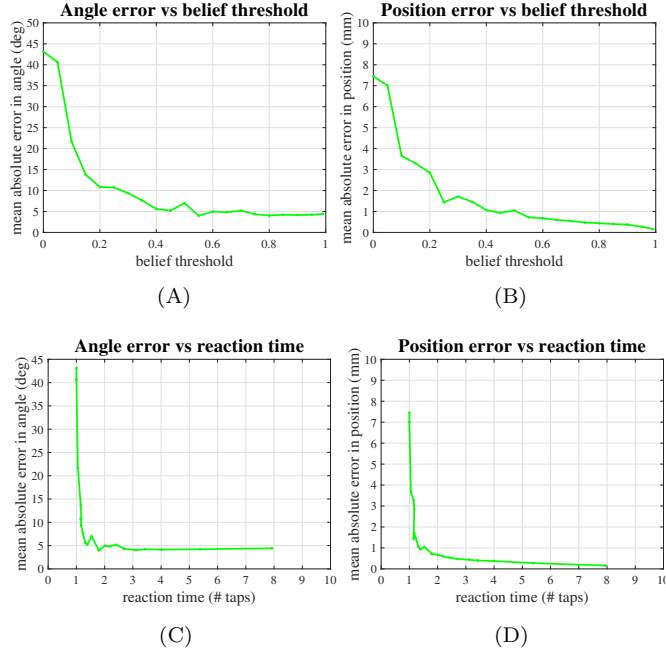


Figure 5: Perception accuracy and reaction time for recognition of angle and position perceptual classes from a contour following task with active Bayesian perception. (A),(B) Perception accuracy against belief threshold is improved for larger belief thresholds. (C),(D) Reaction time required for decision-making increases for larger belief thresholds. These results shows that active perception can be adjusted to perform either fast decisions with low accuracy or highly accurate decisions with large number of tactile contacts.

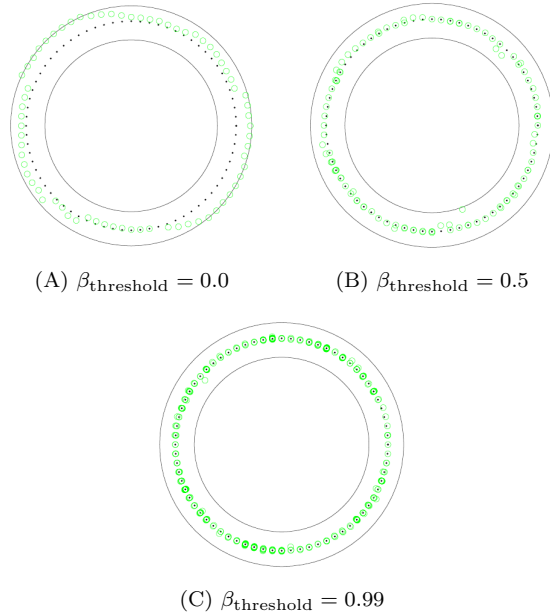


Figure 6: Tactile contour following results from a circular-shaped object using active perception and a biomimetic fingertip sensor. The object contour is defined by the black dotted line, sensor movements are represented by the green colour circles and the black solid line defines the exploration limits according to the collected datasets. (A) Active perception with belief threshold, $\beta_{\text{threshold}} = 0.0$, does not allow the touch sensor to extract the object shape. (B) Active perception with belief threshold, $\beta_{\text{threshold}} = 0.5$, improves the exploration process but still the object shape is not extracted successfully. (C) Large belief thresholds, $\beta_{\text{threshold}} = 0.99$, allow the active perception approach to successfully follow and extract the object shape.

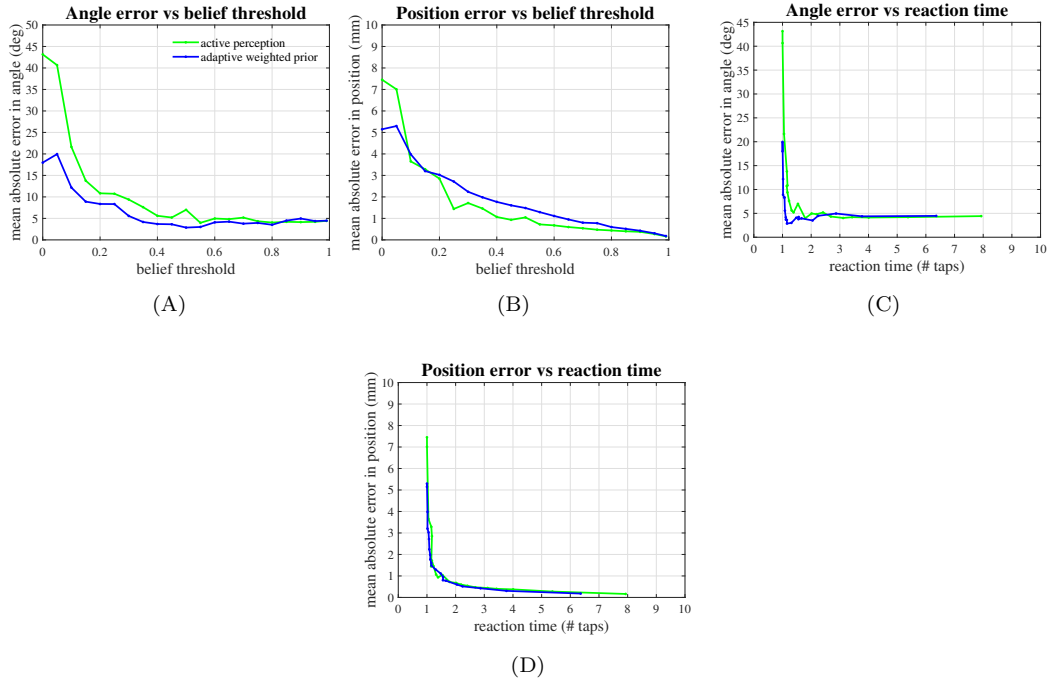


Figure 7: Adaptive weighted prior strategy employed with active perception for recognition of angle and position perceptual classes during a contour following exploration procedure (blue colour curves). (A) Angle perception accuracy is improved requiring small belief threshold values to achieve high accuracy. (C) This result also improves the reaction time for angle perception. (B,D) Recognition of position classes and reaction time do not show improvement by the adaptive weighted prior strategy. Results from the use of active Bayesian perception alone are included (green color curves) for comparison of performance.

334 is improved even for small belief thresholds. In contrast, no improvement was observed for perception of position
 335 classes. Similar to active perception, the adaptive weighted prior shows a gradual reduction of errors for the transition
 336 region from small to large belief thresholds. Angle and position accuracy against reaction time in Figures 7C,D, show
 337 an improvement in the number of tactile contacts (≈ 1 tap) required for the highest accuracy in angle perception.
 338 However, no effects were observed in reaction time for perception of position classes with the adaptive weighted prior
 339 strategy.

340 The accuracy of predictions made by the forward model, based on the observation of decisions and actions, are shown
 341 in Figure 9A. The forward model shows large variability and low accurate prediction at the beginning of the experiment.
 342 However, the performance of the forward model is improved over time, when more decisions and observations have
 343 been made. Adaptation of the confidence parameter, α , used for controlling the combination of information sources,
 344 is shown in Figure 9B. The confidence parameter is adapted according to the accuracy of predictions with respect to
 345 what was perceived in the current decision time. The results shown in Figure 9 were obtained with the belief threshold
 346 $\beta_{\text{thresholds}} = \{0, 0.05, \dots, 0.99\}$. This adaptive method is capable of improving the active Bayesian perception process,
 347 permitting the development of intelligent tactile systems that autonomously combine information sources to adapt its
 348 exploration performance.

349 4.3. Adaptive weighted posterior strategy

350 The contour following task was repeated using the adaptive weighted posterior strategy. The flowchart in Figure 4C
 351 shows the processes for this adaptive strategy. Similar to the experiments in Section 4.2, real tactile data were used for

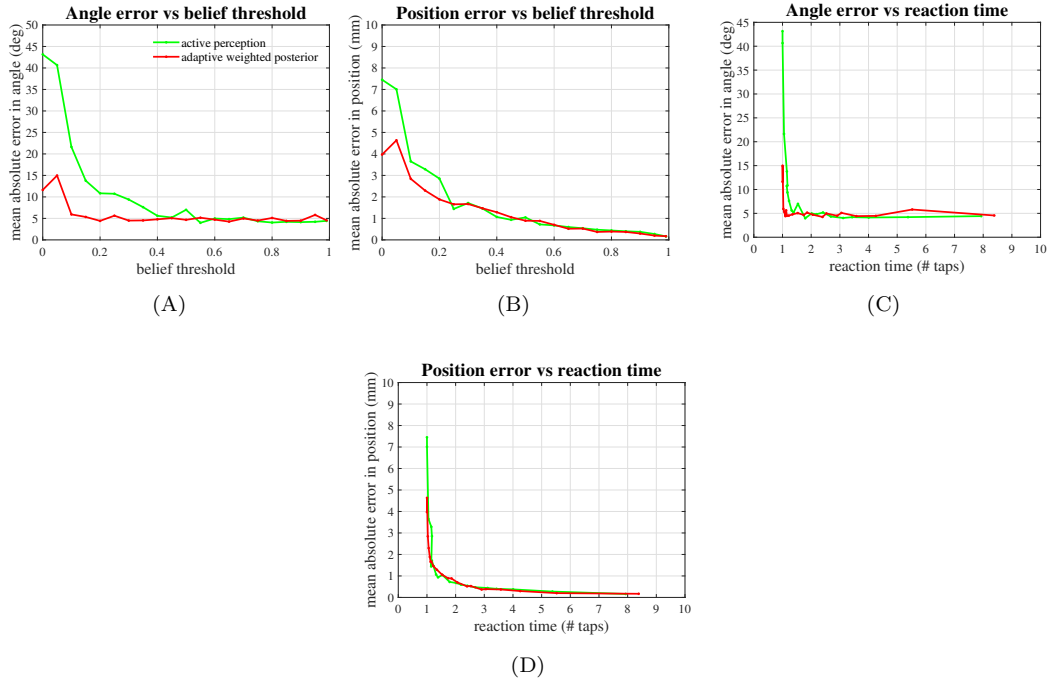


Figure 8: Adaptive weighted posterior strategy employed with active perception for recognition of angle and position perceptual classes during a contour following exploration procedure (red colour curves). (A) High angle recognition accuracy is achieved with small belief threshold values. (C) Reaction time is also improved requiring less number of tactile contacts to make a decision. These results improve the performance of active perception alone. (B) Recognition of position classes shows slight improvement for small belief thresholds. (D) However, reaction time for recognition of position classes does not show improvement. Results from the use of active Bayesian perception alone are also included (green color curves) for comparison of performance.

352 training and testing the adaptive strategy, using a set of belief thresholds for the analysis of performance in accuracy
 353 and reaction time.

354 The adaptive weighted posterior strategy does not affect the prior probability of the active Bayesian perception
 355 process, as with the weighted prior strategy. This strategy combines sensory predictions with the posterior probability
 356 from the active Bayesian perception, once the belief threshold has been exceeded. The decisions are made based on
 357 the combination of current and predicted probability distributions. This process allows the tactile exploration system
 358 to adapt its performance, making decisions based on observations from previous decision times. Figure 8 shows the
 359 performance in accuracy and reaction time for recognition of angle and position classes during the contour following
 360 of a circular-shaped object. Results from the adaptive weighted posterior strategy (red colour curves) are compared
 361 with results achieved by active Bayesian perception alone (green colour curves). The smallest recognition errors for
 362 angle and position classes against belief threshold are 5 deg and 0.18 mm for $\beta = 0.2$ and $\beta = 0.99$, respectively
 363 (Figure 8A,B). Recognition of angle classes was improved with small belief thresholds, reaching smaller errors than
 364 active Bayesian perception. In this case, the accuracy presented a steady behaviour for belief thresholds from 0.2
 365 to 1. Recognition of position classes presented an improvement for small belief thresholds, but it showed a similar
 366 performance to active Bayesian perception for the transition between small and large belief thresholds. The adaptive
 367 weighted posterior also showed an improvement in reaction time, requiring 1 tap for the smallest angle recognition
 368 error. However, this method did not affect the reaction time for recognition of position classes, presenting similar
 369 results to the use of active Bayesian perception alone.

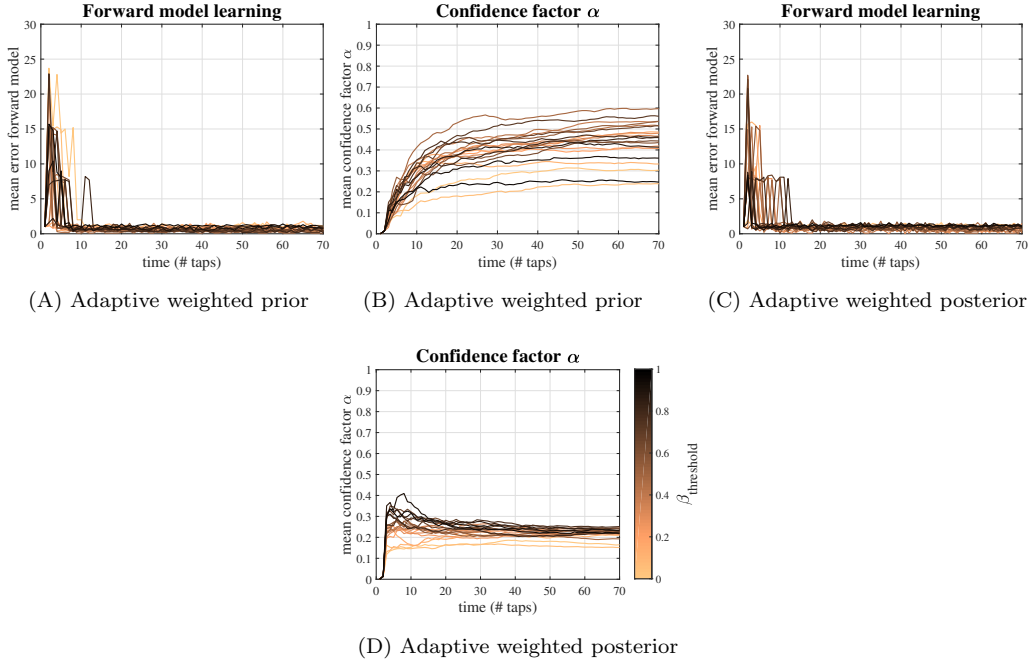


Figure 9: Forward model and confidence parameter implemented by the proposed adaptive strategies. These results are obtained from a contour following exploration procedure using a biomimetic fingertip sensor and evaluated with a set of belief threshold $\beta_{\text{threshold}} = \{0, 0.05, \dots, 0.99\}$, which are represented by coloured curves. (A) Adaptive weighted prior strategy; accuracy of the forward model for prediction of sensory observations improves over time. (B) Confidence parameter adapts over time, based on the accuracy of predictions, to control the combination of information sources by the adaptive weighted prior strategy. (C) Adaptive weighted posterior strategy; forward model accuracy improves over time. (D) Adaptive confidence parameter, based on the accuracy of prediction, which permit to control the combination of information sources by the weighted posterior strategy.

370 The adaptive behaviour of the forward model and confidence parameter is shown in Figures 9C,D. These results were
 371 obtained from the exploration task using the set of belief threshold $\beta_{\text{threshold}} = \{0, 0.05, \dots, 0.99\}$. Predictions made
 372 by the forward model presented a large variability at the beginning of the exploration task, but they improved when
 373 more decisions and observations were made. Similarly, the confidence parameter was adapted over time, according to
 374 the accuracy of predictions from the forward model. This process permits to control the combination of information
 375 sources, but also to control the contribution made by predictions in the decision-making process. Thus, decisions rely
 376 more on predictions when they are accurate, otherwise, decision rely more on the output from active perception alone.
 377 Results show that this adaptive strategy allows the development of intelligent tactile exploration systems that, capable
 378 of autonomously adapt over time, achieve a better performance and trade-off between accuracy and reaction time.

379 A statistical analysis, using the one-way analysis of variance (ANOVA), was used to observe whether the angle
 380 and position classes, recognised by the adaptive weighted strategies, are statistically different from the recognition
 381 performed by active perception alone. Thus, we analyse the null-hypothesis H_0 : there is no difference between the
 382 recognition of angle and position classes performed by the active perception, adaptive weighted prior and adaptive
 383 weighted posterior methods. The hypothesis testing employs information from angle and position classes, recognised
 384 by the active and adaptive methods from all the contour following exploration tasks performed by the fingertip sensor.
 385 Statistical information from these variables is presented in Table 1.

386 First, ANOVA is applied to all angle and position classes obtained from the active perception method and adaptive

Table 1: Statistical information (mean, standard deviation, median, minimum and maximum values) from the angle and position classes recognised by active perception, adaptive weighted prior and posterior methods. This information was obtained from the object shape exploration implemented with the contour following procedure using the tactile sensor.

	active perception		adaptive weighted prior		adaptive weighted posterior	
	angle	position	angle	position	angle	position
mean	2.09	1.74	1.31	1.86	1.15	1.33
standard deviation	2.41	2.05	1.19	1.55	0.74	1.25
median	1.02	0.91	0.86	1.35	0.91	0.85
minimum / maximum	0.49 / 12.97	0.11 / 8.11	0.21 / 6.87	0.02 / 6.62	0.34 / 5.87	0.04 / 5.19

Table 2: Statistical analysis of active perception and the adaptive weighted prior strategy. The parameters MSC/MSE, F -statistic and p -value show the difference between results from active perception (no adaptive approach) and the adaptive weighted prior strategy for recognition of angle and position classes.

active perception (no adaptive) vs adaptive weighted prior						
angle			position			significance level
MSC/MSE	F -statistics	p -value	MSC/MSE	F -statistics	p -value	α
45.38/3.62	12.52	0.0004	1.19/3.32	0.35	0.54	0.001
reject H_0			fail to reject H_0			

387 weighted prior strategy. The results from analysis, composed by the mean square columns (MSC), mean square errors
388 (MSE), F -statistics and p -value, are shown in Table 2. For angle recognition, the F -statistics value of 12.52 (MSC/MSE
389 = 45.38/3.62), together with the p -value of 0.0004 for a significance level $\alpha = 0.001$, indicate that the null-hypothesis
390 is rejected. This means that there is a statistically significant difference between angle recognition from the active
391 and adaptive weighted prior. In contrast, for position recognition, the adaptive weighted prior failed to reject the
392 null-hypothesis, given the p -value of 0.54 and significance level $\alpha = 0.001$. In other words, there is no statistically
393 significant difference between the active and adaptive weighted prior methods for the recognition of position classes.

394 Second, the results from ANOVA applied to the active and adaptive weighted posterior methods are shown in
395 Table 3. For the case of angle recognition, the null-hypothesis is rejected based on the p -value of 8.23×10^{-6} . Conversely,
396 the adaptive weighted posterior method failed to reject the null-hypothesis for recognition of position classes, given the
397 p -value of 0.041 for $\alpha = 0.001$. The results from Table 3 show that there is statistically significant difference, between
398 the active and adaptive weighted posterior methods, for the recognition of angle classes. However, this difference was
399 not observed for the recognition of position classes.

400 Third, the statistical analysis is applied to both adaptive weighted strategies as shown in Table 4. This analysis
401 shows that there is no statistically significant difference between the angle and position recognised by both adaptive
402 weighted strategies (fail to reject the null-hypothesis). This result is indicated by the p -values of 0.17 and 0.0013
403 for angle and position classes, respectively, with significance level $\alpha = 0.001$. These results also correspond to the
404 performance observed from angle and position perception by both adaptive weighted strategies in Sections 4.2 and 4.3.

405 5. Discussion

406 This work presented an investigation on adaptive strategies that, combining sensory predictions and current ob-
407 servations, enhance the active perception process for autonomous tactile exploration. First, this research showed that
408 tactile exploration is improved by active control of robot movements using tactile feedback. Second, it was shown that
409 sensory predictions from a forward model, combined with current sensory observations, permitted the autonomous

Table 3: Statistical analysis of active perception and the adaptive weighted posterior strategy. The parameters MSC/MSE, F -statistic and p -value show the results from active perception (no adaptive approach) and the adaptive weighted posterior strategy for recognition of angle and position classes.

active perception (no adaptive) vs adaptive weighted posterior						
angle			position			significance level
MSC/MSE	F -statistics	p -value	MSC/MSE	F -statistics	p -value	α
65.65/3.18	20.61	8.23×10^{-6}	12.13/2.89	4.18	0.041	0.001
reject H_0			fail to reject H_0			

Table 4: Statistical analysis of the adaptive weighted prior and adaptive weighted posterior strategies. The parameters MSC/MSE, F -statistic and p -value show the statistical analysis from the recognition of angle and position classes performed with the contour following experiments.

adaptive weighted prior vs adaptive weighted posterior						
angle			position			significance level
MSC/MSE	F -statistics	p -value	MSC/MSE	F -statistics	p -value	α
1.86/0.99	1.88	0.17	20.94/1.98	10.53	0.0013	0.001
fail to reject H_0			fail to reject H_0			

410 adaptation of active Bayesian perception to improve perception accuracy, reaction time and their trade-off during
 411 robot tactile exploration and recognition tasks.

412 For validation of the adaptive strategies for object exploration, real tactile datasets were collected using a biomimetic
 413 fingertip sensor and a plastic object as stimuli. Sensor movements were systematically controlled by a 3-DoF robot
 414 with an exploratory procedure based on taps or palpations. This exploratory procedure (1) is inspired by humans in
 415 situations when they touch a sharp surface or perform a medical inspection, (2) it reduces damage to the surface of
 416 fingertip sensors and (3) offers an alternative exploration approach for robots that are not capable to slide their tactile
 417 sensors. In this work, a circular-shaped object was selected for all the experiments for the following reasons. First, the
 418 circular object gives the fingertip sensor the possibility to test all the angles classes, while covering the 360 degs around
 419 the plastic object. This type of object allows us to observe the accuracy and speed for recognition of all angle classes.
 420 Second, building the circular object using real tactile data, for exploration in offline mode, is not as computationally
 421 expensive as building other objects, e.g., sellotape. Exploration of other object shapes, may not allow the fingertip
 422 sensor to test all the angle classes for validation of the active and adaptive perception methods.

423 First, active perception method was tested with the contour following exploration to extract object shape (see
 424 Figures 5 and 6). This perception approach, which has been tested in a previous work [10], is included here to motivate
 425 the research on the novel adaptive strategies for perception, exploration and combination of information sources. Active
 426 tactile movements, and large evidence accumulated from the interaction with the environment, permitted the sensor
 427 to achieve a gradual improvement in perception accuracy during object exploration (see Figure 6B). The accumulation
 428 of evidence is controlled by a belief threshold, which needs to be exceeded to allow the fingertip sensor to make a
 429 decision. These results fit with studies from psychology and neuroscience, which have shown that humans make reliable
 430 decisions once they have sufficient evidence [52]. Large belief thresholds provide better perception accuracy, however,
 431 the larger the belief threshold the larger the reaction time (number of taps) required to make a decision. This effect is
 432 expected given that humans explore actively moving their hands and fingers, but also they employ the needed time to
 433 reach the sufficient level of confidence about the object being explored [53]. This work has focused on active sensing,
 434 but for a description of the benefits of active over passive sensing refer to the following works [10, 23].

435 Humans rely on multiple information sources to make accurate and fast decisions. For example, the use of current
436 information from the environment, and knowledge gained over time, allow humans to make predictions, learn and
437 adapt their performance while interacting with the environment [6, 36, 37]. In this work, the adaptive weighted prior
438 and posterior strategies, that present a novel approach for adaptive combination of information sources and prediction
439 of sensory observations, were implemented to improve the performance of the active Bayesian perception method.
440 First the adaptive weighted prior, applied at the beginning of the Bayesian perception process, combines a uniform
441 and a predicted probability distribution. A preliminary study of the adaptive weighted prior was presented in [9], and
442 here a detailed and systematic analysis was undertaken. Second, the adaptive weighted posterior, applied at the end of
443 the active Bayesian perception process, combines a posterior and a predicted probability distribution. These adaptive
444 strategies permit the observation of the effects in performance when sensory predictions, combined with current sensory
445 observations, are applied at different stages of the active Bayesian perception process. Sensory predictions employed
446 by these methods were obtained with a forward model using a predicted information gain approach [42, 54], which in
447 this work was modified to analyse ‘what would have happened’ if a certain action ‘would have been made’ at previous
448 decision time. This process allowed the autonomous adaptation of the forward model based on the observation of
449 decisions and actions made. The benefit of these adaptive methods is that if predictions are accurate, then tactile
450 perception will improve using a combination of information sources than relying on current sensory observations alone.
451 Essentially, this means that decisions made by active Bayesian perception will be more accurate by the combination
452 of what it was predicted and current sensory observations, which overcomes the assumptions and manual control of
453 parameters employed in previous works [10]. The adaptive weighted strategies were systematically validated with the
454 recognition of angle and position classes from the contour following exploration procedure. In this experiment both
455 strategies improved the performance of angle recognition, with small recognition errors and small belief thresholds,
456 over the results obtained by active perception alone. This demonstrates that adaptation of active perception allows
457 the fingertip sensor to perform more accurate and fast decisions, while improving the trade-off between accuracy
458 and reaction time in autonomous robot exploration tasks (Figures 7 and 8). For recognition of position classes, an
459 improvement was observed with the adaptive weighted posterior strategy. However, no improvement was observed
460 with the adaptive weighted prior strategy. This performance in position classes is related to the design of the forward
461 model, which only takes into consideration the angle classes for estimation of sensory predictions. Then, both adaptive
462 strategies are optimised for perception of angle classes but not for position classes. For that reason, for the future
463 work we consider to extend the forward model to make predictions about expected angles and positions. With this
464 approach, we plan to improve the performance in accuracy and speed for both angle and position classes during
465 exploration tasks. Figures 7 and 8 show the improvements from the adaptive strategies and their comparison with
466 active Bayesian perception.

467 To ensure reliable combination of information sources, predictions from forward model need to be evaluated and
468 weighted [35]. A confidence parameter was employed to weight the combination of information sources for both adaptive
469 strategies. This parameter autonomously adapts over time, according to the accuracy of what it was predicted and
470 what it was perceived. Therefore, this parameter controls the contribution from predictions used in the combination
471 of information sources, ensuring reliable, accurate and fast decisions from the Bayesian perception process. The
472 adaptation of the forward model and confidence parameter for both adaptive strategies is shown in Figure 9. We
473 observed that the forward model started with large variability, providing inaccurate predictions, however, the forward

474 model improved its performance once more observations and prediction were made. Thus, the confidence parameter
475 was adapted according to the reliability of predictions, to ensure a better performance in accuracy and reaction time.
476 Results showed that accurate predictions benefit the active perception process, but even if predictions are not accurate
477 they do not degrade or negatively affect the perception process. The proposed adaptive perception and weighted
478 combination processes offer a robust approach for various robotic applications. For instance, human-robot interaction
479 and collaboration need of robots capable to predict human actions, performing safe and adaptive robot control and
480 reducing the risk of injuring the human operator. Assistive robots need to understand and predict the intention
481 of human movement, in order to safely apply the required assistance at the appropriate time. Wearable robots for
482 rehabilitation is another application where adaptation, according to the recovery progress estimated by the robot, is
483 crucial to deliver a reliable and beneficial rehabilitation to the patient. Recognition, prediction and adaptation, using
484 data from multiple information sources, are essential to develop autonomous robots capable to learn and adapt to
485 their surrounding changing environment. Another important aspect in robotics, and which we plan to investigate in
486 future works, is the adaptive combination of multiple sensing modalities, e.g., touch, vision, audio, which represents a
487 challenging and crucial topic to gradually deliver intelligent and highly safe autonomous systems for interaction with
488 their surrounding environment as humans do.

489 The experiments shown in this work employed rigid objects only, however, nowadays non-rigid or soft objects
490 are becoming attractive for robotics research. Non-rigid objects are gaining attention because of their compliance
491 and deformable physical characteristics, which are essential for safe human-robot interaction, assistive robots and
492 autonomous exploration robots. Currently, the tapping procedure for data collection, implemented by our proposed
493 method, uses a predefined threshold for contact detection with the fingertip sensor. Thus, for contact detection of
494 non-rigid object, our method needs to be extended with a module that adapts the contact threshold according to the
495 softness of the object being explored. This adaptive contact detection module would also allow the fingertip sensor to
496 explore objects made of a mixture of different materials. However, the modules for active and adaptive perception,
497 and control of the fingertip sensor, would not need to be modified. The development and integration of modules for
498 dealing with non-rigid object is part of our plans for future works. All in all, this work proposes a method to allow the
499 development of intelligent systems capable of autonomously control the combination of information sources, relying
500 more on predictions when they are accurate and relying more on current observations otherwise.

501 Autonomous robots, capable to understand their surrounding environment, require methods for tactile perception
502 and decision-making, but also for adaptation over time. Overall, this work presented two novel computational methods,
503 that integrating both active and adaptive perception processes, enable robots to perceive and autonomously adapt their
504 performance and the trade-off between perception accuracy and reaction time during tactile exploration, recognition
505 and interaction tasks.

506 **6. Conclusions**

507 In this work, the adaptive weighted prior and posterior strategies were developed to improve the performance of
508 active perception in tactile exploration tasks. These strategies presented a novel method for adaptive combination
509 of current and predicted sensory observations. Both adaptive strategies employed the novel Predicted Information
510 Gain (PIG) method, to learn the forward model responsible for providing sensory predictions. A confidence parameter
511 was learned for the evaluation of the accuracy of predictions, and adapt the combination of information sources. The

512 adaptive strategies were systematically validated with the recognition of angle and position data extracted from the
513 exploration of object shape, using a tactile robotic platform. Angle class accuracy of 2.8 deg, and reaction time of 1
514 tap, were improved by the adaptive approach over the performance achieved by active perception of 5 deg and 5 taps.
515 Position class accuracy of 0.18 mm was similar for all perception methods. The results demonstrate the benefits, in
516 accuracy and reaction time, when multiple information sources are adaptively combined. Overall, the novel adaptive
517 weighted strategies can enable tactile robots to autonomously improve their performance in exploration and recognition
518 tasks, and in the interaction with humans and the surrounding environment.

519 **7. Acknowledgements**

520 The authors would like to thank to the Sheffield Robotics Lab at the University of Sheffield, and the Autonomous
521 System Lab at the University of Bath for the robotic facilities and the technical support provided for this research
522 work.

523 **8. References**

- 524 [1] R. Bajcsy, Active perception, *Proceedings of the IEEE* 76 (8) (1988) 966–1005. doi:10.1109/5.5968.
- 525 [2] T. J. Prescott, M. E. Diamond, A. M. Wing, Active touch sensing, *Phil. Trans. R. Soc. B* 366 (2011) 2989–2995.
526 doi:10.1098/rstb.2011.0167.
- 527 [3] R. L. Klatzky, S. Lederman, Intelligent exploration by the human hand, in: *Dextrous robot hands*, Springer, 1990,
528 pp. 66–81.
- 529 [4] U. Martinez-Hernandez, Tactile sensors, in: *Scholarpedia of Touch*, Springer, 2016, pp. 783–796.
- 530 [5] H. Barlow, M. Hawken, A. Parker, T. Kaushal, Human contrast discrimination and the threshold of cortical
531 neurons, *JOSA A* 4 (12) (1987) 2366–2370.
- 532 [6] K. P. Körding, D. M. Wolpert, Bayesian decision theory in sensorimotor control, *Trends in cognitive sciences*
533 10 (7) (2006) 319–326.
- 534 [7] U. Martinez-Hernandez, A. Damianou, D. Camilleri, L. W. Boorman, N. Lawrence, T. J. Prescott, An integrated
535 probabilistic framework for robot perception, learning and memory, in: *Robotics and Biomimetics (ROBIO)*, 2016
536 IEEE International Conference on, IEEE, 2016, pp. 1796–1801.
- 537 [8] U. Martinez-Hernandez, I. Mahmood, A. A. Dehghani-Sanij, Simultaneous bayesian recognition of locomotion
538 and gait phases with wearable sensors, *IEEE Sensors Journal* 18 (3) (2018) 1282–1290. doi:10.1109/JSEN.2017.
539 2782181.
- 540 [9] U. Martinez-Hernandez, T. J. Prescott, Adaptive perception: learning from sensory predictions to extract object
541 shape with a biomimetic fingertip, in: *Intelligent Robots and Systems (IROS)*, 2017 IEEE/RSJ International
542 Conference on, IEEE, 2017, pp. 6735–6740.
- 543 [10] U. Martinez-Hernandez, T. J. Dodd, M. H. Evans, T. J. Prescott, N. F. Lepora, Active sensorimotor control for
544 tactile exploration, *Robotics and Autonomous Systems* 87 (2017) 15–27.

- 545 [11] S. Stansfield, Primitives, features, and exploratory procedures: Building a robot tactile perception system, in:
546 Robotics and Automation. Proceedings. 1986 IEEE International Conference on, Vol. 3, IEEE, 1986, pp. 1274–
547 1279.
- 548 [12] S. Chitta, J. Sturm, M. Piccoli, W. Burgard, Tactile sensing for mobile manipulation, Robotics, IEEE Transactions
549 on 27 (3) (2011) 558–568.
- 550 [13] A. Schneider, J. Sturm, C. Stachniss, M. Reisert, H. Burkhardt, W. Burgard, Object identification with tactile
551 sensors using bag-of-features, in: Intelligent Robots and Systems, 2009. IROS 2009. IEEE/RSJ International
552 Conference on, IEEE, 2009, pp. 243–248.
- 553 [14] N. Gorges, S. E. Navarro, D. Göger, H. Wörn, Haptic object recognition using passive joints and haptic key
554 features, in: Robotics and Automation (ICRA), 2010 IEEE International Conference on, IEEE, 2010, pp. 2349–
555 2355.
- 556 [15] H. Nakamoto, W. Fukui, F. Kobayashi, F. Kojima, N. Imamura, H. Shirasawa, Shape classification based on
557 tactile information by universal robot hand, in: Industrial Electronics, 2009. IECON'09. 35th Annual Conference
558 of IEEE, IEEE, 2009, pp. 2360–2365.
- 559 [16] M. Johnsson, C. Balkenius, Sense of touch in robots with self-organizing maps, IEEE Transactions on Robotics
560 27 (3) (2011) 498–507.
- 561 [17] S. E. Navarro, N. Gorges, H. Wörn, J. Schill, T. Asfour, R. Dillmann, Haptic object recognition for multi-fingered
562 robot hands, in: Haptics Symposium (HAPTICS), 2012 IEEE, IEEE, 2012, pp. 497–502.
- 563 [18] Z. Pezzementi, E. Plaku, C. Reyda, G. D. Hager, Tactile-object recognition from appearance information, IEEE
564 Transactions on Robotics 27 (3) (2011) 473–487.
- 565 [19] A. Rubio-Solis, G. Panoutsos, Interval type-2 radial basis function neural network: a modeling framework, IEEE
566 Transactions on Fuzzy Systems 23 (2) (2015) 457–473.
- 567 [20] Q. Li, C. Schürmann, R. Haschke, H. Ritter, A control framework for tactile servoing, in: Proc. Robotics: Science
568 and Systems, 2013.
- 569 [21] R. Bajcsy, M. Campos, Active and exploratory perception, CVGIP: Image Understanding 56 (1) (1992) 31–40.
- 570 [22] T. Sun, J. Back, H. Liu, Combining contact forces and geometry to recognize objects during surface haptic
571 exploration, IEEE Robotics and Automation Letters 3 (3) (2018) 2509–2514.
- 572 [23] U. Martinez-Hernandez, T. Dodd, T. J. Prescott, N. F. Lepora, Active bayesian perception for angle and po-
573 sition discrimination with a biomimetic fingertip, in: Intelligent Robots and Systems (IROS), 2013 IEEE/RSJ
574 International Conference on, IEEE, 2013, pp. 5968–5973.
- 575 [24] L. Natale, E. Torres-Jara, A sensitive approach to grasping, in: Proceedings of the sixth international workshop
576 on epigenetic robotics, 2006, pp. 87–94.
- 577 [25] S. Decherchi, P. Gastaldo, R. S. Dahiya, M. Valle, R. Zunino, Tactile-data classification of contact materials using
578 computational intelligence, IEEE Transactions on Robotics 27 (3) (2011) 635–639.

- 579 [26] N. Jamali, C. Sammut, Material classification by tactile sensing using surface textures, in: Robotics and Automa-
580 tion (ICRA), 2010 IEEE International Conference on, IEEE, 2010, pp. 2336–2341.
- 581 [27] U. Martinez-Hernandez, T. J. Dodd, T. J. Prescott, Feeling the shape: Active exploration behaviors for object
582 recognition with a robotic hand, *IEEE Transactions on Systems, Man, and Cybernetics: Systems* 48 (12) (2018)
583 2339–2348. doi:10.1109/TSMC.2017.2732952.
- 584 [28] R. Martins, J. F. Ferreira, M. Castelo-Branco, J. Dias, Integration of touch attention mechanisms to improve the
585 robotic haptic exploration of surfaces, *Neurocomputing* 222 (2017) 204–216.
- 586 [29] A. Petrovskaya, O. Khatib, Global localization of objects via touch, *IEEE Transactions on Robotics* 27 (3) (2011)
587 569–585.
- 588 [30] R. E. Goldman, A. Bajo, N. Simaan, Algorithms for autonomous exploration and estimation in compliant envi-
589 ronments, *Robotica* 31 (01) (2013) 71–87.
- 590 [31] U. Martinez-Hernandez, A. A. Dehghani-Sani, Adaptive bayesian inference system for recognition of walking
591 activities and prediction of gait events using wearable sensors, *Neural Networks* 102 (2018) 107–119.
- 592 [32] N. Jamali, C. Ciliberto, L. Rosasco, L. Natale, Active perception: Building objects’ models using tactile explo-
593 ration, in: *Humanoid Robots (Humanoids)*, 2016 IEEE-RAS 16th International Conference on, IEEE, 2016, pp.
594 179–185.
- 595 [33] S. Thrun, W. Burgard, D. Fox, *Probabilistic robotics*, MIT press, 2005.
- 596 [34] U. Martinez-Hernandez, A. A. Dehghani-Sani, Probabilistic identification of sit-to-stand and stand-to-sit with a
597 wearable sensor, *Pattern Recognition Letters*doi:https://doi.org/10.1016/j.patrec.2018.03.020.
- 598 [35] R. Shadmehr, M. A. Smith, J. W. Krakauer, Error correction, sensory prediction, and adaptation in motor control,
599 *Annual review of neuroscience* 33 (2010) 89–108.
- 600 [36] K. P. Körding, D. M. Wolpert, Bayesian integration in sensorimotor learning, *Nature* 427 (6971) (2004) 244–247.
- 601 [37] K. P. Körding, S.-p. Ku, D. M. Wolpert, Bayesian integration in force estimation, *Journal of Neurophysiology*
602 92 (5) (2004) 3161–3165.
- 603 [38] J. F. Ferreira, M. Castelo-Branco, J. Dias, A hierarchical bayesian framework for multimodal active perception,
604 *Adaptive Behavior* 20 (3) (2012) 172–190.
- 605 [39] P.-Y. Oudeyer, F. Kaplan, What is intrinsic motivation? a typology of computational approaches, *Frontiers in*
606 *neurorobotics* 1.
- 607 [40] A. G. Barto, S. Singh, N. Chentanez, Intrinsically motivated learning of hierarchical collections of skills, in:
608 *Proceedings of the 3rd International Conference on Development and Learning*, Citeseer, 2004, pp. 112–19.
- 609 [41] A. Dearden, Y. Demiris, L. Kaelbling, A. Saffotti, Learning forward models for robots, *IJCAI-INT JOINT CONF*
610 *ARTIF INTELL*, 2005.

- 611 [42] D. Y. Little, F. T. Sommer, Learning and exploration in action-perception loops, *Frontiers in neural circuits* 7.
- 612 [43] J. Gottlieb, P.-Y. Oudeyer, M. Lopes, A. Baranes, Information-seeking, curiosity, and attention: computational
613 and neural mechanisms, *Trends in cognitive sciences* 17 (11) (2013) 585–593.
- 614 [44] L. Pape, C. M. Oddo, M. Controzzi, C. Cipriani, A. Förster, M. C. Carrozza, J. Schmidhuber, Learning tactile
615 skills through curious exploration, *Frontiers in Neurobotics* 6.
- 616 [45] G. Metta, G. Sandini, D. Vernon, L. Natale, F. Nori, The icub humanoid robot: an open platform for research in
617 embodied cognition, in: *Proceedings of the 8th Workshop on Performance Metrics for Intelligent Systems, PerMIS*
618 '08, ACM, New York, NY, USA, 2008, pp. 50–56.
- 619 [46] M. Petit, S. Lallée, J.-D. Boucher, G. Pointeau, P. Cheminade, D. Ognibene, E. Chinellato, U. Pattacini, I. Gori,
620 U. Martinez-Hernandez, et al., The coordinating role of language in real-time multimodal learning of cooperative
621 tasks, *IEEE Transactions on Autonomous Mental Development* 5 (1) (2013) 3–17.
- 622 [47] U. Martinez-Hernandez, L. Boorman, T. Prescott, Multisensory wearable interface for immersion and telepresence
623 in robotics, *IEEE Sensors Journal* 17 (8) (2017) 2534–2541.
- 624 [48] U. Martinez-Hernandez, A. Rubio-Solis, T. J. Prescott, Bayesian perception of touch for control of robot emotion,
625 in: *Neural Networks (IJCNN), 2016 International Joint Conference on, IEEE, 2016*, pp. 4927–4933.
- 626 [49] N. F. Lepora, U. Martinez-Hernandez, M. Evans, L. Natale, G. Metta, T. J. Prescott, Tactile superresolution and
627 biomimetic hyperacuity, *IEEE Transactions on Robotics* 31 (3) (2015) 605–618.
- 628 [50] J. Dargahi, S. Najarian, Human tactile perception as a standard for artificial tactile sensing a review, *The Inter-*
629 *national Journal of Medical Robotics and Computer Assisted Surgery* 1 (1) (2004) 23–35.
- 630 [51] H. C. Cho, M. S. Fadali, K. S. Lee, Online probability density estimation of nonstationary random signal using
631 dynamic bayesian networks, *International Journal of Control Automation and System* 6 (1) (2008) 109–118.
- 632 [52] P. L. Smith, R. Ratcliff, Psychology and neurobiology of simple decisions, *Trends in neurosciences* 27 (3) (2004)
633 161–168.
- 634 [53] K. Overvliet, J. B. Smeets, E. Brenner, The use of proprioception and tactile information in haptic search, *Acta*
635 *psychologica* 129 (1) (2008) 83–90.
- 636 [54] A. Nilles, Applying predicted information gain to physically embodied agents.