



Title	A study of operating reserve procurement in power markets with application of insurance theory: contract-based vs pool-based approaches
Author(s)	Chan, CY; Ni, Y; Wu, FF
Citation	IEEE Power Engineering Society Summer Meeting, Chicago, Illinois, USA, 24 July 2002, v. 3, p. 1397-1402
Issued Date	2002
URL	http://hdl.handle.net/10722/46403
Rights	©2002 IEEE. Personal use of this material is permitted. However, permission to reprint/republish this material for advertising or promotional purposes or for creating new collective works for resale or redistribution to servers or lists, or to reuse any copyrighted component of this work in other works must be obtained from the IEEE.

A Study of Operating Reserve Procurement in Power Markets with Application of Insurance Theory: Contract-based v.s. Pool-based Approaches

C. Y. Chan, Student Member, IEEE, Y. X. Ni, S. M., IEEE and Felix F. Wu, Fellow, IEEE

Abstract--In the power markets, the ancillary services are treated as special commodities. Operating reserve is an important commodity in the category of ancillary services, which supports the system reliability against unexpected generator outages. In this paper, we study the procurement of operating reserve via two approaches, i.e. contract-based model and pool-based model. In order to guarantee the availability of reserved capacity and reduce the loss of consumer at generator forced outages, insurance policy is applied. Decentralized optimal decision is adopted. After presenting the math models of the two approaches, it is proven that pool-based approach is more cost-effective and should be adopted in the deregulated power markets.

Index Terms-- Ancillary Service, Decentralized Optimization, Deregulated Power Markets, Insurance Theory

I. INTRODUCTION

Electricity is a very special product. It is not storable and the demands are fluctuating and lack of elasticity, therefore it is difficult to realize real-time power balance at lower cost. In the power market, not only electricity, but also transmission services and ancillary services are important commodities to be traded. Operating reserve is an important commodity in the category of ancillary services, which supports the system reliability against unexpected generation outages. In traditional power systems, the ancillary services are usually centrally handled. The system operator will determine the reserves requirement and procure it from the reserve suppliers. And the corresponding cost is then allocated to the consumer based on electricity consumption of individual end users.

It is well known that, in conventional power systems, the reserve requirement is determined more on reliability

viewpoint than on cost-effective viewpoint. More often, the N-1 security criterion is used, i.e. the reserved capacity should at least be greater than or equal to the largest generation unit, and in the meantime based on experiences the reserved capacity should be no less than a certain percentage of total operation capacity. In the power industry deregulation, the responsibility for and procurement of reserve are studied in quite a few papers [1-5]. However, most of the researches use centralized approaches.

A centralized handling and decision on ancillary service and a uniform pricing scheme definitely cannot reflect the need of the consumers. i.e. consumers have no choices on preferred reliability level and cost-effective operating reserve. Besides there are no incentives for the system operator to make efficient decision on reserved capacity. There are also no incentives for the reserve capacity providers to commit the requested reserve capacity. Therefore, the flexibility, efficiency and quality of the current ancillary service markets are in question. Besides in case of electricity supply interruption, the consumers will suffer great economic risk.

According to the market economy principles, the best way for efficient commodity transaction is to allow decentralized optimal decisions and it makes use of the 'invisible hand' of the market to induce optimal social welfare and market efficiency. In [6], a conceptual study on reserve capacity procurement is conducted with insurance theory applications [7,8]. A power insurer is introduced. It represents the consumer (also the insured) to purchase reserve capacity from generators and sells insurance policy to the consumers.

The results of [6] are very challenging:

- The operating reserve market allows the power consumers to determine their own reserve requirements.
- The decentralized optimal decision becomes possible, and yields the same optimal results as the centralized optimal decision.
- With insurance policy, the consumers can shift the outage risk to the power insurer.
- The insurance policy induces an incentive and enforces the liability for the insurer to manage the reserve capacity.

However, the model used in [6] is very simple and limited

The research is sponsored by RGC of the H.K. Government, to whom the authors would like to express their heartfelt acknowledgments.

C. Y. Chan is with Dept. of Electrical and Electronic Engineering, The University of Hong Kong, Pokfulam Road, Hong Kong (e-mail: chiychan@eee.hku.hk).

Y. X. Ni is with Dept. of Electrical and Electronic Engineering, The University of Hong Kong, Pokfulam Road, Hong Kong (e-mail: yxni@eee.hku.hk).

Felix F. Wu is with Dept. of Electrical and Electronic Engineering, The University of Hong Kong, Pokfulam Road, Hong Kong (e-mail: ffwu@eee.hku.hk).

to one generation, one consumer and one insurer only. In this paper, we will extend the mechanism in [6] to multi-player cases. In order to simplify our analytical study, we assume the studied system has N identical gencos and M identical consumers. Two approaches are investigated. One is contract-based approach, and the other pool-based approach. In both cases, $N-1$ security assumption will hold; i.e. only one generator will outage at a time. The mathematic models and optimal decision procedures are presented. It is proven that pool-based approach is more cost-effective and should be adopted in the deregulated power markets.

This paper is organized as follows. The details of the reserve capacity market mechanism with the contract-based approach are introduced in section II. The market with pool-based approach is studied in section III. In section IV, the comparison is made between the two approaches and it is proven pool-based approach is more cost-effective. Conclusions are drawn in section V.

II. CONTRACT-BASED APPROACH

We assume that there are three types of players in the market: N gencos ($G_i, i=1 \dots N$), M consumers ($C_{i,j}, i=1 \dots N, j=1 \dots H, M=N \cdot H$) and a power insurer (I). We assume all the N gencos are identical and the M consumers are identical as well. The gencos provide both electric energy and reserve capacity on requests. The gencos want to maximize their own profits, so do the consumers. In the electricity market, gencos sell power to consumers at the Market Clearing Price (MCP). The total power supply S_Σ is assumed to be equal to the total demand Q_Σ with transmission loss neglected. It is reasonable to assume that genco i maintains an acceptable outage probability OP_i ($0 < OP_i < 1$) declared in the contract. We can use penalty system to enforce the liability for the genco to maintain OP_i . In this paper, we assume the penalty system is in well operation, therefore OP_i is fixed in our study.

In this section, a contract-based model for reserve procurement will be derived. Assume each genco (G_i) has bilateral contracts to sell real power to H consumers denoted as group i (see Fig. 1.). $C_{i,j}$ denotes consumer j of group i with bilateral contract with genco i .

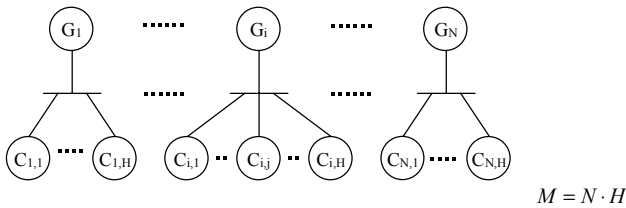


Fig. 1. Contract-based model for operating reserves

The consumers can obtain benefits via purchase real power, but they will suffer loss (outage cost $OC_{i,j}$) when the outage occurs. Assuming that the consumer's benefit via utilizing

power $Q_{i,j}$, is $B_{i,j}(Q_{i,j})$. The function $B_{i,j}(Q_{i,j})$ usually has the following characteristics: $\left((\cdot)' = \frac{d(\cdot)}{dQ_{i,j}} \right)$

$$\begin{aligned} B_{i,j}(0) &= 0 \\ B_{i,j}'(Q_{i,j}) &\geq 0 \quad \text{for } Q_{i,j} \geq 0 \\ B_{i,j}''(Q_{i,j}) &\leq 0 \quad \text{for } Q_{i,j} \geq 0 \end{aligned} \quad (1)$$

In the contract-based approach, we assume if genco G_i outages, the supply to consumers $C_{i,j}, j=1 \dots H$ who have contracts with G_i will be interrupted; while the other consumers should not be affected (although they are all connected to the same network). Therefore, when genco G_i outages, the consumer $C_{i,j}$ will lose all fed power $Q_{i,j}$. The outage cost for consumer $C_{i,j}$ with reserve capacity $T_{i,j}$ and the corresponding energy cost in fuel cost nature $\frac{1}{H} C_{RE}(T_{i,j} \cdot H)$ can be express as

$$OC_{i,j}(T_{i,j}) = \left[\begin{aligned} & [B_{i,j}(Q_{i,j}) - MCP \cdot Q_{i,j}] \\ & - \left[B_{i,j}(T_{i,j}) - \frac{1}{H} C_{RE}(T_{i,j} \cdot H) \right] \end{aligned} \right] \cdot \Delta t \quad (2)$$

The first term within the bracket is the expected net profit without any outage at known electricity market clearing price (MCP) and the second term within the bracket is the expected net profit when an outage occurs. Because of $N-1$ security and identical consumer assumptions, the total reserve capacity will be $(T_{i,j} \cdot H)$, and the corresponding energy cost ($C_{RE}(\cdot)$) will be shared by H consumers in load group i . The capacity cost in (opportunity cost nature), which is constantly paid no matter you use the reserve energy or not, will be considered separatley. The outage cost of consumer $C_{i,j}$ should be zero when genco G_k ($k \neq i$) outages. Therefore, the expected outage cost $EOC_{i,j}(T_{i,j})$ for consumer $C_{i,j}$ can be defined as the product of the outage probability and the outage cost cause by the genco G_i outage only, i.e.

$$EOC_{i,j}(T_{i,j}) = OP_i \cdot OC_{i,j}(T_{i,j}) \quad (3)$$

There is an incentive for the consumers to spend certain amount of money to reduce the loss, e.g. to purchase insurance policy. The consumers will also optimize their decisions on $T_{i,j}$ according to the reserve capacity price of reserves and their own outage cost functions.

Assume the power insurer acts as both an insurer and a reserve schedule coordinator concurrently, and he is a non-profit operator. (There is no difficulty to include the profit.) Without considering the administration cost, his expected profit is assumed to be zero. It is also assumed that the reserve capacity cost curve $C_R(T_\Sigma)$ is known, where T_Σ is system-wide total reserve. The corresponding cost of the reserve capacity is allocated fairly to the consumers based on reserve capacity requested by individual consumers.

The insurance policy for the power consumers is designed

as follow: once the power consumer $C_{i,j}$ has purchased the insurance policy with reserve capacity of $T_{i,j}$. The power insurer will procure the amount of reserved capacity $R_{i,j}$ from the supplies, and the reserve capacity will be supplied to the consumer $C_{i,j}$ in the event of genco i outage. Consumer $C_{i,j}$ should pay corresponding cost $C_R(T_\Sigma)/M$ for the reserved capacity. In the meantime, the consumer can claim a percentage of his outage loss (say $K_{i,j}$, $0 \leq K_{i,j} \leq 1$) to be compensated by the insurer in case outage happens, however, he must pay a certain premium $p_{i,j}(T_{i,j}, K_{i,j})$ for it. The total premium for the insurance policy to be paid by $C_{i,j}$ to the insurer should be ($M = N \cdot H$, see Fig. 1):

$$p_{i,j}(T_{i,j}, K_{i,j}) = \frac{C_R(T_\Sigma)}{M} + K_{i,j} \cdot EOC_{i,j}(T_{i,j}), \quad 0 \leq K_{i,j} \leq 1 \quad (4)$$

where $T_{i,j}$: requested reserve capacity by the consumer $C_{i,j}$, in MW; $K_{i,j}$: percentage of the outage loss of consumer to be insured; $C_R(T_\Sigma)$: the total cost for the power insurer to procure the total reserved capacity T_Σ ; $EOC_{i,j}(T_{i,j})$: expected outage loss of the consumer when the reserved capacity is $T_{i,j}$. The second term is indeed the premium corresponding to the insurance policy itself [8]. Since reference [6] has proved that the optimal decision of each consumer is to purchase the full compensated insurance policy, so $K_{i,j} = 1$. With the N-1 security assumption, the rational insurer and consumers know the reserves T_Σ can be repeatedly used by the N groups. Meanwhile, for a generator outage, only relevant H consumers will suffer from the outage in contract-based approach. Therefore, the premium in (4) is ($T_\Sigma = T_{i,j} \cdot H$):

$$p_{i,j}(T_{i,j}) = \frac{C_R(T_{i,j} \cdot H)}{M} + EOC_{i,j}(T_{i,j}) \quad (5)$$

The consumer with the insurance policy has the follow expected-cost minimization problem

$$\min_{T_{i,j}} TC_{i,j}(T_{i,j}) = EOC_{i,j}(R_{i,j}) + p_{i,j}(T_{i,j}) - EOC_{i,j}(R_{i,j}) \quad (6.a)$$

$$\min_{T_{i,j}} TC_{i,j}(T_{i,j}) = \frac{C_R(T_{i,j} \cdot H)}{M} + OP_i \cdot OC_{i,j}(T_{i,j}) \quad (6.b)$$

The first term of (6.a) is the expected outage cost when real reserved capacity provided to $C_{i,j}$ is $R_{i,j}$, the second term is the premium paid for the insurance policy and the third term is the expected claim received from the insurer to compensate the outage loss. The optimal $T_{i,j}$ for (6) should satisfy

$$\begin{aligned} \frac{\partial TC_{i,j}(T_{i,j})}{\partial T_{i,j}} = 0, \text{ i.e. } \frac{H}{M} \cdot C_R'(T_{i,j} \cdot H) + OP_i \cdot OC_{i,j}'(T_{i,j}) = 0 \\ \Rightarrow C_R'(T_{i,j} \cdot H) = -N \cdot OP_i \cdot OC_{i,j}'(T_{i,j}) \end{aligned} \quad (7)$$

The L.H.S of (7) is the marginal cost of reserves and the R.H.S. of (7) is the marginal reducing of the expected outage cost.

The purchase of insurance policies by M consumers is

according to their outage cost function (see (2)). However, the power insurer might not buy total reserve capacity from gencos at requested T_Σ . Indeed the insurer is facing the follow expected-cost minimization problem with the real reserve capacity R_Σ ($R_\Sigma = R_{i,j} \cdot H$) to be optimized:

$$\begin{aligned} \min_{R_\Sigma} C_{ins}(R_\Sigma) &= C_R(R_\Sigma) + \sum_{i,j} EOC_{i,j}(R_{i,j}) - \sum_{i,j} p_{i,j}(T_{i,j}) \\ &= C_R(R_\Sigma) + M \cdot OP_i \cdot OC_{i,j}(R_{i,j}) - M \cdot p_{i,j}(T_{i,j}) \end{aligned} \quad (8)$$

where the first term is the total cost to procure the total reserves, the second term is the total expected claim pay to the consumers for compensating their loss at genco outages and the third term is the total premium received from the consumers. Substituting (5) into (8), the optimal R_Σ for (8) should satisfy ($R_{i,j} = R_\Sigma / H$):

$$\begin{aligned} \frac{\partial C_{ins}(R_\Sigma)}{\partial R_\Sigma} = 0, \text{ i.e. } C_R'(R_{i,j} \cdot H) + M \cdot OP_i \cdot OC_{i,j}'(R_{i,j}) \cdot \frac{1}{H} = 0 \\ \Rightarrow C_R'(R_{i,j} \cdot H) = -N \cdot OP_i \cdot OC_{i,j}'(R_{i,j}) \end{aligned} \quad (9)$$

Comparing (7) and (9) we can see that the optimal reserve $R_{i,j}$ maintained by the insurer is exactly the same as optimal reserve $T_{i,j}$ requested by the consumer $C_{i,j}$, which is very attractive property of the approach. And $C_{ins}(R_\Sigma) = 0$ when $R_\Sigma = T_\Sigma$, since the power insurer is non-profit operator.

If the centralized decision approach is used, the system-wide expected cost $TC_{CB}(R_\Sigma)$ minimization without insurance policy is ($R_\Sigma = R_{i,j} \cdot H$):

$$\min_{R_\Sigma} TC_{CB}(R_\Sigma) = C_R(R_\Sigma) + M \cdot OP_i \cdot OC_{i,j}(R_{i,j}) \quad (10)$$

the centralized optimal solution R_Σ can be solved for using the first order condition:

$$\begin{aligned} \frac{\partial TC_{CB}(R_\Sigma)}{\partial R_\Sigma} = 0, \text{ i.e. } C_R'(R_\Sigma) + M \cdot OP_i \cdot OC_{i,j}'(R_{i,j}) \cdot \frac{1}{H} = 0 \\ \Rightarrow C_R'(R_\Sigma) = -N \cdot OP_i \cdot OC_{i,j}'(R_{i,j}) \end{aligned} \quad (11)$$

We can see that the decentralized decision approach has the same optimal solution (see (7) and (9)) as the centralized decision (see (11)).

In this section, the contract-based approach for operating reserve has been introduced. For each genco outage, we assume only a small group of consumers will suffer the loss. With the N-1 assumption, the reserves can be repeatedly used.

III. POOL-BASED APPROACH

In this section, a pool-based approach for operating reserve will be considered. Still there are N identical gencos ($G_i, i = 1 \dots N$), M identical consumers ($C_j, j = 1 \dots M$) and a power insurer (I) in the market (see Fig. 2). The characteristics of those participants are same as described in the previous section. However in the pool-based approach, for each genco outage, all the consumers in the pool will lose a small amount of power supply.




Fig. 2. Pool-based model for operating reserves

Therefore, when genco G_i outages, the outage cost for consumer C_j can be expressed as

$$OC_j(S_i, T_j) = \left\{ \begin{array}{l} [B_j(Q_j) - MCP \cdot Q_j] \\ B_j \left(Q_j - \frac{Q_j}{Q_\Sigma} S_i + T_j \right) \\ -MCP \cdot \left(Q_j - \frac{Q_j}{Q_\Sigma} S_i \right) - \frac{1}{M} \cdot C_{RE}(T_j \cdot M) \end{array} \right\} \cdot \Delta t \quad (12)$$

where $S_\Sigma = \sum_i S_i = N \cdot S_i$: total supply,

$Q_\Sigma = \sum_j Q_j = M \cdot Q_j$: total demand, T_j : reserve capacity of consumer j, and $S_\Sigma = Q_\Sigma$. $C_{RE}(T_j \cdot M)$ is the energy cost for total reserve $T_\Sigma = T_j \cdot M$.

We can simplify the outage cost function as

$$OC_j(T_j) = \left\{ \begin{array}{l} [B_j(Q_j) - MCP \cdot Q_j] \\ B_j \left(Q_j - \frac{Q_j}{N} + T_j \right) \\ -MCP \cdot \left(Q_j - \frac{Q_j}{N} \right) - \frac{1}{M} C_{RE}(T_j \cdot M) \end{array} \right\} \cdot \Delta t \quad (13)$$

The expected outage cost $EOC_j(T_j)$ for consumer C_j is defined as the summation of the products of outage probability OP_i and the outage cost cause by genco G_i outage for $i = 1, \dots, N$, i.e..

$$EOC_j(T_j) = \sum_i OP_i \cdot OC_j(T_j) = N \cdot OP_i \cdot OC_j(T_j) \quad (14)$$

Base on the assumption of identical gencos and consumers, with insurance policy, the premium function of consumer j in the pool model can be expressed as ($T_\Sigma = T_{i,j} \cdot M$)

$$\begin{aligned} p_j(T_j) &= \frac{C_R(T_\Sigma) + EOC_j(T_j)}{M} \\ &= \frac{C_R(T_j \cdot M)}{M} + N \cdot OP_i \cdot OC_j(T_j) \end{aligned} \quad (15)$$

The consumer with the insurance policy has the follow expected-cost minimization problem similar to (6):

$$\min_{T_j} TC_j(T_j) = EOC_j(T_j) + p_j(T_j) - EOC_j(T_j) \quad (16)$$

Substituting (15) into (16), yield:

$$\min_{T_j} TC_j(T_j) = \frac{C_R(T_j \cdot M)}{M} + N \cdot OP_i \cdot OC_j(T_j) \quad (17)$$

The optimal T_j for (17) should satisfy

$$\begin{aligned} \frac{\partial TC_j(T_j)}{\partial T_j} &= 0, \text{ i.e. } C_R'(T_j \cdot M) + N \cdot OP_i \cdot OC_j'(T_j) = 0 \\ \Rightarrow C_R'(T_j \cdot M) &= -N \cdot OP_i \cdot OC_j'(T_j) \end{aligned} \quad (18)$$

T_j can be solve for from (18), where the marginal cost of reserve capacity equals to the marginal reducing of the expected outage cost. However, the power insurer might not keep total reserve capacity at requested $T_\Sigma = T_j \cdot M$. Indeed insurer is facing the follow expected-cost minimization problem similar to (8) with the real reserve capacity R_Σ to be optimized ($R_\Sigma = R_j \cdot M$)

$$\begin{aligned} \min_{R_\Sigma} C_{ins}(R_\Sigma) &= C_R(R_j \cdot M) + \sum_j EOC_j(R_j) - \sum_j p(T_j) \\ &= C_R(R_j \cdot M) + M \cdot N \cdot OP_i \cdot OC_j(R_j) - M \cdot p(T_j) \end{aligned} \quad (19)$$

The optimal R_Σ for (19) should satisfy

$$\begin{aligned} \frac{\partial C_{ins}(R_\Sigma)}{\partial R_\Sigma} &= 0, \text{ i.e. } C_R'(R_j \cdot M) + M \cdot N \cdot OP_i \cdot OC_j'(R_j) \cdot \frac{1}{M} = 0 \\ \Rightarrow C_R'(R_j \cdot M) &= -N \cdot OP_i \cdot OC_j'(R_j) \end{aligned} \quad (20)$$

Comparing (18) and (20) we can see that the optimal reserve R_j maintained by the insurer will be the same as the optimal reserve T_j requested by the consumer C_j . And $C_{ins}(R_\Sigma) = 0$ when $R_\Sigma = T_\Sigma$, since the power insurer is non-profit operator.

If the centralized decision approach is used, the social expected cost $TC_{Pool}(R_\Sigma)$ minimization without insurance policy is ($R_\Sigma = R_j \cdot M$)

$$\min_{R_\Sigma} TC_{Pool}(R_\Sigma) = C_R(R_j \cdot M) + M \cdot N \cdot OP_i \cdot OC_j(R_j) \quad (21)$$

The centralized optimal solution R_Σ can be solved for from (21):

$$\begin{aligned} \frac{\partial TC_{Pool}(R_\Sigma)}{\partial R_\Sigma} &= 0, \text{ i.e. } C_R'(R_j \cdot M) + M \cdot N \cdot OP_i \cdot OC_j'(R_j) \cdot \frac{1}{M} = 0 \\ \Rightarrow C_R'(R_j \cdot M) &= -N \cdot OP_i \cdot OC_j'(R_j) \end{aligned} \quad (22)$$

Comparing (18) and (20) with (22), we can conclude that with the insurance policy the decentralized optimal decision yields the same optimal solution as the centralized optimal decision.

IV. COMPARISON OF THE TWO APPROACHES

In the previous two sections, we have shown that, with a well-defined insurance policy global optimal results can be reached via decentralized decisions, in which each market participant tries to maximize its own benefit.

Because of the difference between the outage cost functions under the contract-based model and the pool-based model, for the *same amount* of reserve, the two models will have different total costs for reserves, i.e. $OC_{i,j} \left(\frac{R_\Sigma}{H} \right)$ of each consumer in

contract-based approach is not equal to $OC_j \left(\frac{R_\Sigma}{M} \right)$ of each

consumer in pool-based approach, and

$$TC_{CB}(R_\Sigma) \neq TC_{Pool}(R_\Sigma) \quad (23)$$

Let R_Σ^* be the optimal solution under the contract-based

model and R_{Σ}^{Δ} be the optimal solution under the pool-based model. The two optimal results will not equal to each other. A significant question is that which approach can induce a cheaper total expected cost. The conclusion is *the pool-based approach is more cost-effective*, which is proven below.

Let the function $\Delta TC(R_{\Sigma})$ be the difference between the total cost function under contract-based approach $TC_{CB}(R_{\Sigma})$ and the total cost function under the pool-based approach $TC_{Pool}(R_{\Sigma})$.

$$\Delta TC(R_{\Sigma}) = TC_{CB}(R_{\Sigma}) - TC_{Pool}(R_{\Sigma}) \quad (24)$$

According to the total cost functions in (10) and (21), we have

$$\begin{aligned} \Delta TC(R_{\Sigma}) &= [C_R(R_{\Sigma}) + M \cdot OP_i \cdot OC_{i,j}(R_{i,j})] \\ &\quad - [C_R(R_{\Sigma}) + M \cdot N \cdot OP_i \cdot OC_j(R_j)] \\ &= M \cdot OP_i \cdot [OC_{i,j}(R_{i,j}) - N \cdot OC_j(R_j)] \end{aligned} \quad (25)$$

Based on the outage cost functions (2) and (12), (25) will be:

$$\Delta TC(R_{\Sigma}) = M \cdot OP_i \cdot \left[\begin{array}{l} \left[\begin{array}{l} [B_{i,j}(Q_{i,j}) - MCP \cdot Q_{i,j}] \\ - [B_{i,j}(T_{i,j}) - \frac{1}{H} C_{RE}(T_{i,j} \cdot H)] \end{array} \right] \cdot \Delta \\ -N \cdot \left[\begin{array}{l} [B_j(Q_j) - MCP \cdot Q_j] \\ B_j \left(Q_j - \frac{Q_j}{Q_{\Sigma}} S_i + R_j \right) \\ -MCP \cdot \left(Q_j - \frac{Q_j}{Q_{\Sigma}} S_i \right) - \frac{1}{M} C_{RE}(T_j \cdot M) \end{array} \right] \cdot \Delta \end{array} \right] \quad (26)$$

Under the same electricity market conditions, we know:

$$\begin{aligned} B_{i,j}(Q_{i,j}) &= B_j(Q_j), Q_{i,j} = Q_j, Q_{\Sigma} = S_{\Sigma} \\ R_{\Sigma} &= R_{i,j} \cdot H, R_{\Sigma} = R_j \cdot M, T_{i,j} = R_{i,j}, T_j = R_j, T_{i,j} \cdot H = T_j \cdot M \end{aligned} \quad (27)$$

Therefore we can simplify (26) to

$$\Delta TC(R_{\Sigma}) = M \cdot OP_i \cdot \Delta \cdot \left[\begin{array}{l} B_j(Q_j) - B_j \left(\frac{R_{\Sigma}}{H} \right) \\ -N \cdot B_j(Q_j) + N \cdot B_j \left(Q_j - \frac{Q_j}{N} + \frac{R_{\Sigma}}{M} \right) \end{array} \right] \quad (28)$$

At $R_{\Sigma} = 0$,

$$\begin{aligned} \Delta TC(0) &= M \cdot OP_i \cdot \Delta \cdot \left[B_j(Q_j) - N \cdot B_j(Q_j) + N \cdot B_j \left(Q_j - \frac{Q_j}{N} \right) \right] \\ &= N \cdot M \cdot OP_i \cdot \Delta \cdot \left[-B_j(Q_j) \left(1 - \frac{1}{N} \right) + B_j \left(Q_j \left(1 - \frac{1}{N} \right) \right) \right] \end{aligned} \quad (29)$$

From Lemma 1 (see appendix) equation (A.2) and since $0 \leq a = 1 - \frac{1}{N} \leq 1$ ($N \geq 1$), we have:

$$\begin{aligned} B_j(Q_j) \left(1 - \frac{1}{N} \right) &\leq B_j \left(Q_j \left(1 - \frac{1}{N} \right) \right) \\ \Rightarrow B_j \left(Q_j \left(1 - \frac{1}{N} \right) \right) - B_j(Q_j) \left(1 - \frac{1}{N} \right) &\geq 0 \\ \Rightarrow \Delta TC(0) &\geq 0 \end{aligned} \quad (30)$$

With the N-1 security assumption, the maximum amount of reserve R_{Σ} is equal to the power supplied by the largest

generation unit, i.e. $R_{\Sigma} = Q_j = \frac{Q_{\Sigma}}{N}$, then

$$\begin{aligned} \Delta TC \left(\frac{Q_{\Sigma}}{N} \right) &= M \cdot OP_i \cdot \Delta \cdot \left[\begin{array}{l} B_j(Q_j) - B_j \left(\frac{Q_{\Sigma}}{N \cdot H} \right) - N \cdot B_j(Q_j) \\ + N \cdot B_j \left(Q_j - \frac{Q_j}{N} + \frac{Q_{\Sigma}}{N \cdot M} \right) \end{array} \right] \\ &= 0 \end{aligned} \quad (31)$$

The first derivative of the $\Delta TC(R_{\Sigma})$ is

$$\begin{aligned} \Delta TC'(R_{\Sigma}) &= M \cdot OP_i \cdot \Delta \cdot \left[\begin{array}{l} -B_j' \left(\frac{R_{\Sigma}}{H} \right) \cdot \frac{1}{H} \\ + N \cdot B_j' \left(Q_j - \frac{Q_j}{N} + \frac{R_{\Sigma}}{M} \right) \cdot \frac{1}{M} \end{array} \right] \\ &= \frac{M}{H} \cdot OP_i \cdot \Delta \cdot \left[B_j' \left(Q_j - \frac{Q_j}{N} + \frac{R_{\Sigma}}{M} \right) - B_j' \left(\frac{R_{\Sigma}}{H} \right) \right] \end{aligned} \quad (32)$$

From Lemma 2 (see appendix) equation (A.7), we know:

$$\begin{aligned} Q_j - \frac{Q_j}{N} + \frac{R_{\Sigma}}{M} &\geq \frac{R_{\Sigma}}{H} \\ \Rightarrow B_j' \left(Q_j - \frac{Q_j}{N} + \frac{R_{\Sigma}}{M} \right) &\leq B_j' \left(\frac{R_{\Sigma}}{H} \right) \quad \because B_j''(\cdot) \leq 0 \\ \Rightarrow \Delta TC'(R_{\Sigma}) &\leq 0 \end{aligned} \quad (33)$$

Based on equations (30), (31) and (33), we know

$$\Delta TC(0) \geq 0, \Delta TC \left(\frac{Q_{\Sigma}}{N} \right) = 0, \Delta TC'(R_{\Sigma}) \leq 0 \text{ for } 0 \leq R_{\Sigma} \leq \frac{Q_{\Sigma}}{N}$$

which means $\Delta TC(R_{\Sigma}) \geq 0$ for all $0 \leq R_{\Sigma} \leq \frac{Q_{\Sigma}}{N}$, or say

$$TC_{CB}(R_{\Sigma}) \geq TC_{Pool}(R_{\Sigma}) \text{ for all } 0 \leq R_{\Sigma} \leq \frac{Q_{\Sigma}}{N} \quad (34)$$

Denoting R_{Σ}^* as the optimal value of R_{Σ} under the contract-based approach, and R_{Σ}^{Δ} as the optimal value of R_{Σ} under the pool-based approach, it is clear:

$$\begin{aligned} TC_{CB}(R_{\Sigma}^*) &\leq TC_{CB}(R_{\Sigma}) \quad \text{for all } R_{\Sigma}, 0 \leq R_{\Sigma} \leq \frac{Q_{\Sigma}}{N} \\ TC_{Pool}(R_{\Sigma}^{\Delta}) &\leq TC_{Pool}(R_{\Sigma}) \quad \text{for all } R_{\Sigma}, 0 \leq R_{\Sigma} \leq \frac{Q_{\Sigma}}{N} \end{aligned} \quad (35)$$

From Eqs. (34) and (35), we can conclude: (set $R_{\Sigma} = R_{\Sigma}^*$ in (34))

$$\begin{aligned} TC_{CB}(R_{\Sigma}^*) &\geq TC_{Pool}(R_{\Sigma}^*) \geq TC_{Pool}(R_{\Sigma}^{\Delta}) \\ \Rightarrow TC_{CB}(R_{\Sigma}^*) &\geq TC_{Pool}(R_{\Sigma}^{\Delta}) \end{aligned} \quad (36)$$

Equation (36) shows the optimal total cost under the contract-based approach will be greater than or equal to the optimal total cost under the pool-based approach, no matter it is centralized optimal decision or decentralized optimal decision (we have proven they yield same value in our designed mechanism). In the other word, the pool-based approach is more cost-effective and should be adopted in the deregulated power markets.

V. CONCLUSION

In this paper, conceptual study on decentralized operating reserve plan is conducted. Two possible approaches are suggested. They are contract-based approach and pool-based approach. It is shown that, with the insurance policy, the decentralized optimal decision becomes possible and it yields the same optimal results as the centralized optimal decision in

both approaches.

It is proven for any amount of reserved capacity, the optimal total cost under the contract-based approach will be greater than or equal to the optimal total cost under the pool-based approach. Therefore, the pool-based approach is more cost-effective and should be adopted in the deregulated power markets.

Further research work is required to consider non-identical multi-players and transmission network impacts. For a large system with a large number of participants, N-1 security assumption may not be adequate. Reserve capacity based on an optimal-percentage of operating capacity should be considered as well.

VI. APPENDIX

Lemma 1: For a function $f(x)$ with the follow characteristics

$$\begin{aligned} f(0) &= 0 \\ f'(x) &\geq 0, \text{ for } x \geq 0 \\ f''(x) &\leq 0, \text{ for } x \geq 0 \end{aligned} \quad (\text{A.1})$$

It can be proven:

$$\begin{aligned} a \cdot f(x) &\geq f(a \cdot x) \text{ for } \forall a \geq 1; \text{ and} \\ a \cdot f(x) &\leq f(a \cdot x) \text{ for } \forall 0 \leq a \leq 1 \end{aligned} \quad (\text{A.2})$$

Proof:

By Taylor series, we have (if $O(x^3) \approx 0$):

$$a \cdot f(x) = a \cdot f(0) + a \cdot x \cdot f'(0) + a \cdot \frac{x^2}{2} \cdot f''(0) \quad (\text{A.3})$$

$$f(a \cdot x) = f(0) + a \cdot x \cdot f'(0) + \frac{a^2 \cdot x^2}{2} \cdot f''(0) \quad (\text{A.4})$$

because $f''(x) \leq 0$, we can have

$$\begin{aligned} (1) \quad a \cdot \frac{x^2}{2} \cdot f''(0) &\geq \frac{a^2 \cdot x^2}{2} \cdot f''(0) \text{ for } a \geq 1 \\ \Rightarrow a \cdot f(x) &\geq f(a \cdot x) \text{ for } a \geq 1 \end{aligned} \quad (\text{A.5})$$

$$\begin{aligned} (2) \quad a \cdot \frac{x^2}{2} \cdot f''(0) &\leq \frac{a^2 \cdot x^2}{2} \cdot f''(0) \text{ for } 0 \leq a \leq 1 \\ \Rightarrow a \cdot f(x) &\leq f(a \cdot x) \text{ for } 0 \leq a \leq 1 \end{aligned} \quad (\text{A.6})$$

Lemma 2: In the pool approach,

$$Q_j - \frac{Q_j}{N} + \frac{R_\Sigma}{M} \geq \frac{R_\Sigma}{H} \text{ if } N, M \geq 1 \text{ and } Q_\Sigma \geq R_\Sigma \cdot N \quad (\text{A.7})$$

Proof:

$$\begin{aligned} Q_j - \frac{Q_j}{N} + \frac{R_\Sigma}{M} - \frac{R_\Sigma}{H} &= \frac{Q_\Sigma}{M} - \frac{Q_\Sigma}{M \cdot N} + \frac{R_\Sigma \cdot N}{M \cdot N} - \frac{R_\Sigma \cdot N}{H \cdot N} \\ &= \frac{1}{M} (Q_\Sigma - R_\Sigma \cdot N) - \frac{1}{M \cdot N} (Q_\Sigma - R_\Sigma \cdot N) \\ &\geq 0 \quad (\because N, M \geq 1, Q_\Sigma \geq R_\Sigma \cdot N) \end{aligned} \quad (\text{A.8})$$

$$\Rightarrow Q_j - \frac{Q_j}{N} + \frac{R_\Sigma}{M} \geq \frac{R_\Sigma}{H} \quad (\text{A.9})$$

VII. REFERENCES

- [1] R. Billinton; N.A. Chowdhury. Operating reserve assessment in interconnected generating systems. IEEE Transactions on Power Systems Vol. 3, No. 4, Nov. 1988, pp. 1479-1487
- [2] Terje Gjengedal, Jan Ove Gjerde, Roger Flolo. Ancillary Services in Deregulated Power Systems; What are they; Who Need Them and Who

Pays. Proceedings of International Conference on Power System Technology (POWERCON), 1998. vol. 1. pp. 704-709

- [3] Shams N. Siddiqi; Martin L. Baughman. Reliability Differentiated Pricing of Spinning Reserve. IEEE Transactions on Power Systems, Vol. 10, No. 3, Aug. 1995. pp. 1211-1218.
- [4] Chung-Li Tseng; Shmuel S. Oren; Alva J. Svoboda; Raymond B. Johnson. Price-based adaptive spinning reserve requirements in power system scheduling. Electrical Power and Energy Systems, Vol. 21, Issue. 2 (1999), pp. 137-145.
- [5] E.H. Allen; M.D. Ilić. Reserve Market for Power Systems Reliability. IEEE Transactions On Power Systems, Volume 15, No. 1, Feb. 2000. pp. 228-233.
- [6] C.Y. Chan; F.F. Wu; Y. Ni. Conceptual Study on Decentralized Ancillary Service Plan with Applications of Insurance Theory.
- [7] M. Manove. Provider Insurance. Bell Journal of Economics, 1983, pp. 327-330.
- [8] Karl H. Borch, The mathematical theory of insurance: an annotated selections of papers on insurance published, 1960-1972. Lexington, Mass.: Heath, 1974

VIII. BIOGRAPHIES

Chi Yiu Chan (Student M. IEEE) He received his B Sc., M. Eng. degree from The University of Auckland in New Zealand. He is now a Ph.D. candidate of the University of Hong Kong. His research interests are power system reliability, operating reserves requirement and pricing in power systems and power markets.

Felix F. Wu (Fellow, IEEE) He received his Ph. D. degree from University of California at Berkeley (UCB). He is now a chair professor of electrical engineering and vice president of the University of Hong Kong. Prior to that he was a professor and vice-chair of Dept. of EECS, UCB. His research interests are electric energy industry restructuring, power system investment planning, design of modern control centres, distribution automation, distributed processing etc.

Yixin Ni (S. M. IEEE) She received her B. Eng., M. Eng., and Dr. Eng. degrees all in electrical engineering, Tsinghua University, China. She was former professor and director of National Power System Lab, Tsinghua University and now with the University of Hong Kong. Her research interests are power system stability and control, FACTS, AI tech. applications in power systems and power markets.