

Potentials of Gas Emission Reduction (GHG) by the Glass Sheet Industry through Energy Conservation

Washington Purba^{1,*}, Erkata Yandri^{1,3}, Roy Hendroko Setyobudi^{1,4}, Hery Susanto¹, Satriyo Krido Wahono⁵, Kiman Siregar^{6,7}, Yogo Adhi Nugroho⁸, Abubakar Yaro^{9,10}, Kamaruddin Abdullah^{1,2}, Yahya Jani¹¹, and Danny Faturahman¹²

¹Graduated School of Renewable Energy, Darma Persada University, Jl. Taman Malaka Selatan No.22, Pd. Kelapa, Duren Sawit, Jakarta 13450, Indonesia

²JAP-Energia, Graha Mampang, Lt. 3, Suite 305, Jl. Mampang Prapatan Raya Kav. 100, Jakarta 12760, Indonesia

³Center of Renewable Energy, Darma Persada University

⁴Department of Agriculture Science, Postgraduate Program, University of Muhammadiyah Malang, Jl. Raya Tlogomas No. 246, Malang, 65145, East Java, Indonesia

⁵Research Division for Natural Product Technology – Indonesian Institute of Sciences, Jl. Jogja - Wonosari, km 31.5, Gunung Kidul, Special Region Yogyakarta 55861, Indonesia

⁶Department of Agricultural Engineering of Syah Kuala University, Jl.Tgk. Hasan Krueng Kalee No.3, Kopelma Darussalam, Banda Aceh 23111, Indonesia

⁷Indonesian Life Cycle Assessment Network (ILCAN), Kawasan Puspitek Serpong, Tangerang, Banten 15314, Indonesia

⁸Data Processing, *Rumah Paper* – Editage Services, Jl. Tokala No.1, Malang 65146, East Java, Indonesia

⁹Institute of Health Sciences & Research, AHRO Scientific Publishing, 272 Bath Street, Glasgow G2 4JR, Scotland, UK

¹⁰Strathclyde Institute of Pharmacy & Biomedical Sciences (SIPBS), University of Strathclyde, SPBBS, 161 Cathedral St, Glasgow G4 0RE, Scotland, UK

¹¹Department of Built Environment and Energy Technology, Faculty of Technology, Linnaeus University, Lückligs plats 1 (Hus M), 351 95 Växjö, Sweden

¹²Departement Marine Engineering, Faculty of Ocean Technology, Darma Persada University

Abstract. Sheet Glass Industry is one industry that uses 75 % natural gas energy and 25 % electricity. Using the Intergovernmental Panel on Climate Change, IPCC-2006 emission calculation method, the average greenhouses gas (GHG) emissions obtained from the calcination process obtained 112 211 t CO₂ yr⁻¹ per plant and an average emission factor (EF_{kl}) of 0.18 CO₂ t⁻¹ yr⁻¹ of pull. With the technology of converting heat into electrical energy, residual combustion as flue gases has the potential to be used to produce electrical energy. Referring to the analysis and calculation; one of factories has potential to generate 0.8 MW to 3 MW electric energy. It's efficiency of 10 % to 40 % so that it can be calculated as a component of GHG emission reductions whose value is 4.6 t CO₂ yr⁻¹ to 18.7 t CO₂ yr⁻¹ per plant. With this reduction, each of the GHG emission and emission factors per plant dropped to 93 442 t CO₂ yr⁻¹ and 0.16 CO₂ t-pull⁻¹

Keywords: Emission factor, energy efficiency, flue gas, greenhouse gas, global

*Corresponding author: wp.sidadolok@gmail.com

Introduction

Global warming is a term used to describe the gradual increase in the average temperature of the earth's atmosphere and oceans, the value of $0.74\text{ }^{\circ}\text{C} \pm 0.18\text{ }^{\circ}\text{C}$ ($1.33\text{ }^{\circ}\text{F} \pm 0.32\text{ }^{\circ}\text{F}$) over the last 100 yr. Increasing the amount of carbon dioxide and other greenhouse gases released by burning fossil fuels, land clearing, agriculture, and other human activities, is believed to be the main source of global warming that has occurred over the past 50 yr. The Intergovernmental Panel on Climate Change (IPCC) concluded that, most of the increase in global average temperatures since the mid-20th century was most likely due to increased concentrations of greenhouse gases (GHGs) due to human activities [1].

The industrial sector provides energy consumption which varies by region, according to differences in industrial output, energy intensity (measured as energy consumed per unit of gross output), and industry composition [2]. Companies can reduce energy consumption in all ways, including improving industrial sector processes to optimize energy use and minimize energy losses, increase the use of cogeneration, and recycle materials and types of fuel to reduce costs and increase efficiency

Energy consumption in our country Indonesia until 2016 is 1 018 MBoe. In contrast to the distribution of global consumption by sector, of the total consumption of the industry is ranked second energy users, namely 30.88 %. The biggest energy consumption is the transportation sector by 43.89 % followed by residential / household 16.62 %, commercial 5.8 % and others. Based on the type of energy used, petroleum is still the largest portion of 43.7 % followed by electricity 19.9 %, natural gas 15.3 %, coal 9.6 %, LPG 8.5 % and biofuels 2.97 % [3].

Concerns from the world community on GHG emissions led to the birth of the Kyoto Protocol in December 1998, followed by the birth of the Paris Agreement at the 21st COP in Paris, 30 November to 12 December 2015. which contained agreements from member countries, which in essence agreed on the temperature threshold globally is below $2\text{ }^{\circ}\text{C}$, overcoming the maximum temperature change of $1.5\text{ }^{\circ}\text{C}$ from pre-industrial times

Indonesia signed the Paris Agreement on 22 April 2016 and was later ratified through Law Number 16 Year 2016. Indonesia's commitment at COP-21 in Paris to reduce GHG emissions by 29 % in 2030 by its own efforts (CM1) or by 41 % with international assistance (CM2) as outlined in the Nationally Determined Contribution (NDC) document [4]. This momentum is the basis for changing the target for GHG emission reductions in Indonesia by 26 % in 2020. From the 29 % figure, the energy sector received a portion of emission reduction of 314×10^6 t of CO_2 on its own efforts and 398×10^6 t of CO_2 with international support [4].

This paper is intended to analyze and calculate the electrical energy potential of sheet glass flue gas conversion and its contribution to the GHG emission of the industrial sector in Indonesia

2 Literature review

Until 2016, GHG emissions in Indonesia were $1\ 515 \times 10^6$ t CO_2 and this figure is down 39 % compared to 2015, and the biggest contribution was from the peat/forest fire sector 88 %, energy by 5 %, land use and forestry sector (Land use, land-use change, and forestry /LULUCF) by 27 % while the Industrial sector (Industrial Processes and Production Use/ IPPU) increased by 2 % [4].

Calculation of GHG emissions using the Intergovernmental Panel on Climate Change Guidelines in the 2006 IPCC Guidelines [5, 6] and the application of this methodology has been stipulated in Minister of LHK Regulation Number P.73 / MenLHK / Setjen / Kum.

1/12/2017 dated 29 December 2017 concerning Guidelines for the Implementation and Reporting of Greenhouse Gas Inventories [7].

The sheet glass production process begins with the preparation of raw materials for silica sand, dolomite, cullet and other supporting raw materials which are mixed into one raw material (mixed batch), then put into stages in a furnace with a capacity of 500 t yr⁻¹ to 700 t yr⁻¹ with a temperature of 1 500 °C , and operates for 24 h, 365 d, 15 yr continuously. In the production process, the biggest use of energy is natural gas (NG) in the smelting of raw materials and electrical energy in the process of forming, cooling and cutting. Figure 1 shows a diagram of the process of producing sheet glass, the use of energy and the resulting flue gas [8].

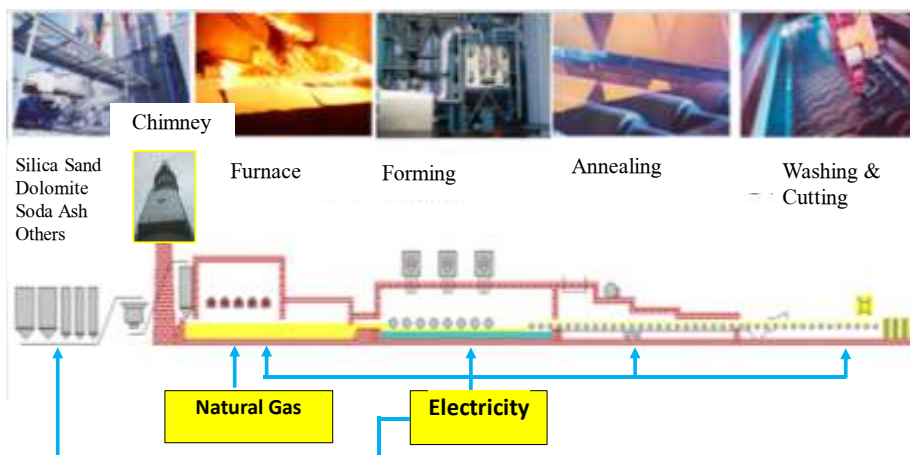


Fig. 1. Glass sheet manufacturing flow process

Raw material that has been melted (molten glass) is flowed on top of tin at a temperature of 600 °C to 800 °C for the formation of thickness and dimensions and is gradually cooled (annealing) with a blower.

The final process is washing, cutting (washing & cutting). In the production process, GHG emissions will occur during the melting process as direct emissions and the use of electricity in the process of forming, cooling and cutting as indirect emissions. The Equation (1) shows the heat energy from the furnace flue gas.

$$Q_{hr} = m \times C_p \times \Delta T \tag{1}$$

Q_{hr} = Heat (J), m = mass (kg), C_p = Heat Specific (J kg⁻¹ . K), dan ΔT = delta Temperatur In/Out (K or C)

Flue gas specific heat with NG fuel as in Table 1.

Table 1. Specific heat from the flue gas with NG fuel [9, 10]

Substance	Formula	$C_p = a + bt + bt^2 + br^3$ (t in K, C_p in kJ kmol ⁻¹ , K)				RANGE (K)	%ERROR	
		a	B	c	d		Max	Min
Nitrogen	N ₂	28.9	-1.57E-03	8.08E-06	-2.87E-09	273 to 1 800	0.59	0.34
Oxygen	O ₂	25.48	1.52E-02	-7.16E-06	1.31E-09	273 to 1 800	1.19	0.28


Substance	Formula	$C_p = a + bt + bt^2 + bt^3$				RANGE	%ERROR	
		(t in K, C_p in $\text{kJ kmol}^{-1}, \text{K}$)					(K)	Max
		a	B	c	d			
Carbon Dioxide	CO ₂	22.26	5.98E-02	-3.50E-05	7.47E-09	273 to 1 800		
Water Vapor	H ₂ O	32.24	1.92E-03	1.06E-05	-3.60E-09	273 to 1 800	0.53	0.24
Sulfur Dioxide	SO ₂	25.78	5.80E-02	-3.81E-05	8.61E-09	273 to 1 800	0.45	0.24

For some types of glass industry, the % of fuel that becomes heat losses in flue gas is 29 %, 30 %, 57 %, 53 %, and 56 % for sheet glass, container, press, insulation fiber, and textile fiber, as in Table 2.

Table 2. The capacity of furnaces and flue gases of several types of glass industry [9, 10]

Glass industry segment	Furnace capacity range	Typical furnace capacity	Natural gas consumption	Waste heat	% natural gas input lost to heat
	(t)	(t)	(Tbtu y ⁻¹)	(Tbtu y ⁻¹)	(%)
Flat glass	300 to 1 000	550+	41.10	11.82	29
Container glass	50 to 330	250	45.49	13.65	30
Pressed/brown glass	1 to 300	75	16.82	9.63	57
Insulation fiber glass	20 to 300	100	3.24	1.73	53
Textile fiber glass	100 to 150	100 to 150	11.05	6.14	56

The combustion reaction of a fuel into flue gases is describe [11] in Equation (2):



The percentage of each flue gas as the result of the reaction in Equation 2 with natural gas fuels can be calculated in a number of excess air as shown in Table 3.

Table 3. Composition of combustion flue gases with some % excess air

Flue Gas (%)	Excess Air (EA) in %									
	10	20	30	40	50	60	70	80	90	100
CO ₂	8.72	8.05	7.48	6.98	6.54	6.16	5.82	5.51	5.24	4.99
H ₂ O	17.43	16.1	14.95	13.96	13.09	12.32	11.64	11.03	10.48	9.98
N ₂	72.11	72.63	73.09	73.48	73.82	74.13	74.40	74.64	74.86	75.05
O ₂	1.74	3.22	4.48	5.58	6.54	7.39	8.14	8.82	9.43	9.98

GHG emission equation from energy use (GHG_{ENG}) [12] is describe in Equation (3).

$$GHG_{ENG} = EC \times EF \quad (3)$$

EC = Energy Consumption, EF = Emission Factor (56.2 CO₂ TJ⁻¹ for Natural Gas, 77.4 CO₂ TJ⁻¹ for Residual Oil).

GHG emission from process (GHG_{IPPU}) [6] is describe in Equation (4).

$$GHG_{IPPU} = Mg \times EF \times (1 - CR) \quad (4)$$

Mg = pull (ton), $EF = 0.21 \text{ kg CO}_2 \text{ kg}^{-1}$ glass at cullet ratio 10 % to 25 %, CR = cullet ratio.

Assessment of several industrial sector flue gases, conversion technology and investment costs per kW electricity, potential ORC applications for the conversion of flue gas heat to electricity from four industrial intensive sectors in several countries in the EU 27 and GHG emission reduction using electricity converted from gas The flue is shown in Table 4 and Table 5.

Table 4. Conversion of flue gas into electricity in several industrial sectors [13].

Industry	Temperature (°C)	Process	Technology	Efficiency (%)
Glass	230 to 480	Melting	SRC	20 to 43
			ORC	8 to 12
			TEG	5
			KC	15
Aluminium	790 to 1 080	2 nd Melting	SRC	20 to 30
Steel	580 to 680	Roll Mill	SRC-CO2-PC	13 to 17
Paper	82 to 140	Dryer	ORC	8 to 12
Food	150 to 350	Boiler	ORC	8 to 12
Chemical	150 to 260	Preheater	ORC	8 to 12

SRC (Steam Rankine Cycle), ORC (Organic Rankine Cycle), KC (Kalina Cycle).
 SC-CO2-C (Super Critical CO2 Cycle), TEG (Thermo Electric Generator).

Table 5. ORC application in four sectors in several EU27 countries [14].

Item	Industry	Glass	Cement	Steel	Oil & gas
	Process	Melting	Clinker	Eaf+roll mill	Gcs & gsf
Numbers		58	241	399	
Capacity (Mt yr ⁻¹)		12	247	217	
ORC Power (MW)		79	574	748	
E Recovery (GWh yr ⁻¹)	5 000 h	383	2 870	3 740	6 520
	8 000 h	628	4 592	5 984	10 432
Emission (k t CO ₂ yr ⁻¹)	5 000 h	140	1 212	1 351	2 328
	8 000 h	225	1 940	2 162	3 724
Cost Saving (ey y ⁻¹)	5 000 h	35	260	344	583
	8 000 h	56	416	550	933
Power Specific (r _p)		2.7 (kW t ⁻¹) d ⁻¹	1.01 (kW t ⁻¹) d ⁻¹	6.87 (kW t ⁻¹) d ⁻¹	

3 Methodology

The research methodology uses qualitative and quantitative methods. Quantitative using data for 2014 to 2018 from five different factories both for data on energy consumption, raw materials, and production volume. The data for the 5 yr are averaged, then GHG emissions are calculated using the 2006 IPCC method for the energy sector and IPPU as Figure 2.

GHG uses a combination of quantitative and qualitative, while the physical data of flue gas for 60 d from one of the factories is used as a reference to determine the physical

quality of flue gas heat. In the analysis, in addition to using physical / technical research data will also use qualitative methods, namely the chemical stoichiometry calculation to obtain the percentage of oxygen in the flue gas as a basis for the calculation of the resulting flue gas mass. Quantitative data was also carried out with literature studies of several previous studies on the technology of converting hot gas to electrical energy, but not in detail explained electricity from gas conversion is used in the production process and is calculated as a reduction of GHG emissions

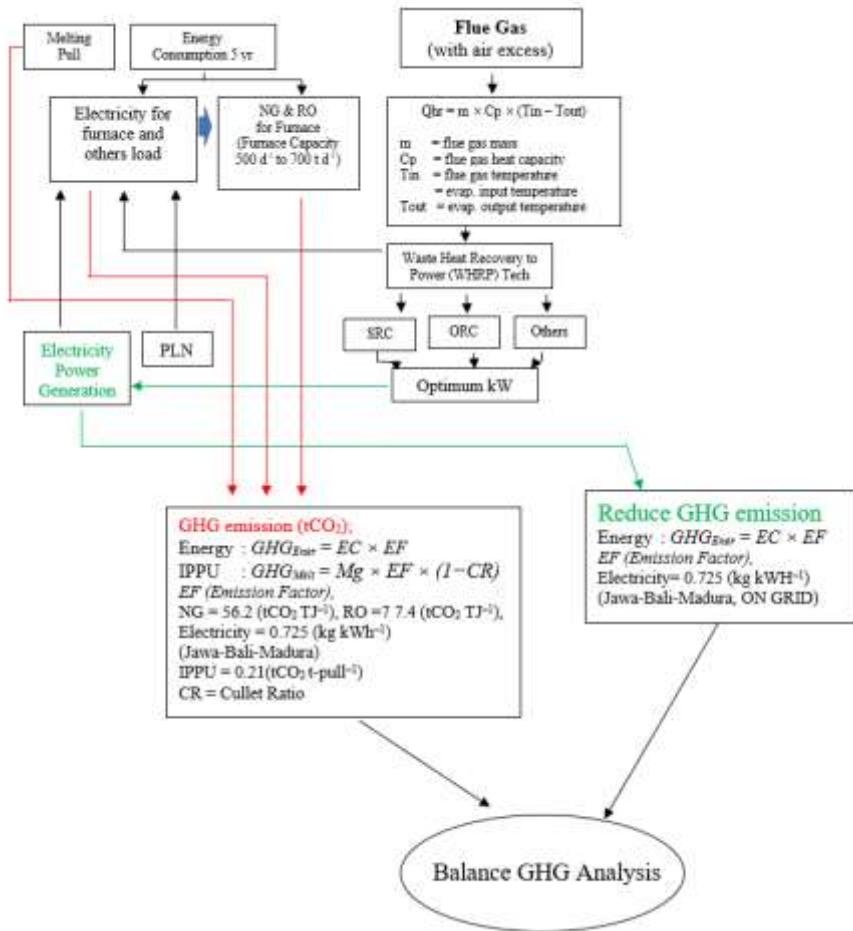


Fig. 2. Research flow

3.1 Data collection

Secondary data sources obtained from average data in 2014 to 2018, both for natural gas (NG) consumption data, residual oil, electricity and total glass volume produced (= pull) from five different factories as Table 6.

Table 6. Energy consumption & glass pull

Description	Unit	2014	2015	2016	2017	2018
Electricity (PLN)	MWh	22 224	21 188	20 632	23 565	24 142
Natural Gas	TJ	1 217	1 211	1 126	1 118	1 175
Residual Oil	TJ	-	8	114	55	2
Pull	t	153 020	152 543	146 259	173 388	171 476
Cullet Ratio	%	35	36	40	35	36

Flue gas temperature data using a source from the Distributed Control System (DCS) in 60 d and PI for one fuel cycle (20 min) such as Figure 3 and Figure 4.



Fig. 3. Flue Gas Temperature within 60 d

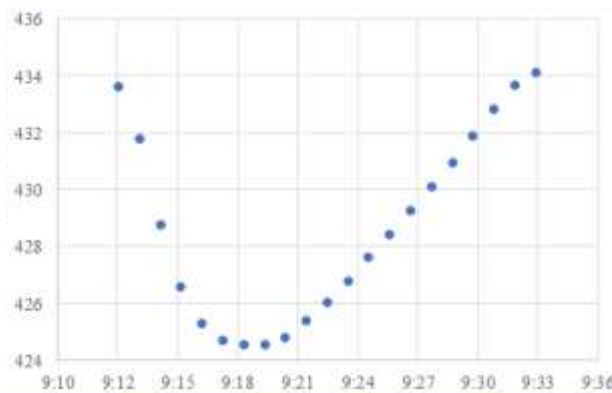


Fig. 4. Flue Gas Temperature within one firing cycle

From the DCS and PI data the maximum temperature is 434 °C, minimum 398 °C and an average of 416 °C.

3.2 Flue gas heat to electricity energy

If the density of NG = 0.74016, 1 NM³ NG = 1.0989 M³, air excess EA% from Table 3, stoichiometry A/F = 9.52, the obtained mass of 1 NM³ NG is 0.8134 kG so that the mass can be calculated each flue gas molecule such as CO₂, H₂O, N₂, O₂ and others with Equations 2 to Equation 9. With this data and the rate of natural gas consumption of 3 880 NM³ h⁻¹ (one furnace), the calculation of the molecular mass of the flue gas is shown in Table 7.

Table 7. The molecular mass of the flue gas in 1 NM³ natural gas

Composition	Mass (kg)	%	Cp (kcal kg ⁻¹)	Unit
CO ₂	2.219	10.8	0.200 7	kcal kg ⁻¹
H ₂ O	1.762	8.57	0.480 0	kcal kg ⁻¹
N ₂	15	72.99	0.248 2	kcal kg ⁻¹
O ₂	1.399	6.81	0.219 7	kcal kg ⁻¹
Others	0.169	0.82	0.230 0	kcal kg ⁻¹
Total	20.55	100	0.261 9	kcal kg⁻¹

With a molecular mass of 20.55 kg, a specific heat of 0.2619 from Table 6, natural gas consumption of 3 880 NM³ h⁻¹, input temperature of 434 °C, output of 120 °C and putting them into equation 2-1, a flue gas heat energy of is obtained 6.732 kcal h⁻¹ and equivalent with 7 830 kW h⁻¹.

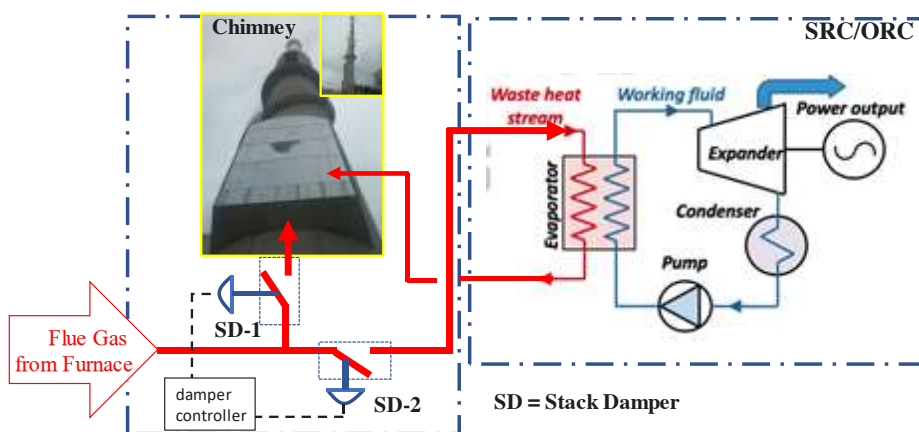


Fig. 5. Flue gas heat flow mechanism into the SRC/ORC

Through the process of converting heat into mechanical energy, electrical energy can be produced at 7 830 kW × the efficiency of converters such as SRC/ORC. Figure 5 shows a simple schematic mechanism of the flue gas heat flow into the SRC/ORC. The flue gas heat that is fed into the SRC evaporator is taken from the furnace output before being discharged into the chimney, through a flow regulating mechanism called a Stack Damper

4 Result and discussion

Using secondary data, a theoretical description of the calculation of GHG emissions and the potential heat of flue gases into electrical energy in the previous discussion, the results are presented in the following graphs.

Average emissions in 2014 to 2018 from five factories were 112 211 t CO₂, and were the biggest contributors to emissions from natural gas energy and 60 % residual oil, followed by the smelting process of raw materials 26 % and electrical energy by 14 %, as in Figure 6. When compared to emissions from electricity with natural gas and oil residuals to total emissions from energy, the percentage is 20 %:80 %. The amount of GHG emissions calculated is only half of the previous research data in Table 5 which is 225 Kt CO₂ yr⁻¹

because the table is based on all processes including transportation of raw materials, yields and others within the plant but for this study only uses data in the smelting process

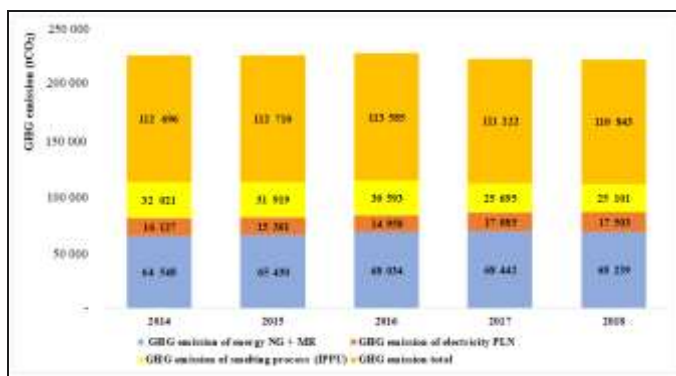


Fig. 6. GHG emission energy & smelting process

Emissions to ton pull, hereinafter referred to as FEkl (FEkl = Sheet Glass Emission Factor) are obtained by dividing the total GHG emissions in Figure 6 against pull in Table 6, as shown in Figure 7. The highest FEkl occurred in 2016 because one of the factories only operates until July 2017 and used 500 TJ residual oil, almost the same as natural gas of 518 TJ while residual oil emission factors were 32 % higher than natural gas. FEkl decreased from 0.19 to 0.16 starting in 2017 and 2018 because one other new factory starts production in early 2017 has a new furnace and a greater capacity, means that the efficiency of burning a new furnace is better.

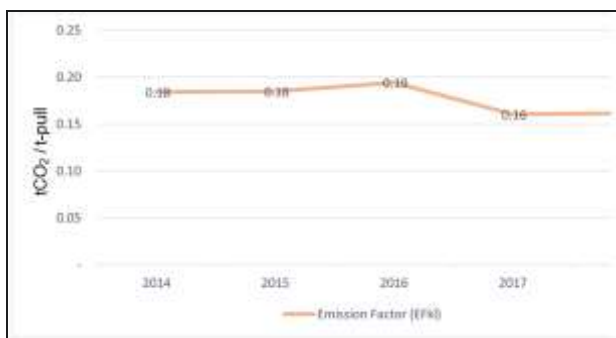


Fig. 7. GHG emissions (tCO₂) / t-pull.

The potential of electricity per year per furnace is 6 472 MWH up to 26 889 MWH from the flue gas heat of 7 830 kWh with an efficiency of SRC / ORC 10 % to 40 % as Figure 8. The higher the efficiency, the greater the electrical energy produced.

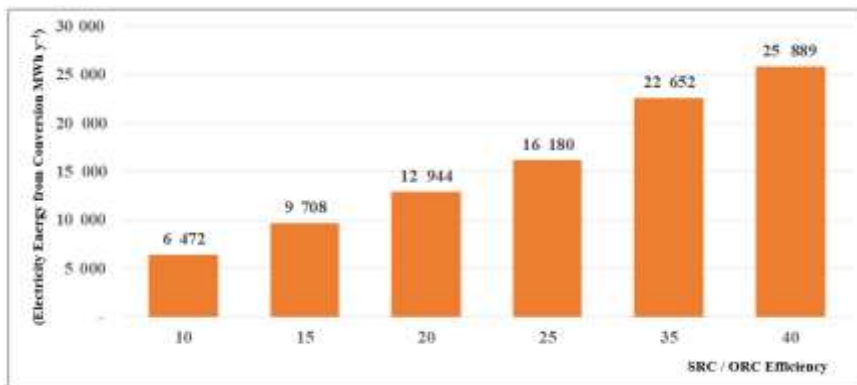


Fig. 8. Potential Electricity Energy (1 yr) from Flue Gas Conversion 7 830 kW-h per $\text{NM}^3 \text{h}^{-1}$ Natural Gas at SRC / ORC efficiency of 10 % to 40 %.

Calculation of the potential for reducing GHG emissions from the use of converted electricity, using the equation and the emission factor of the power plant from a PLN source of $0.725 \text{ t CO}_2 \text{ MWh}^{-1}$ (grid Ja-Ma-Li) as shown in Figure 9.

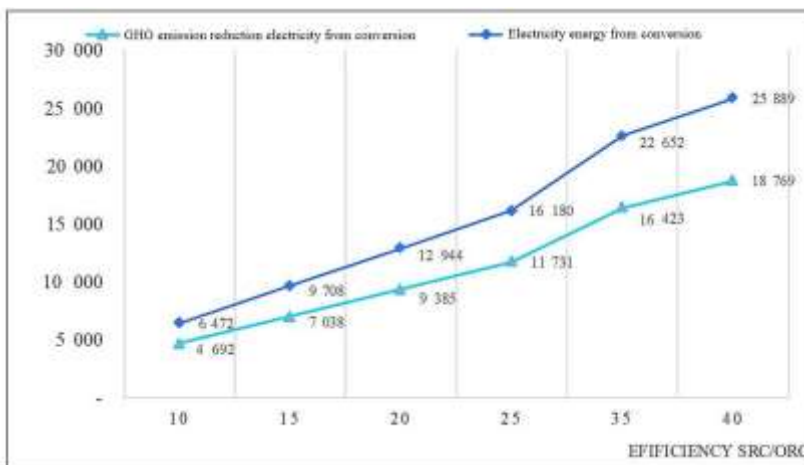


Fig. 9. Potential annual GHG Emission reductions from converting electricity

The converted electricity used in Figure 9 is a reduction in emissions, and will indirectly reduce the average emission factor from $0.18 \text{ t CO}_2 / \text{t pull}$ on Figure 7 to 0.17 t CO_2 to $0.15 \text{ t CO}_2 / \text{t-pull}$, it means that the average FE_{kl} is down by 11 %, shown in Figure 10.

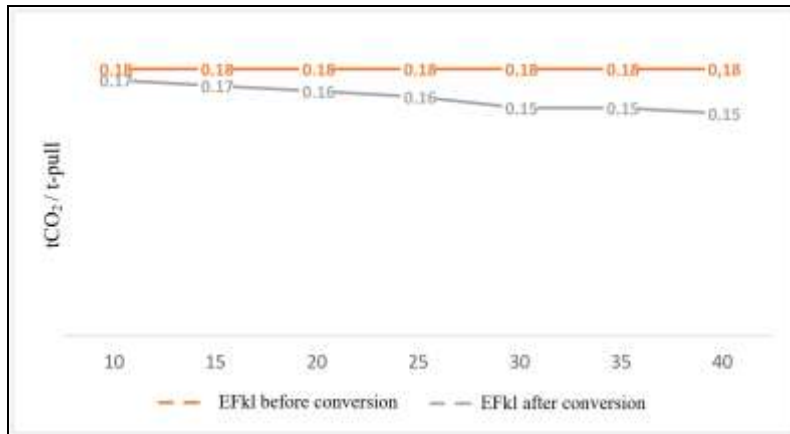


Fig. 10. GHG emissions per ton-pull (FEkl) before and after the use of converted electricity

5 Conclusion

Utilization of flue gas that is converted into electrical energy in the sheet glass industry with a pull capacity of 500 t to 700 t has the potential to generate electricity from 6 472 MWH yr⁻¹ to 25 889 MWH yr⁻¹, depending on the efficiency of the SRC/ORC used. The converted electricity will indirectly reduce GHG emissions by a factor of 0.18 t CO₂/t pull to 0.17 t CO₂ to 0.15 t CO₂/t pull, or an average reduction of 11 %, meaning that every single furnace in the glass industry can contribute to reducing emissions 11 % of emissions by utilizing flue gas into electrical energy that is used alone, and in emission total per year will reduce 112 211 t CO₂ yr⁻¹ to 93 442 t CO₂ yr⁻¹ per plant.

References

1. Encyclopedia Britannica. *Global Warming - Climatic Variation Since The Last Glaciation*. [Online] from <https://www.britannica.com/science/global-warming/Climatic-variation-since-the-last-glaciation> (2020). [Accessed 23 July 2020].
2. L. Miró, S. Brückner, L.F. Cabeza, *Renewable and Sustainable Energy Reviews*, **51**:847–855(2015). <https://www.doi.org/10.1016/j.rser.2015.06.035>
3. Ministry of Energy and Mineral Resources Republic of Indonesia, *2017 Handbook of Energy & Economic Statistics of Indonesia*, Jakarta: ESDM (2017), pp. 72. <https://www.esdm.go.id/assets/media/content/content-handbook-of-energy-economic-statistics-of-indonesia-2017-.pdf>
4. KEMEN-LHK, *Laporan Inventarisasi GRK dan Monitoring, Pelaporan dan Verifikasi 2017* [GHG Inventory and Monitoring, Reporting and Verification Report 2017], Jakarta: Kemen-LHK (2017), pp. 117. [in Bahasa Indonesia]. http://ditjenppi.menlhk.go.id/reddplus/images/adminppi/dokumen/lap_igrk_2018.pdf
5. D.R. Gómez, J. Wattersson, B.B. Americano, C. Ha, G. Marland, E. Matsika et al., *Stationary combustion*. Energy, 2006 IPCC Guidelines for National Greenhouse Gas Emissions Inventories, Geneva : Intergovernmental Panel on Climate Change (2006). https://www.ipcc-nggip.iges.or.jp/public/2006gl/pdf/2_Volume2/V2_2_Ch2_Stationary_Combustion.pdf
6. L. Hanle, P. Maldonado, E. Onuma, M. Tichy, H.G. van Oss, *Mineral Industry Emision*, 2006 IPCC Guidelines for National Greenhouse Gas Inventories, IPCC

- (2006). pp. 1–40. https://www.ipcc-nggip.iges.or.jp/public/2006gl/pdf/3_Volume3/V3_2_Ch2_Mineral_Industry.pdf
7. KEMEN-LHK, *Peraturan Menteri Lingkungan Hidup dan Kehutanan Republik Indonesia nomor P.73/Menlhk/Setjen/Kum.1/12/2017 tentang Pedoman Penyelenggaraan dan Pelaporan Inventarisasi Gas Rumah Kaca Nasional* [Regulation of the Minister of Environment and Forestry of the Republic of Indonesia Number P.73 / Menlhk / Setjen / Kum.1 / 12/2017 Regarding Guidelines for Implementing and Reporting the National Greenhouse Gas Inventory]. Jakarta: Kemen-LHK (2018). No. 163, 2018, pp. 249. [in Bahasa Indonesia]. <http://ditjenpp.kemenkumham.go.id/arsip/bn/2018/bn163-2018.pdf>
 8. MTPV-Designing Energy for the Future. *Glass Manufacturers - Convert Waste Heat Into Clean Energy* [Online] <https://www.mtpv.com/markets/glass/> (2020). [Accessed 23 July 2020].
 9. I.B. Page, *Waste heat recovery: technology and opportunities in US Industry*. US: Industrial technologies program US Department of Energy - Industrial Technologies Program, pp. 1–112(2008). https://www1.eere.energy.gov/manufacturing/intensiveprocesses/pdfs/waste_heat_recovery.pdf
 10. B. Inc, *Waste Heat Recovery: Technology Opportunities in the US Industry*. US: US Department of Energy, (2008). pp. 1–112. https://www1.eere.energy.gov/manufacturing/intensiveprocesses/pdfs/waste_heat_recovery.pdf
 11. Engineering ToolBox, *Stoichiometric Combustion*. [Online] from: https://www.engineeringtoolbox.com/stoichiometric-combustion-d_399.html (2003). [Accessed 23 July 2020].
 12. BAPPENAS. *Pedoman Teknis Perhitungan Baseline Emisi Gas Rumah Kaca Sektor Berbasis Energi* [Technical Guidelines for Baseline Calculation of Energy-Based Greenhouse Gas Emissions], Jakarta: Bappenas), (2014), pp. 60. http://ranradgrk.bappenas.go.id/rangrk/admincms/downloads/publications/Pedoman_teknis_penghitungan_baseline_emisi_GRK_sektor_berbasis_energi.pdf
 13. A. Amiri, M.R. Vaseghi, *IEEE Transactions on Industry Applications*, **51**,1:13–19(2015). <https://ieeexplore.ieee.org/abstract/document/6877735/>
 14. F. Campana, M. Bianchi, L. Branchini, A. De Pascale, A. Peretto, M. Baresi, et al., *Energy Conversion and Management*. **76**:244–252(2013). <https://www.doi.org/10.1016/j.enconman.2013.07.041>