



Электромагнитные поля компактных люминесцентных энергосберегающих ламп



Мария ЕВДОКИМОВА
Maria P. EVDOKIMOVA



Елена ФАРАФОНОВА
Elena A. FARAFONOVA

Елена ОЗЕРОВА
Elena S. OZEROVA

Озерова Елена Сергеевна – кандидат биологических наук, доцент кафедры «Химия и инженерная экология» Московского государственного университета путей сообщения (МИИТ), Москва, Россия.
Евдокимова Мария Павловна – инженер Национального исследовательского института медицины труда, Москва, Россия.
Фарифонова Елена Александровна – студентка 4-го курса МИИТ, Москва, Россия.

Electromagnetic Fields of Compact Energy-Saving Fluorescent Lamps

(текст статьи на англ. яз. – English text of the article – p. 228)

Рассматриваются вопросы, связанные с возможной экологого-гигиенической опасностью, которые могут представлять электромагнитные поля компактных энергосберегающих ламп. Приведены результаты измерений электромагнитных полей в низкочастотной области: спектрального состава, напряженности в зависимости от расстояния для ламп различных видов и потребляемой мощности. Показано, что максимальные величины напряженности электромагнитного поля частотой 50 Гц от измеренных энергосберегающих ламп не превышают предельно допустимых уровней.

Ключевые слова: экологическая безопасность, гигиена труда, компактные энергосберегающие лампы, электромагнитные поля, спектр электромагнитных полей, предельно допустимые уровни.


Переход на альтернативные источники энергии и ее рачительное использование – это одна из сегодняшних глобальных проблем человечества. Внедрение ресурсосберегающих систем и технологий в ОАО «Российские железные дороги» складывается из комплекса мероприятий, направленных на энергосбережение и повышение энергетической эффективности, что определено федеральным законодательным актом [1]. В числе прочего – внедрение энергоэффективного светотехнического оборудования для освещения помещений и территорий железнодорожных объектов, перспективных источников света, к которым, в частности, относятся компактные люминесцентные энергосберегающие лампы.

ПРЕДМЕТ ИЗУЧЕНИЯ

Переход с устаревших ламп накаливания на новые энергосберегающие лампы обусловлен их высокой световой отдачей, длительным сроком службы и незначительным тепловыделением. В связи с этим

Таблица 1

**Основные характеристики компактных люминесцентных
энергосберегающих ламп «Osram»**

Общий вид и тип ламп	Мощность	Световой поток	Цветовая температура	Габариты
 Osram «Micro Twist»	15 Вт	970 лм	2700 К	103×48 мм
 Osram «Micro Twist»	12 Вт	740 лм	2700 К	97×48 мм
 Osram «Dulux Superstar Classic A»	14 Вт	740 лм	2700 К	140×71 мм
 Osram «Dulux Star compact»	11 Вт	600 лм	2700 К	119×43мм

возникают не только технические проблемы, но и вопрос о потенциальной опасности, которую могут представлять энергосберегающие лампы для окружающей среды и человека [2, 3].

Компактные люминесцентные лампы в отличие от традиционных ламп накаливания, которые излучают видимый свет при нагревании находящейся в стеклянной колбе с инертным газом вольфрамовой нити, работают по принципу люминесцентной трубки, свернутой или в виде компактной спирали, или наподобие буквы U. В корпусе такой лампы содержится балластное электронное устройство, которое обеспечивает генерацию электрических импульсов для поддержания газового разряда в парах ртути, содержащихся в трубке. Электрический разряд создает импульсное ультрафиолетовое излучение, преобразуемое в видимый свет с помощью нанесенного на внутренние стенки трубы люминофора.

Такая технология имеет более высокую эффективность, чем у обычных ламп накаливания, однако создает некоторые недостатки: другой спектральный состав излучаемого света, содержание в трубке ртути и генерацию электромагнитных полей (ЭМП), связанных главным образом с электронным балластным устройством. Измерения величины ЭМП у компактных люминесцентных ламп различных фирм-

производителей проводились в низко- [4], средне- и высокочастотном диапазонах [5]. Но при этом не рассматривались вопросы, касающиеся спектрального состава ЭМП ламп в области низких частот, а также связь формы ламп и их мощности с расстоянием и интенсивностью создаваемых ими полей. И именно в том была цель нашего исследования, проводившегося на базе Научно-исследовательского института медицины труда.

МАТЕРИАЛЫ И МЕТОДЫ

Изучение интенсивности электромагнитного поля велось с помощью измерителя напряженности электрической и магнитной составляющих NARDA EFA-300 (NARDA Inc., США). Он позволяет проводить спектральный анализ ЭМП с использованием быстрого преобразования Фурье в диапазоне частот 5 Гц-32 кГц с шириной полосы (по уровню +0/-3 дБ) до 32 кГц. В измерениях фигурировало шесть компактных люминесцентных ламп «Osram» (Франция), имеющих незначительные различия в потребляемой мощности и отличающихся по виду и световому потоку. Тип и характеристики ламп приведены в таблице 1.

РЕЗУЛЬТАТЫ И ОБСУЖДЕНИЕ

В процессе измерения антенна EFA 2245/90.31 в диэлектрическом держателе



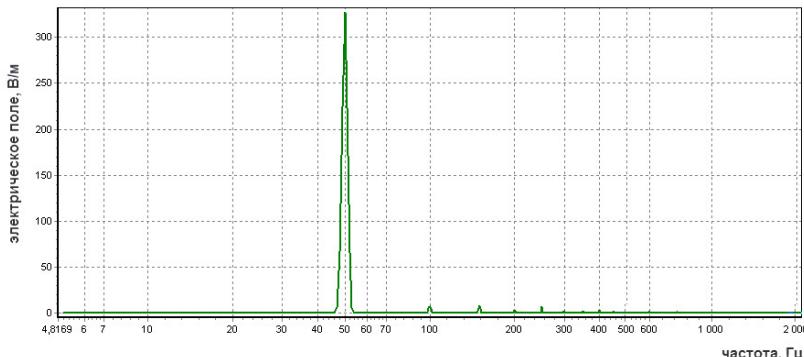


Рис. 1. Характерный спектр электромагнитного поля (электрическая составляющая) компактной люминесцентной лампы в диапазоне частот от 4 Гц до 2 кГц.

Таблица 2

Величины напряженности электрической составляющей ЭМП частотой 50 Гц на различных расстояниях от вершины компактной люминесцентной энергосберегающей лампы «Osram» (вертикальная ось)

Вид лампы, потребляемая мощность и световой поток	Напряженность электромагнитного поля частотой 50 Гц, В/м				
	Расстояние от лампы, см				
	1	5	10	15	30
«Micro Twist» 15 Вт, 970 лм	459,3	189,6	117,5	82,2	47,4
«Micro Twist» 12 Вт, 740 лм	449,7	175,6	113,4	82,2	45,4
«Dulux Superstar Classic A» 14 Вт, 740 лм	339,8	177,2	105,5	77,8	48,9
«Duluxstar Compact» 11 Вт, 600 лм	403,2	196,6	109,8	78,0	47,2

размещалась по вертикальной оси компактной люминесцентной лампы в пяти точках на расстояниях 1, 5, 10, 15 и 30 см от ее вершины. Первый этап заключался в регистрации спектра ЭМП ламп в диапазоне частот от 5 Гц до 32 кГц. Анализ полученных результатов показал, что спектры отличаются только амплитудой спектральных составляющих, тогда как их соотношение не меняется в зависимости от вида лампы и ее мощности. Характерный вид спектра ЭМП (электрическая составляющая) компактной люминесцентной лампы приведен на рис. 1. В спектре присутствуют основная электрическая составляющая ЭМП на частоте 50 Гц и в значительно меньшей степени — гармоники.

Исходя из полученного спектрального состава ЭМП, были проведены основные измерения напряженности поля всех ламп на частоте 50 Гц. Анализ результатов свидетельствует, что величины напряженности ЭМП на расстоянии 30 см от ламп в пре-

делах ошибки измерений практически одинаковы и находятся в пределах от 45,4 до 48,5 В/м. Однако на расстоянии одного см проявляются различия, касающиеся в первую очередь ламп с компактной спиралью («Micro Twist») и классической формы («Dulux Superstar Classic A») (см. таблицу 2).

Из всех шести измеренных ламп только у классической по форме «Dulux Superstar Classic A» величина напряженности ЭМП меньше зависит от расстояния до лампы. Однако, несмотря на самую меньшую величину ее напряженности ЭМП на расстоянии 1 см (339,8 В/м), значение того же параметра при 30 см является максимальным из всех измерений и составляет 48,9 В/м. Промежуточное положение по результатам измерения ЭМП частотой 50 Гц занимает «Duluxstar Compact», у которой при наименьшей потребляемой мощности 11 Вт величина напряженности сопоставима с величинами ламп «Micro



Twist», но световой поток у них меньше и составляет 600 лм.

ВЫВОДЫ

По результатам измерения можно предполагать, что величина напряженности электрической составляющей ЭМП на частоте 50 Гц компактных люминесцентных ламп зависит от конструктивного исполнения светоизлучающей трубки, а также от потребляемой лампами мощности.

Полученные данные позволяют считать наиболее оптимальной по сочетаемым характеристикам (световой поток, габариты и равномерное распределение интенсивности ЭМП в зависимости от расстояния) лампу «Dulux Superstar Classic A». Максимальные величины напряженности ЭМП частотой 50 Гц у нее составляют на расстоянии 1 см 459,3 В/м, а 30 см – 48,9 В/м.

Предельно допустимый уровень напряженности ЭМП частотой 50 Гц на рабочем месте в течение всей рабочей смены в соответствии с действующими санитарно-эпидемиологическими правилами и нормативами равен 5 кВ/м [7], а в жилых помещениях – не выше 0,5 кВ/м [8]. Обращаясь с позиций этих критерии к вопросам безопасности ЭМП компактных люминесцентных энергосберегающих ламп, можно

однозначно отметить их безусловную безопасность для окружающей среды и человека.

ЛИТЕРАТУРА

1. Федеральный закон Российской Федерации от 23 ноября 2009 г. № 261-ФЗ «Об энергосбережении и о повышении энергетической эффективности и о внесении изменений в отдельные законодательные акты Российской Федерации». [Электронный ресурс]: <http://www.rg.ru/2009/11/27/energo-dok.html>. Доступ 18.02.2016.
2. Гуревич В. Энергосберегающие лампы: обратная сторона медали // Электротехнический рынок. – 2010. – № 1–2. – С. 31–32.
3. Вредны ли люминесцентные лампы? Обзор по материалам СМИ // Энергосовет. – 2010. – № 6. – С. 56–59.
4. Azizi M., Aliabadi M., Golmohammadi R. The intensity of electromagnetic fields emitted by common compact fluorescent lamps // Journal of Ergonomics. – 2015. – Vol. 3, N. 2. – P. 76–84.
5. Bakos J., Nagy N., Juhász P., Thuróczy G. Spot measurements of intermediate frequency electric fields in the vicinity of compact fluorescent lamps // Radiat. Prot. Dosim. – 2010. – Vol. 142, N. 2–4. – P. 354–357.
6. Nadakuditi J., Douglas M., Capstick M., Kühn S., Kuster N. Application of an induced field sensor for assessment of electromagnetic exposure from compact fluorescent lamps // Bioelectromagnetics. – 2012. – Vol. 33, N.2. – P. 166–175.
7. Санитарно-эпидемиологические правила и нормативы СанПиН 2.2.4/1191–03. «Электромагнитные поля в производственных условиях». – М., 2003.
8. Санитарно-эпидемиологические правила и нормативы СанПиН 2.1.2.2645–10. «Санитарно-эпидемиологические требования к условиям проживания в жилых зданиях и помещениях». – М., 2010.

Координаты авторов: **Озерова Е. С.** – kafedra_ec_miit@mail.ru,
Евдокимова М. П. – yevdokimova.m@gmail.com, **Фарафонова Е. А.** – falenk@mail.ru.

Статья поступила в редакцию 09.02.2016, актуализирована 18.02.2016, принята к публикации 24.05.2016.





ELECTROMAGNETIC FIELDS OF COMPACT ENERGY-SAVING FLUORESCENT LAMPS

Ozerova, Elena S., Moscow State University of Railway Engineering (MIIT), Moscow, Russia.

Evdokimova, Maria P., Research Institute of Occupational Medicine, Moscow, Russia.

Farafonova, Elena A., Moscow State University of Railway Engineering (MIIT), Moscow, Russia.

ABSTRACT

The questions related to potential environmental and hygienic hazard, which may be caused by electromagnetic field of compact energy saving lamps, are considered. The results of measurements of electromagnetic fields in low frequency domain:

spectral composition, intensity depending on distance for lamps of various types and power consumption are presented. It is shown that maximum value of electromagnetic field frequency of 50 Hz from the measured energy saving lamps does not exceed the maximum permissible levels.

Keywords: ecological safety, occupational health, compact energy saving lamps, electromagnetic field, spectrum of electromagnetic fields, maximum permissible levels.

Background. The transition to alternative energy sources and its sustainable use is one of modern global problems. The introduction of resource-saving systems and technologies in JSC Russian Railways is composed of a set of measures aimed at energy conservation and energy efficiency, as defined by federal legislation [1]. Among other things – introduction of energy-efficient lighting equipment for illumination of premises and territories of railway facilities, advanced light sources, which, in particular, include compact fluorescent energy saving lamps.

Objective. The objective of the authors is to consider some important issues related to electromagnetic fields strength of compact energy-saving fluorescent lamps.

Methods. The authors use general scientific and engineering methods, comparative analysis, graph construction.

Results.

The object of study

Transition from outdated incandescent light bulbs to new energy-saving lamps is caused by their high luminous efficiency, long service life and low heat generation. In this regard, there are not only technical problems, but also the question of potential danger that can be posed by energy-saving lamps for environment and human [2, 3].

Compact fluorescent lamps, unlike conventional incandescent lamps that emit visible light upon heating of a tungsten filament being in a glass flask with inert gas operate under a principle of a fluorescent tube, collapsed or in a form of a compact spiral or like letter U. The body of such a lamp contains a ballast electronic device that ensures generation of electric pulses to maintain a gas discharge in mercury vapor contained in the tube. The electrical discharge creates a pulsed ultraviolet radiation converted into visible light by phosphor deposited on inner walls of the tube.

This technology has a higher efficiency than conventional incandescent lamps, however, has some drawbacks: other spectral composition of emitted light, content of mercury in the tube and generation of electromagnetic fields (EMF) associated primarily with the electronic ballast device. Measurements of EMF of

compact fluorescent lamps of different manufacturers were carried out in low [4], medium and high frequency ranges [5]. But it does not address issues related to spectral composition of EMF of lamps at low frequencies, as well as connection between the form of lamps and their power with distance and intensity of the fields generated by them. And that was the purpose of our study, conducted on the basis of Research Institute of Occupational Medicine.

Materials and methods

The study of electromagnetic field intensity was conducted using the field-intensity meter of electric and magnetic components NARDA EFA-300 (NARDA Inc., USA). It allows EMF spectral analysis using a Fast Fourier Transform in the frequency range of 5 Hz to 32 kHz with a bandwidth (at the level of +0/-3 dB) up to 32 kHz. The testing regarded six compact fluorescent lamps «Osram» (France), with minor differences in power consumption and differing in appearance and luminous flux. Type and characteristics of the lamps are shown in Table 1.

Results and discussion

During the measurement antenna of EFA 2245 / 90.31 in the dielectric holder was placed on the vertical axis of the compact fluorescent lamp at five points at distances of 1, 5, 10, 15 and 30 cm from its apex. The first step was to register the EMF spectrum of lamps in the frequency range from 5 Hz to 32 kHz. Analysis of the results showed that the spectra differ only in amplitude of the spectral components, while their ratio does not vary with the type of lamp and its power. The typical form of the EMF spectrum (electric component) of the compact fluorescent lamp is shown in Pic. 1. The spectrum contains the main electric component of EMF at a frequency of 50 Hz and to a lesser extent – harmonics.

Based on the obtained spectral composition of EMF were conducted basic field strength measurements of all lamps at a frequency of 50 Hz. Analysis of the results shows that the value of EMF strength at a distance of 30 cm from lamps within the measurement errors are virtually identical and are in the range of 45.4 to 48.5 V/m. However, at a distance of one cm differences arise regarding primarily bulbs of lamps with a compact spiral

Table 1

The main characteristics of energy-saving compact fluorescent lamps «Osram»

General view and type of lamps	Power	Luminous flux	Color temperature	Dimensions
Osram «Micro Twist»	15 W	970 lm	2700 K	103×48 mm
Osram «Micro Twist»	12 W	740 lm	2700 K	97×48 mm
Osram «Dulux Superstar Classic A»	14 W	740 lm	2700 K	140×71 mm
Osram «Dulux Star compact»	11 W	600 lm	2700 K	119×43mm

Table 2

The values of strength of the electric component of EMF of 50 Hz frequency at different distances from the top of the compact fluorescent energy-saving lamp «Osram» (vertical axis)

Lamp type, power consumption and luminous flux	Strength of electromagnetic field with a frequency of 50 Hz, V/m				
	Distance from the lamp, cm				
	1	5	10	15	30
«Micro Twist» 15 W, 970 lm	459,3	189,6	117,5	82,2	47,4
«Micro Twist» 12 W, 740 lm	449,7	175,6	113,4	82,2	45,4
«Dulux Superstar Classic A» 14 W, 740 lm	339,8	177,2	105,5	77,8	48,9
«Duluxstar Compact» 11 W, 600 lm	403,2	196,6	109,8	78,0	47,2

(«Micro Twist») and of classical forms («Dulux Superstar Classic A») (see Table 2).

Of all six measured lamps only for classically shaped «Dulux Superstar Classic A» a value of EMF intensity is less dependent on the distance from the lamp. However, despite the fact that it has the smallest value of its strength of EMF at a distance of 1 cm (339,8 V/m), the value of the same parameter at 30 cm is the maximum of all measurements and is 48,9 V/m. An intermediate position on the results of measurement of EMF with a frequency of 50 Hz is taken by «Duluxstar Compact», in which at least power consumption of 11 W the value of intensity is comparable with the values of «Micro Twist» lamps, but the luminous flux is less and is 600 lm.

Conclusions. According to the measurement results it can be assumed that the value of strength of electric component of EMF at a frequency of 50 Hz of compact fluorescent lamps depends on design of the light emitting tube, as well as on the power consumption of the lamps.

The obtained data allow to consider as the most optimal for compatible characteristics (luminous flux, dimensions and even distribution of EMF intensity depending on the distance) the lamp «Dulux Superstar Classic A». The maximum values of EMF intensity at 50 Hz frequency are at a distance of 1 cm of 459,3 V/m and at 30 cm are of 48,9 V/m.

Maximum permissible level of strength of EMF with frequency of 50 Hz in the workplace throughout the work shift in accordance with sanitary-epidemiological rules and norms is 5 kV/m [7], and in residential areas – not more than 0,5 kV/m [8]. Speaking from the standpoint of these criteria about EMF safety of compact fluorescent energy saving lamps, their absolute safety for the environment and humans can be clearly noted.

REFERENCES

1. Federal Law of the Russian Federation dated November 23, 2009 № 261-FZ «On energy saving and energy efficiency improvements and on amendments to certain legislative acts of the Russian Federation» [Federal'nyj zakon Rossijskoy Federatsii ot 23 noyabrya 2009 g. № 261-FZ «Ob ehnergosberezenii i o povyshenii energeticheskoy effektivnosti i o vnesenii izmenenij v otdel'nye zakonodatel'nye akty Rossijskoy Federatsii»]. [Electronic resource]: <http://www.rg.ru/2009/11/27/energo-dok.html>. Last accessed 18.02.2016.
2. Gurevich, V. Energy-saving lamps: obverse case [Energosberegayushchie lampy: obratnaya storona medali]. Elektrotehnicheskiy rynok, 2010, Iss. 1–2, pp. 31–32.
3. Are fluorescent lamps harmful? Review of media materials [Vredny li lyuminestsentnye lampy? Obzor po materialam SMJ]. Energosovet, 2010, Iss. 6, pp. 56–59.
4. Azizi, M., Aliabadi, M., Golmohammadi, R. The intensity of electromagnetic fields emitted by common compact fluorescent lamps. *Journal of Ergonomics*, Vol. 3, 2015, Iss. 2, pp. 76–84.
5. Bakos, J., Nagy, N., Juhász, P., Thuróczy, G. Spot measurements of intermediate frequency electric fields in the vicinity of compact fluorescent lamps. *Radiation Protection Dosimetry*, Vol. 142, 2010, Iss. 2–4, pp. 354–357.
6. Nadakuditi, J., Douglas, M., Capstick, M., Kühn, S., Kuster, N. Application of an induced field sensor for assessment of electromagnetic exposure from compact fluorescent lamps. *Bioelectromagnetics*, Vol. 33, 2012, Iss. 2, pp. 166–175.
7. Sanitary-epidemiological rules and norms SanPiN2.2.4 / 1191–03. «Electromagnetic field under production conditions» [Sanitarno-ehpidemiologicheskie pravila i normativy SanPiN2.2.4/1191–03. «Elektromagnitnye polya v proizvodstvennykh usloviyakh»]. Moscow, 2003.
8. Sanitary-epidemiological rules and norms SanPiN2.1.2.2645–10. «Sanitary-epidemiological requirements for living conditions in residential buildings and premises» [Sanitarno-ehpidemiologicheskie pravila i normativy SanPiN2.1.2.2645–10. «Sanitarno-ehpidemiologicheskie trebovaniya k usloviyam prozhivaniya v zhilykh zdaniyah i pomeşhcheniyakh»]. Moscow, 2010.


Information about the authors:

Ozerova, Elena S. – Ph.D. (Biology), associate professor at the department of Chemistry and Environmental Engineering of Moscow State University of Railway Engineering (MIIT), Moscow, Russia, kafedra_ec_miit@mail.ru.

Evdokimova, Maria P. – engineer of Research Institute of Occupational Medicine, Moscow, Russia, yevdokimova.m@gmail.com.

Farafonova, Elena A. – a 4th year student of Moscow State University of Railway Engineering, Moscow, Russia, falenk@mail.ru.

Article received 09.02.2016, revised 18.02.2016, accepted 24.05.2016.

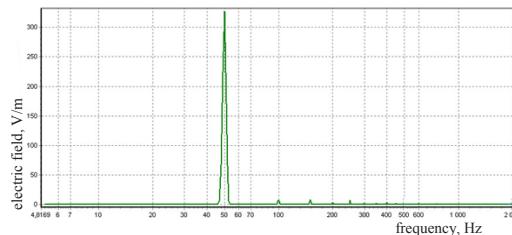

Pic. 1. The characteristic spectrum of electromagnetic field (electric component) of the compact fluorescent lamp in the frequency range from 4 Hz to 2 kHz.

