

Copyright WILEY-VCH Verlag GmbH & Co. KGaA, 69469 Weinheim, Germany, 2014.

NANO MICRO
small

Supporting Information

for *Small.*, DOI: 10.1002/sml.201303894

Donut-Shaped $\text{Li}_4\text{Ti}_5\text{O}_{12}$ Structures as a High Performance
Anode Material for Lithium Ion Batteries

Anulekha K. Haridas, Chandra S. Sharma, and Tata N. Rao**

Supporting Information

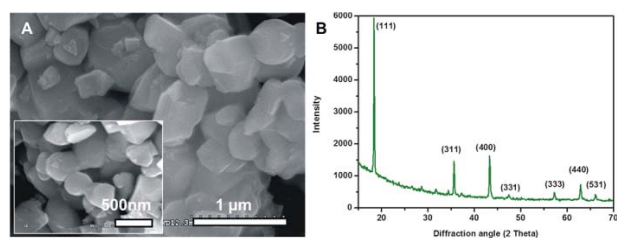


Figure S1. FESEM and XRD pattern of commercial LTO

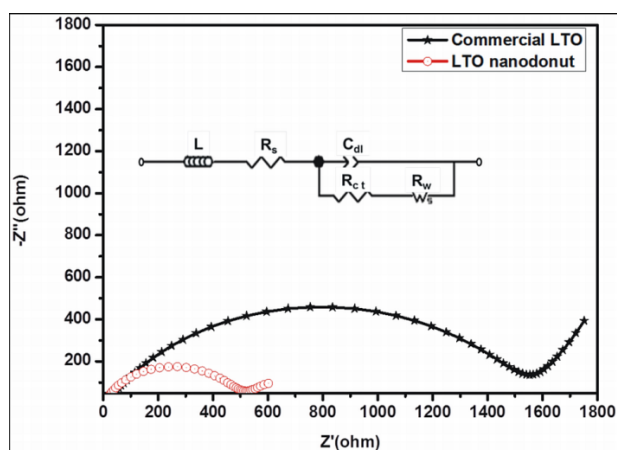


Figure S2. EIS Nyquist plot comparison of LTO sub-micron donuts and commercial LTO at 10 mV . An equivalent circuit for the same is also provided in the inset.

Electrochemical impedance curve fitting results on LTO sub-micron donuts and commercial LTO

Sl. No		R_s (Ω)	C_{dl} (μF)	R_{ct} (Ω)
1.	Commercial LTO	11.93	22.51	1561
2.	LTO sub-micron donuts	4.79	24.12	484.9

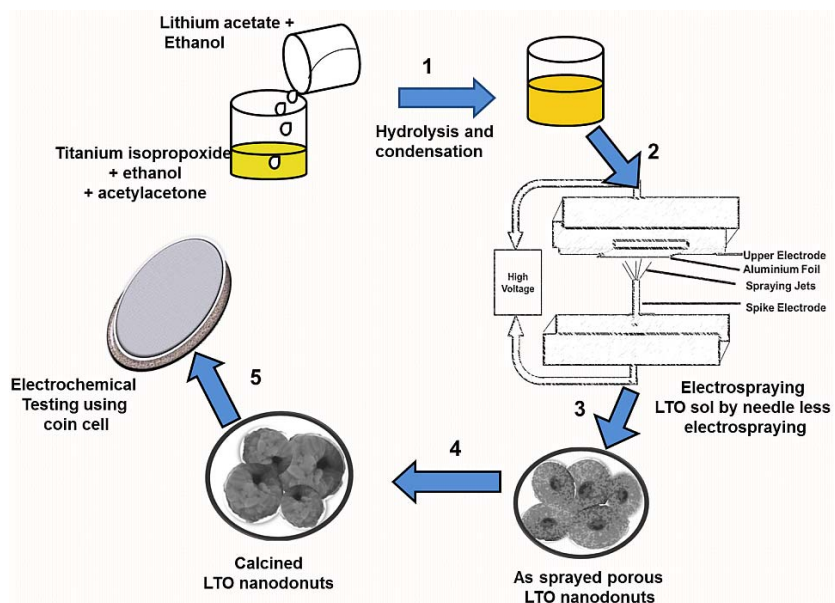


Figure S3. Schematic showing formation of LTO **sub-micron** donuts by sol-gel electrospinning for lithium ion battery application