

Title	The internal structure of a rockslide dam induced by the 2008 Wenchuan (Mw7.9) earthquake, China
Author(s)	Wang, Gonghui; Huang, Runqiu; Kamai, Toshitaka; Zhang, Fanyu
Citation	Engineering Geology (2013), 156: 28-36
Issue Date	2013-04
URL	http://hdl.handle.net/2433/173357
Right	© 2013 Elsevier B.V.
Type	Journal Article
Textversion	author

September 24, 2012

1

2 Submitted to *Engineering Geology*

3

4 Title:

5 The internal structure of a rockslide dam induced by the 2008 Wenchuan (M_w 7.9) earthquake, China

6

7 Authors: Gonghui Wang, Runqiu Huang, Toshitaka Kamai, Fanyu Zhang

8

9 **Addresses of authors:**

10 Gonghui Wang, Assistant Professor (Corresponding author)

11 Research Center on Landslides

12 Disaster Prevention Research Institute

13 Kyoto University

14 Gokasho, Uji, 611-0011

15 Japan

16 Tel: (+81)774-384114; Fax:(+81)774-384300

17 e-mail: wanggh@landslide.dpri.kyoto-u.ac.jp

18

19 Runqiu Huang, Professor

20 State Key Laboratory of Geo-hazard Prevention and Geo-environment Protection

21 Chengdu University of Technology

22 Chengdu, Sichuan 610059

23 P.R. China

24

25 Toshitaka Kamai, Professor

26 Disaster Prevention Research Institute

27 Kyoto University

28 Gokasho, Uji, 611-0011

29 Japan

30

31 Fanyu Zhang, Dr.

32 Disaster Prevention Research Institute, Kyoto University, Japan

33 (Currently, School of Civil Engineering and Mechanics, Lanzhou University, Lanzhou, Gansu, P.R. China)

34 Abstract:

35 The internal structure of landslide dams plays a key role in their stability; however, it has not been much studied,
36 probably due to the difficulty in obtaining information on internal structure in most cases. Here, we examined the
37 shear-wave-velocity structure of a rockslide dam by a surface-wave technique called multichannel analysis of
38 surface waves (MASW). During the 2008 Wenchuan earthquake ($M_w 7.9$), more than 60,000 landslides were
39 triggered and 800 landslide dams formed. Those dams with a high risk of collapse threatened rescue activities,
40 and almost all of the large landslide dams were treated by digging a sluiceway immediately after the earthquake.
41 Although the risk of collapse of many landslide dams was removed or lowered, not all of the countermeasures
42 were based on well controlled methods. To analyze the internal of landslide dams to assist in carrying out
43 reliable countermeasures, we made detailed investigations on some of the dams, and here describe one landslide
44 dam that occurred in the Tianchi area. Grain-size analysis revealed that the displaced landslide materials
45 experienced fragmentation and segregation during the long movement. The shear-wave-velocity profile of the
46 dam revealed that the dam consisted of three facies (carapace, body and basal facies). The boundary between
47 facies is distinct. The body facies had a greater shear-wave velocity (compared to those landslide dams that had
48 suffered collapse failure during the construction of a sluiceway), showing that the dam consisted of more densely
49 deposited materials. This kind of dam body had a lower permeability, capable of retarding seepage that triggers
50 collapse failure of the dam body due to piping. Big blocks on the surface also enabled the dam body to have
51 greater resistance to overflow and thus reducing possible collapse failure in the immediate aftermath of
52 overtopping.

53

54 Key Words: Landslide dam, 2008 Wenchuan earthquake, internal structure, stability of landslide dam, grain size
55 distribution

56

57 Introduction

58 Landslide dams form when large landslides block river flows, forming lakes. Landslide dams formed by
59 such mass movements are often weak in structure, and can fail under their own weight or by overtopping.
60 Sometimes the released water carrying landslide debris causes fatalities and substantial damage to properties
61 downstream. For example, a landslide dammed Dadu River in an earthquake in Sichuan Province in 1786. Ten
62 days later, the dam failed, resulting in a devastating flood that reached 1400 km downstream, killing about
63 100,000 people (Li et al., 1986).

64 In recent years, many landslide dams triggered by earthquakes and rainfall have been reported. They often
65 cause great difficulties to the recovery phases in the hazard areas, and also threaten the safety of people living
66 downstream. It is normally required to make a risk assessment of the stability of the dam within a short time
67 immediately after the dam's formation (Tabatake et al. 2002). Two different approaches, the topographical
68 approach (Costa & Schuster 1988, 1991; Casagli & Ermini 1999; Ermini & Casagli, 2003; Korup, 2002, 2004)
69 and the hydraulic approach (Mizuyama et al, 1987, 1989; Takahashi and Kuang, 1988; Takahashi and Nakagawa,
70 1993), have been developed to analyze the possible longevity of the dam and the flood profile when the dam is
71 breached. The topographical characteristics and the breaching failure mechanisms due to overtopping have been
72 widely examined. Nevertheless, our understanding of the formation of landslide dams is still poor; so many
73 countermeasures for dealing with some giant landslide dams are empirically based. Normally, a landslide dam
74 consists of heterogeneous displaced debris, with properties determined by the locality as well as by the
75 movement of the landslide itself. Hence, in many cases, although the risk of dam breaching has been
76 acknowledged and understood, there are still cases in which the dam has collapsed while countermeasures were
77 being carried out. For example, in 2000, a giant rock avalanche formed a large landslide dam in the Yigong area,
78 Tibet, China, and the main countermeasure was digging a sluiceway. However, the dam collapsed suddenly after
79 the sluiceway was finished, resulting in severe downstream flooding, killing about 100 people downstream, and
80 resulting in 5,000 people losing their homes (Zhu et al., 2003). Although this kind of catastrophic failure had
81 occurred previously, the countermeasures for the Tangjiashan landslide dam formed in the 2008 Wenchuan

82 earthquake in Sichuan, China (dam height: about 100 m; dam volume: about 24 Mm³; storage capacity of
83 dammed lake: about 320 Mm³) was also the construction of a spillway across the dam. Abrupt breaching
84 occurred due to rapid erosion at the dam site, and a great flood threatened the cities downstream, such as
85 Beichuan and Mianyang (Liu et al., 2009). Fortunately, only 1/3 of the dam height was breached, and 2/3 of the
86 dam height remained stable, preventing the release of the entire reservoir of water. On the other hand, some
87 hundreds of tonnes of dynamite were used on another landslide dam (formed during the 2008 Wenchuan
88 earthquake), in an attempt to make a spillway by blasting to lower the risk of an outburst flood in case the dam
89 breached abruptly. However, the explosion only functioned to break the big rocks, and the landslide dam itself
90 was stable enough. From these cases, we can conclude that a proper approach for analyzing whether a landslide
91 dam is stable or not has not been set up from an engineering viewpoint.

92 During the 2008 Wenchuan (M_w 7.9) earthquake, more than 90,000 people were killed due to the collapse of
93 houses or landslides. The earthquake triggered 40 – 60 thousand landslides (Huang, 2009; Dai et al., 2011;
94 Gorum et al., 2011) and more than 800 landslide dams were formed (Fan et al., 2012), greatly hindering recovery
95 and reconstruction in the seismic hazard area. Almost all of the landslide dams failed naturally or were removed
96 artificially soon after the earthquake. However, some of the larger landslide dams still remain, impounding large
97 volumes of water, so there is still a major risk of outburst flooding. Therefore, it is of great importance to
98 develop a fast and effective method to assess the risk of outburst flooding due to landslide dam failure.

99 To assist in assessing the risk of outburst flooding due to landslide dam failure, we carried out detailed field
100 surveys of some of the big landslide dams formed during the 2008 Wenchuan earthquake, investigating the
101 geological and topographical characteristics of the landslides, their processes of formation and the internal
102 structure of the landslide dams. In this paper, through study of the landslide dam formed in Tianchi Town,
103 Mianzhu City, we examine the formation of a landslide dam resulting from a long-travel rockslide occurring in a
104 carbonate rock area. We surveyed the internal structure of the dam site by means of a multiple-channel
105 surface-wave technique, and also analyzed the grain size distribution at the dam site. Based on the survey results,
106 we discuss the dam's formation and stability. Fig. 1 shows the epicenter the 2008 Wenchuan earthquake, the

107 locations of landslides and the location of the Tianchi landslide dam.

108

109 **2. Wenchuan earthquake and landslide dams**

110 On May 12, 2008, at 14:28 hr local time, an earthquake ($M_w 7.9$), with a hypocentre at 30.99°N, 103.36°E,
111 at a depth of 19 km occurred in Sichuan province, China (USGS, 2008). This is known as the Wenchuan
112 earthquake, named after the earthquake's epicenter in Wenchuan County (Fig. 1). The maximum ground
113 acceleration recorded during the earthquake was at Wolong, 18 km WNW of the epicenter. Peak accelerations
114 there were 957.7 gal in the East-West direction, 652.9 gal in the North-South direction, and 948.1 gal vertically
115 (Li *et al.*, 2008). The earthquake was felt as far away as Beijing (1500 km away) and Shanghai (1700 km away),
116 and also in some nearby countries. Strong aftershocks continued to hit the area months after the main quake,
117 causing further casualties and damage.

118 The 2008 Wenchuan earthquake occurred in the Longmen Shan thrust zone, which is located on the eastern
119 boundary area of the Tibetan plateau. The Longmen Shan thrust zone is one of the most significantly deformed
120 regions in China, with many seismically active faults (Burchfiel *et al.*, 1995, 2008; Jia *et al.*, 2006, 2007;
121 Densmore *et al.*, 2007). The thrust zone is about 60 km wide, and marks the topographic boundary between the
122 eastern Tibetan Plateau and the Sichuan basin. The convergence rate across the thrust zone is inferred to be 4-6
123 mm/yr (Deng *et al.*, 1994). Earthquakes occur frequently along this zone. In 1933, a M7.5 earthquake occurred
124 in Diexi, 50 km northeast of Wenchuan. During this earthquake, some large lakes were formed behind landslide
125 dams, and 6800 people were killed (about 2500 people were directly killed by the floods that followed collapse
126 of two landslide dams). In 1976, two earthquakes (M7.2) occurred in Songpan and Pingwu, northeast of
127 Chengdu.

128 In the Wenchuan earthquake area, the rocks in the vicinity of the Longmen Shan thrust zone are mainly
129 composed of Triassic granite, metamorphosed sandstone, phyllite, sandy slate and dolomite (Ma, 2002). The
130 rocks are closely jointed due to strong tectonic movement in this area. The adjacent Chengdu basin has been less
131 affected by tectonic activity and remained relatively stable throughout the Cenozoic; here the strata of Jurassic

132 and Cretaceous age are covered by Quaternary alluvium (Ma, 2002).

133 The earthquake formed more than 800 landslide dams (Fan et al., 2012), of which 104 had heights of >10 m,
134 impounding >10,000 m³ of water, and with catchment areas >20 km². Based on the scale of the landslide dam,
135 the possible peak value of outburst flooding after breaching, and the possible downstream flooding area, the
136 degree of risk of each landslide dam was placed into one of three risk categories (high, medium and low). Of the
137 landslide dams, 6 were at high risk, 25 were at medium risk and 72 were at low risk (Liu, 2008; Yin, 2008).
138 Emergency treatment measures had been carried on many of the landslide dams. The emergency work on the
139 Tangjiashan landslide dam was reported worldwide and attracted wide concern.

140

141 3. Landslide dam in the Tianchi area

142 The landslide dam in Tianchi town (hereinafter called the Tianchi landslide dam) (Fig. 2), about 100 km
143 north of Chengdu, resulted from a rock avalanche occurring on the right slope of a tributary of the Mianyuan
144 River in Mianzhu City. Fig. 2a shows a satellite image of the landslide area taken before the earthquake. Figs. 2b
145 and 2c present an oblique view of the whole dam site and a view from upstream. Fig. 2d shows a view of the
146 dam from downstream, in which the piping is marked by a circle. From the Google Earth image and field
147 investigation, we inferred that there was an unstable rock at the source area before the earthquake (marked as
148 'Unstable block' in Fig. 2a). The geological setting of the Tianchi area is presented in Fig. 3. The landslide area
149 consists of Devonian clastics and carbonate (dolomite or dolomitic limestone). Bedding planes and joints of the
150 bed rock in the source area were surveyed and are shown in Fig. 4, and they can be mainly divided into 5 groups.
151 The bedrock of the source area was fractured by these bedding planes and joints, and a big unstable wedge was
152 formed on the bedrock near the mountain ridge (Fig.4a). This unstable wedge failed during the earthquake, and
153 traveled downslope rapidly (~28.5 m/s, Wang et al., 2011), burying the river channel, and climbing the slope of
154 the opposite bank. A landslide dam was formed, with a dam height of 34–41 m, a length (along the river channel)
155 of 158 m, and a width (across the river channel) of 70–102 m. The city hall, elementary school, and some houses
156 on the upstream side were flooded by the impounded water. Fig. 5 shows the cross section along line I-I' shown

157 in Fig. 2a. For the cross section in Fig. 5, the topography after the quake was measured by a laser measuring
158 technique (Trupulse360), while the topography before the quake was inferred from maps and field investigation.

159 The landslide dam is located on a tributary of the Miyuan River. The local engineers thought that the
160 landslide dam was formed by big rock blocks, because the surface is covered by big rocks up to 6 m. Water
161 flows from the lower part of the landslide dam on the downstream side, and the water level of the barrier lake
162 was almost constant.

163 No engineering work was undertaken on the Tianchi landslide dam for about one and half years after the
164 earthquake. Thereafter, following the need for recovery and reconstruction work upstream of the landslide dam,
165 a spillway was dug in the dam gradually by steps. Finally, the dam was excavated to the level of the river bed
166 before the earthquake. Fig. 6 shows the status of excavation of the channel at different times (Fig.6a on June,
167 2010). The channel had been excavated in three steps at the time of our first survey, and had reached the original
168 bed river at the time of our second survey (June, 2010). The progressive channel excavation enabled us to
169 perform a geophysical survey using a surface wave technique called the multichannel analysis of surface waves
170 (MASW) and also carry out grain-size-distribution analysis of the soil layers in the dam at different depths.

171

172 **4 Internal structure of the landslide dam**

173 4.1 Grain-size distribution

174 The surface of Tianchi landslide dam was almost completely covered by very large boulders (c. 2–6 m in
175 diameter). Observations of the soil layers in the dam exposed as channel construction progressed revealed that
176 the boulders were mostly in the surficial soil layer; immediately below the surficial layer were small boulders (<
177 0.5 m), gravels and finer debris. To analyze the grain-size distribution of soil layers at different depths within the
178 dam, we analyzed grain size by sieving and photography. The reliability of this combined method for grain size
179 distribution analysis has been verified by Casagli et al (2003). We performed the analysis by following steps.

180 (1) The area ratio of grains with $\phi > 40\text{mm}$ was measured by means of particle digital image analysis. Due to
181 the progressive excavation of the channel, soil layers at different depths were exposed. We sampled 11 points at

182 different soil layer levels, reshaping the face locally to be vertical. Two orthogonally oriented scales were put on
183 the vertical surface, and photographs were taken.

184 (2) For the target measuring area, the area ratios of grains with differing sizes were calculated by
185 photographic analysis. After taking the photo, the grain in each photograph was outlined by drawing a line along
186 its boundary. Using the outlined figure, the diameter (the diameter of the inscribing circle of the outline) and the
187 cross section area of each grain were calculated, and the total cross section area of grains with the same diameter
188 was then calculated. Considering the possibility of human error in drawing the outlines of grains, we used a
189 photographic analysis method to analyze the larger grains with $\phi > 4.75$ mm.

190 (3) We took samples from the surface of the photographed area, sieved out those gravels with $\phi > 50$ mm,
191 and took 10 kg of samples ($\phi \leq 50$ mm) to the laboratory for further grain size analysis by sieving following the
192 ASTM standard.

193 (4) The percentages of grains with different grain sizes were calculated. Assuming that the debris has the
194 same density, the percentages by weight of grains with differing sizes were calculated through the area ratio
195 (obtained by particle digital image analysis) of different grains and the results from sieving analysis.

196 We sampled 11 locations for the distribution of grain size in the Tianchi landslide dam (Fig. 6a). Samples
197 P1 – P8 were taken on November 2009, and P9 – P11 on June 2012. P1 – P4 and P8 are located on the upper
198 steps along the road, P5 – P7 are on the side slope of the excavation at level L3. P9 – P11 are located at the
199 bottom of the excavation (about 2 m above the outcropping former river bed). P9 is near the downstream margin
200 of the landslide dam, while P10 is below P7, and P11 is below P5. Fig. 7 presents the grain-size distributions.
201 Because very large boulders were located only in the surficial layer, there were no grains > 50 cm in Fig. 7. From
202 the grain size distribution of P1 – P4, and P8 (Fig. 7a), we saw that the grains tended to become coarser closer to
203 the lateral margins (say, P8 and P9). This tendency is normal in the deposits of large-scale rock avalanches
204 (Schulz et al., 2008; Crosta et al., 2011; Davis and McSaveney, 2011; Dunning and Armitage 2011), due to the
205 segregation of grains during movement. Nevertheless, a similar tendency was missing in the grain-size
206 distribution of P5 – P7 (Fig. 7b). This may result from the facts that P5 – P7 were located in the deeper soil

207 layers of the dam site, and the distance between them was relatively short.

208

209 4.2 Shear-wave velocity profile of the landslide dam

210 To investigate the internal structure of the landslide dam, we used a surface-wave method known as
211 multichannel analysis of surface waves (MASW) (Park et al., 1999; Hayashi and Suzuki, 2004) to measure the
212 shear-wave velocity profile of the landslide-dam site. The survey principle of MASW and the layout of
213 equipment (Seismograph: Model McSEIS-SXW, OYO Corporation, Tokyo, Japan; Geophones: Model GS-11D,
214 OYO Geospace Corporation, Houston, Texas, USA) are outlined in Fig. 8. In the survey, 24 geophones were
215 spaced at 2 m intervals along a line. A wooden hammer (about 8 kg) was used as the seismic motion exciter. The
216 hammer points were outside of both ends of the survey line and also intermediate between the geophones. We
217 carried out our first survey in November 2009, when the landside dam had been excavated with the shape shown
218 in Fig. 6b. The landslide dam excavation had three steps (L1, L2 and L3), with the most upper one (L1) along the
219 original road before the earthquake and exposed during the excavation. Step L3 (shown by dashed line) was flat
220 at the time of our survey, although it was later dug deeper as excavation progressed. In June of 2010, we
221 surveyed this area again, when the excavation had been finished, and the bottom of the excavation had reached
222 almost to the original river bed level (L4). Hereinafter, we call these survey lines L1, L2, L3, and L4,
223 respectively. Fig. 9 show the shear-wave velocity profile along survey line L1, and Fig.10 along survey lines L2
224 to L4. As mentioned above, L1 is along the original road. The shear-wave velocity values obtained along this
225 line thus represent those of the slope before the earthquake. As shown in Fig. 9, most of the field has shear-wave
226 velocity values ranging from 400–480 m/s. However, around 30 m from the beginning point and at a depth of 9
227 m, shear-wave velocity values are smaller (ranging from 350–400m/s). This field of smaller shear-wave velocity
228 values might reflect the former channel of the stream, i.e., landslide debris buried the stream path, with the soil
229 layer deposited being looser than the surrounding original mountain slope.

230 Survey line L2 was along the newly built road. Due to the construction of the road, a 3–5m thick soil layer
231 had been excavated (Fig. 6b). In L2, the whole surficial layer (about 6 m deep) and all soil layers (from the

232 surface to the bottom) 0–30 m from the upstream end of the line had relatively smaller shear-wave velocity
233 values (330–390 m/s) (Fig. 10a). Most of the soil layer along L3 showed greater shear-wave velocity values (400
234 m/s–480 m/s) (Fig. 10b). However, the domain on the middle part of the survey line (30–60m) and 7–10m deep
235 had relatively smaller shear-wave velocity values (330m/s–400m/s). Although the grain size of the soil layer near
236 this area was not measured, from the grain size distribution of the surficial soil layers in L3 (P5–P7 in Fig. 7b),
237 we can infer that the effective grain size (D_{10}) tended to become smaller. If it is assumed that the soil density is
238 everywhere constant, the rigidity modulus becomes smaller with decrease of gravel content. Because the
239 shear-wave velocity $V_s = \sqrt{\frac{G}{\rho}}$ (G : Rigidity modulus; ρ : mass of soil layer), the smaller the rigidity modulus is,
240 the smaller the shear-wave velocity becomes. Therefore, we infer that the area with smaller shear-wave velocity
241 (shown in the ellipsoidal area) might result from a segregation phenomenon as shown in Fig. 7. Due to the
242 segregation process during movement, finer debris accumulated in this area, forming soil layers that are
243 relatively weaker than the surrounding domain. The soil layer below line L4 showed high shear-wave velocity
244 values (400 m/s–480 m/s) in general, with a small area with relative low shear-wave velocities (330–390 m/s).
245 However, the soil layer near the bottom (the original river bed) showed lower shear-wave velocities
246 (250–300m/s). This may partially result from the original fluvial river-channel deposits and also the entrained
247 substrate mixed with rockslide debris.

248

249 5. Discussion

250 It has been noted that breaching of landslide dams normally results from three types of failure processes
251 (Takahashi and Kuang, 1988), i.e., overtopping erosion, occurrence of slides on the whole dam, and progressive
252 failure. It has also been noted that overtopping breaching is dominant in breached landslide dams, and that
253 progressive dam failure due to seepage (piping flow) is rare (Mizuyama et al., 1987, 1989). However, of the 32
254 big landslide dams that formed during the 2008 Wenchuan ($M_w 7.9$) earthquake and had engineered channels
255 excavated in them, 8 failed from piping flow (Xu et al. 2009). Thus, in the case of the Wenchuan earthquake,
256 piping-triggered catastrophic breaching of landslide dam was not rare. Furthermore, many of the landslide dams

257 that consisted of finer grained debris of sand and gravels suffered breaching due to overtopping erosion. On the
258 other hand, landslide dams consisting of coarser materials (such as gravels and huge boulders) showed greater
259 stability (Chigira et al., 2010; Wang, 2011).

260 For longevity analysis of landslide dams, an approach termed the *Dimensionless Blockage Index (DBI)* has
261 been proposed by Ermini and Casagli (2003).

$$262 \quad DBI = \log (A_b H_d/V_d) \quad (1)$$

263 where A_b is area of the catchment (km^2); H_d is height of the landslide dam (m) ; V_d is volume of the landslide
264 dam ($\times 10^6 \text{ m}^3$). Based on the analysis of many recorded landslide dams all over the world, Ermini and Casagli
265 (2003) recognized three “stability domains” for the dimensionless blockage index (1) when $DBI < 2.75$, the
266 landslide dam lies in the stability domain; (2) when $2.75 < DBI < 3.08$, the landslide dam is in the uncertain
267 domain; and (3) when $DBI > 3.08$, the landslide dam is in the instability domain.

268 For Tianchi landslide dam, its length is about 158 m, width 70–102 m, and height 34–41 m, the upstream
269 catchment area is about 30.83 km^2 . Equation 1 indicated a *Dimensionless Blockage Index* value of 3.72. Hence,
270 Tianchi landslide dam could be regarded to lie in the instability domain. However, no breaching occurred before
271 the channel was excavated. This suggested that the landslide dam itself was stable. It is noted that during the
272 channel excavation on some other large landslide dams formed in the same earthquake in Sichuan, such as
273 Tangjiashan, Xiaojiaqiao, and Xiaogangjian, etc, abrupt dam breaching occurred, resulting in catastrophic
274 flooding downstream. In Fig. 11, we superimposed the plot of catchment area against V_d/H_d together with those
275 obtained by Ermini & Casagli (2003), where SD means the stability domain, UD instability domain. The risk of
276 abrupt breaching of some large landslide dams formed in the 2008 Wenchuan earthquake is correctly indicated
277 by the Dimensionless Blockage Index, with the exception of the Tianchi landslide dam. This may be due to the
278 fact that the Dimensionless Blockage Index is based on topographic features of the landslide dam and the
279 upstream catchment area, without consideration of the dam’s geotechnical properties. Such anomalous behavior
280 has also been reported by Strom (2010), who suggests that additional quantitative parameters characterizing
281 landslide dams and dammed lakes should be used in the stability analysis of landslide dams. However, although

282 the geotechnical properties of landslide dams play a key role in dam stability and also in the resistance to
283 overtopping erosion, they have been rarely incorporated before now, probably due to the difficulties in obtaining
284 them.

285 We surveyed the shear-wave velocity profiles of several large landslide dams formed in the 2008 Wenchuan
286 earthquake, and found that those dams that abruptly breached during the construction of the sluiceway had
287 shear-wave velocity values smaller than 250 m/s (Wang, 2011). It is known that the standard penetration test N
288 value of a soil layer has a positive correlation with the shear-wave velocity (Imai and Tonouchi, 1982). A higher
289 shear-wave velocity value means that the soil layer has greater penetration resistance, indicating that the soil
290 layer is more tightly consolidated. From Fig. 10 we can see that almost all the domains of Tianchi landslide dam
291 have greater shear-wave velocity values (say, >300 m/s). Therefore, we conclude that the landslide dam is in a
292 tightly consolidated state, so no abrupt breaching could occur during the discharge of impounded water after the
293 channel excavation was finished. The greater shear-wave velocities may be due to the fact that the landslide
294 debris with high mobility rushed into the river valley, and was deposited there suddenly, leading to the debris
295 being tightly consolidated. Such tightly consolidated landslide dams may be less likely to experience slides
296 compared to loosely deposited landslide dams (Foster et al., 2000).

297 According to Dunning and Armitage (2011), rock-avalanche deposits generally exhibit three sedimentary
298 facies: i.e., a carapace facies (the coarsest unit composing the surface and near surface), a body facies (the main
299 body of the rock-avalanche deposit), and a basal facies (the base of the rock-avalanche deposit). The boundary
300 between the basal facies and the body facies is often indistinct in the field. Our MSWA survey showed that these
301 three facies were easily identified from the shear-wave velocity profile (Fig. 10). The carapace and basal facies
302 have smaller shear-wave velocities, while the body facies occupying the main area of the deposits has greater
303 shear-wave velocities. Therefore, the shear-wave velocity profile enables us to not only identify the distribution
304 of these facies, but also to estimate the geotechnical properties of each facies.

305 Hydraulic prediction of downstream flooding due to failure of a landslide dam is of great importance to the
306 assessment of potential damage downstream and effective evacuation. By now, some approaches to this kind of

307 hydraulic prediction have been proposed, based on experimental work on landslide dams consisting of
308 homogenous soil layers. However, as revealed by the grain size distribution of Tianchi landslide dam, a landslide
309 dam normally consists of heterogeneous debris. Therefore, in the analysis of a landslide dam formed by
310 long-runout landslides, the sedimentary facies phenomenon should be considered. Especially in the analysis of
311 breaching risk due to overtopping, the effects of very large boulders in the surficial layers should be taken into
312 account. As in the case of the Tianchi landslide dam, the giant boulders ($\phi=2\sim6\text{m}$) of the surficial layer can
313 elevate the resistance to overtopping erosion, and thus retard the occurrence of sudden breaching. On the other
314 hand, as pointed by Dunning and Armitage (2011), the presence of a coarse layer (carapace facies) in the upper
315 part of the landslide dam may enhance permeability, so that the upper layer may become saturated rapidly after
316 overtopping, resulting in rapid breaching. However, the finer materials inside the landslide dam are tightly
317 consolidated and can lower the seepage and lead to a lower water table in the downstream dam body. In this case,
318 even if overtopping occurs, the soil layers in the downstream part of the dam may not be saturated quickly, so
319 collapse failure may not occur.

320 It is noted that at present there is no accepted rapid approach to predict the stability of a landslide dam
321 immediately after its formation. However, we expect that a method combining the Dimensionless Blockage
322 Index and shear-wave velocity survey results could be developed so that the risk of abrupt breaching of a
323 landslide dam can be assessed rapidly and more reliably. In the future, we plan to carry out similar geophysical
324 surveys on more landslide dams with differing topographic, geological and movement characteristics to develop
325 a physically based method of assessing the breaching risk of landslide dams.

326

327 **6. Conclusions**

328 To understand the formation and mechanisms allowing abrupt breaching of landslide dams that formed
329 during the 2008 Wenchuan ($M_w 7.9$) earthquake, a landslide dam that resulted from a long-runout rockslide in the
330 Tianchi area was investigated. Based on geophysical surveys on the dam and grain-size analysis, the internal
331 structure and the stability of this landslide dam were analyzed. The conclusions are as follows:

332 (1) Tianchi landslide resulted from the failure of an unstable rock block in the source area. The displaced
333 landslide mass traveled a long distance, colliding with the opposite river bank, and damming the river. Because
334 the bedding planes and the joints in the source area were well developed, the landslide debris consisted of many
335 very large boulders.

336 (2) Segregation phenomenon occurred within the displaced debris. After a long distance of movement, the
337 larger boulders formed surficial layer, the coarse carapace facies found on many rock avalanche deposits. The
338 debris was much finer deeper within the landslide dam.

339 (3) A seismic geophysical survey of the landslide dam revealed that the soil layers inside the dam had
340 greater shear-wave velocities in general (>330 m/s), and the landslide dam was not homogenous. The surficial
341 layer (carapace facies) and the bottom layer (basal facies) have relatively smaller shear-wave velocities values.
342 Some domains of the central part of the dam also show relatively smaller shear-wave velocities—namely, some
343 relatively weaker layers are sandwiched in the landslide dam.

344 (4) Tianchi landslide dam was covered by huge boulders but consisted of tightly consolidated finer
345 materials. This kind of dam structure can resist overtopping erosion and reduce the likely occurrence of piping,
346 thus retarding breaching immediately after the occurrence of overtopping flow.

347 Last, it is noted that detailed seismic geophysical surveys on many other landslide dams are ongoing to
348 understand the internal structure of landslide dams with differing geological and topographic backgrounds and
349 differing movement mechanisms. The target landslide dams are those triggered by the 2008 Wenchuan
350 earthquake in China, by the 2004 Niigata Prefecture Chuetsu earthquake in Niigata, Japan, and by heavy rainfall
351 during the 2011 Typhoon Talas in Kii Peninsula, Japan. By doing so, we are expecting to enhance the reliability
352 in the analysis of stability of landslide dam with help of shear-wave velocity profiles.

353

354 **Acknowledgments :**

355 This research was supported by the Opening Fund of State Key Laboratory of Geohazard Prevention and
356 Geoenvironment Protection (Chengdu University of Technology) (Nos. SKLGP2011K012), a scientific research

357 grant from the MEXT of Japan (Grant No. 21403002), and a 2009 special event fund for promotion of disaster
358 prevention research, DPRI, Kyoto University (SA21-06). We are grateful to Dr. Wei Hu (Chengdu University of
359 Technology), Prof. Masahiro Chigira (Kyoto University), Prof. Xiyong Wu (Southwest Jiaotong University), Dr.
360 Fei Cai (Gunma University), Dr. Sergio Lourence (Cardiff University), and Dr. Murice McSaveney (GNS
361 Science, New Zealand), for their help and valuable discussions on this work. Valuable English editing by Dr.
362 Eileen McSaveney (GNS Science, New Zealand) is appreciated.

363 **References**

- 364 Burchfiel, B.C., Chen, Z., Liu, Y., Royden, L.H., 1995. Tectonics of the Longmen Shan and adjacent regions,
365 central China, *International Geological Review* 37, 661–735.
- 366 Burchfiel, B.C., Royden, L.H., van der Hilst RD, Hager, B.H., 2008. A geological and geophysical context for
367 the Wenchuan earthquake of 12 May 2008, Sichuan, People's Republic of China, *GSA Today* 18
- 368 Casagli, N., Ermini, L., 1999. Geomorphic analysis of landslide dams in the northern Apennine. *Transactions of*
369 *the Japanese Geomorphological Union* 20, 219– 249.
- 370 Casagli, N., Ermini, L. Rosati G. 2003. Determining grain size distribution of the material composing landslide
371 dams in the Northern Apennines: sampling and processing methods. *Engineering Geology*, 69(1-2): 83-97
- 372 Chigira, M., Wu, X.Y., Inokuchi, T., Wang, G., 2010: Landslides induced by the 2008 Wenchuan earthquake,
373 Sichuan, China. *Geomorphology*, 118(3-4.: 225-238.
- 374 Costa, J.E., Schuster, R.L., 1988. The formation and failure of natural dams, *Geological Society of America*
375 *Bulletin* 100, pp. 1054–1068
- 376 Costa, J.E., Schuster, R.L., 1991. Documented historical landslide dams from around the world. *U.S. Geological*
377 *Survey Open-FileReport* 91-239, 1-486.
- 378 Crosta, G.B., Frattini, P., Fusi, N., Sosio, R. 2011. Formation, characterization, and modeling of the Val Pola
379 rock-avalanche dam (Italy). Chapter 12, in *Natural and Artificial Rockslide dams* (Evans, Hermanns, Strom,
380 and Scarascia-Mugnozza, eds.), Springer, pp:347-368
- 381 Dai, F.C., Xu, C., Yao, X., Xu, L., Tu, X.B. and Gong, Q.M., 2011. Spatial distribution of landslides triggered by
382 the 2008 Ms 8.0 Wenchuan earthquake, China. *Journal of Asian Earth Sciences*, 40(4): 883-895
- 383 Deng Q, Chen S, Zhao X., 1994. Tectonics, seismicity, and dynamics of the Longmen Shan Mountains and its
384 adjacent regions, *Seismological Geology* 16: 389–403 (in Chinese)
- 385 Densmore, A.L., Ellis, M.A., Li, Y., Zhou, R., Hancock, G.S., Richardson, N., 2007. Active tectonics of the
386 Beichuan and Pengguan faults at the eastern margin of the Tibetan Plateau, *Tectonics* 26: TC4005

387 Dunning, S.A., Armitage, P.J., 2011. The grain-size distribution of rock-avalanche deposits: implications for
388 natural dam stability. Chapter 19 in *Natural and Artificial Rockslide dams* (Evans, Hermanns, Strom, and
389 Scarascia-Mugnozza, eds.), Springer, pp: 497-498.

390 Davies, T.R., McSaveney, M.J., 2011. Rock-avalanche size and runout – implications for landslide dams.
391 Chapter 17 in *Natural and Artificial Rockslide dams* (Evans, Hermanns, Strom, and Scarascia-Mugnozza,
392 eds.), Springer, pp: 441-462.

393 Ermini, L., Casagli, N., 2003. Prediction of the behaviour of landslide dams using a geomorphological
394 dimensionless index. *Earth Surface Processes and Landforms*, 28(1): 31-47.

395 Fan, X., Gorum, T., Cees J. van Westen, Korup, O., Xu, Q., Dai, F., Huang, R., Wang, G., 2012. Transient water
396 and sediment storage of the decaying landslide dams induced by the 2008 Wenchuan earthquake, China.
397 *Geomorphology* 171-172: 58-68.

398 Foster, M.A., Fell, R., Spannangle, M., 2000. The statistics of embankment dam failures and accidents. *Canadian*
399 *Geotechnical Journal* 37(5), 1000–1024.

400 Gorum, T., Fan, X.M., van Westen, C.J., Huang, R.Q., Xu, Q., Tang, C., Wang, G., 2011. Distribution pattern of
401 earthquake-induced landslides triggered by the 12 May 2008 Wenchuan earthquake. *Geomorphology*
402 133(3-4):152-167.

403 Hayashi, K., Suzuki, H., 2004. CMP cross-correlation analysis of multi-channel surface-wave data. *Explor.*
404 *Geophys.*, 35 (2004), pp. 7–13

405 Huang, R.Q., 2009. *Geohazard assessment of the Wenchuan Earthquake*. Science Press, 944P (in Chinese)

406 Imai, T., Tonouchi, K., 1982. Correlation of N-value with S-wave velocity and shear modulus. *Proc. 2nd*
407 *European Symp. Of Penetration Testing (Amsterdam)*, 57–72.

408 Jia, D., Wei, G., Chen, Z., Li, B., Zeng, Q., Yang, G., 2006. Longmen Shan fold-thrust belt and its relation to the
409 western Sichuan Basin in central China: new insights from hydrocarbon exploration, *AAPG Bulletin* 90:
410 1435–1447.

411 Jia, Q., Jia, D., Zhu, A., Chen, Z., Hu, Q., Luo, L., Zhang, Y., Li, Y. 2007. Active tectonics in the Longmen
412 thrust belt to the eastern Qinghai–Plateau and Sichuan Basin: evidence from topography and seismicity,
413 Chinese Journal of Geology 42: 31–44.

414 Korup, O., 2002. Recent research on landslide dams - a literature review with special attention to New Zealand,
415 Progress in Physical Geography 26, 206-235.

416 Korup, O., 2004. Geomorphometric characteristics of New Zealand landslide dams. Engineering Geology 73,
417 13–35

418 Li, H., Fu, X., Van Der Woerd, J., Si, J., Wang, Z., Hou, L., Qiu, Z., Li, N., Wu, F., Xu, Z., Tapponnier, P., 2008.
419 Co-seismic surface rupture and dextral-slip oblique thrusting of the Ms 8.9 Wenchuan Earthquake. Acta
420 Geologica Sinica 82, 1623–1643.

421 Li, T., Schuster, R.L., Wu, J., 1986. Landslide dams in south central China. In: Schuster, R.L. (Ed.), Landslide
422 Dams Processes, Risk and Mitigation, Special Publication vol. 3. ASCE, pp. 146– 162.

423 Liu, N., 2008. Lesson from the countermeasures on lowering the risk of the dammed lakes formed by large
424 landslides during the 2008 Wenchuan earthquake. Journal of China Water Resources 16,1-7 (in Chinese)

425 Liu N., Zhang J.X., Lin, W., Cheng W.Y., Chen Z.Y., 2009. Draining Tangjiashan barrier lake after Wenchuan
426 earthquake and the flood propagation after the dam break. Science in China Series E: Technological
427 Sciences, 52(4): 801-809.

428 Li, X., Zhou, Z., Yu, H., Wen, R., Lu, D., Huang, M., Zhou, Y., Cu, J., 2008. Strong motion observations and
429 recordings from the great Wenchuan Earthquake. Earthquake Engineering and Engineering Vibration 7,
430 235–246.

431 Ma LF (ed.). 2002. Geological atlas of China, Geological Publishing House, 348p

432 Mizuyama, T., Ishikawa, Y., Fukumoto, A., 1987. Landslide dams outburst due to seepage. Annual of Public
433 Works Research Institute, Vol.2744, 18-91 (in Japanese).

434 Mizuyama, T., Ishikawa, Y., Fukumoto, A., 1989. Landslide dams outburst and its Countermeasure. Civil
435 Engineering Journal, Vol.31-11; 50-56 (in Japanese).

436 Park, C.B., Miller, R.D., Xia, J., 1999. Multichannel analysis of surface waves. *Geophysics*, 64 (3), 800–808.

437 Schulz, W.H., Harp, E.L., Jibson, R.W., 2008. Characteristics of large rock avalanches triggered by the
438 November 3, 2002 Denali Fault earthquake, Alaska, USA, Proc. 10th ISL, Xian, China, June 30-July 4, 2008,
439 Taylor and Francis Group, London, 1447-1453.

440 Sherard, J.L., 1979. Sinkholes in dams of coarse, broadly graded soils, 13th ICOLD Congress, India, Vol. II, pp.
441 25-35.

442 Strom, A., 2010. Landslide dams in Central Asia region. *Journal of the Japan Landslide Society* 47(6), 309-324.

443 Tabatake, S., Mizuyama T., Inoue, K., 2002. Landslide dam and hazards, Kokon Press, 205pp.

444 Takahashi, T., Kuang, S.F., 1988. Hydrograph prediction of debris flow due to failure of landslide dam. *Annuals,*
445 *Disas. Prev. Res. Inst., Kyoto Univ., No.31 B-2: 601-615.*

446 Takahashi, T., Nakawaga H., 1993. Flood and Debris flow hydrograph due to collapse of a natural dam by
447 overtopping. *Journal of Hydroscience and Hydraulic Engineering, JSCE*, 37: 699-704.

448 USGS, 2008. Website (<http://earthquake.usgs.gov/eqcenter/eqinthenews/2008/us2008ryan/>), accessed on
449 September 17, 2012.

450 Wang, G., 2011. Formation of large scale landslide dams and failure prediction. Proceedings of 2011 landslide
451 symposium, Kansai Branch of Japan Landslide Society, pp:65-80 (in Japanese).

452 Wang, Q., Wang, Y.S., Jiang, Y.A., Wei, P., Zhi, Z.Z., 2011. The initiation mechanism and movement process of
453 Tianchi landslide. *Gansu Water Conservancy and Hydropower Technology* 47(1):16-18 (In Chinese).

454 Xu, Q., Fan, X.M., Huang, R.Q., Van Westen, C.J., 2009. Landslide dams triggered by the Wenchuan Earthquake,
455 Sichuan Province, south west China. *Bull Eng Geol Environ* 68:373-386.

456 Yin, Y.P., 2008. Researches on the Geo-hazards triggered by Wenchuan Earthquake, Sichuan, *Journal of*
457 *Engineering Geology* 16: 433-444 (in Chinese).

458 Zhu, P.Y., Wang, C.H., Wang Y.C., 2003. Large-scale landslide-debris avalanche in Tibet, China, (2) formation
459 of an exceptionally serious outburst flood from a landslide dam in Tibet. *Landslide News, International*
460 *newsletter of the Japan Landslide Society*, 14/15: 23-25.

461 **Captions:**

462 Fig. 1 Epicenter of the Sichuan earthquake, the distribution of landslides, and location of the Tianchi landslide
463 dam (after Huang and Li, 2009).

464
465 Fig. 2 Landslide dam in the Tianchi area: (a) satellite image of landslide area before the quake; (b) view of the
466 landslide from upstream of the dam after channel excavation (taken on March 19, 2011); (c) landslide dam and
467 lake (Courtesy of F. Cai, taken on November 7, 2008 by F. Cai); (d) landslide dam viewed from downstream
468 (Courtesy of F. Cai, taken on November 7, 2008)

469
470 Fig.3 Geological settings of the Tianchi area – 1: Stratum boundary; 2: Fault; 3: Tianchi landslide area; 4:
471 Quaternary alluvial and diluvial deposit; 5: Triassic sandstone, conglomerate, siltstone and mudstone; 6:
472 Triassic shale; 7: Triassic clastic rock and carbonate rock; 8: Permian shale, limestone and basalt; 9: Devonian
473 sandstone and conglomerate with carbonate rock; 10: Devonian clastic rock and carbonate rock; 11: Silurian
474 slate; 12: Cambrian shale, siltstone, mudstone and sandstone; 13: Cambrian dolomite; 14: Sinian dolomite and
475 marble; 15: Proterozoic acid volcanic, clastic rock and carbonate rock; 16: Proterozoic granite; 17: Diabase
476 dike (after Ma, 2002)

477
478 Fig. 4 (a) Source area of the landslide; (b) Stereonet plot of rock-mass discontinuities in the source area

479
480 Fig. 5 Longitudinal section along line I-I' in Fig. 2a

481
482 Fig. 6 (a) Photograph of landslide dam after excavation, with locations of shear-wave velocity survey lines and
483 grain-size sampling points (P1–P11); (b) Cross section of the landslide dam at differing surveying times. L3,
484 L4: spillway levels on November 20, 2009, and June 16, 2010, respectively.

485
486 Fig. 7 Grain size distributions of materials from dam body: (a) samples on the same altitude level, (b) samples at
487 different depths within the dam body

488
489 Fig. 8 Measurement principle of multichannel analysis of surface waves (MASW).

490

491 Fig. 9 Shear-wave velocity profile along traverse line L1

492

493 Fig. 10 Shear-wave velocity profile of the dam body. (a), (b), (c): results for traverse line L2, L3 and L4,

494 respectively

495

496 Fig.11 Stability analysis using Dimensionless Blockage Index (after Ermini and Casagli (2003)) ▲ : intact

497 landslide dams; ◆:collapsed landslide dams

498 Figures

499

500

501

502

503

504

505

506


507

508

509

510

511

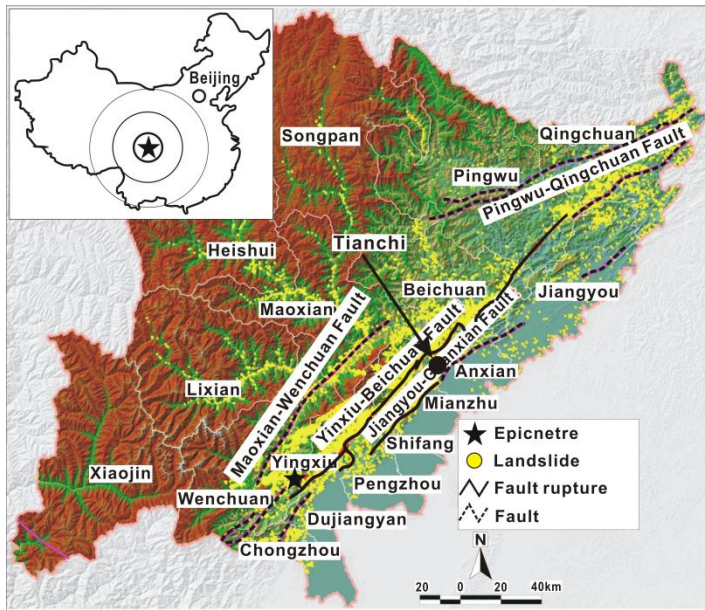

512 Fig. 1 Epicenter of Sichuan earthquake, distribution of landslides, and location of Tianchi landslide dam (after
513 Huang and Li (2009)).

514

515

516

517

518

519

520

521

522

523

524



525

526

527

528

529

530

531

532 Fig. 2 Landslide dam in Tianchi area. (a) aerial photo of landslide area before the quake; (b) View of the
533 landslide from the upper stream of the river after all construction has been finished (Taken on March 19,
534 2011); (c) Landslide dam and lake (Courtesy of F. Cai, taken on November 7, 2008 by F. Cai) viewing from
535 upstream; (d):Landslide dam viewing from downstream (Courtesy of F. Cai, taken on November 7, 2008)

536
 537
 538
 539
 540
 541
 542
 543
 544
 545
 546
 547
 548
 549
 550
 551
 552
 553
 554
 555
 556
 557
 558
 559
 560
 561
 562
 563
 564
 565
 566
 567
 568
 569
 570
 571
 572
 573
 574
 575
 576
 577
 578
 579
 580

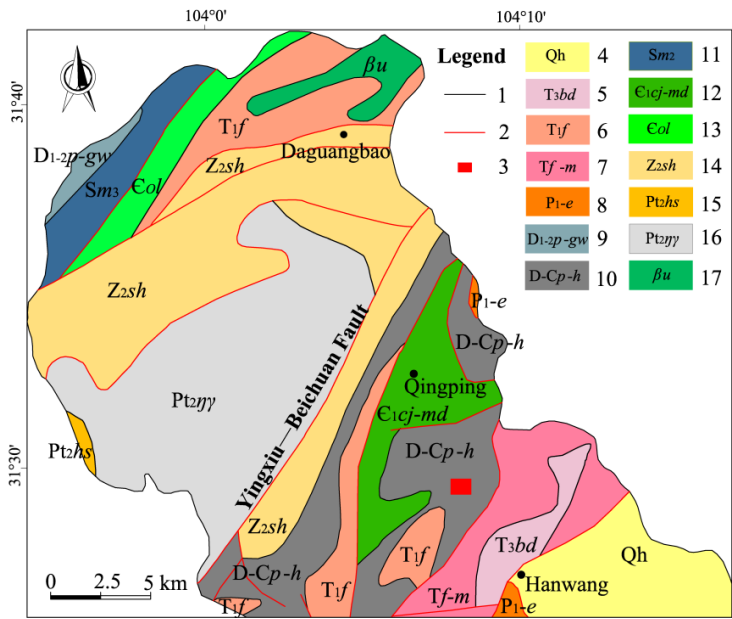


Fig. 3 Geological settings of Tianchi area (1: Stratum boundary; 2: Fault; 3: Tianchi landslide area; 4: Quaternary alluvial and diluvial deposit; 5: Triassic Sand, conglomerate, siltstone and mudstone; 6: Triassic shale; 7: Triassic clastic rock and carbonate rock; 8: Permian shale, limestone and basalt; 9: Devonian sandstone and conglomerate with carbonate rock; 10: Devonian clastic rock and carbonate rock; 11: Silurian slate; 12: Cambrian shale, siltstone, mudstone and sandstone; 13: Cambrian dolomite; 14: Sinian dolomite and marble; 15: Proterozoic acid volcanic, clastic rock and carbonate rock; 16: Proterozoic granite; 17: Diabase dike)(after Ma, 2002)

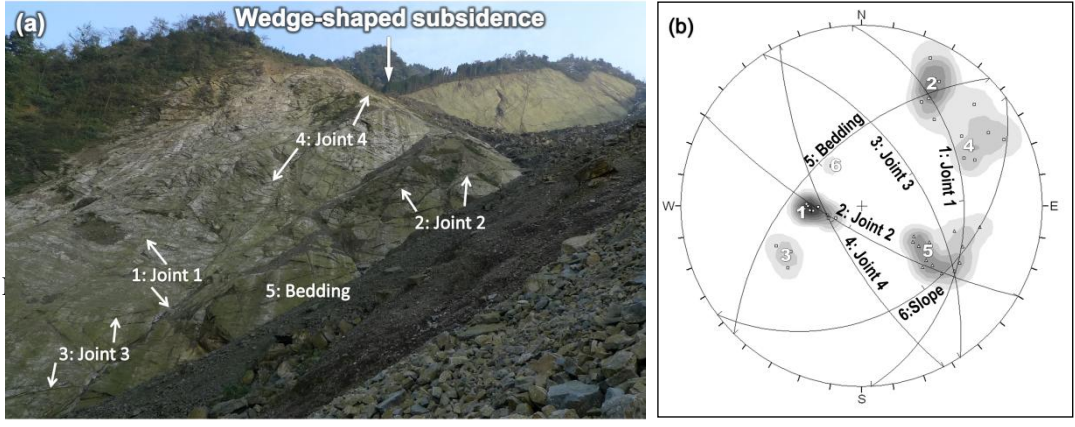


Fig. 4 (a): Source area of the landslide, (b): Stereonet graph of the discontinuities of rocks on the source area

581
 582
 583
 584
 585
 586
 587
 588
 589
 590
 591
 592
 593
 594
 595
 596
 597
 598
 599
 600
 601
 602
 603
 604
 605
 606
 607
 608
 609
 610
 611
 612
 613
 614
 615
 616
 617
 618
 619
 620
 621
 622
 623
 624
 625
 626
 627
 628
 629
 630
 631
 632

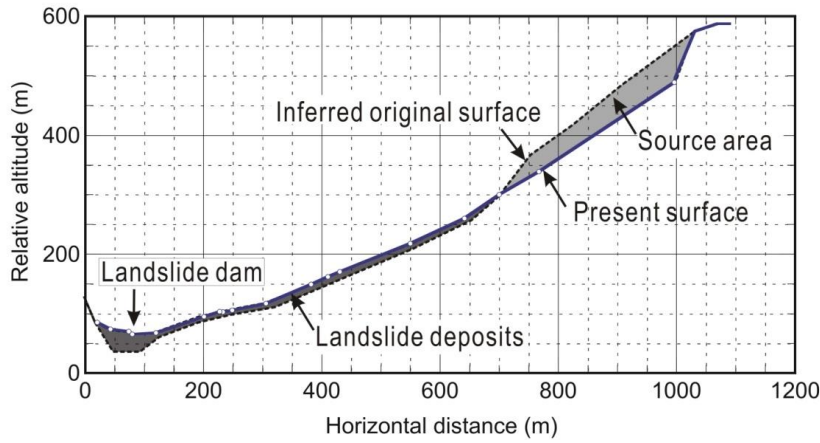


Fig. 5 Longitudinal section along line I-I' in Photo 2a


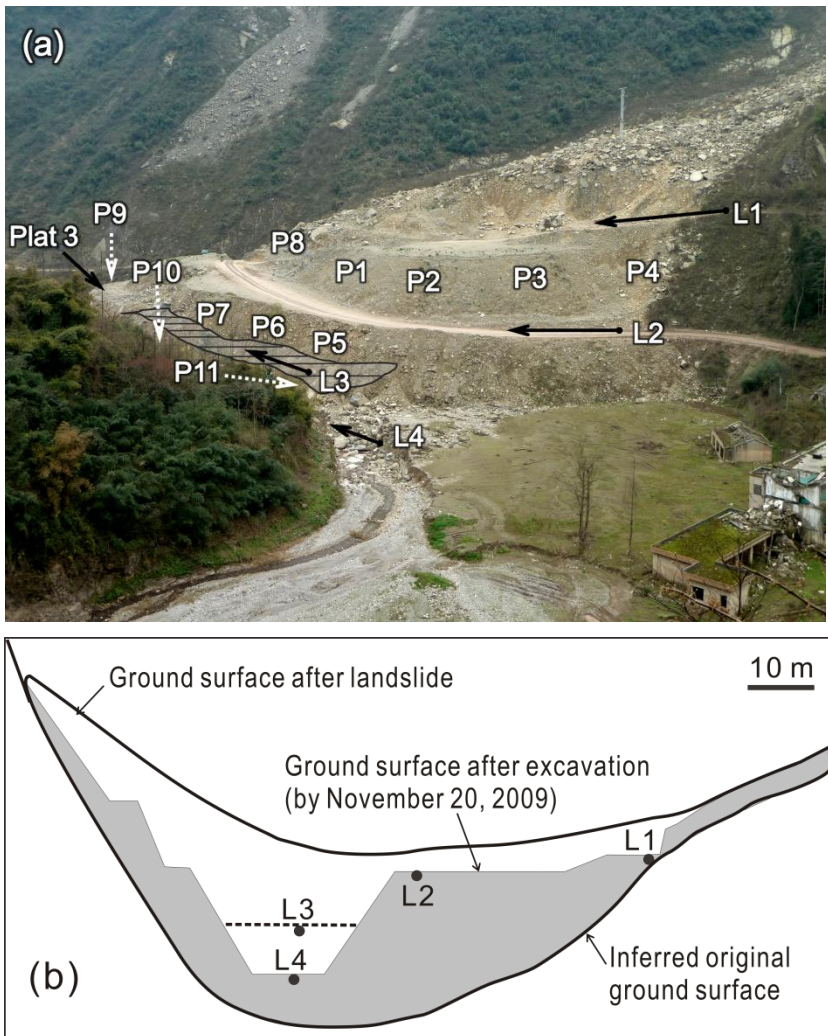



Fig. 6 (a) Photo of landslide dam after excavation with locations of S-wave survey lines and grain size analysis points (P1~P11); (b) Cross section of the landslide dam during differing surveying times. L3, L4: spillway levels on November 20, 2009, and June 16, 2010, respectively.

633
 634
 635
 636
 637
 638
 639
 640
 641
 642
 643
 644
 645
 646
 647
 648
 649
 650
 651
 652

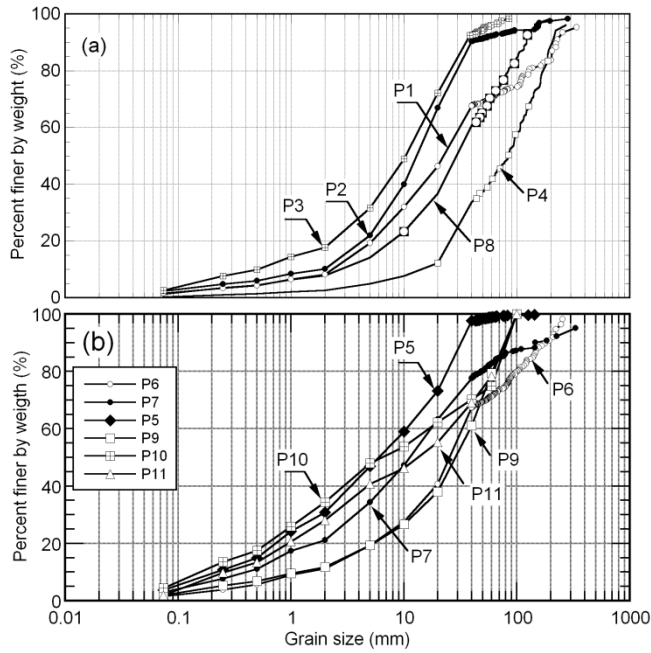


653 Fig. 7 Grain size distributions of materials from dam body. (a): samples on the same altitude level. (b): Samples
 654 at different depth of the dam body

655
 656
 657

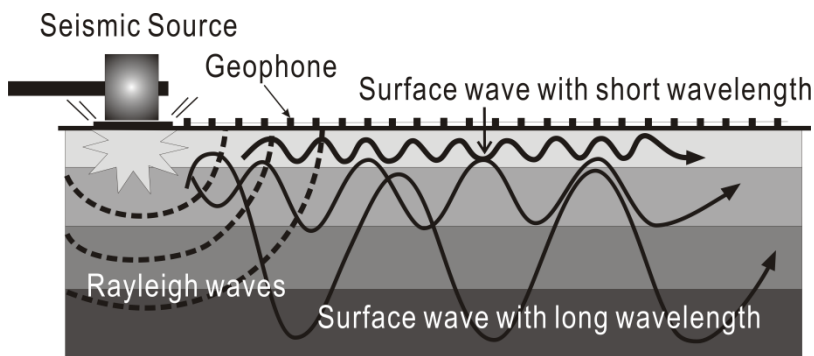

665 Fig. 8 Measurement principle of multichannel analysis of surface waves (MASW).

666
 667
 668
 669
 670
 671
 672
 673
 674

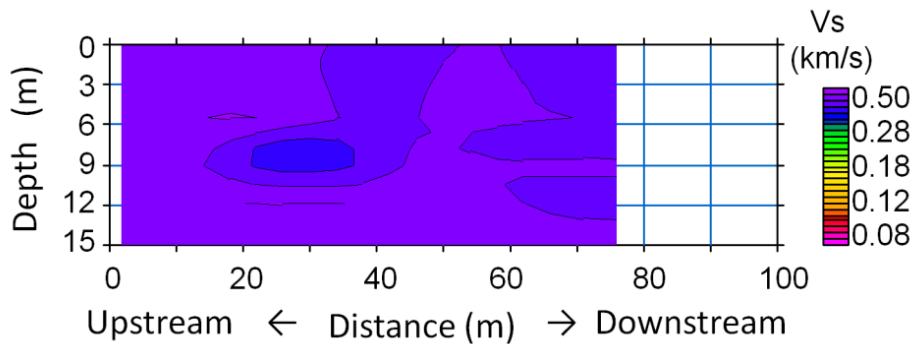

675 Fig. 9 Shear-wave velocity (Vs) profile along traverse line L1

676

677

678

679

680

681

682

683

684

685


686

687

688

689

690

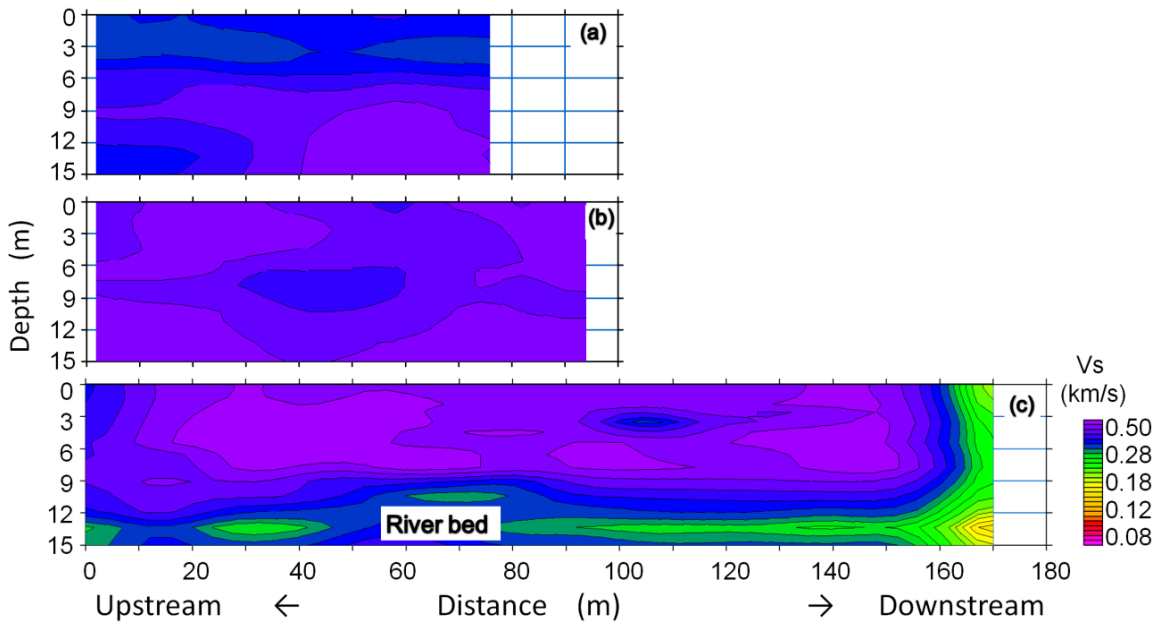

691 Fig. 10 Shear-wave velocity (V_s) profile of the dam body. (a), (b), (c): results for traverse line L2, L3 and L4,
 692 respectively

693

694

695

696

697

698

699

700

701

702

703

704

705

706

707


708

709

710

711

712

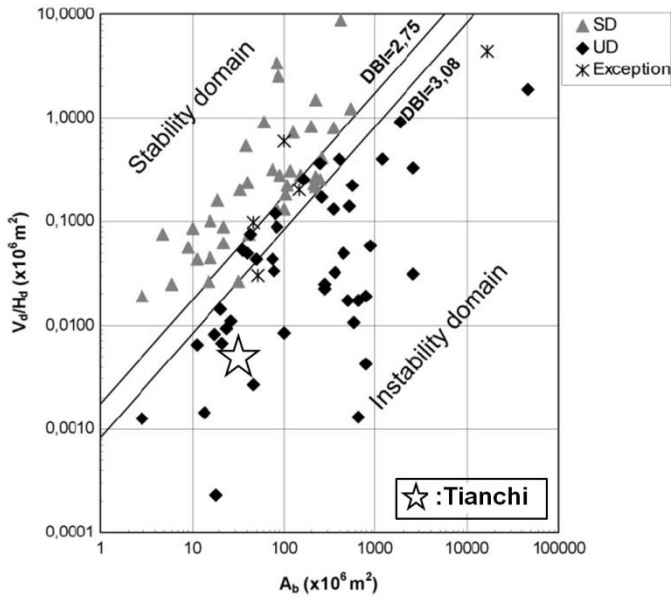

713 Fig.11 Stability analysis using Dimensionless Blockage Index (after Ermini and Casagli (2003)) ▲ : intact
 714 landslide dams; ◆ : collapsed landslide dams