

Title	Development of Wood-based Molding bonded with Tannin and Sucrose
Author(s)	Takeyama, Akinori
Citation	Sustainable humansphere : bulletin of Research Institute for Sustainable Humansphere Kyoto University (2013), 9: 54-54
Issue Date	2013-10-31
URL	http://hdl.handle.net/2433/185636
Right	
Type	Departmental Bulletin Paper
Textversion	publisher

 ABSTRACTS (MASTER THESIS)

Development of Wood-based Molding bonded with Tannin and Sucrose

(Graduate School of Agriculture,
Laboratory of Sustainable materials, RISH, Kyoto University)

Akinori Takeyama

Introduction

Recently, synthetic adhesives derived from fossil resources are used in many wood-based materials. However, considering the finite fossil resources, it is desirable to replace natural-based adhesives based on non-fossil resources. Condensed tannin has been used as a main raw material for tannin-based adhesives. Conventional tannin-based adhesives are usually synthesized by reacted with compounds derived from fossil resources such as formaldehyde. It is beneficial to develop a tannin-based adhesive composed of only natural materials derived from bio-resources. In this research, sucrose was used as a raw material for a tannin based adhesive. The physical properties of wood-based molding bonded with the tannin adhesive were investigated.

Materials and Methods

Wood powder of *Acacia mangium*, tannin and sucrose were used in this research. Powder size of materials was 60 mesh pass (under 250 μ m). Dried raw materials were added to a beaker, and shaken sufficiently by hand. Mixture of powder was added to dies, and pressed to yield molded products by hot press. The mixture ratios of tannin and sucrose were 100:0, 75:25, 50:50, 25:75 and 0:100. The contents of adhesive were 0~40wt%. Three-point bending and repeated boiling tests were performed to evaluate physical and mechanical properties of the molded products.

Results and discussion

Figure 1 shows the relationship between the adhesive content and bending properties under the mixing ratio of 50:50 with tannin and sucrose. The bending properties were increased with increasing of adhesive content, and modulus of rupture (MOR) of 33.3wt% adhesive content was 39MPa. In addition, this molding had good water resistance. Consequently, there is a possibility that a mixture of tannin and sucrose can be used as a natural adhesive for wood-based molding.

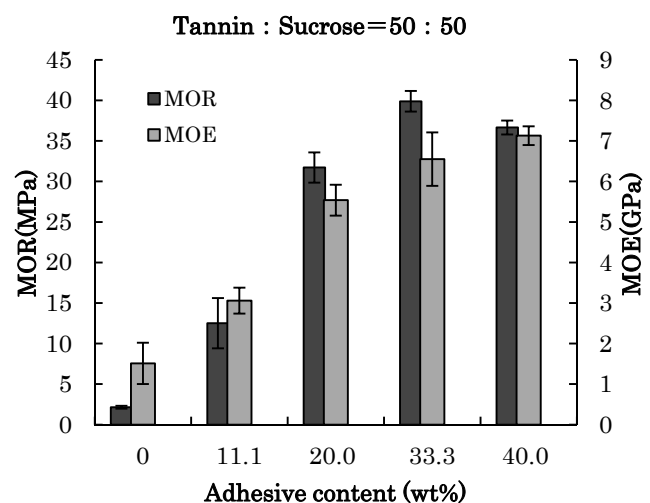


Fig1. Effects of adhesive content on bending properties
Molded at 200°C, 4MPa, for 10minutes