

On the spatial and temporal discretization of vertical diffusion in the turbulent planetary boundary layer

Florian Lemarié

► **To cite this version:**

Florian Lemarié. On the spatial and temporal discretization of vertical diffusion in the turbulent planetary boundary layer. AGU Ocean Sciences Meeting 2020, Feb 2020, San Diego, United States. hal-03153601

HAL Id: hal-03153601

<https://hal.inria.fr/hal-03153601>

Submitted on 19 May 2021

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.



Context: advection-diffusion operator to parameterize unresolved scales in PBLs (and beyond)

The resulting turbulent viscosity/diffusivity K

→ strongly varies spatially, i.e. large values of $\frac{h(\partial_z K)}{K}$

→ depends nonlinearly on model variables


→ induces stiffness, i.e. large $\sigma^{(2)} = \frac{K\Delta t}{h^2}$

Usual approach: use of (semi)-implicit temporal schemes with 2nd-order FD discretization

What could be wrong with 2nd-order in space ?

• With $Pe^{(n)} = \frac{h^n \partial_z^n K}{K} \neq 0, n \geq 1$

$$\partial_z(K\partial_z\phi)_k^{(C2)} = \partial_z(K\partial_z\phi)_k + \frac{1}{24}\partial_z\left(K\left[Pe^{(2)}\partial_z\phi + 2\Delta z Pe^{(1)}\partial_z^2\phi + 2\Delta z^2\partial_z^3\phi\right]\right) + \mathcal{O}(\Delta z^4)$$

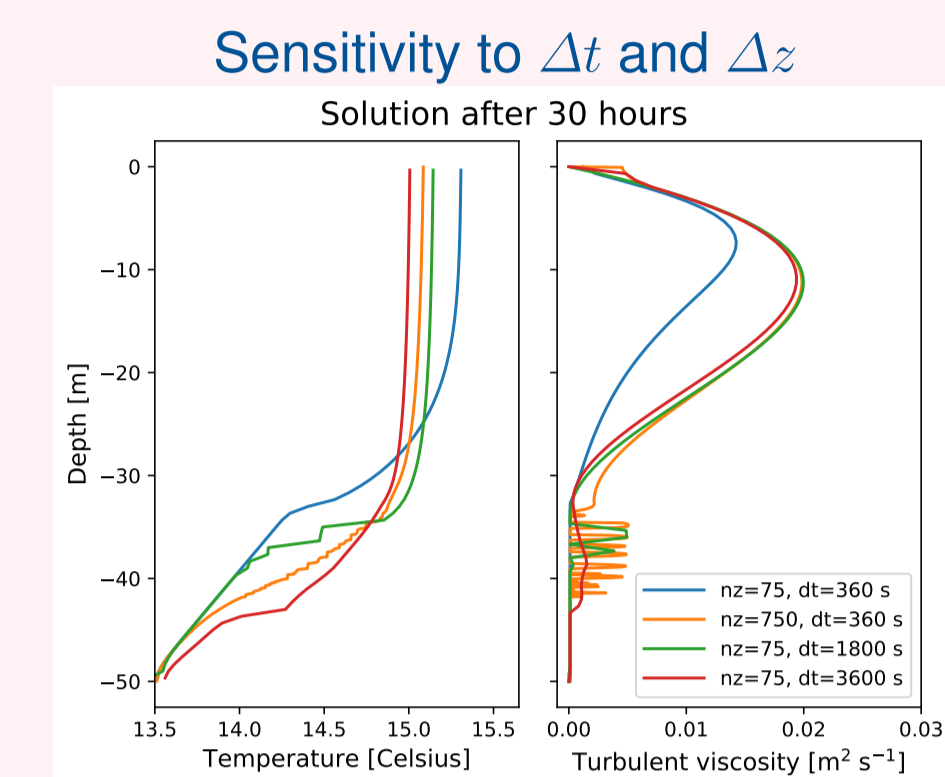

Single-column exp. (Wind-induced deepening of BL)


What could be wrong with (semi)-implicit scheme in time ?

- Lack of monotonic damping / Inexact damping for large $\sigma^{(2)}$
- $\mathcal{O}(\Delta t)$ errors in coupling with physical parameterizations

Maps of K_{min}^{num} from realistic simulations [Lemarié et al., 2015]

• K_{min}^{num} is the diffusivity in the continuous equation with same damping as the numerical damping

• $K/K_{min}^{num} \gg 1 \Rightarrow$ the damping seen by the model is smaller than the theoretical damping ($\sigma^{(2)} = \sigma^{mld}, \theta = \frac{2\pi}{N_{mld}}$)

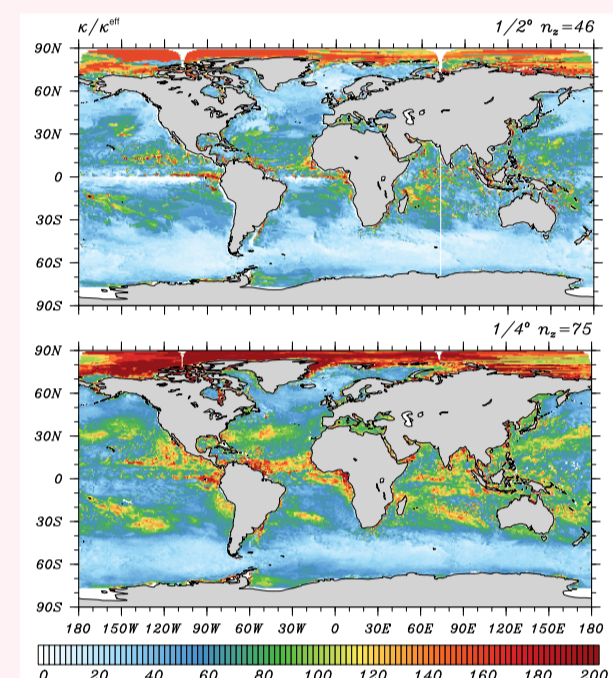

Objectives:

- ▶ Have a better control of numerical sources of error independently from the physical principles of the subgrid scheme
- ▶ Ensure the consistency between the parameterization and the resolved fluid dynamics (e.g. for air-sea B.C. & $K(z)$ computation)

1 - Spatial discretization

Constraints

- ▶ limit ourselves to tridiagonal linear problems
- ▶ possibility to have a joint treatment of vertical advection and diffusion
- ▶ allow a finite-volume interpretation

Possible alternatives

- ▶ Exponential Compact scheme, e.g. [Tian & Dai, 2007]
 - Specifically designed for accuracy with large Peclet numbers
- ▶ Padé compact finite volume discretization

General form of the discretization

$$\partial_z(K\partial_z\phi) = \frac{K_{k+1/2}d_{k+1/2} - K_{k-1/2}d_{k-1/2}}{h_k}, \quad d_{k+1/2} = (\partial_z\phi)_{k+1/2}$$

for standard discretization: $d_{k+1/2} = (\phi_{k+1} - \phi_k)/h_{k+1/2}$ (h : vertical layers thickness)

Compact Padé Finite Volume methods, e.g. [Kobayashi, 1999]

Unknowns: derivatives $d_{k+1/2}$ on cell interfaces, for $m, n \in \mathcal{N}$

$$\sum_{i=1}^m \alpha_i d_{k+1/2-i} + d_{k+1/2} + \sum_{i=1}^m \alpha_i d_{k+1/2+i} = \frac{1}{h} \left(\sum_{j=1}^n \gamma_j \bar{\phi}_{k+j} - \sum_{j=1}^n \gamma_j \bar{\phi}_{k-j+1} \right)$$

▶ For $(m, n) = (1, 1)$: $\alpha_1 d_{k-1/2} + d_{k+1/2} + \alpha_1 d_{k+3/2} = \gamma_1 \left(\frac{\bar{\phi}_{k+1} - \bar{\phi}_k}{h} \right)$

$(\alpha_1, \gamma_1) = \left(\frac{1}{10}, \frac{6}{5}\right) \rightarrow$ 4th-order discretization of $d_{k+1/2}$ (for $K = \text{cste}$)
 $(\alpha_1, \gamma_1) = \left(\frac{1}{4}, \frac{3}{2}\right) \rightarrow$ equivalent to parabolic splines reconstruction.

- ▶ Can be reinterpreted in terms of subgrid reconstruction as parabolic splines
- ▶ Flexibility provided by α and γ parameters




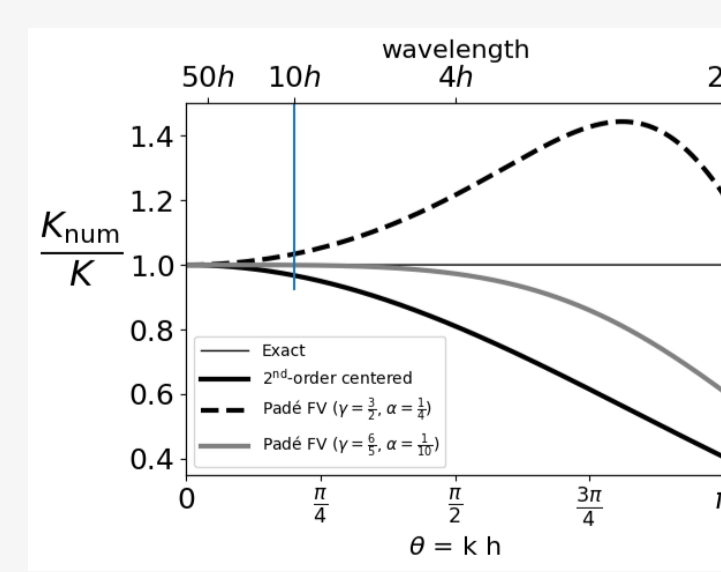


Figure 1: Ratio of numerical vs exact diffusion w.r.t. the normalized wavenumber $\theta = k_z h$ for different spatial discretizations.

2 - Treatment of the boundary condition (Monin-Obukhov consistency)

no-slip boundary condition is never applied in practice
 → replaced by a flux condition consistent with wall laws

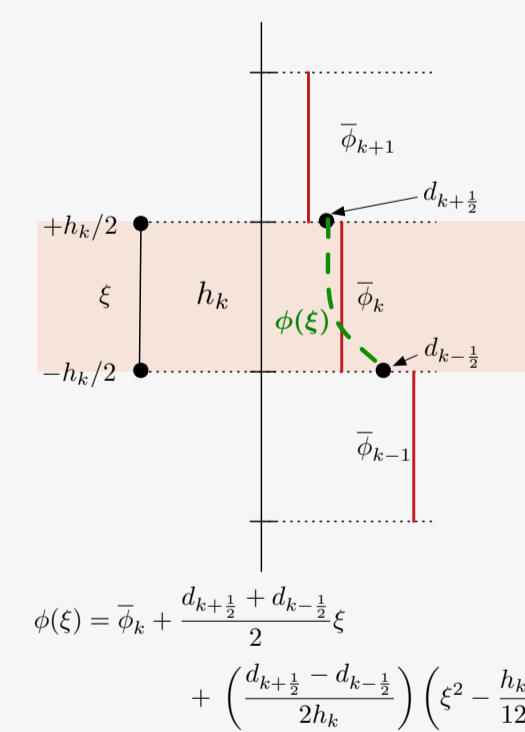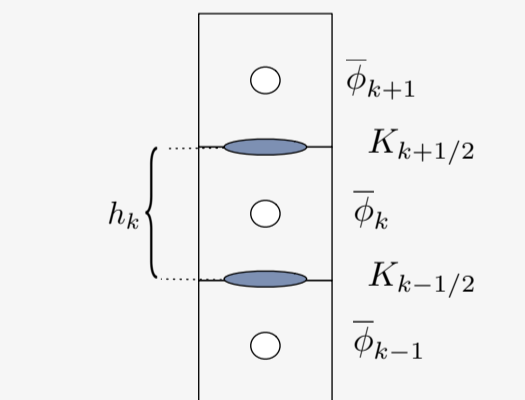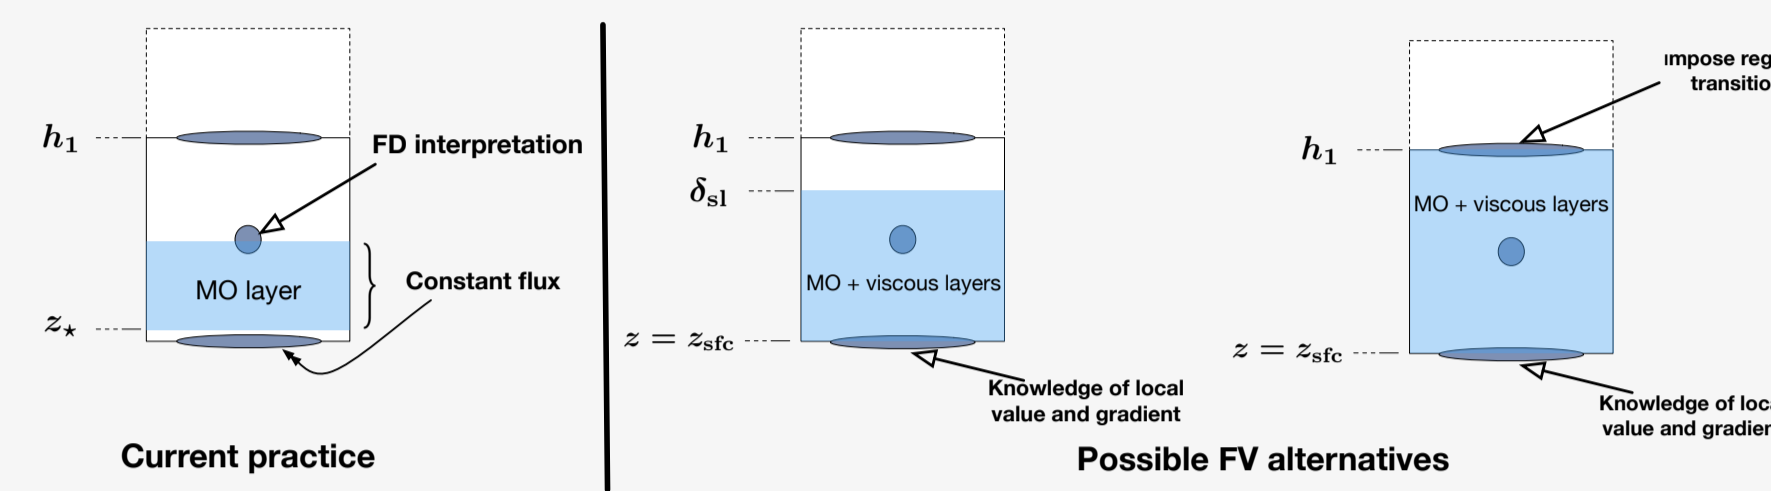

Current practice :

$$\begin{cases} \partial_z(\kappa|\phi_x|(z+z_*)\partial_z\phi) = 0 \\ \phi(z_*) = \chi_{sfc} \\ \phi(h_1/2) = \phi_1 \end{cases}$$

$$\phi(z) = (\phi_1 - \chi_{sfc}) \left(\frac{\ln\left(\frac{1}{2} + \frac{z}{2z_*}\right)}{\ln\left(\frac{1}{2} + \frac{h_1}{4z_*}\right)} \right) + \chi_{sfc}$$

FV approach with $h_1 = \delta_{sl}$:

$$\begin{cases} \partial_z(\kappa|\phi_x|(z+z_*)\partial_z\phi) = 0 \\ \phi(z_{sfc}) = \chi_{sfc} \\ \phi(h_1) = \phi_{3/2} \end{cases}$$

$$\phi(z) = (\phi_{3/2} - \chi_{sfc}) \left(\frac{\ln\left(1 + \frac{z}{z_*}\right)}{\ln\left(1 + \frac{h_1}{z_*}\right)} \right) + \chi_{sfc}$$

Asymptotics :

Resolved case (combining the first 2 lines of the matrix)

$$\frac{1}{6}d_{5/2} + \frac{5}{6}d_{3/2} + \frac{1}{2}d_{1/2} = \frac{\bar{\phi}_2 - \chi_{sfc}}{h}$$


Unresolved case (for $h \rightarrow 0$)

$$\frac{1}{6}d_{5/2} + \left(\frac{1}{3} + \left[1 + \frac{h}{2z_*} \right] \right) d_{3/2} = \frac{\bar{\phi}_2 - \chi_{sfc}}{h}$$

Smooth transition between the unresolved and the resolved limit

Numerical experiment :

$$\partial_z(K(z)\partial_z\phi) = \frac{\partial_z \mathcal{R}}{\rho C_p}, \quad \phi(0) = \phi_{bot}, \quad \phi\left(\frac{19h_{bl}}{20}\right) = \phi_{top}$$

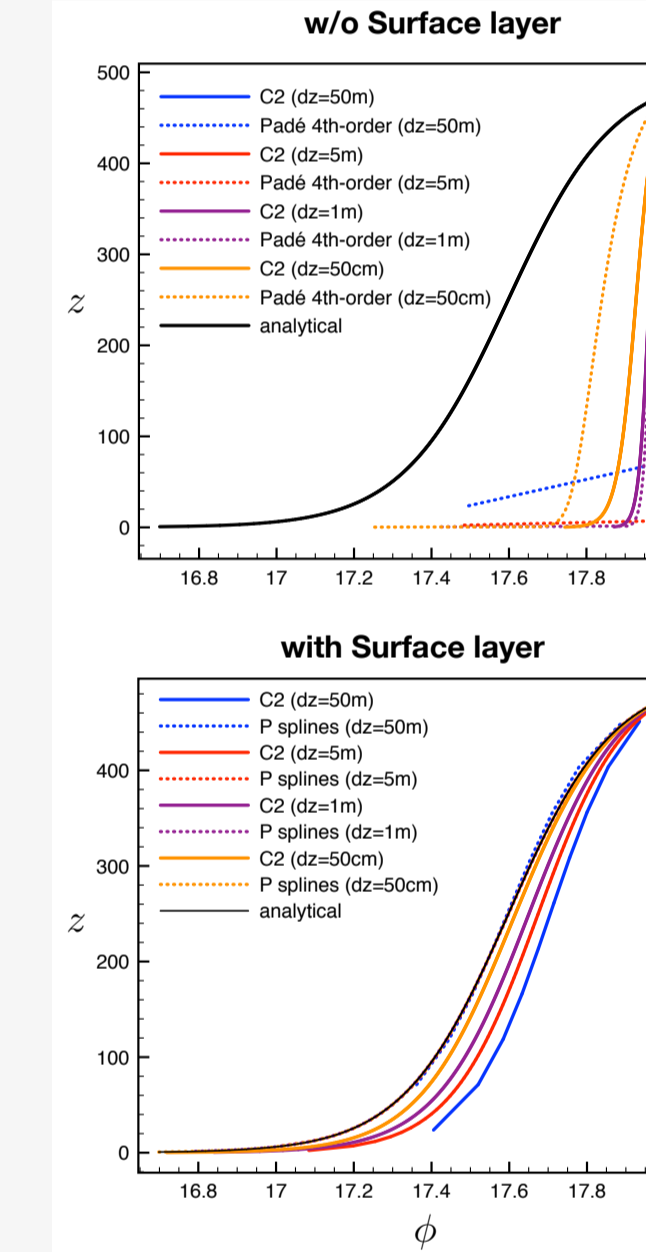

3 - Combination with time discretization

Combining Padé type schemes with implicit Euler leads to

$$\left(\frac{\alpha}{\gamma} - \frac{K_{k+3/2}\Delta t}{h^2} \right) d_{k+3/2} + \left(\frac{1}{\gamma} + 2\frac{K_{k+1/2}\Delta t}{h^2} \right) d_{k+1/2} + \left(\frac{\alpha}{\gamma} - \frac{K_{k-1/2}\Delta t}{h^2} \right) d_{k-1/2} = \frac{\bar{\phi}_{k+1} - \bar{\phi}_k}{h} + \frac{\Delta t}{h} (\text{rhs}_{k+1} - \text{rhs}_k)$$

- ▶ easy to generalize for non-constant grid-size
- ▶ The tridiagonal solve provides the flux and not $\bar{\phi}$

Properties for well-behaved numerical solutions


- ▶ Unconditional stability
- ▶ Monotonic damping (damping increases with increasing wavenumber, i.e. $\partial_\theta \mathcal{A} < 0$)
- ▶ Non-oscillatory (i.e. $\mathcal{A} \geq 0$)
- ▶ Proper control of grid-scale noise $\forall \sigma^{(2)}$

→ Convergence & stability are often not sufficient

With implicit Euler scheme :

$$\mathcal{A}(\sigma^{(2)}, \theta) = \frac{1 + 2\alpha \cos \theta}{1 + 2\alpha \cos \theta + 4\gamma \sigma^{(2)} (\sin \frac{\theta}{2})^2}$$

- ▶ 2nd-order accurate in space : $\alpha = \frac{\gamma - 1}{2}$
- ▶ $\forall \gamma \neq 0, \partial_\theta \mathcal{A} < 0$: non-oscillatory if $\mathcal{A}(\pi) \geq 0$
- ▶ Two possibilities :
 - ▶ $\mathcal{A}(\sigma^{(2)}, \pi) = 0 \rightarrow \gamma = 2$
 - ▶ 4th-order in space $\rightarrow \gamma = \frac{6}{5 - 6\sigma^{(2)}}$

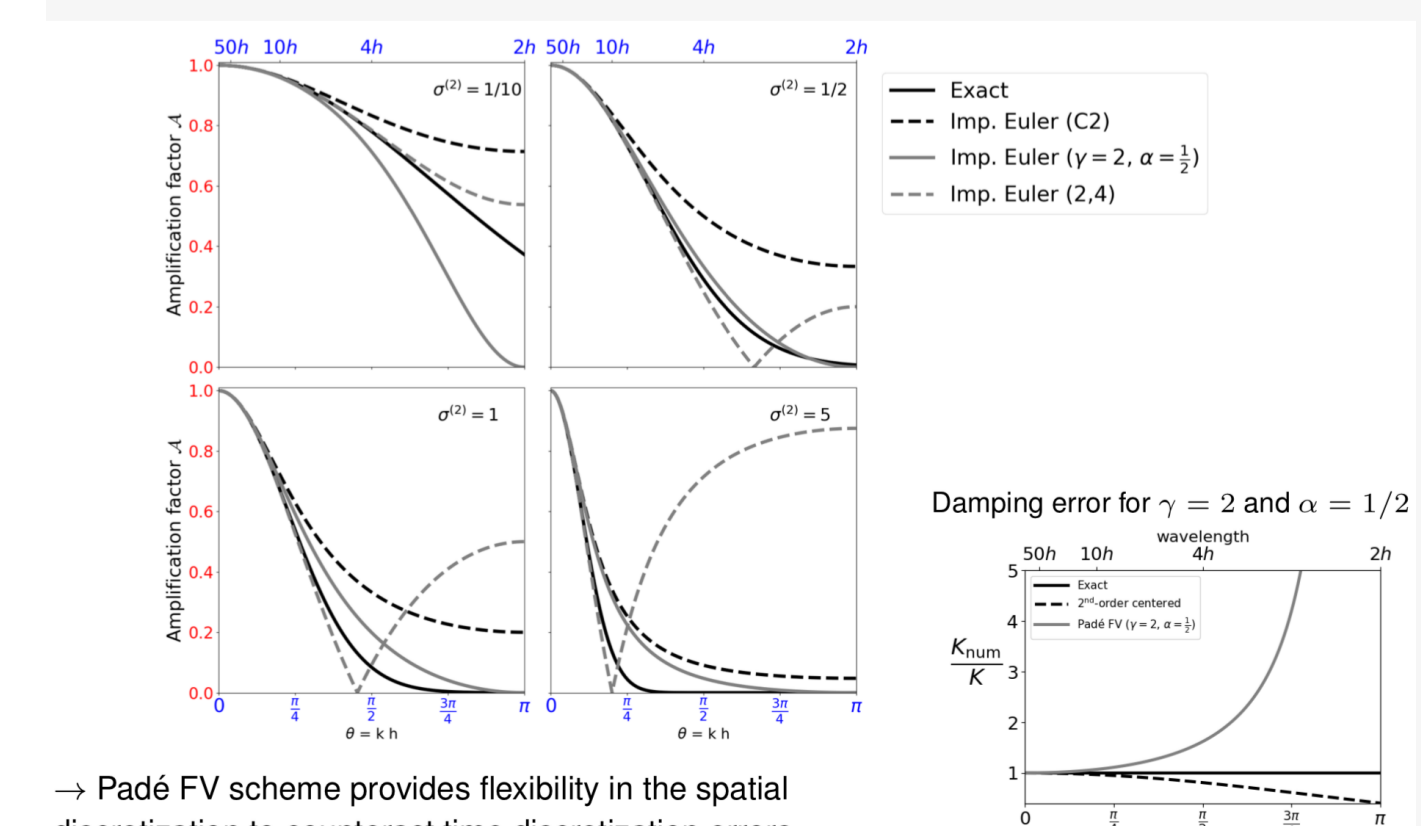

→ Padé FV scheme provides flexibility in the spatial discretization to counteract time discretization errors.

4 - Combination with subgrid closure schemes and energetic consistency

For X -equation closures with $X > 0$ a global energy budget can be derived


$$\begin{aligned} \partial_t u - \partial_z(K_m \partial_z u) = 0 &\rightarrow \partial_t KE - \partial_z(K_m \partial_z KE) = -K_m (\partial_z u)^2 = -P \\ \partial_t b - \partial_z(K_s \partial_z b) = 0 &\rightarrow \partial_t PE - \partial_z((-z)K_s \partial_z b) = K_s \partial_z b = -B \\ \partial_t TKE - \partial_z(K_e \partial_z TKE) &= P + B - \varepsilon \end{aligned}$$

Energy budget in a water column (ignoring the contribution of B.C.) with ε the TKE dissipation:


$$E = \int_{z_{bot}}^{z_{top}} (KE + PE + TKE) dz \rightarrow \partial_t E = - \int_{z_{bot}}^{z_{top}} \varepsilon dz$$

- ▶ The discrete counterpart of it tells you exactly how to discretize forcing terms in the TKE equation
- ▶ Numerical experiment: single column with 0-equation closure (KPP, [Large et al., 1994])
 - Use subgrid reconstruction to detect critical Ri-number
 - "Energy consistent" discretization of the Richardson number

Standard approach

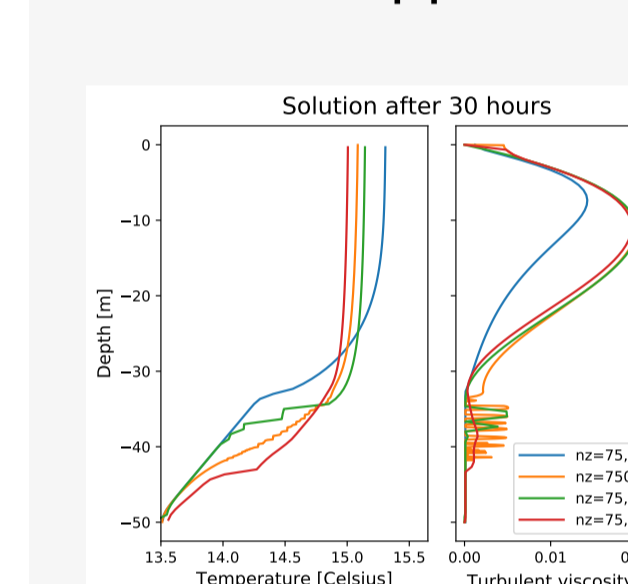

Implicit Euler + FV Padé

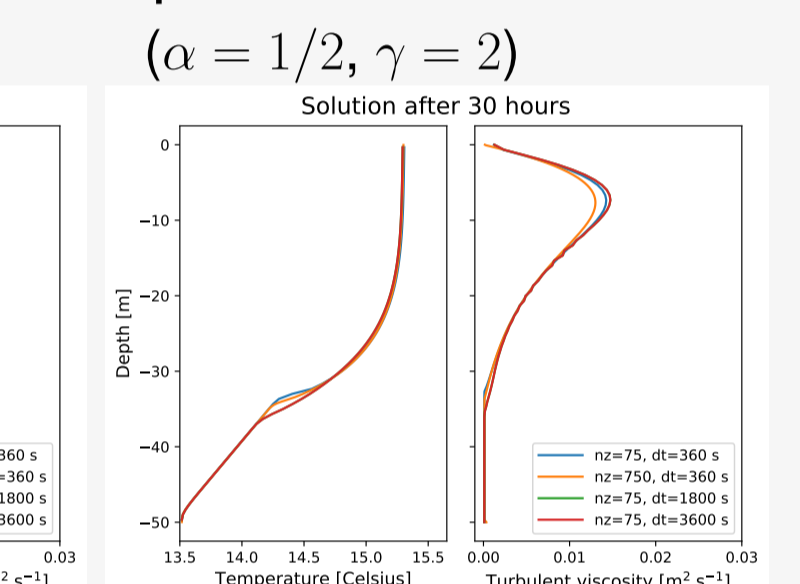

Turbulent Shear and buoyancy production (methodology of [Burchard 2002])

$$(\partial_z u)_{k+1/2}^2 = a_{k+1/2}^u \left\{ \frac{(u_{k+1}^{n+1} + u_{k+1}^n) - (u_k^{n+1} + u_k^n)}{2h_{k+1/2}} \right\}$$

$$(\partial_z b)_{k+1/2} = a_{k+1/2}^b$$

Relevant not only for TKE closure but also for Ri based closure schemes

5 - Summary & Perspectives

Summary

- ▶ Padé FV approach provides a good combination of simplicity and flexibility to handle diffusive terms with minimal changes in existing codes
 - ▶ Allows a good combination with surface layer param. and existing time-stepping
 - ▶ Provides degrees of freedom to mitigate numerical errors in time or to impose desired properties
- ▶ Simple single column test (Kato & Phillips) indicates a reduced sensitivity to numerical parameters

Perspectives

- ▶ Nonlinear stability
- ▶ Extension to mass-flux scheme
 - ▶ Neutral case \rightarrow stratified case
- ▶ Single column tests & global ocean simulation
- ▶ Add representation of oceanic molecular sublayer + MO layer in the top most oceanic grid box for OA coupling purposes, e.g. [Zeng & Beljaars, 2005]

References