


Zhang He
Hao Yuanyuan
Xu Cheng
Qin Luying



<http://dx.doi.org/10.21278/brod72107>

ISSN 0007-215X

eISSN 1845-5859

MODEL OF WORKING SHIP CROSSING CHANNEL

UDC 629.5.051.53

Original scientific paper

Summary

An application method for working ship crossing safely is proposed to determine how to make navigation scheme at a certain time. This method makes it possible for decision makers to make reasonable judgments at different times. In this paper, the position relationship between working ship and navigation vessel in waterway is analysed by considering the ship size, hydrological conditions of waterway, ship arrival model and ship navigation trajectory. Using genetic algorithm, the operation scheme of keeping a safe distance between the working ship and the vessel in the channel is solved by taking the speed and direction of the working ship as genetic factors. By analysing the crossing scheme at each starting time in a given time range, the optimal crossing scheme with the farthest distance between the working ship and the vessels in the channel is obtained. According to the measured data, the simulation is carried out with MATLAB to verify the model of working ship crossing channel. The results show that it is safe and reliable to choose the navigation scheme proposed in this paper, which has strong application value.

Key words: ship collision avoidance; crossing the gap; genetic algorithm

1. Introduction

The working ship navigates between different working areas in the channel to perform work tasks. Due to the uncertain location of the working area, working ships cross the channel more frequently than other vessels. However, most working ships have low speed and poor flexibility. The possibility of collision is really high.

There are many reasons for collision avoidance failure, such as human failures [1]. According to statistics, more than 80% of ship collision accidents are caused by human error [2]. The International Maritime Organization (IMO) has been devoting to the research on the technologies and regulations of the Maritime Autonomous Surface Ship (MASS) in recent years [3]. It is very important to establish the ship autonomous anti-collision model, which

can provide a reasonable navigation scheme for the operator and reduce the operation accidents.

In the process of working ship navigation, the surrounding environment is uncertain, so it is necessary to plan the collision avoidance path through real-time data [4]. Automatic identification system (AIS) and the electronic chart display and information system (ECDIS) are very helpful for this [5]. Three basic processes of determining evasive solutions are motion prediction, conflict detection, and conflict resolution [6]. Firstly, the motion and trajectory of the ship are analysed, then the collision risk is evaluated, and finally the collision is avoided by different ways.

Chen Qi [7] introduced the ship-following model with fully considered of relevant factors such as vessel type, ship maneuverability and dangerousness of port's goods is proposed, from which the equations of safety interval under different safety condition levels are specified respectively. Hou Haiqiang [8] calculated the minimum safety distance by analysing the speed distribution of different vessel clearance. Li Xiaoyu [9] designed an adaptive sampling collision avoidance trajectory generation algorithm based on the classical velocity obstacle method for autonomous collision avoidance in Multi-ship encounters. Yang Baicheng [10] focused on the decision problem of collision avoidance action of ships under the situation of multiple ships, based on the improved simulated annealing algorithm, proposed a calculation method of ship steering avoidance. He Yixiong [11] studied the static collision avoidance mechanism (combining the methods of ship domain and speed obstacle theory) and the course control system (combining the fuzzy adaptive PID control and ship motion equations), and set a dynamic ship collision avoidance mechanism. Cheng Zhiyou et al [12] put forward the technology of traffic conflict to measure the collision risk of single vessel crossing ship flow, and analysed the collision avoidance characteristics of passenger ferry on Yangtze River trunk from four aspects: passenger ferry navigation environment, passenger ferry maneuverability, personnel quality and collision avoidance characteristics; combined with inland river collision avoidance rules and good craft requirements, the collision avoidance characteristics of passenger ferry on Yangtze River trunk line were analysed. Ma [13] proposed a method to predict collision risk of ships in passenger-ferry waters by confirming collision risk and collision avoidance path on the basis of machine speed obstacle algorithm. Wang HB [14] proposed a hybrid self-organizing scheduling method for restricted two-way waterways, with Vessel Traffic Service centre managing the direction of traffic flow according to the navigation situations.

However, most of the papers focus on collision avoidance in the case of multi vessel encounter, and few on the gap between vessels. Due to the similarity between ship crossing clearance and pedestrian crossing, the optimization of pedestrian crossing is also included in the reference. Zhao Jia [15] analysed the distance between the pedestrian and the incoming vehicle, the velocity of the vehicle and the allowed gap for crossing to build a psychological distance model for the pedestrian crossing the street safely and a multivariate Logistic regression decision model. Jairus [16] described the behaviour of the drivers under illegal pedestrian crossing circumstances by proposing an extended car-following model. Yang Qi [17] analysed the conflicts between pedestrians and vehicles, constructed a cellular automata model for pedestrian-vehicle interactive operation in signalized intersection, which determined the specific pedestrian crossing shape. Chaudhari Avinash et al [18] analysed the pedestrians' decisions whether to cross the street at unprotected mid-block crosswalks, determined that the traffic gap size, pedestrian speed, vehicle speed, concentration on gap are the parameters, which influences the pedestrian crossing decisions. Cao Yu [19] used the critical gap method in the Gap Acceptance Theory to determine the critical value of deceleration to avoid conflicts for cars. But there are differences as well. Working ship has no

control measures in waterway. Compared with pedestrians and vehicles on the road, working ships have poor flexibility and are unable to stop in time.

Therefore, this paper analyses the position relationship between the working ship and the navigation vessel in the channel by considering the four factors of ship size, hydrological conditions, ship arrival model and ship navigation trajectory, and constructs the clearance model of working ship crossing. Using genetic algorithm, taking the velocity (include magnitude and direction) of working ship as genetic factors, this paper predicts whether the working ship can cross the clearance between the navigating vessels in the channel, and obtains the optimal crossing scheme by adjusting the crossing time of the working ship. The result obtained by this research is the necessary premise of ship guidance, which can ensure the safety of the ship in the process of navigation. It is also the basis of channel capacity calculation. At the same time, in the process of ship route planning, it is inevitable that ships will cross the main channel, which can get help from this study.

2. Problem Description

In the channel, the direction of the ship is divided into two directions: upstream and downstream. At the same time, due to the needs of production and life, there are often fishing, dredging or other offshore operation areas in the channel, and the distribution of working ships in the operation area is more intensive. On the way to the operation site, the working ship needs to cross the channel. When facing the channel with multiple operation areas, the working ship can take two kinds of navigation paths: bypassing the operation area and crossing the operation area, as shown in Figure 1. It can be easily seen in the figure that if we find a way for the ship to cross the operation area, the navigation distance can be significantly reduced.

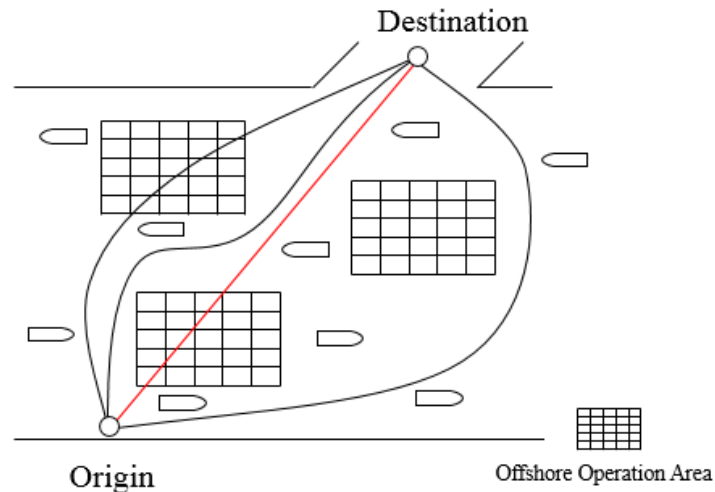


Fig.1 Paths of working ship crossing the channel with multiple operation areas

The location of the working ship is uncertain, and there is no fixed sign on the chart, which makes the vessels lack vigilance. Therefore, to judge whether the working ship can cross the channel, it is necessary to comprehensively analyse the navigation track of the navigating vessel in the channel and the navigation track of the working ship to determine the position of the ship. In order to accurately predict and judge the navigation trajectory of working ship, it is necessary to analyse the navigational speed and direction angle. By the way, the flow in the channel is not static, and the hydrological conditions and other factors should also be included in the analysis. At the same time, the ship in the water can't be simply

regarded as a particle, and the influence of ship type should be considered. There are various forms of ship arrival in waterway, including continuous arrival model, Robertson geometric distribution model and Poisson distribution model.

In order to ensure the safety of the working ship crossing the channel, the commonly used method is to send signals to the vessels around the working ship to make them slow down, so that the working ship can cross the channel smoothly. In order to avoid the influence on the surrounding vessels, this paper analyses the distance between the surrounding vessels and the working ship at each time under different crossing schemes to judge whether the working ship can successfully cross the channel at that time. In this paper, it is considered that the working ship crosses the channel at a constant speed and it uses two steering angles when crossing the vessel in upstream and downstream. As long as there is no intersect between the working ship's trajectory and the normal navigation ship's trajectory in the channel at the same time and space, then it can be considered that the working ship can be safe and does not affect the ships on the channel to cross the channel. At the same time, we supposed that the maneuverability of the ship is good enough to navigate according to the navigating scheme.

3. Model of Working Ship Crossing Channel

3.1 Prediction of ship navigation trajectory

3.1.1 Navigation trajectory of vessels navigating in the channel

We defined the nearest vessel to the working ship in downstream as vessel i , whose velocity is marked v_i . Similarly, the nearest vessel to the working ship in upstream is vessel j , whose velocity is marked v_j . As the flow in the channel is not static, it has velocity and direction, the flow velocity is expressed by v_s , and the direction angle of it is expressed by α , taking the channel direction as the horizontal direction. The trajectory is obtained by the vector combination of ship velocity and flow velocity as shown in Figure 2.

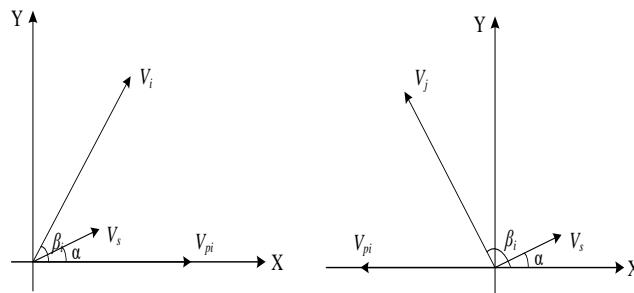


Fig.2 Motion vector of vessel i and j

Setting the vector of the vessel's velocity and the flow velocity in the vertical direction to 0.

$$v_i \cdot \sin \beta_i + v_s \cdot \sin \alpha = 0 \quad (1)$$

$$v_j \cdot \sin \beta_j + v_s \cdot \sin \alpha = 0 \quad (2)$$

where β_i is the angle of velocity for vessel i , β_j is the angle of velocity for vessel j .

The following variables is obtained by transformation:

$$\beta_i = \arcsin \left(-\frac{v_s \cdot \sin \alpha}{v_i} \right) \quad (3)$$

$$\beta_j = \arcsin \left(-\frac{v_s \cdot \sin \alpha}{v_j} \right) \quad (4)$$

The actual speed in horizontal direction of the vessel i, v_{pi} , and the actual speed in horizontal direction of vessel j, v_{pj} , can be expressed.

$$v_{pi} = v_i \cdot \cos \beta_i + v_s \cdot \cos \alpha \quad (5)$$

$$v_{pj} = v_j \cdot \cos \beta_j + v_s \cdot \cos \alpha \quad (6)$$

3.1.2 Navigation trajectory of working ship

Take o to represent the working ship. v_{ok} and γ_k represent the speed and direction angle of the working ship. When the working ship crosses the channel, it should pass through the vessels downstream and upstream separately. The velocity and direction angle are different in these two periods, marked with subscript k. When k takes 1, it refers the process when the working ship cross the vessels in downstream. When k takes 2, it refers the process when the working ship cross the vessels in upstream. The trajectory is obtained by the vector combination of ship velocity and flow velocity as shown in Figure 3.

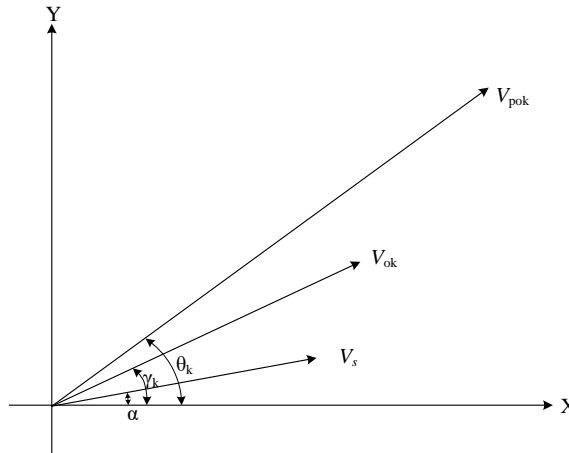


Fig.3 Working ship velocity vector

Then the synthetic velocity of the working ship and flow, v_{pok} , and the track angle of the working ship, θ_k , can be expressed.

$$v_{pok} = \sqrt{(v_{ok} \cdot \sin \gamma_k + v_s \cdot \sin \alpha)^2 + (v_{ok} \cdot \cos \gamma_k + v_s \cdot \cos \alpha)^2} \quad (7)$$

$$\theta_k = \arctan \frac{v_o \cdot \sin \gamma_k + v_s \cdot \sin \alpha}{v_o \cdot \cos \gamma_k + v_s \cdot \cos \alpha} \quad (\theta_k \neq 0 \text{ or } \pi) \quad (8)$$

3.2 Position relationship between working ship and navigation vessel in the channel

3.2.1 The effective length of working ship

When the working ship navigates at γ_k , the working ship is inclined, as shown in Figure 4. The effective length in vertical and horizontal are related to three factors: direction angle γ_k , the breadth of working ship b_o and the length of working ship l_o .

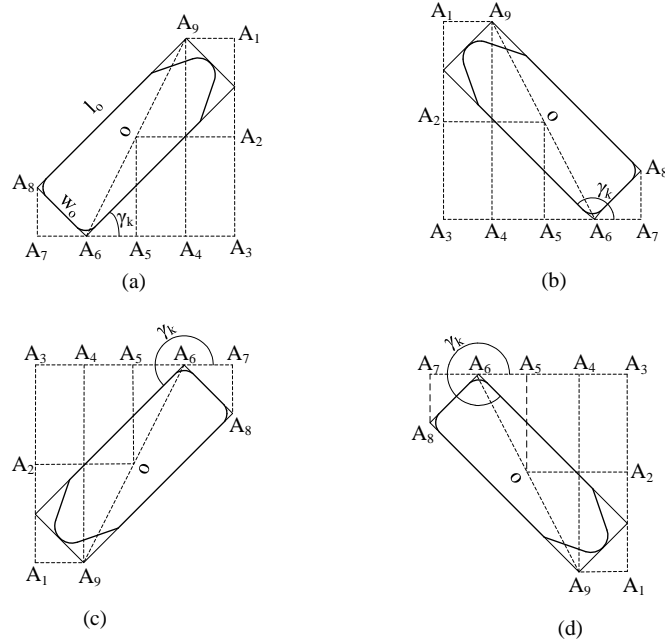


Fig.4 The working ship navigate at angle of γ_k

The effective length in vertical direction can be expressed by:

$$A_1A_3 = 2A_1A_2 = 2A_1A_3 = |l_o \cdot \sin \gamma_k| + |b_o \cdot \cos \gamma_k| \quad (9)$$

The effective length in horizontal direction can be expressed by:

$$A_3A_7 = 2A_3A_5 = 2A_5A_7 = (|l_o \cdot \cos \gamma_k| + |b_o \cdot \sin \gamma_k|) \quad (10)$$

3.2.2 Clearance between working ship and navigation vessels

The distance between the working ship and the navigating ship in the channel refers to the distance when they are at the same horizontal plane. According to the ship's coordinates and dimensions, the following two processes of working ship crossing the ship in downstream direction and the ship in upstream direction are discussed.

(1) The clearance between working ship and the vessels in downstream

At the initial moment t_0 , the working ship is on its position to cross the channel. And it's going to navigate to the demarcation line between upstream and downstream as shown in Figure 5.

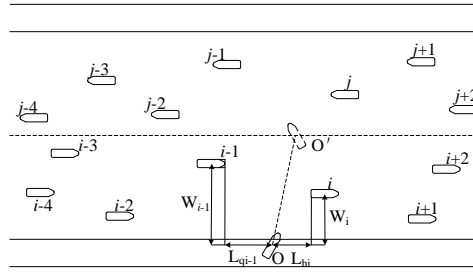


Fig.5 At the moment of t_0 , working ship is ready to cross

According to the coordinate relationship, we get the following variables:

The vertical distance between the working ship and the vessel i :

$$W_i = y_i - y_o \quad (11)$$

When the working ship navigates to the same horizontal plane to the vessel in downstream, if the working ship is behind it, the working ship should traverse from the aft of it. Otherwise if the working ship is in front of it, the working ship should traverse from the fore of it. The distance between the working ship and the aft of vessel i , L_{hi} , and the distance between the working ship and the fore of vessel $i-1$, L_{qi-1} .

$$L_{hi} = x_i - x_o - \frac{l_i}{2} \quad (12)$$

$$L_{qi-1} = x_o - x_i - \frac{l_{i-1}}{2} \quad (13)$$

Where, (x,y) refers to the coordinate of the ship when the working ship crosses the downstream vessels; l_i refers to the length of vessel i .

Sketch of working ship traversing from the aft of vessel i is shown in Figure 6. The working ship just reaches the underside of the vessel i . We get the following variables:

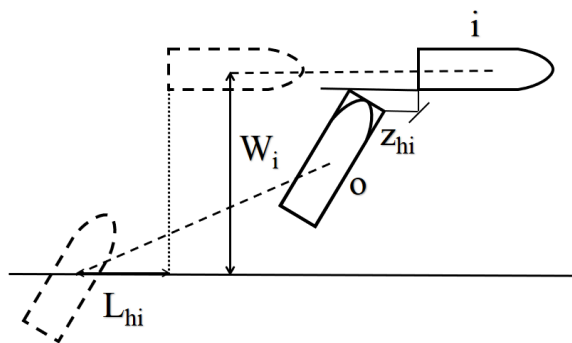


Fig.6 The working ship crossing from the stern of the vessel i

The required time when the working ship navigates from the ready position to the position to traverse from the aft of the vessel i :

$$t_{hi} = \frac{W_i - \frac{1}{2} \cdot b_i - \frac{1}{2} \cdot (|l_o \cdot \sin \gamma_1| + |b_o \cdot \cos \gamma_1|)}{|v_{po1} \cdot \sin \theta_1|} \quad (14)$$

The clearance between the working ship and vessel i , when the working ship gets the position to traverse from the aft of the vessel i :

$$z_{hi} = L_{hi} + v_{pi} \cdot t_{hi} - v_{po1} \cdot \cos \theta_1 \cdot t_{hi} - \frac{1}{2} \cdot (|l_o \cdot \cos \gamma_1| + |b_o \cdot \sin \gamma_1|) \quad (15)$$

Sketch of working ship crossing from the fore of the vessel i is shown in Figure 7. The working ship just leaves the upside of vessel i . We get the following variables:

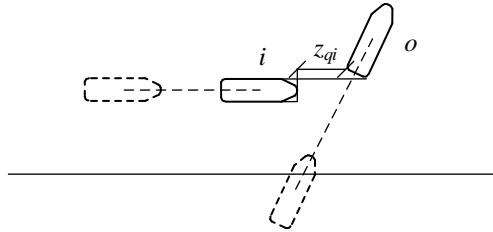


Fig.7 The working ship crosses the bow of i

The required time when the working ship navigates from the ready position to the position to traverse from the fore of vessel i :

$$t_{qi} = \frac{w_i + \frac{1}{2} \cdot b_i + \frac{1}{2} \cdot (|l_o \cdot \sin \gamma_1| + |b_o \cdot \cos \gamma_1|)}{|v_{po1} \cdot \sin \theta_1|} \quad (16)$$

The clearance between the working ship and vessel i , when the working ship gets the position to traverse from the fore of vessel i :

$$z_{qi} = L_{qi} - v_{pi} \cdot t_{hi} + v_{po1} \cdot \cos \theta_1 \cdot t_{qi} - \frac{1}{2} \cdot (|l_o \cdot \cos \gamma_1| + |b_o \cdot \sin \gamma_1|) \quad (17)$$

(2) The clearance between working ship and the vessels in upstream

After the working ship reaches the demarcation line between downstream and upstream, it required a period to change the direction angle. The moment when the working ship gets ready to cross the vessels in upstream is expressed.

$$t_{c1} = t_0 + \frac{Y_1}{|v_{po1} \cdot \sin \theta_1|} + t_z \quad (18)$$

Where, Y_1 refers to the width of the main channel in downstream direction, t_z refers to the time required for working ship to adjust the direction angle.

At this time, the working ship is getting ready to cross the vessels in upstream, which is shown in Figure 4. After the change of direction angle, we use o' and j' to represent the working ship and vessel j .

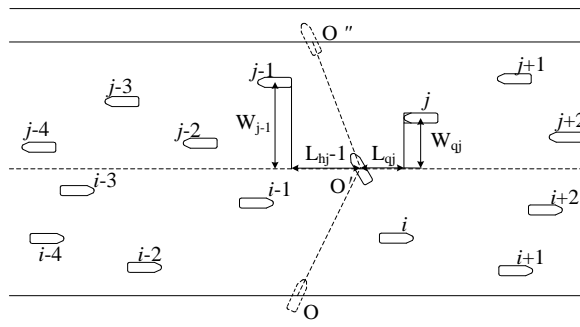


Fig. 8 At the moment of t_{c1} , working ship is ready to cross the vessels in upstream

$$x'_o = x_o + \frac{Y_1}{|v_{po1} \cdot \sin \theta_1|} \cdot v_{po1} \cdot \cos \theta_1 \quad (19)$$

$$y'_o = y_o + Y_1 \quad (20)$$

$$x'_j = x_j - t_{c1} \cdot v_{pj} \quad (21)$$

$$y'_j = y_j \quad (22)$$

According to the coordinate relationship, we get the following variables:

The vertical distance between the working ship and the vessel j:

$$W_j = y'_j - y'_o \quad (23)$$

Being similar to the process of working ship crossing the ship in downstream direction, the distance between the working ship and the aft of vessel $j-1$, L_{hj-1} , and the distance between the working ship and the fore of vessel j , L_{qj} , are expressed.

$$L_{hj-1} = x'_o - x'_j - \frac{l_{j-1}}{2} \quad (24)$$

$$L_{qj} = x'_j - x'_o - \frac{l_j}{2} \quad (25)$$

Where (x', y') refers to the coordinate of the ship after the working ship changed direction angle, l_j is the length of vessel j.

Sketch of working ship traversing from the fore of vessel j is shown in Figure 9. The working ship just leaves the upside of the vessel j. We get the following variables:

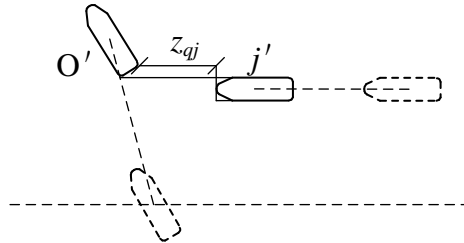


Fig.9 The working ship traversed from the bow of the vessel j

The required time when the working ship navigates from the demarcation line to the position to traverse from the fore of vessel j' :

$$t_{qj} = \frac{w_j + \frac{1}{2} \cdot b_j + \frac{1}{2} \cdot (|l_o \cdot \sin \gamma_2| + |b_o \cdot \cos \gamma_2|)}{|v_{po2} \cdot \sin \theta_2|} \quad (26)$$

The clearance between the working ship and vessel j' , when the working ship gets the position to traverse from the fore of vessel j' :

$$z_{qj} = L_{qj} - v_{pj} \cdot t_{qj} - v_{po2} \cdot \cos \theta_2 \cdot t_{qj} - \frac{1}{2} \cdot (|l_o \cdot \cos \gamma_2| + |b_o \cdot \sin \gamma_2|) \quad (27)$$

Sketch of working ship traversing from the aft of vessel j' is shown in Figure 10. The working ship just reaches the downside of the vessel j' . We get the following variables:

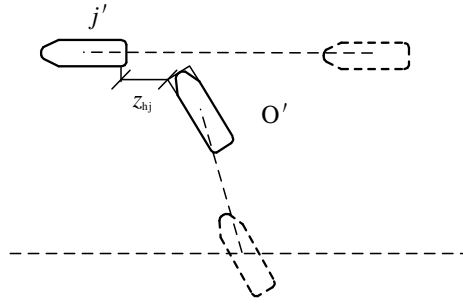


Fig.10 The working ship traversed from the stern of the vessel j

The required time when the working ship navigate from the demarcation line to the position to traverse from the aft of the vessel j' :

$$t_{hj} = \frac{w_j - \frac{1}{2} \cdot b_j - \frac{1}{2} \cdot (|l_o \cdot \sin \gamma_2| + |b_o \cdot \cos \gamma_2|)}{|v_{po2} \cdot \sin \theta_2|} \quad (28)$$

The clearance between the working ship and vessel j' , when the working ship gets the position to traverse from the aft of vessel j' :

$$z_{hj} = L_{hj} + v_{pj} \cdot t_{hj} + v_{po2} \cdot \cos \theta_2 \cdot t_{hj} - \frac{1}{2} \cdot (|l_o \cdot \cos \gamma_2| + |b_o \cdot \sin \gamma_2|) \quad (29)$$

3.3 Criteria for successful crossing

3.3.1 Feasibility judgment of crossing at one time

If the working ship is allowed to cross the navigating vessels at t_0 , the clearance between the working ship and the navigating vessel should be farther than the safe distance, expressed as $z_{t_0} \geq 0$.

$$z_{t_0} = \min(z_i, z_j) \quad (30)$$

$$z_i = \max(z_{qi} - h_{qi}, z_{hi} - h_{hi}) \quad (31)$$

$$z_j = \max(z_{qj} - h_{qj}, z_{hj} - h_{hj}) \quad (32)$$

Where, z_i refers to the effective distance between working ship and vessel; z_j refers to the effective distance between working ship and vessel j ; h_{qi} refers to the safe distance when the working ship traverses from the fore of the vessel i ; h_{hi} refers to the safe distance when the working ship traverses from the aft of the vessel i ; h_{qj} refers to the safe distance when the working ship traverses from the fore of the vessel j ; h_{hj} refers to the safe distance when the working ship traverses from the aft of the vessel j .

3.3.2 Feasibility judgment of crossing at any time in the given time range

In order to find out the most suitable navigation scheme of working ship in a given time range, from t_0 to t_n . We use $t_0 + n\Delta t$ to replace any time in the time range. The clearances between working ship and the vessels in channel are expressed.

$$z'_{hi} = L_{hi} + v_{pi} \cdot (t_{hi} + n\Delta t) - v_{po1} \cdot \cos \theta_1 \cdot t_{hi} - \frac{1}{2} \cdot (|l_o \cdot \cos \gamma_1| + |b_o \cdot \sin \gamma_1|) \quad (33)$$

$$z'_{qi} = L_{qi} - v_{pi} \cdot (t_{qi} + n\Delta t) + v_{po1} \cdot \cos \theta_1 \cdot t_{qi} - \frac{1}{2} \cdot (|l_o \cdot \cos \gamma_1| + |b_o \cdot \sin \gamma_1|) \quad (34)$$

$$z'_{hj} = L_{hj} + v_{pj} \cdot (t_{hj} + n\Delta t) - v_{po2} \cdot \cos \theta_2 \cdot t_{hj} - \frac{1}{2} \cdot (|l_o \cdot \cos \gamma_2| + |b_o \cdot \sin \gamma_2|) \quad (35)$$

$$z'_{qj} = L_{qj} - v_{pj} \cdot (t_{qj} + n\Delta t) + v_{po2} \cdot \cos \theta_2 \cdot t_{qj} - \frac{1}{2} \cdot (|l_o \cdot \cos \gamma_2| + |b_o \cdot \sin \gamma_2|) \quad (36)$$

If the working ship is allowed to cross at $t_0 + n\Delta t$, then $z_{t_0+n\Delta t} \geq 0$.

$$z_{t_0+n\Delta t} = \min(z'_i, z'_j) \quad (37)$$

$$z'_i = \max(z'_{qi} - h_{qi}, z'_{hi} - h_{hi}) \quad (38)$$

$$z'_j = \max(z'_{qj} - h_{qj}, z'_{hj} - h_{hj}) \quad (39)$$

Where, z'_i refers to the effective distance between working ship and vessel i ; z'_j refers to the effective distance between working ship and vessel j .

The start time of the working ship which keeps the longest distance from the ship in the channel is the most suitable starting crossing time. The navigation scheme at this time is the most suitable navigation scheme.

$$z = \max(z_{t_0}, z_{t_0+\Delta t}, z_{t_0+2\Delta t}, \dots, z_{t_n}) \quad (40)$$

4. Model Solving

Genetic algorithm was first proposed by Professor J.H.Holland, which originated from the study of natural and artificial adaptive systems in the 1960s.[20] Genetic algorithm transforms the process of solving the problem into a process similar to the crossover and mutation of chromosome genes in biological evolution. It is a method to search the optimal solution by simulating the natural evolution process. In order to obtain the best speed and direction scheme of working ship crossing the channel in a given time range, it is necessary to solve and record every moment in the time range, and finally find the safest navigation scheme in the specified time range.

A single-chain real number coding scheme is used in this paper: each chromosome represents a navigation scheme consisting of the speed of working ship, the direction angle when the working ship crosses the vessels in downstream and the direction angle when the working ship crosses the vessels in upstream.

$$Pop(g) = \{X_1^g, X_2^g, X_3^g, \dots, X_m^g, \dots, X_M^g\} \quad g = 1, 2, \dots, G_{\max} \quad (41)$$

$$X_m^g = \{v_o^g, \gamma_1^g, \gamma_2^g\} \quad m = 1, 2, \dots, M \quad (42)$$

Where $Pop(g)$ represents the genetic population; X_m^g represents one of the chromosomes, i.e. a navigation scheme; g represents generation; G_{\max} represents the largest generation; m represents the m -th individual of the population; M represents the population size.

The operation steps of genetic algorithm are as follows:

Step 1: Initialization. Set the Maximum Generation. Generate M individuals randomly, as the genetic population. M takes 50 in this paper.

Step 2: Individual evaluation. Because genetic algorithm requires that the fitness of individuals must be non-negative. But it is possible for the distance between the working ship and the vessels in channel to go negative, i.e. a failed negative scheme which may cause collision. So the fitness function is selected as $f = z_{in} + A$, where A is a large enough number to make $f > 0$. At the same time, the fitness values of each individual in the population are calculated. A takes 20000 in this paper.

Step 3: Selection. Apply the selection operator to the population, according to the fitness value of individuals, some excellent individuals are selected to inherit to the next generation population, according to some rules or methods. In this paper, Roulette Wheel Selection method is used for selection operation, and the possibility of offspring retention is determined according to the proportion of fitness value of each individual in the population. For example, the fitness of an individual X_m^g is f_x , and its probability of being selected is expressed as:

$$p_x = \frac{f_x}{\sum_{x=1}^M f_x} \quad (43)$$

The greater the individual fitness value, the greater the chance of being selected. Generate a random number in each round to determine the selected individual.

Step 4: Crossover. Apply the crossover operator to the population. Exchange some of chromosomes for the selected pairs of individuals in a certain probability p_c to produce new individuals. p_c takes 0.9 in this paper.

Step 5: Mutation. Apply the mutation operator to the population. Change one or some genes with a certain probability p_m for the selected individuals to produce new individuals. After selection, crossover and mutation of $Pop(g)$, the next generation population $Pop(g+1)$ is obtained. Recalculate and sort the fitness values, and get ready for the next genetic operation. p_m takes 0.04 in this paper.

Step 6: Judgment of termination conditions. The process continues until the specified number of generations is attained and acceptable or the best possible solution evolves [21]. If the conditions are not met, go to step 2 and continue to evolve. G_{max} takes 1000 in this paper.

5. Case Analysis and Simulation

According to the information (from <http://www.shipxy.com/>) of vessels and hydrological conditions at the Yangtze River Estuary, at 14:20, in March 12, 2020, the situation of the channel at this time is shown in Figure 11 and Table 1.

The width of the river here is 1500 meters. The upstream section is 700 meters, and the downstream section is 800 meters. The flow and the channel are in the same direction. And the speed of flow is $1 \text{ kn}\cdot\text{h}^{-1}$. The arrival of vessels in channel arrive obey the Poisson distribution. The breadth of working ship is 10m, and the length of it is 50m. The speed of working ship is in range of $4.5 \text{ kn}\cdot\text{h}^{-1}$ to $6 \text{ kn}\cdot\text{h}^{-1}$. The direction angle of it is in range of 70° to 110° . $h_{hi} = h_{qi} = 260\text{m}$, $h_{hj} = h_{qj} = 140\text{m}$, $t_z = 20\text{s}$. Assuming that the working ship is going to navigate to the opposite bank from (0,0), the minimum effective distance within 0 to 1200

seconds are shown in the figure 12. Only if the minimum effective distance is greater than 0, can the working ship cross the channel successfully. The navigating scheme at each starting crossing time is shown in Table 2.

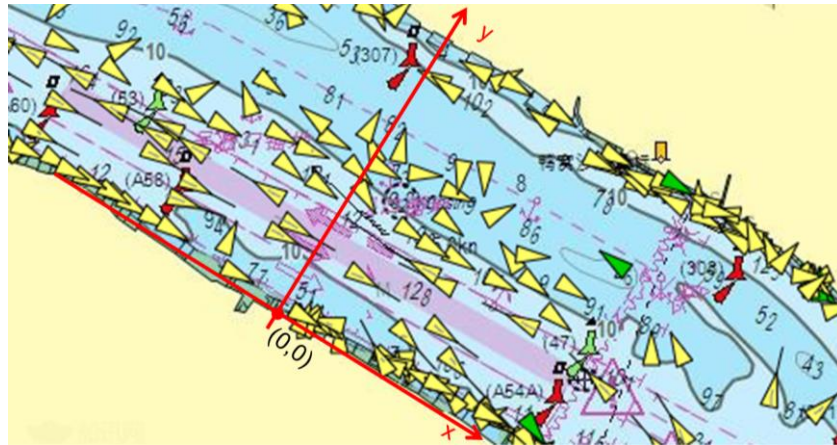


Fig.11 The Yangtze River channel

Table 1 Vessel information statistics

Horizontal coordinates	Vertical coordinates	Ship Length/m	Ship Breadth/m	Ship Speed/kn·h ⁻¹
1619	560	155	22	12.1
-2038	345	53	9	13.1
2899	637	140	20	13
2455	49	62	12	13.2
2026	511	100	14	8
3420	333	141	24	11.1
-214	698	34	7	6.7
3054	471	99	16	8.4
-242	395	97	16	24.7
385	171	43	7	8.8
705	505	53	9	11.6
2236	315	127	19	14
-1674	133	97	16	5.2
-1897	215	53	9	9.9
2736	321	98	16	9.1
4217	478	190	32	10.6
581	445	35	10	8.8
1977	610	98	16	11.7
-4433	369	35	10	6.3
-3166	276	190	32	15
-1405	337	125	20	7.5
-2278	718	285	40	8.8
-3085	344	55	9	11.4
-2552	270	151	21	12.3
-3373	588	55	10	7.6
2326	531	81	14	8
-921	589	58	9	7.5
-45	318	54	8	7.2

-3392	154	36	10	29.1
952	1423	67	12	14.5
-4477	1334	55	9	12
1561	1301	39	6	7
3140	1352	199	32	12.9
2505	1409	81	13	10.8
2216	1131	66	15	9.6
2015	1057	44	9	14.1
2636	1387	57	10	13
-1484	915	54	9	10.6
-1522	1411	56	9	9.1
3169	935	140	20	15
4202	1221	57	9	10.6
1183	920	53	9	5.5
-1581	952	159	24	11.3
3414	1427	53	9	10.9
-4040	891	225	32	11.9
3697	1113	39	11	11.6
1559	1457	63	27	5.6
2652	1226	92	15	10.6
4251	1169	180	26	12.3
753	1146	108	17	14.3
-1319	1373	300	40	7
286	1078	54	9	9.1
-275	1155	53	9	10.3
3766	1064	84	13	14.1
-2788	1329	172	28	5.9
830	1315	55	9	10.5
-2179	1311	53	9	12.3
4137	875	85	13	6.4
-2323	970	52	8	11.2
-2088	1242	53	9	10
-2320	1152	160	23	6.3
-2579	1369	222	30	8.9
-4271	1335	48	8	8.8
703	1356	46	7	9.5

Table 2 Optimal schemes at all times

Starting crossing time/s	Speed of working ship /kn·h ⁻¹	$\gamma_1/^\circ$	$\gamma_2/^\circ$	Minimum effective distance/m
0	5.50	83.82	74.56	-43.91
30	5.96	72.59	108.43	-9.06
60	4.82	109.59	79.93	7.97
90	5.48	109.65	97.80	28.42
120	6.00	106.16	75.60	33.90
150	5.99	90.52	95.32	-24.53
180	4.51	90.19	76.05	-268.17
210	4.67	70.01	74.95	-167.93
240	5.99	71.04	108.88	-155.36
270	5.69	108.92	75.28	-265.99
300	5.99	75.32	78.68	-321.85
330	4.51	106.38	92.91	-158.33
360	4.86	85.14	98.12	-91.81
390	5.99	84.05	91.31	-111.76
420	4.69	110.00	73.85	-67.18
450	5.39	105.38	108.80	-30.08
480	4.89	70.02	76.41	-23.23
510	5.49	70.02	71.00	-86.95
540	6.00	70.05	80.31	-155.74
570	5.99	70.02	99.99	-236.08
600	4.50	110.00	88.96	-255.27
630	4.51	109.93	105.05	-175.45
660	4.50	109.98	100.29	-94.81
690	4.50	110.00	108.30	-14.49
720	4.83	109.90	106.61	58.71
750	4.54	106.94	72.23	137.63
780	5.97	108.92	97.54	199.60
810	5.34	89.23	71.31	183.58
840	5.92	81.83	73.92	163.36
870	5.99	70.07	92.44	82.60
900	6.00	70.35	107.43	-72.58
930	5.25	109.87	102.06	-36.44
960	5.86	109.99	109.88	37.01
990	4.58	88.90	70.22	176.46
1020	5.20	79.87	70.62	167.32
1050	5.98	73.39	70.02	146.37
1080	6.00	71.20	95.19	4.35
1110	5.98	70.09	90.12	-145.85
1140	4.50	109.93	70.73	-212.67
1170	4.55	101.27	93.11	-200.39
1200	5.98	70.56	108.36	-189.88

According to the simulation results, at the 780-th seconds, the minimum effective distance (Z_{780}) between the working ship and the vessels in channel is the farthest, which is the most suitable crossing time. The speed of working ship should be 5.97 kn/h, the direction angle when it crosses the vessels in downstream should be 108.92 °, and the direction angle when it crosses the vessels in upstream should be 97.54 °.

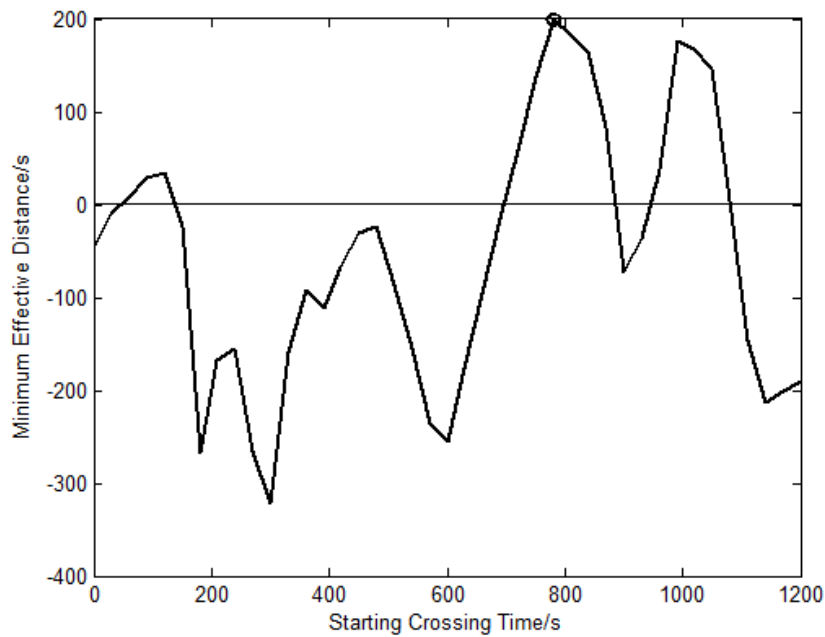


Fig.12 Optimal solutions at all times

Under this crossing scheme, when the working ship navigates to the same horizontal plane as the ship in the channel, the positions of the working ship and the vessels in the channel is shown in the figure 13. The solid line represents the navigation track of the working ship. ◀ represents the vessels in upstream and ▶ represents the vessels in downstream. It is obvious from the figure that during the navigation of the working ship, the working ship always keeps effective distance from the ship in the channel, which successfully avoids the occurrence of collision accidents. When the working ship navigates to the same horizontal plane as the vessels in the channel, the effective distance between the engineering ship and them is shown in Figure 14. All the effective distances in the figure are positive, which indicates that the working ship has no influence on the vessels navigating in the channel. That is to say, the working ship can navigate to the destination safely.

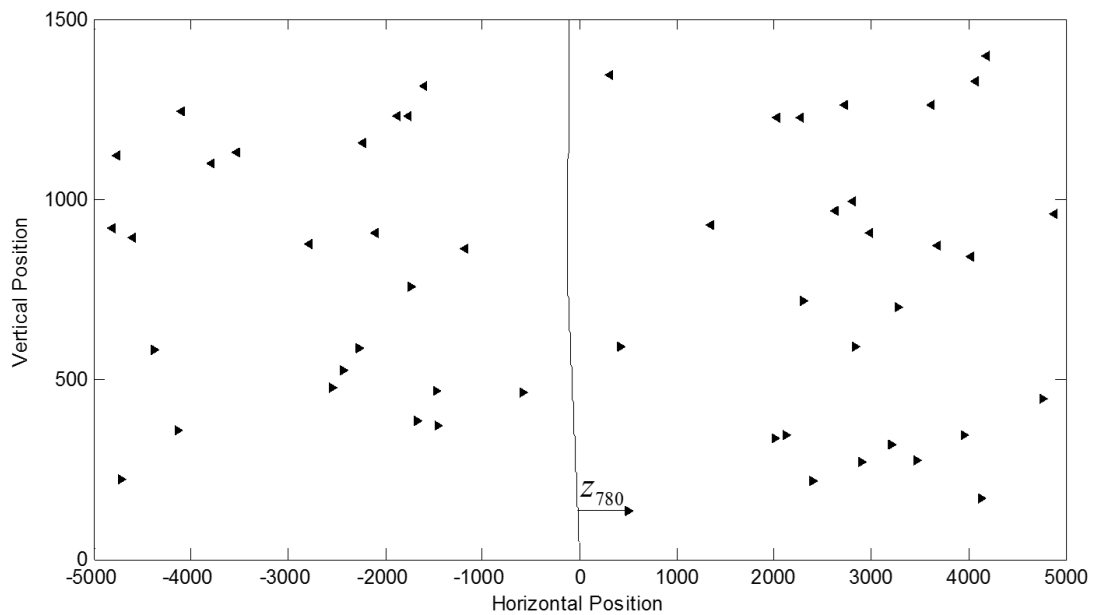


Fig.13 The position of vessels in channel when the working ship navigates to the horizontal plane where they are

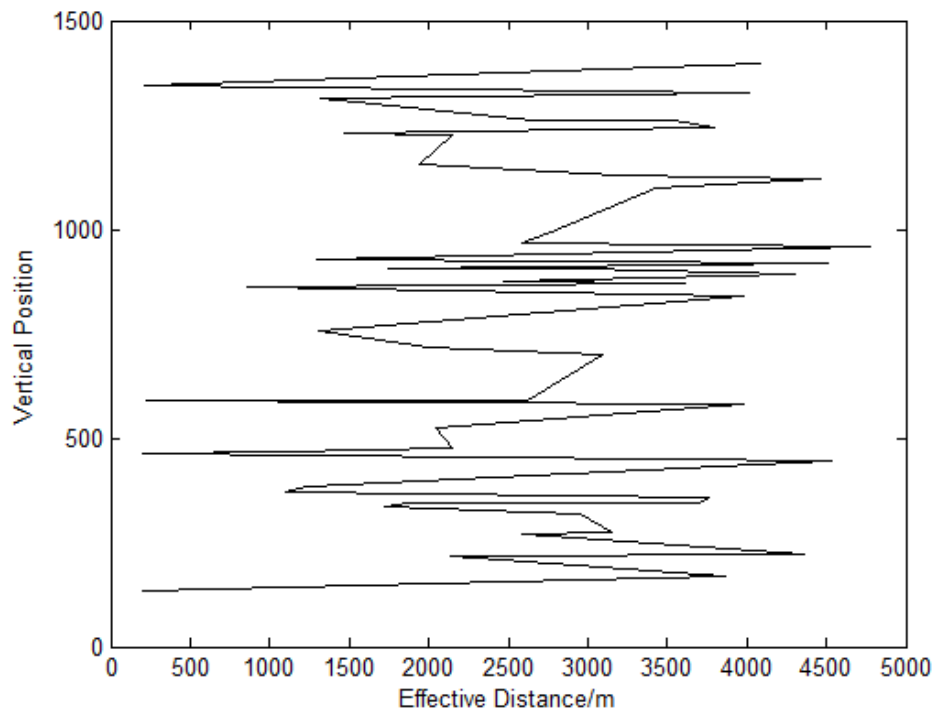


Fig.14 The effective distance between the working ship and the vessels in the channel, when it navigates to different horizontal plane

6. Conclusion

In this paper, the ship size, channel hydrological conditions, ship arrival model and other factors are comprehensively considered to predict the trajectory of working ship and navigating vessels in the channel. Through the analysis of the position relationship between the working ship and the navigation vessels in the channel, a trajectory model of working ship crossing clearance is constructed. With the help of genetic algorithm, the navigating scheme of keeping the maximum effective distance between the working ship and the vessels in channel at different starting crossing time is obtained. Finally, by comparing the effective distances in each scheme, the optimal navigating scheme of navigating speed and direction within a given time range are determined. The practicability of the model is verified by MATLAB simulation. At the same time, the model established in this paper can provide a clear suggestion to the working ship pilot, so as to avoid the ship collision accident caused by human error and improve the reliability and safety of decision-making. In the process of solving the model, a variety of crossing schemes are obtained, which is the basis of the next step of ship guidance. On this basis, according to the different needs of decision makers, it can be further optimized to achieve ship guidance.

ACKNOWLEDGMENT

This paper is supported by the National Key Research and Development Program of China (No.2017YFC0805309).

REFERENCES

- [1] Wuliu Tian, Quandang Ma, Jinfen Zhang, et al. Ship collision risk assessment model for qinzhou port based on event sequence diagram[J]. BRODOGRADNJA, 2020,71(2):1-14.
<https://doi.org/10.21278/brod71201>
- [2] He Yixiong, Jin Yi, Huang Liwen. etal. Quantitative analysis of COLREG rules and seamanship for autonomous collision avoidance at open sea[J]. Ocean Engineering, 2017,140:281-291.
<https://doi.org/10.1016/j.oceaneng.2017.05.029>
- [3] WangShaobo, ZhangYingjun, LiLianbo. A collision avoidance decision-making system for autonomous ship based on modified velocity obstacle method[J]. Ocean Engineering, 2020,215.
<https://doi.org/10.1016/j.oceaneng.2020.107910>
- [4] YunLi, JianZheng. Real-time collision avoidance planning for unmanned surface vessels based on field theory[J]. ISA Transactions, 2020(106):233-242.
<https://doi.org/10.1016/j.isatra.2020.07.018>
- [5] Ming-Cheng Tsou. Multi-target collision avoidance route planning under an ECDIS framework[J]. Ocean Engineering, 2016(121):268-278.
<https://doi.org/10.1016/j.oceaneng.2016.05.040>
- [6] Yamin Huang, Linying Chen, Pengfei Chen, et al. Ship collision avoidance methods: State-of-the-art[J]. Safety Science,2020(121):451-473.
<https://doi.org/10.1016/j.ssci.2019.09.018>
- [7] Cheng Qi. Influence of Safety Interval between Ships on Throughput Capacity of Coastal Fairway[D]. Dalian: Dalian University of Technology, 2011.
- [8] Hou Haiqiang, LI Yicheng, CHU Xiumin. Vessel clearance model in busywaters of the Yangtze river[J]. Journal of Dalian Maritime University, 2013, 39(04): 21-24.
<https://doi.org/10.16411/j.cnki.issn1006-7736.2013.04.024>
- [9] Li Xiaoyu, Xu Jinsong, Yang Rongwu. Autonomous collision avoidance method for multi-ship encounter situations[J]. Ship Engineering,2018,40(09):67-71.
<https://doi.org/10.13788/j.cnki.cbge.2018.09.067>
- [10] Yang Baicheng, Zhao Zhilei. Multi-ship encounter collision avoidance decisions based on improved simulated annealing algorithm[J]. Journal of Dalian Maritime University,2018,44(02):22-26.
<https://doi.org/10.16411/j.cnki.issn1006-7736.2018.02.004>
- [11] He Yixiong, Zhang Xiaohan, Hu Weixuan. The research of ship dynamic collision avoidance mechanism based on course control system[J]. Journal of Southwest Jiaotong University, 2020,55(05):988-993+1027.
<http://kns.cnki.net/kcms/detail/51.1277.u.20181206.1629.006.html>
- [12] Cheng Zhiyou, Lian Tianxiang, Zhou Xidong, etal. Motion model of passenger-ferry crossing waterway based on traffic conflict technique on the trunk line of the Yangtze River and application[J]. Science Technology and Engineering,2018,18(24): 165—171.
- [13] Ma C C, Hao J L, Ma Y F, etal. A collision warning algorithm for area of inland ferry based on velocity obstacle. 9th International Conference on Frontier of Computer Science and Technology. Dalian Institute of Electrical and Electronics Engineers Inc, 2015: 191-195
- [14] Wang Hongbo, Tian Wuliu, Zhang Jinfen, et al. A hybrid self-organizing scheduling method for ships in restricted two-way waterways [J]. BRODOGRADNJA,2020,71(2):15-30.
<https://doi.org/10.21278/brod71202>
- [15] Zhao Jia, Song Zhu, Zhang Mingfang, etal. Research on pedestrian crossing decision without signal control[J]. China Safety Science Journal,2017,27(05):25-30.
<https://doi.org/10.16265/j.cnki.issn1003-3033.2017.05.005>
- [16] Jairus Odawa Malenje, Jing Zhao, Peng Li, Yin Han. An extended car-following model with the consideration of the illegal pedestrian crossing[J]. Physica A: Statistical Mechanics and its Applications,2018(508):650-661.
<https://doi.org/10.1016/j.physa.2018.05.074>
- [17] Yang qi, Lu yang, Wang li-li. Analysis of Applicability of Pedestrian Crossing Form in Signalized Intersection[J]. China Journal of Highway and Transport, 2014,27(10):93-100.
<https://doi.org/10.19721/j.cnki.1001-7372.2014.10.011>

- [18] Chaudhari Avinash, Ninad Gore, Arkatkar Shriniwas, etal. Choice crossing behaviour model for Safety Margin of pedestrian at mid-blocks in India. Transportation Research Procedia,2020,48:2329-2342.
- [19] Cao Yu, Sun Xiaoduan, He Yulong. Research on methods of traffic conflict discrimination based on gap acceptance theory. Road Traffic & Safety, 2014,14(3):34—40.
<https://doi.org/10.13986/j.cnki.jote.2014.03.005>
- [20] Holland J H.Adaptation in natural and artificial system[M].Ann Arbor: University of Michigan Press, 1975.
- [21] Matulja, D ,Dejhalla, R. Optimization of the Ship Hull Hydrodynamic Characteristics in Calm Water[J]. BRODOGRADNJA,2013,64(4):425-436.

Submitted: 27.12.2020 Zhang He zhanghe@dlmu.edu.cn

Hao Yuanyuan cris_hyy@qq.com

Accepted: 15.04.2021 Xu Cheng xuxuch@163.com

Qin Luying 384676580@qq.com

Affiliation: College of Transportation Engineering, Dalian Maritime University

Address:No.1, Linghai Road, Ganjingzi District, Dalian City, Liaoning

Province,China