

# Northumbria Research Link

Citation: Ng, Wai Pang and Kanesan, Thavamaran (2015) Is fiber the catalyst for growth of the mobile wireless network? In: TENCON 2015 - IEEE Region 10 Conference, 1st - 4th November 2015, Macau, China.

URL: <http://dx.doi.org/10.1109/TENCON.2015.7373192>  
<<http://dx.doi.org/10.1109/TENCON.2015.7373192>>

This version was downloaded from Northumbria Research Link:  
<http://nrl.northumbria.ac.uk/26159/>

Northumbria University has developed Northumbria Research Link (NRL) to enable users to access the University's research output. Copyright © and moral rights for items on NRL are retained by the individual author(s) and/or other copyright owners. Single copies of full items can be reproduced, displayed or performed, and given to third parties in any format or medium for personal research or study, educational, or not-for-profit purposes without prior permission or charge, provided the authors, title and full bibliographic details are given, as well as a hyperlink and/or URL to the original metadata page. The content must not be changed in any way. Full items must not be sold commercially in any format or medium without formal permission of the copyright holder. The full policy is available online: <http://nrl.northumbria.ac.uk/policies.html>

This document may differ from the final, published version of the research and has been made available online in accordance with publisher policies. To read and/or cite from the published version of the research, please visit the publisher's website (a subscription may be required.)

[www.northumbria.ac.uk/nrl](http://www.northumbria.ac.uk/nrl)



# Is Fiber the Catalyst for Growth of the Mobile Wireless Network? (Invited)

W. P. Ng, *Senior Member, IEEE*, and T. Kanesan, *Member, IEEE*

**Abstract**—This paper will focus on how the growth of the mobile wireless technology can be supported by optical fiber, through wireless over fiber technologies. The paper will include recent advances in the field of fiber-wireless convergence such as cloud-based radio-over-fiber (RoF), point-to-point RoF system and millimeter wave network architectures. The advances in the mobile networks to meet the demand of mobile broadband, is driving the size of the cells to reduce. These small cells will be a prominent feature in the next generation 4G and 5G technologies and these cells must be connected with a high speed backbone. RoF offers a technology for seamless link between the small cells and macrocells. Therefore the convergence of mobile wireless and optical fiber will be essential to accommodate the growth of bandwidth requirements, thus enabling a high speed channel at the access network.

**Index Terms**— Long Term Evolution (LTE), Optical Orthogonal Frequency Division Multiplexing (OOFDM), Radio-over-Fibre (RoF)

## I. INTRODUCTION

The growth in mobile broadband has been well documented and in the recent OECD (Organisation for Economic Co-operation and Development) 2013 report on Communications Outlook, the average subscription rate of mobile Internet access in OECD countries as a whole rose to 56.6% in June 2012, up from just 23.1% in 2009 [1]. In addition, the OECD report in measuring the digital economy noted that mobile broadband subscriptions represent 73% of all broadband access paths [2]. One of the emerging issues is the increase in demand for data with limited availability of spectrum. As a result the mobile networks will be offloading traffic to fixed/backhaul networks [3]. Since the mobile systems are moving to small cells architectures, the need for these fixed networks is more prominent where they can deliver higher bandwidth to the access networks. In order to provide seamless transitions from wireless to fixed networks, one of the promising technologies is radio-over-fiber (RoF), also known as wireless-over-fiber (WoF).

This paper will provide a brief overview of the current state of play in RoF/WoF. Firstly the paper will focus on Cloud-based radio access network and then point-to-point 4G long term evolution on RoF. Finally the paper will discuss the emerging WiGig standard which enables the use of unlicensed band at 60 GHz.

W. P. Ng is with the Optical Communications Research Group, Northumbria University, Newcastle-upon-Tyne, NE1 8ST U.K. (e-mail: wai-pang.ng@northumbria.ac.uk)

T Kanesan is with the Telekom Malaysia R&D, 63000 Cyberjaya, Selangor, Malaysia. Copyright (c) 2015 IEEE.

## II. CLOUD-BASED RADIO ACCESS NETWORK

As the mobile technologies are moving towards higher bandwidth, the distance between the user equipment (UE) and the base station will reduce, hence the introduction of small cells. These small cells will be the primary platform for 4G and 5G mobile systems. As the number of cells grows, the associated operating cost will also increase, namely due to increase in power consumption. One of the solution advocated by the operators and vendors is Cloud-based radio access network (Cloud-RAN) [4-6], where the backhaul is powered by fiber. The NSF Center for Optical Wireless Applications (COWA) at Georgia Institute of Technology, has demonstrated a novel multi-service small cell Cloud-RAN based on RoF technologies, which is capable of integrating legacy wireless services in a shared backhaul, as shown in Fig. 1 [7].




Fig. 1. Architecture of the proposed small-cell Cloud-RAN [7]

## III. LTE ON ROF

The base station of the 4G mobile networks, known as evolved node B (eNB), is highly complex and expensive, while its coverage radius is around 1km [8]. Therefore in order to extend the coverage of the eNB, the wireless signal can be seamlessly transported further over optical fiber. There are many architectures employing RoF that have been proposed and this paper will highlight a few of them. Kanesan *et al* has optimized the optical modulators and defined an optimum optical launch power for the RoF link that operates as the interface between an eNB and remote node (RN) for both 4G long term evolution (LTE) and LTE-Advanced, both theoretically [9] and experimentally [10, 11].

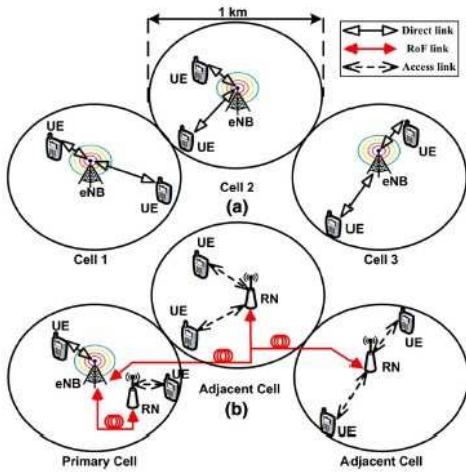


Fig. 2. Full Duplex LTE radio access network structure (a) without RNs and (b) with RNs in an urban environment [12]

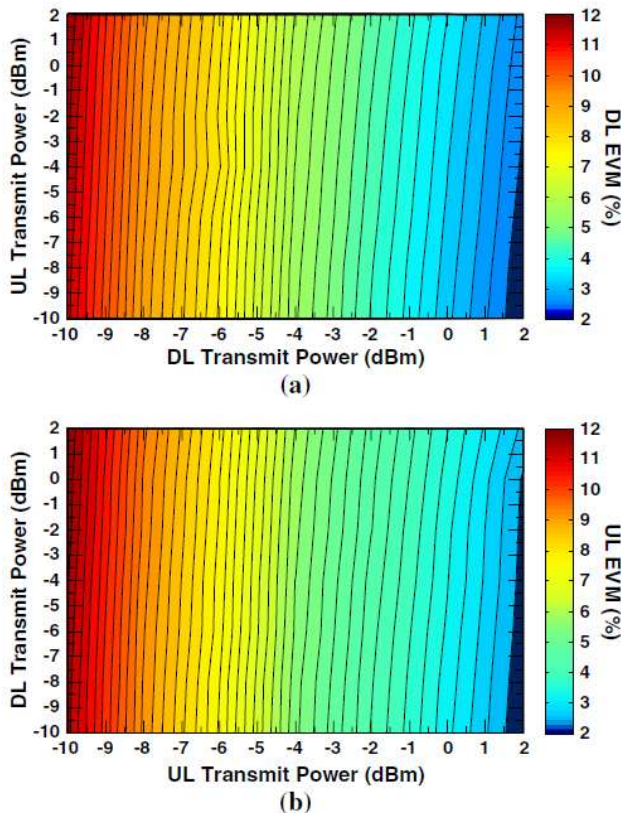


Fig. 3. Multiple EVM combinations of (a) downlink (DL) and (b) uplink (UL) radio frequency (RF) transmit power with respect to the interfering UL and DL RF transmit power, respectively. DL signal is transmitted at 2.62 GHz and UL at 2.57 GHz [12].

The Optical Communications Research Group (OCRG) at Northumbria University, UK, has successfully demonstrated a full duplex point-to-point RoF system for LTE uplink and downlink, which operates within the required error vector magnitude (EVM) specified by 3GPP specifications [12]. The full duplex scenario is depicted in Fig. 2, where one eNB can be used to support the adjacent cell using a simple RN. Fig. 3 shows the effect of the full duplex link with respect to the EVM performance.

The group also proposed using frequency dithering techniques in direct and external modulations to suppress the stimulated Brillouin scattering (SBS) in the LTE RoF system. By suppressing SBS, the overall signal to noise ratio of the optical signal improves dramatically [13, 14].

#### IV. MILLIMETER WAVE ON ROF

Recent technological advancement in unlicensed RF band at 60 GHz and the demand for higher speed have driven a new Wi-Fi standard known as WiGig [15]. An example of WiGig applications is depicted in Fig. 4. This emerging WiGig standard has given rise to research in millimeter wave (MMW) [16], however the transmission length of such system will be short due to high atmospheric attenuation. As a result, for in-building applications, optical fiber has the potential to provide a comprehensive distribution network for WiGig.

Research in MMW over fiber technologies is demonstrated by Chang and Liu [17], where multi access schemes are employed in an aircraft wireless sensor communications network, as shown in Fig. 5. The generation of optical MMW is a challenge and there are many researchers working on novel techniques and optimizing the overall performance of the optical MMW system [18, 19].

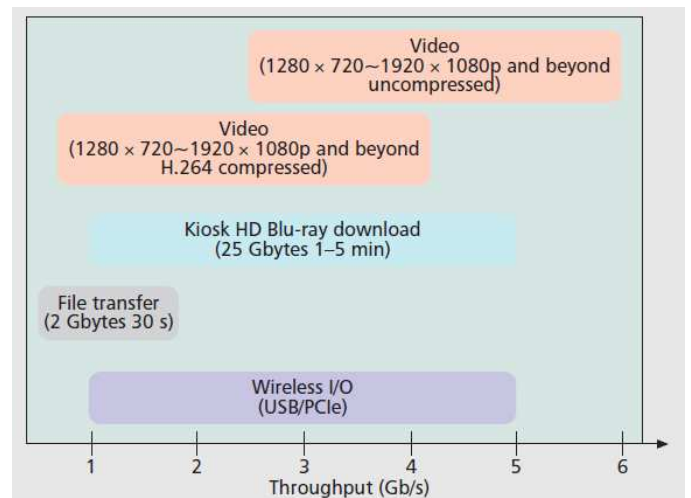


Fig. 4. Example of WiGig applications from Hansen [15]

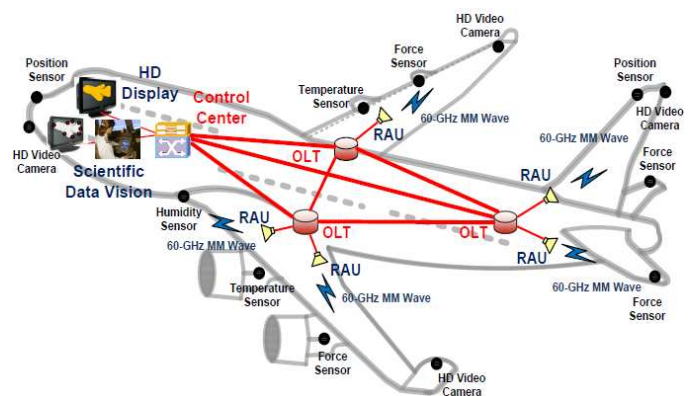


Fig. 5. MMW Wireless Sensor Communications Network [17]

## V. CONCLUSION

This paper has provided an overview on the current emerging wireless technologies and as the need for higher speed grows, the cell size will reduce. The connectivity of these small cells are essential in delivering high quality mobile data services, hence the paper has reviewed some advanced technologies, where optical fiber can play a major role in such architecture. Therefore the answer to the title of the paper is a resounding "Yes!".

## REFERENCES

- [1] OECD, *OECD Communications Outlook 2013*: OECD Publishing, 2013.
- [2] OECD, *Measuring the Digital Economy*: OECD Publishing, 2014.
- [3] Ericsson, "It all comes back to backhaul," *Ericsson White Paper*, 2014.
- [4] C. Mobile, "C-RAN: The road towards Green RAN," *China Mobile Research Institute White Paper*, 2011.
- [5] M. Palanivelu. (2012). *LTE: The Best Thing to Happen to Wireless Networks*. Available: <https://techzine.alcatel-lucent.com/lte-best-thing-happen-wireless-networks>
- [6] N. S. Networks, "Liquid Radio: Let traffic waves flow most efficiently," *Nokia Siemens Networks White Paper*, 2011.
- [7] L. Cheng, Z. Liang, Z. Ming, W. Jing, C. Lin, and C. Gee-Kung, "A Novel Multi-Service Small-Cell Cloud Radio Access Network for Mobile Backhaul and Computing Based on Radio-Over-Fiber Technologies," *Lightwave Technology, Journal of*, vol. 31, pp. 2869-2875, 2013.
- [8] T. Wirth, V. Venkatkumar, T. Haustein, E. Schulz, and R. Halfmann, "LTE-Advanced Relaying for Outdoor Range Extension," in *Vehicular Technology Conference Fall (VTC 2009-Fall)*, 2009 IEEE 70th, 2009, pp. 1-4.
- [9] T. Kanesan, W. P. Ng, Z. Ghassemlooy, and J. Perez, "Optimization of Optical Modulator for LTE RoF in Nonlinear Fiber Propagation," *Photonics Technology Letters, IEEE*, vol. 24, pp. 671-619, 2012.
- [10] T. Kanesan, W. P. Ng, Z. Ghassemlooy, and C. Lu, "Experimental Verification of Optimized LTE-RoF System for eNB Cell Radius Improvement," *Photonics Technology Letters, IEEE*, vol. 24, pp. 2210-2213, 2012.
- [11] W. P. Ng, T. Kanesan, Z. Ghassemlooy, and C. Lu, "Theoretical and Experimental Optimum System Design for LTE-RoF Over Varying Transmission Span and Identification of System Nonlinear Limit," *Photonics Journal, IEEE*, vol. 4, pp. 1560-1571, 2012.
- [12] T. Kanesan, W. P. Ng, Z. Ghassemlooy, and C. Lu, "Experimental Full Duplex Simultaneous Transmission of LTE Over a DWDM Directly Modulated RoF System," *Journal of Optical Communications and Networking*, vol. 6, pp. 8-17, 2014/01/01 2014.
- [13] T. Kanesan, W. P. Ng, Z. Ghassemlooy, and C. Lu, "Investigation of Optical Modulators in Optimized Nonlinear Compensated LTE RoF System," *Lightwave Technology, Journal of*, vol. 32, pp. 1944-1950, 2014.
- [14] T. Kanesan, S. M. Mitani, R. Mohamad, H. M. Hizan, W. P. Ng, Z. Ghassemlooy, S. Rajbhandari, P. A. Haigh, and G.-K. Chang, "Spectral Shape Impact of Nonlinear Compensator Signal in LTE RoF system," *Photonics Technology Letters, IEEE*, vol. PP, pp. 1-1, 2015.
- [15] C. J. Hansen, "WiGiG: Multi-gigabit wireless communications in the 60 GHz band," *Wireless Communications, IEEE*, vol. 18, pp. 6-7, 2011.
- [16] "IEEE Standard Letter Designations for Radar-Frequency Bands," *IEEE Std 521-2002 (Revision of IEEE Std 521-1984)*, pp. 0\_1-3, 2003.
- [17] C. Gee-Kung and L. Cheng, "Millimeter-wave, multi-access wireless over fiber technologies and applications," in *Avionics, Fiber- Optics and Photonics Technology Conference (AVFOP)*, 2012 IEEE, 2012, pp. 20-21.
- [18] C. Hung-Chang, L. Cheng, L. Jie, F. Shu-Hao, H. Yu-Ting, J. Zhensheng, H. Sailing, Y. Jianjun, and C. Gee-Kung, "Emerging technologies for mm-wave RoF communication," in *Photonics Society Summer Topical Meeting Series, 2012 IEEE*, 2012, pp. 88-89.
- [19] A. Bahrami, W. P. Ng, and Z. Ghassemlooy, "Experimental analysis of fibre non-linearity on second harmonic optical microwave radio-over-fibre system," *Circuits, Devices & Systems, IET*, vol. 8, pp. 334-338, 2014.