

# On the Impact of the User Terminal Velocity on HSPA Performance in MBMS Multicast Mode

Alessandro Raschellà<sup>1</sup>, Anna Umbert<sup>2</sup>, Giuseppe Araniti<sup>1</sup>, Antonio Iera<sup>1</sup>, Antonella Molinaro<sup>1</sup>

<sup>1</sup>*ARTS Laboratory - Dept. DIMET - University "Mediterranea" of Reggio Calabria*

*Reggio Calabria - 89100, ITALY*

e\_mail:{alessandro.raschella, araniti, antonio.iera, antonella.molinaro}@unirc.it;

<sup>2</sup>*Signal Theory and Communication Dept., Universitat Politecnica de Catalunya (UPC)*

*Jordi Girona, 1-3, 08034 Barcelona, Spain*

[annau@tsc.upc.edu](mailto:annau@tsc.upc.edu)

**Multimedia Broadcast/Multicast Services (MBMS), introduced in Universal Mobile Telecommunication System (UMTS), have the aim to allow transmissions from a single source entity to multiple destinations. From the radio perspective, MBMS foresees both point-to-point (PtP) and point-to-multipoint (PtM) transmission mode, supported by Dedicated, Common, and Shared channels. The High Speed Downlink Packet Access (HSDPA), analyzed in this paper, can guarantee a higher data rate through the introduction of High Speed Downlink Shared Channel (HS-DSCH), thus improving the performance of MBMS transmissions. The aim of this paper is to investigate the impact of the User Equipment (UE) speed on the maximum number of users that the HS-DSCH can support for MBMS applications. In particular, two different mobility profiles are taken into account (Pedestrian and Vehicular) and the obtained results are validated by considering different transmission power levels, cell coverage sizes and bit rates.**

*Index Terms*—Multicast; UMTS; MBMS; HSPA; User Mobility

## I. INTRODUCTION

In the last few years, manifest improvements in mobile terminals and network infrastructures supplies users with innovative and enhanced communication services. Thanks to this evolutionary trend, today Third Generation (3G) cellular wireless networks, such as Universal Mobile Telecommunication System (UMTS), are able to provide videoconference, multimedia streams (i.e. TV on mobile phones), broadband transmission, and file downloading services [1]. The introduction of highlighted applications on the one hand has originated the need to increase the bit rate transmission, whereas, on the other hand, has pushed towards the definition of new policies able to optimize the radio resource utilization. For these reasons two new approaches have been introduced by the Third Generation Partnership Project (3GPP) standardization body: (i) the High Speed Downlink Packet Access (HSDPA) technique [2] and (ii) the Multimedia Broadcast and Multicast Service (MBMS) system [3]. HSDPA, standardized as part of Release 5, extends and improves the performance of pre-existing UMTS protocols granting higher data rates [2]. While, MBMS, introduced in UMTS Release 6 specifications, allows point-to-multipoint (PtM) transmissions, in which the same data is delivered from a single source entity to multiple recipients. MBMS services can utilize over the radio interface both *Common* (Forward Access Channel, FACH) and *Dedicated* (Dedicated Channel, DCH) channels, defined by UMTS Release 99, as well as *Shared* transport channel (High Speed Downlink Shared Channel, HS-DSCH), subsequently introduced by HSDPA Release 5.

Several studies have been conducted to determine the conditions in which the utilization of one channel is more efficient compared to the other ones, in terms of radio resource

usage. For instance, it has been demonstrated that when the number of multicast users is low, the use of DCH channels is preferred, otherwise either FACH or HS-DSCH may be utilized depending on the considered scenario and radio network conditions. Extensive studies, which aimed at finding out the *Thresholds* in terms of "*served user number*" to switch from dedicated to common or shared channels, are reported in [4, 5]. From these studies clearly emerges that: (i) DCHs are limited in terms of "*consumed power*"; (ii) FACH in terms of "*maximum bit rate*"; (iii) HS-DSCH in terms of "*served user number*" [4, 5].

In this work we center our efforts on HSPA technology with the purpose of introducing more information for a correct determination of the *Switching Thresholds*. In fact, starting from previous studies [4, 5], in this paper, we further demonstrates that the *maximum number of users* served by the HS-DSCH (and, as a consequence, also the *Switching Thresholds*) hardly depends on the User Equipment (UE) speed. In particular, two different mobility models are taken into account: Pedestrian and Vehicular. Results are obtained through an analytical computation performed using MATLAB and a simulator implemented by Simulink.

This paper is organized as follows. Section II provides a brief overview about the MBMS, highlighting the system architecture. In Section III the HS-DSCH transport channel is presented. In Section IV the considered multipath profiles and mobility models are described. Main results obtained by simulation campaigns are the focus of Section V. Finally, in the last section, conclusive remarks are presented.

## II. MBMS ARCHITECTURE

MBMS allows different kinds of content to be broadcasted across a wide area covered by a cellular network, stimulating

the development of novel mobile mass-media services. As a complement to the unicast solution, the MBMS architecture makes more efficient use of network resources and capacity through PtM transmissions [3]. For instance, it enables several mobile users to watch the same TV program at the same time, and in the same area, even during peak demand of broadcast services. MBMS is implemented by adding new capabilities to the existing functional entities of the 3GPP architecture, as shown in Figure 1.

**SGSN (Serving GPRS Support Node)** jointly handles the whole set of users subscribing the same MBMS service, by establishing and maintaining a single connection towards the relevant MBMS data source.

**GGSN (Gateway GPRS Support Node)** performs message screening, mobility handling, data tunneling, QoS negotiation, and policing. It receives IP multicast traffic from MBMS sources and redirects it towards the proper GTP (GPRS Tunneling Protocol) tunnel.

**BM-SC (Broadcast-Multicast Service Centre)** authenticates and authorizes the content providers and checks the integrity of the data received from them; determines the QoS degrees for MBMS transmissions and provides MBMS data repetitions to face the problem of data loss.

**CBC (Cell Broadcast Centre)** may be used to announce MBMS services to the users.

**UE (User Equipment)**, following the activation of MBMS services, is enabled to receive MBMS data without explicit user requests, receives indication of further service availability, allows for the simultaneous reception of MBMS service announcements and data, and supports security functions for MBMS services.

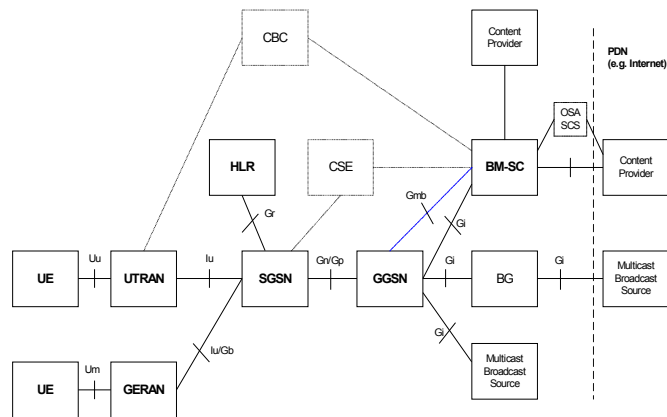


Figure 1 - MBMS architecture [3]

### III. HS-DSCH DESCRIPTION

HS-DSCH is the shared transport channel introduced by the HSDPA standard to carry out user data in the downlink direction. The main purpose of HSDPA is to increase packet data throughput and rate, by exploiting link adaptation and fast physical layer retransmission. Furthermore, in HSDPA technique the *Adaptive Modulation and Coding (AMC)* replaces the variable *Spreading Factor (SF)* and fast power control procedures. The *AMC* allows changing the kind of modulation and coding depending on the radio channel conditions; the *Channel Quality Information (CQI)* is a typical

HSDPA parameter that contains such information. In fact, the transport block size, the number of used physical channels and the modulation technique can be evaluated from the CQI value [2].

In a wireless network scenario, the chosen  $E_b/N_0$  corresponds to a particular *Block Error Rate (BLER)* for a given data rate. However, the  $E_b/N_0$  metric is not an appropriate measure for HSDPA because the bit rate on the HS-DSCH can be varied every *Transmission Time Interval (TTI)*, by utilizing different modulation schemes, effective code rates, and a given number of physical channel codes. Therefore, in the HS-DSCH environment, the  $E_b/N_0$  is replaced by *Signal to Interference Noise Ratio (SINR)* that represents a more appropriate measurement metric. Equation (1) computes this parameter.

$$SINR = SF_{16} \frac{P_{HS-DSCH}}{pP_{own} + P_{other} + P_{noise}} \quad (1)$$

where  $P_{HS-DSCH}$  is the HS-DSCH transmission power,  $P_{own}$  is the own cell interference,  $P_{other}$  is the interference from neighbouring cells,  $P_{noise}$  is the *Additive White Gaussian Noise (AWGN)*,  $p$  is the orthogonality factor (that can be zero in the case of perfect orthogonality), and finally  $SF_{16}$  is the SF equal to 16. A further useful parameter that has to be taken into account is the *geometry factor*, defined according to the following Equation:

$$G = \frac{P_{own}}{P_{other} + P_{noise}} \quad (2)$$

Such a parameter indicates the distance from the base station; in fact, a lower *G-factor* is expected when a user is near the cell edge, where the interference from the neighboring cells is higher than the own cell interference. Finally, by rearranging Equation (1) and taking into account Equation (2), we can express the average HS-DSCH SINR as:

$$SINR = SF_{16} \frac{P_{HS-DSCH}}{P_{own}} \frac{1}{p + G^{-1}} \quad (3)$$

SINR represents an important parameter for our study because, as it will be explained in the next sections, it influences the CQI that can be chosen and, as a consequence, the number of served users through HS-DSCH.

### IV. MOBILITY MODELS AND PROPAGATION CHANNEL

To determine the *maximum number of users* that can be served by HS-DSCH channels depending on the UE speed, different multipath propagation models used for HSDPA shall be taken into account. In Table 1 such models are summarized, according to what reported in 3GPP standards [6].

As shown in Table 1, there exist two different environments: *pedestrian* and *vehicular*. For each environment, a channel impulse response model based on the delayed tap is given. The taps represent the multiple

reflections of the transmitted signal [7]. Such two environments are characterized by: (i) the number of taps; (ii) the *Relative Delay (RD)* with respect to the first tap; (iii) the *Relative Mean Power (RMP)* with respect to the first tap. In [7] it has been demonstrated, through an exhaustive measurement campaign, that generally (case A in the Table), the *RMP* of a delayed tap is relatively small, but occasionally (case B in the Table), there are situations (characterized by worst multipath) that lead to a much larger *RMP* [7]. Therefore, two multipath channels are defined for each environment: (i) ITU Environment A, characterized by low values of *RMP* (case that occurs frequently), (ii) ITU Environment B characterized by a larger *RMP* (case that occurs rarely).

TABLE 1: PROPAGATION CONDITIONS FOR MULTI-PATH FADING ENVIRONMENTS FOR HSDPA PERFORMANCE REQUIREMENTS [6]

Tap Number	ITU Pedestrian A Speed 3km/h (PA3)		ITU Pedestrian B Speed 3km/h (PB3)		ITU vehicular A Speed 30km/h (VA30)		ITU vehicular A Speed 120km/h (VA120)	
	Speed for Band I, II, III and IV 3 km/h		Speed for Band I, II, III and IV 3 km/h		Speed for Band I, II, III and IV 30 km/h		Speed for Band I, II, III and IV 120 km/h	
	Speed for Band V, VI 7 km/h		Speed for Band V, VI 7 km/h		Speed for Band V, VI 71 km/h		Speed for Band V, VI 282 km/h	
	Relative Delay [ns]	Relative Mean Power [dB]	Relative Delay [ns]	Relative Mean Power [dB]	Relative Delay [ns]	Relative Mean Power [dB]	Relative Delay [ns]	Relative Mean Power [dB]
1 <sup>st</sup> Tap	0	0	0	0	0	0	0	0
2 <sup>nd</sup> Tap	110	-9,7	200	-0,9	310	-1,0	310	-1,0
3 <sup>rd</sup> Tap	190	-19,2	800	-4,9	710	-9,0	710	-9,0
4 <sup>th</sup> Tap	410	-22,8	1200	-8,0	1090	-10,0	1090	-10,0
5 <sup>th</sup> Tap			2300	-7,8	1730	-15,0	1730	-15,0
6 <sup>th</sup> Tap			3700	-23,9	2510	-20,0	2510	-20,0

Simulation campaigns have been conducted by considering only the *ITU Pedestrian A* and the *ITU Vehicular A* channels models, as they represent the cases that frequently occur in a real scenario. However, obtained results, reported in the next section, can be easily generalized to the other two cases.

## V. OBTAINED RESULTS

The aim of the conducted simulation campaign is to demonstrate that the *maximum number of users* served by the HS-DSCH (and, as a consequence, also the *Switching Thresholds*) hardly depends on the UE speed. In particular, we evaluate how the UE speed affects the SINR to be guaranteed and then the *maximum number of users* that the HS-DSCH can support.

The last one is obtained, as showed in the following, by means of the relation that exists among SINR, CQI and the *maximum number of users*.

Therefore, two different mobility models are taken into account (*ITU Pedestrian A* and *ITU Vehicular A*) and the *maximum number of users* served by the HS-DSCH is evaluated for: (i) different assigned HS-DSCH power values; (ii) several cell coverage sizes; (iii) two bit rate applications, and (iv) UE category 10 [2].

In Table 2 the main simulation assumptions are presented [6, 8].

Firstly, as the SINR depends on the assigned HS-DSCH transmission power and on the distance from the base station (in according to Equation 3), in Figure 2 we show the SINRs that have to be guaranteed when varying the cited parameters.

TABLE 2 – SIMULATION ASSUMPTIONS

Parameter	Value
Cellular layout	Hexagonal grid
Number of neighbouring cells	18
Site to site distance	1 Km
Cell radius	350 – 550 m
Maximum BS Tx power	20 W
Other BS Tx power	5 W
Common channel power	1 W
Propagation model	Okumura Hata
Multipath channel	ITU Pedestrian A and ITU Vehicular A
Orthogonality factor	0,5
BLER target	10%
Base station antenna gain	11,5 dBi
Thermal noise	-100 dBm
Shadowing	10 dB

Users are assumed randomly scattered in the cell whose coverage radius sizes can be respectively equal to either 550m, or 450m, or 350m. As expected from Equation (3), the SINR guaranteed at the edges of the considered coverage radius sizes improves when such size decreases and/or the HS-DSCH assigned power increases.

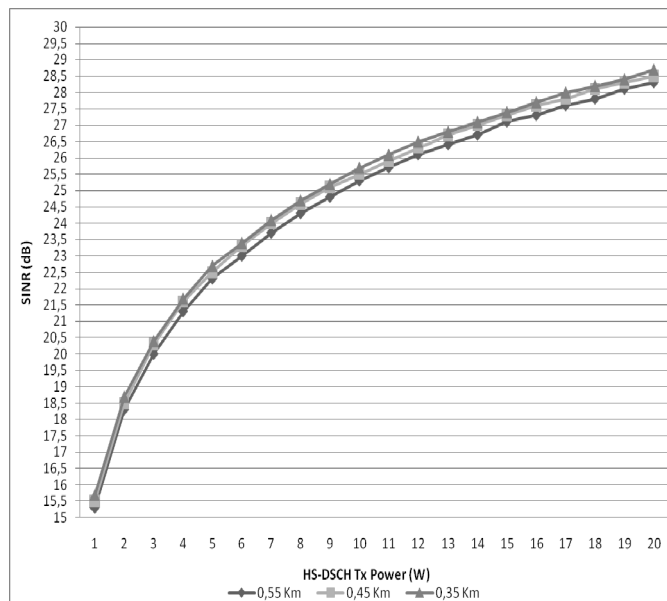


Figure 2 – Guaranteed SINR per Transmission Power and Cell Coverage

Subsequently, we highlight how obtained SINRs limit the maximum number of users served by the HS-DSCH. In fact, in HSDPA, the number of served users depends on the CQI parameters that, in turn, are closely connected to the SINR values.

Therefore, in Figure 3 and Figure 4 we illustrate the SINRs to be guaranteed for different values of CQIs and BLERs, when the mobility models are the *ITU Pedestrian A* and the *ITU Vehicular A* respectively.

We obtained such figures through a simulator implemented by Simulink that allowed us to obtain SINR values, when CQI

and BLER target values are selected. We carried out the simulations by implementing the HS-DSCH coding and modulation chains and the radio channel conditions [10, 11]. Such simulated steps are the following: (i) CRC attachment, (ii) Scrambling, (iii) Segmentation, (iv) Turbo Coding, (v) Hybrid ARQ, (vi) Interleaving, (vii) 16QAM constellation rearrangement, (viii) Modulation Mapper, (ix) Scrambling, (x) Modulation, (xi) Multipath depending on the mobility model.

The curves reported in Figure 3 and 4 demonstrate that an increase of the CQI and/or a decrease of the BLER imply higher SINR values to be guaranteed.

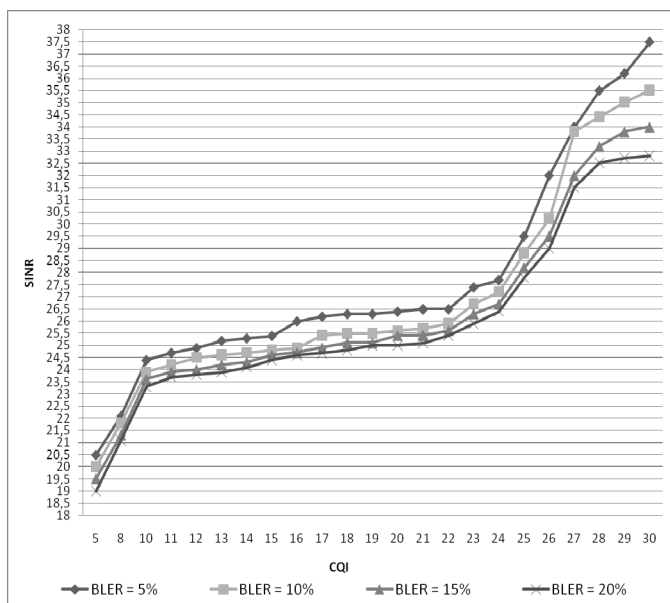


Figure 3 – SINR to be guaranteed per CQI using the ITU Pedestrian A model

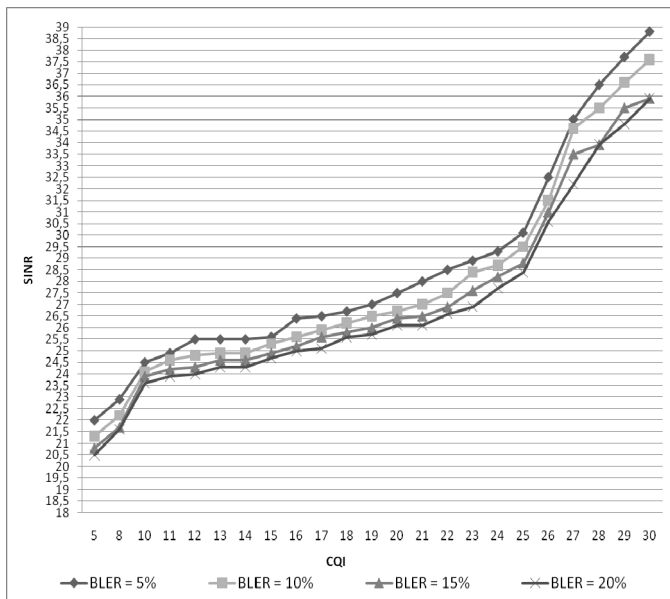


Figure 4 – SINR to be guaranteed per CQI using the ITU Vehicular A model

Moreover, the SINRs are greater utilizing the *ITU Vehicular A* model compared to the *ITU Pedestrian A* model. As a consequence, higher UE speeds, when BLER target and

CQI values are set, imply greater SINR values that have to be guaranteed.

Therefore, in Table 3 a mapping between the CQI values and the maximum *Physical Bit Rate* is illustrated. Every *Physical Bit Rate* depends on the used modulation technique and on the number of utilized physical channels.

As a consequence, the *maximum number of users served* by the HS-DSCH is obtained by dividing the maximum *Physical Bit Rate* by the service bit rate.

For instance, the first CQI value, characterized by a QPSK modulation and by a use of one physical channel, gives a maximum *Physical Bit Rate* equal to 480 kbps that allows serving 7 UEs for 64 kbps applications and 3 UEs for 128 kbps ones [9].

TABLE 3 - HS-DSCH PARAMETERS

CQI	Modulation	# Physical Channel	Physical Bit Rate (kbps)	UE Number 64 kbps	UE Number 128 kbps
1	QPSK	1	480	7	3
2	QPSK	1	480	7	3
3	QPSK	1	480	7	3
4	QPSK	1	480	7	3
5	QPSK	1	480	7	3
6	QPSK	1	480	7	3
7	QPSK	2	960	15	7
8	QPSK	2	960	15	7
9	QPSK	2	960	15	7
10	QPSK	3	1440	22	11
11	QPSK	3	1440	22	11
12	QPSK	3	1440	22	11
13	QPSK	4	1920	30	15
14	QPSK	4	1920	30	15
15	QPSK	5	2400	37	18
16	16-QAM	5	4800	75	37
17	16-QAM	5	4800	75	37
18	16-QAM	5	4800	75	37
19	16-QAM	5	4800	75	37
20	16-QAM	5	4800	75	37
21	16-QAM	5	4800	75	37
22	16-QAM	5	4800	75	37
23	16-QAM	7	6720	105	52
24	16-QAM	8	7680	120	60
25	16-QAM	10	9600	150	75
26	16-QAM	12	11520	180	90
27	16-QAM	15	14400	225	112
28	16-QAM	15	14400	225	112
29	16-QAM	15	14400	225	112
30	16-QAM	15	14400	225	112

If, for instance, we can assign 11 W to the HS-DSCH, when considering 450 meters of radius, then a SINR equal to 25.9 dB could be guaranteed (see Figure 2). By examining the case when the *ITU Pedestrian A* is the considered channel model, we can notice that the guaranteed SINR is the value that allows obtaining a CQI equal to 22 when 10% is the selected BLER target (see Figure 3). This means that the *maximum number of users* is 75 for applications with a bit rate equal to 64 kbps; while it is 37 when such a value is equal to 128 kbps (see Table 3).

Finally, next tables summarize the *maximum number of users*, obtained when varying cell coverage radius size, transmission power, given a target BLER of 10%. In

particular, Table 4 refers to the *ITU Pedestrian A* mobility model, while Table 5 to the *ITU Vehicular A* model. We assume the values of assigned HS-DSCH transmission power varying between 7 and 12 W [5, 10].

TABLE 4 – MAXIMUM NUMBERS OF USERS FOR ITU PEDESTRIAN A MODEL

Cell Coverage Radius (m)	HS-DSCH Tx Power (W)	SINR (dB)	CQI	UE Number 64 kbps	UE Number 128 kbps
550	7	23,7	10	22	11
	8	24,3	11	22	11
	9	24,8	15	37	18
	10	25,3	17	75	37
	11	25,7	21	75	37
450	7	24	11	22	11
	8	24,6	13	30	15
	9	25,1	16	75	37
	10	25,5	19	75	37
	11	25,9	22	75	37
350	7	24,1	11	22	11
	8	24,7	14	30	15
	9	25,2	16	75	37
	10	25,7	21	75	37
	11	26,1	22	75	37
	12	26,5	23	105	52

TABLE 5 – MAXIMUM NUMBERS OF USERS FOR ITU VEHICULAR A MODEL

Cell Coverage Radius (m)	HS-DSCH Tx Power (W)	SINR (dB)	CQI	UE Number 64 kbps	UE Number 128 kbps
550	7	23,7	8	15	7
	8	24,3	10	22	11
	9	24,8	12	22	11
	10	25,3	15	37	18
	11	25,7	16	75	37
450	7	24	10	22	11
	8	24,6	11	22	11
	9	25,1	14	30	15
	10	25,5	16	75	37
	11	25,9	17	75	37
350	7	24,1	10	22	11
	8	24,7	12	22	11
	9	25,2	15	37	18
	10	25,7	16	75	37
	11	26,1	18	75	37
	12	26,5	19	75	37

Figures 5 and 6 are graphical representations of some results shown in the Tables above. They highlight the differences between the mobility models in terms of *maximum number of users* served by HS-DSCH, for two different cell coverage radius sizes (550m and 350m). From such figures we can assert that the propagation conditions specified by the *ITU Pedestrian A* model always allows serving either a greater or an equal number of users in comparison to the ones of the *ITU Vehicular A* model. Furthermore, it clearly emerges that smaller radius sizes allow serving a larger number of multicast users. It's worth noting that the maximum *number of users served by HS-DSCH* could be the same also with different CQIs (see Table 3). In these cases, the CQI values are characterized by the same *Physical Bit Rate*; therefore, to understand the difference among such CQIs, we need to take

into account also the *Data Rate* and the *Data Link Bit Rate* [11].

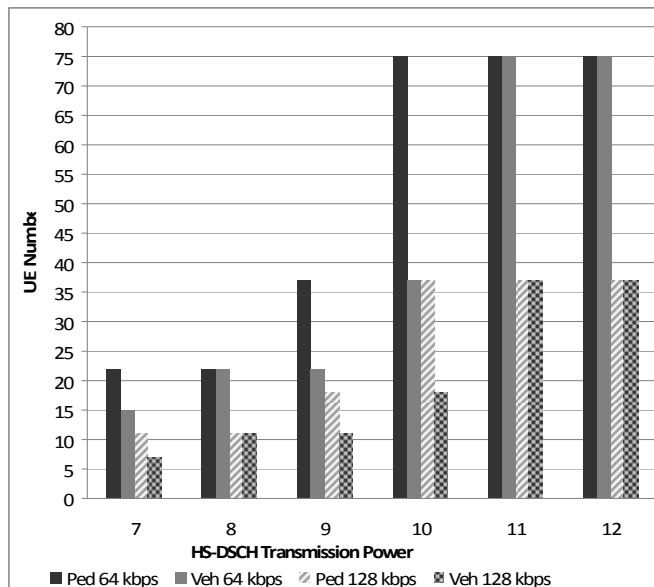


Figure 5 – Maximum UE Number considering radius up to 550 metres

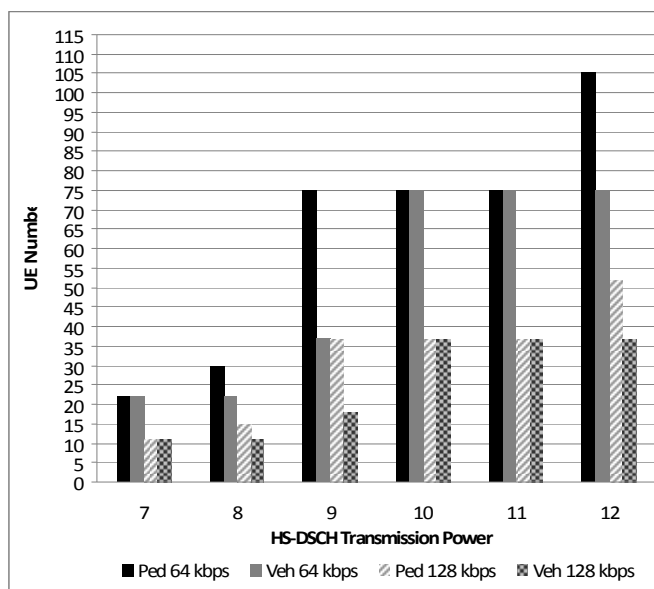


Figure 6 – Maximum UE Number considering radius up to 350 metres

The *Data Rate* is related to the *Transport Block Size*, indicating the transmitted packet size before entering the coding and modulation chain. While the *Data Link Bit Rate* quantifies the number of transmitted *RLC Packets* every TTI.

For instance, by referring to Table 3, it's worth noting that CQI values equal to 17 and 22 support the same number of users. In fact, the relevant *Physical Bit Rates* have the same values (4.800 kbps). But, as shown in Table 6, *Data Rate* and *Data Link Bit Rate* are different for such CQIs. In fact, a CQI equal to 17 corresponds to a *Data Rate* of 2094.5 kbps that allows sending 12 RLC packets with a *Data Link Bit Rate* equal to 1920 kbps. While a CQI equal to 22 is equivalent to a *Data Rate* of 3584 kbps that enables to transmit 21 RLC packets with a *Data Link Bit Rate* equal to 3360 kbps. Thus, a

different amount of RLC packets can be transmitted with the same *Physical Bit Rate* depending on the radio channel condition, thanks to the AMC technique that allows to change coding and modulation every TTI. In particular, when a lower CQI value is available (i.e., CQI equal to 17 instead of 22), a higher signal robustness is given, but at the penalty of having a lower *Data Link Bit Rate* (i.e. 1920kbps and 3584 kbps respectively). This is due to the greater amount of redundancy, compared to the information bits that counterbalance the scarce channel quality [12].

TABLE 6 – MAPPING BETWEEN CQI VALUE AND RLC PACKET SIZE

CQI	Transport Block Size (bits)	Data Rate (kbps)	RLC Packets Number	Data Link Bit Rate (kbps)
1	137	68,5	0	0
2	173	86,5	0	0
3	233	116,5	0	0
4	317	158,5	0	0
5	377	188,5	1	160
6	461	230,5	1	160
7	650	325,5	1	160
8	792	396	2	320
9	931	465,5	2	320
10	1262	631	3	480
11	1483	741,5	4	640
12	1742	871	5	800
13	2279	1139,5	6	960
14	2583	1291,5	7	1120
15	3319	1659,5	9	1440
16	3565	1782,5	10	1600
17	4189	2094,5	12	1920
18	4664	2332	13	2080
19	5287	2643,5	15	2400
20	5887	2943,5	17	2720
21	6554	3277	19	3040
22	7168	3584	21	3360
23	9719	4859	28	4480
24	11418	5709	33	5280
25	14411	7205,5	42	6720
26	17237	8774	52	8320
27	21754	10877	64	10240
28	23370	11685	69	11040
29	24222	12111	72	11520
30	25558	12779	76	12160

## VI. CONCLUSIONS

The use of HS-DSCH can provide higher data rates and improve the performance of pre-existing UMTS channels for MBMS applications. In this paper, we evaluated the *maximum number of users* served by HS-DSCH, taking into account two different mobility models. The study has been conducted by considering different values of HS-DSCH assigned power and several cell radius coverage sizes. We highlighted how such parameters allow obtaining the SINR values that have to be guaranteed. These values influence the maximum number of users that can be served through HS-DSCH. We demonstrated that the propagation conditions specified by the *ITU Pedestrian A* model always enables to serve a greater or equal number of users in comparison to the ones specified by the *ITU Vehicular A* model. Moreover, we illustrated the difference between *Physical Bit Rate*, *Data Rate*, and *Data Link Bit Rate*, by highlighting how several *Data Rate* and *Data Link Bit Rate* could be mapped into the same *Physical Bit Rate*, depending on the quality of the channel.

## REFERENCES

- [1] H. Holma, A. Toskala - WCDMA for UMTS – Radio Access for Third Generation Mobile Communications, 2004 John Wiley and Sons.
- [2] H. Holma, A. Toskala – HSDPA/HSUPA for UMTS – High Speed Radio Access for Mobile Communications, 2006 John Wiley and Sons.
- [3] 3GPP TR 23.846 V6.1.0 Technical Specification Group Services and System Aspects; Multimedia Broadcast/Multicast Service (MBMS); Architecture and functional description (Release 6).
- [4] A. Alexiou, C. Bouras, V. Kokkinos, E. Rekkas - Efficient Delivery of MBMS Multicast Traffic over HSDPA (IEEE 2008).
- [5] A. Raschellà, A. Umberto, G. Arantì, A. Iera, A. Molinaro – SINR-based Transport Channel Selection for MBMS Application (VTC 2009)
- [6] 3GPP TS 25.101 V6.9.0 Technical Specification Group Radio Access Network; User Equipment (UE) radio transmission and reception (FDD) (Release 6).
- [7] Guidelines For Evaluation Of Radio Transmission Technologies For Imt-2000, Recommendation ITU-R M.1225.
- [8] IST-2003-507607 (B-BONE). Deliverable D2.5. Final results with combined enhancements of the air interface.
- [9] 3GPP TS 25.211 V5.8.0 Technical Specification Group Radio Access Network; Physical channels and mapping of transport channels onto physical channels (FDD) (Release 5).
- [10] J.-B. Landre, A. Saadani – Receive Diversity and LMMS Equalization Benefits for HSDPA: Realistic Network Throughputs, 18th Annual IEEE International Symposium on Personal, Indoor and Mobile Radio Communications (PIMRC'07).
- [11] 3GPP TS 34108 V8.2.0 Generation Partnership Project; Technical Specification Group Radio Access Network; Common test environments for User Equipment (UE); Conformance testing (Release 8).
- [12] T. E. Kolding, K. I. Pedersen, J. Wigard, F. Frederiksen, P. E. Mogensen, Nokia Networks – High Speed Downlink Packet Access (HSDPA): WCDMA Evolution.