



## 22 **1 Introduction**

23 Due to the environmental pollution and global warming, the European Council has promoted a  
24 binding EU goal of greenhouse gas emissions with at least 40% internal reduction by 2030  
25 compared to 1990, including 27% share of renewable energy for the EU (European Council, 2014).  
26 Asia with the rapid growth and heavy dependence on fossil fuels (Lee et al., 2017) as well as other  
27 regions e.g. North America, Latin America and Africa (Tan et al., 2017) must carry out a series of  
28 policies and legislations for low-carbon and green growth. Biomass referring to all organic  
29 materials that originate from plants (algae, trees and crops) can be converted into different kinds  
30 of biofuels and energy carriers and is therefore one of the major renewable energy feedstocks  
31 (McKendry, 2002). Compared with other plants, microalgae have a high potential as a sustainable  
32 bioenergy feedstock because of several advantages e.g. higher growth rate, no requirement for  
33 arable land and potential for wastewater treatment to especially recover nutrients (Guldhe et al.  
34 2017) but possibly also to remove toxic heavy metals (Romera et al. 2007) and remove faecal  
35 coliforms (Ansa et al. 2012). Besides, CO<sub>2</sub> from the exhaust gases of e.g. combustion,  
36 metallurgical, chemical and biological processes can be utilized as carbon source for microalgal  
37 cultivation (for a review, see Wang et al. 2008).

38 However, the existing problems, such as high demand for water and nutrients, low biomass  
39 production yields and high cost of microalgal harvesting, need to be solved before commercial  
40 utilization of microalgae to low-value products such as energy and fuels (Arenas et al. 2017). Since  
41 wastewater can provide the water and nutrients for the microalgae, many studies have been carried  
42 out to cultivate microalgae in different kinds of wastewaters including municipal, agricultural and  
43 industrial wastewaters (Ansa et al., 2012; Guldhe et al., 2017; Kinnunen and Rintala, 2016).

44 Microalgal cultivation in anaerobic digestion (AD) effluents, as a specific waste stream, has shown  
45 significant potential for biorefinery applications due to the efficient nutrient removal and  
46 accumulation of high-value products (e.g. astaxanthin, carotenoids and omega-3 fatty acids) to the  
47 microalgal biomass (Polishchuk et al., 2015; Xia and Murphy, 2016). The integration of effluents  
48 of AD from pulp and paper industry biosludge and microalgal cultivation (from now on referred  
49 to as Integrated AD&MC system) has been studied to produce biomass and to recover nutrients  
50 from wastewater (Kinnunen and Rintala, 2016; Polishchuk et al., 2015). The results of our previous  
51 study (Tao et al., 2017) indicated the possibility of high-yield microalgal biomass production and  
52 efficient nutrient removal when *Scenedesmus acuminatus* was cultivated in liquid digestates from  
53 AD of pulp and paper industry biosludge.

54 Pulp and paper industry is water and energy intensive biomass refining industry typically treating  
55 its wastewaters in aerobic systems generating large amount of primary sludge and biosludge.  
56 Anaerobic digestion of the generated sludges has gained increasing attention in pulp and paper  
57 industry sludge treatment due to e.g. biomethane production as renewable energy (Kinnunen et al.,  
58 2015; Veluchamy and Kalamdhad, 2017) and possibility for nutrient recovery. More studies have  
59 focused on anaerobic digestion of biosludge than primary sludge because primary sludge from  
60 pulp and paper mill contains more wood fibres, which can be recycled to the fiber-processing  
61 system of the mill instead of being anaerobically digested (de Alda, 2008; Kamali et al., 2016).  
62 Biosludge also has a quite high content of lignocellulosic materials, which may limit its anaerobic  
63 degradability (Kinnunen et al., 2015). To enhance biomethane production, application of pre-  
64 treatment technologies have been considered. Thermal pretreatment prior to AD is one of the main  
65 approaches used to enhance the methane production of pulp and paper industry biosludge  
66 (Kinnunen et al., 2015; Kamali et al., 2016). To understand the effect of thermal pretreatment

67 temperatures (80 °C, 105 °C, 121 °C and 134 °C) on methane production potential from biosludge  
68 from pulp and paper industry Kinnunen et al. (2015) carried out biomethane potential batch assays  
69 at 35 °C. They reported that biomethane production was increased by 39–140% compared to  
70 untreated biosludge with the increasing pretreatment temperatures, except that biomethane  
71 production from the biosludge treated at the lowest temperature, 80°C, was lower than that  
72 obtained from the untreated one. However, although the increased pretreatment temperature  
73 increased methane production, it also increases the costs and energy consumption of the thermal  
74 pretreatment (Kinnunen et al., 2015). Because of this, Asunis (2015) further studied the anaerobic  
75 digestion of pulp and paper mill biosludge at mesophilic and thermophilic conditions since the  
76 operating temperature is a significant variable that also affects the methane yield. To our  
77 knowledge, the AD plant reported to be under planning phase is the first full-scale AD plant  
78 integrated in the pulp mill for digesting pulp mill sludges (Liikanen, 2016).

79 The previous studies show that biosludge with different treatments (pretreatment and AD  
80 conditions) can result in different methane production yields and digestate compositions  
81 (Kinnunen et al., 2015; Asunis, 2015). However, the microalgal cultivation in the effluents of AD  
82 operated at different conditions has not been compared. Biomethane is generated during the AD  
83 process while microalgal biomass can be produced during the cultivation by using the liquid  
84 digestates from AD. To optimize Integrated AD&MC system for maximum bioenergy  
85 (biomethane and microalgal biomass) production, it is important to study each process and thus  
86 give an overview of the Integrated AD&MC system. The aim of this work was to study *S.*  
87 *acuminatus* cultivation in various types of liquid digestates from AD of pulp and paper industry  
88 biosludge and provide information with practical cases to biorefinery concept in pulp and paper  
89 industries implementing AD and algal cultivation system simultaneously.

## 90 2 Materials and Methods

### 91 2.1 Microalgal strain and liquid digestates

92 *Scenedesmus acuminatus* (SAG 38.81) was obtained from the SAG Culture Collection of Algae at  
93 the University of Göttingen, Germany as a culture suspension. Stock culture was maintained in  
94 100 mL N-8 medium in 250 mL Erlenmeyer flask on an orbital shaker (150 rpm) under fluorescent  
95 lamps (Osram L 18W/965 bio lux, Germany) at a light intensity of  $40 \mu\text{mol photons m}^{-2} \text{s}^{-1}$ . The N-  
96 8 medium consisted of ( $\text{g L}^{-1}$ ):  $\text{KNO}_3$ , 0.506;  $\text{KH}_2\text{PO}_4$ , 0.740;  $\text{Na}_2\text{HPO}_4$ , 0.260;  $\text{MgSO}_4 \cdot 7\text{H}_2\text{O}$ ,  
97 0.050;  $\text{CaCl}_2 \cdot 2\text{H}_2\text{O}$ , 0.018;  $\text{FeNaEDTA} \cdot 3\text{H}_2\text{O}$ , 0.012 and micronutrient ( $\text{ZnSO}_4 \cdot 7\text{H}_2\text{O}$ , 0.003;  
98  $\text{MnCl}_2 \cdot 4\text{H}_2\text{O}$ , 0.013;  $\text{CuSO}_4 \cdot 5\text{H}_2\text{O}$ , 0.018;  $\text{Al}_2(\text{SO}_4)_3 \cdot 18\text{H}_2\text{O}$ , 0.007). An initial pH of 6.5 in the  
99 N-8 medium was adjusted to 8.0 by adding 5 M NaOH.

100 Four types of digestates characterized in this study were collected from anaerobic semi-  
101 continuously fed completely stirred tank reactors (5 L liquid volume) treating biosludge from a  
102 pulp and paper industry wastewater treatment plant (Asunis, 2015). The three different pulp and  
103 paper mill biosludge digestates used in the microalgal cultivation experiments of the present study  
104 were anaerobically digested at 55 °C (thermophilic digestate, T), anaerobically digested at 55 °C  
105 after thermal pretreatment at 121 °C for 10 min (pre-treated thermophilic digestate, Tp) and  
106 anaerobically digested at 35 °C after thermal pretreatment at 121 °C for 10 min (pre-treated  
107 mesophilic digestate, Mp). The fourth pulp and paper mill biosludge digestate referred in this paper  
108 was anaerobically digested at 35 °C (mesophilic digestate, M) (Asunis, 2015) and utilized for  
109 cultivation of *S. acuminatus* in our previous study (Tao et al, 2017). The digestates were  
110 centrifuged at 5200 rpm for 4 min, and the supernatant was filtered through a glass fibre filter  
111 (Whatman GF /A, UK). After filtration, the liquid digestates were stored at 4 °C before use.

112 The microalgal growth results with the mesophilic digestate (M) are not directly comparable to the  
113 other digestates in the present study as *S. acuminatus* was grown in 1.5-times diluted mesophilic  
114 digestate M in the previous study (Tao et al., 2017), whereas in this study *S. acuminatus* was  
115 cultivated in undiluted digestates. Therefore, growth yields of *S. accuminatus* in digestate M are  
116 not compared to the microalgal cultivations results obtained in this study.

## 117 2.2 Photobioreactors

118 *S. acuminatus* was grown separately in the three different digestates (digestate refers to liquid,  
119 filtered digestate) for 21 days in photobioreactors (four replicates with each digestate), which  
120 consisted of a 1-L glass bottle (PYREX) closed with a plastic cap with two tubes going through  
121 the cap as the gas inlet and outlet. Air with 5% CO<sub>2</sub> (v/v) at a flow rate of 0.105 L min<sup>-1</sup> was  
122 sparged from the bottom by a glass distribution tube (porosity 0, ø 22mm, Duran Group, Germany).  
123 The photobioreactors were continuously illuminated using white fluorescent lamps (Osram L  
124 18W/965 de lux cool daylight, Germany) with a light intensity of 240 μmol photos m<sup>-2</sup> s<sup>-1</sup>) from  
125 two sides of the reactors. *S. acuminatus* was inoculated to the photobioreactors to provide an initial  
126 optical density (OD) of 0.2. The initial total culture volume in the reactors was 600 mL. The  
127 temperature of the reactors was maintained at 22±2 °C. Water evaporated during the cultivation  
128 due to the constant sparging, and therefore distilled water was added to compensate the evaporated  
129 water volume (marked with lines on the photobioreactors) each time before taking samples for  
130 analyses.

## 131 2.3 Analytical methods

132 The culture pH was measured using a WTW 330 pH meter (WTW, Germany) with a Slimtrode  
133 electrode (Hamilton, Germany). The light intensity was controlled by measuring the average value  
134 of six sites on two sides of the photobioreactors' outer surface by a MQ-200 Quantum Meter  
135 (Apogee, USA).

136 Volatile suspended solids (VSS) were measured by filtering 10–15 mL culture solution through a  
137 glass fibre filter (Whatman GF/A). Each filter containing the suspended solids was dried at 105 °C  
138 overnight, weighed and then burned in a 550 °C muffle furnace for 2 h and weighed again. VSS  
139 was determined gravimetrically as a difference of the filters after treatment at these two  
140 temperatures. The supernatant after VSS filtration was used in the analysis of digestate OD and  
141 turbidity, soluble chemical oxygen demand (CODs), soluble biochemical oxygen demand (BOD<sub>7s</sub>),  
142 dissolved organic carbon (DOC) and nutrients (N, P, S) concentrations. The OD was measured at  
143 a wavelength of 680 nm using a Shimadzu UV-1700 Pharmaspec spectrophotometer after proper  
144 dilution with distilled water to give absorbance values between 0.2–0.7. Turbidity was measured  
145 with a TN-100/T-100 turbidimeter. OD was also measured from non-filtrated samples to assess  
146 the microalgal biomass production.

147 CODs was determined using dichromate method according to the Finnish Standard SFS 5504. The  
148 determination of BOD<sub>7s</sub> was done with a WTW OxiTop Control/ OxiTop measuring system. DOC  
149 was measured with total organic carbon analyzer (Shimadzu Model TOC-5000) with ASI-5000  
150 autosampler. NH<sub>4</sub><sup>+</sup>-N was measured with an ion selective electrode (Thermo Scientific Orion ISE  
151 meter). The potential extent of ammonium stripping was estimated by the following equation

152 (Emerson et al. 1975) as rate of ammonia stripping has been shown to correlate well with unionized  
153 ammonium concentration related to temperature and pH (Zimmo et al. 2003):

$$154 \quad \text{unionized } NH_3(\%) = \frac{100}{1 + 10^{(pK_a - pH)}} \quad (1)$$

155 where  $pK_a = 0.09018 + \frac{2729.92}{T}$  and T = temperature( $^{\circ}$ K).

156  $NO_3^-$ ,  $NO_2^-$ ,  $PO_4^{3-}$  and  $SO_4^{2-}$  were measured using ICS-1600 ion chromatograph (Dionex, USA)  
157 with AS-DV autosampler, Ion- Pac AS4A-SC anion exchange column, and ASRS-300 suppressor  
158 (2 mm). The eluent contained 1.9 mM  $Na_2CO_3$  and 1.7 mM  $NaHCO_3$ , and the eluent flow rate was  
159 1 mL  $min^{-1}$ .

### 160 **3 Results**

#### 161 **3.1 Characteristics of the liquid digestates**

162 The four pulp and paper industry biosludge digestates originating from digesters operated at  
163 different temperatures treating biosludge with and without thermal pretreatment had different  
164 characteristics (Table 1). The initial pH of all the digestates was above 8.0 and the high alkalinity  
165 in the digestates provided a good buffering capacity for microalgal cultivation since *S. acuminatus*  
166 prefers slightly alkaline conditions. The color of the digestates was measured by absorbance (OD)  
167 at a wavelength of 680 nm and turbidity after removing the microalgal biomass by filtering. In  
168 terms of OD, the color of the thermophilic digestates was higher than that of the mesophilic  
169 digestates. In addition, OD value of the pretreated digestates was higher than those without  
170 pretreatment. The digestate Tp showed the darkest color (OD:  $0.63 \pm 0.08$ , turbidity: 320 NTU) of  
171 all the digestates. However, the value of OD of the digestate T ( $0.59 \pm 0.06$ ) was higher than that of



172 Mp ( $0.35\pm 0.01$ ) while the turbidity of the digestate T (280 NTU) was lower than that of Mp (290  
173 NTU). Thus, there was no clear correlation between OD and turbidity.

174 The thermophilic digestates (T and Tp) had on an average  $65 \text{ mg L}^{-1}$  higher ammonium  
175 concentrations compared with the mesophilic digestates (M and Mp). In addition, the digestates  
176 treated at the same temperature resulted in  $30\text{--}100 \text{ mg L}^{-1}$  higher ammonium concentration with  
177 pretreatment than without pretreatment (Table 1). Ammonium was available in all the digestates  
178 as nitrogen source for microalgal growth, while nitrate and nitrite concentrations were below  $1.0$   
179  $\text{mg L}^{-1}$ . The total phosphorus content was similar ( $27\text{--}30 \text{ mg L}^{-1}$ ) in all the digestates and  
180 approximately 50% of the phosphorus existed in the form of phosphate except in the digestate M,  
181 where phosphate share was slightly higher (64.3%). In addition, the sulfate-S concentration in  
182 digestate Mp was much lower than that in the other three digestates (Table 1).

183 Similar phenomenon as with ammonium was observed with CODs values of the different  
184 digestates. The thermophilic digestates had higher CODs values than the mesophilic digestates and  
185 when the digestates produced at the same digestion temperature were compared, the biosludge  
186 digestates generated in a process with pretreatment resulted in higher CODs than without  
187 pretreatment (Table 1). The  $\text{BOD}_{7\text{S}}/\text{CODs}$  ratios were lower than 1:20 in the measured digestates  
188 (T, Tp and Mp), which means that most of the organic material left in the liquid digestates after  
189 anaerobic digestion was not easily biodegradable. This indicates that the digestate could support  
190 mainly photoautotrophic growth and that the microalgal growth in the digestates relied mainly on  
191  $\text{CO}_2$  as the carbon source.

## 192 3.2 Cultivation of *S. acuminatus* in the liquid digestates

### 193 3.2.1 Microalgal biomass production

194 The microalgal biomass production as indicated by VSS in the three studied digestates (T, Tp and  
195 Mp) was as shown in Fig. 1. The final microalgal biomass concentration after 21 days of batch  
196 cultivation was higher with both thermophilic digestates (T, Tp:  $10.2 \pm 2.2$ – $10.8 \pm 1.2$  g L<sup>-1</sup>) than  
197 that obtained with the mesophilic digestate (Mp:  $7.8 \pm 0.3$  g L<sup>-1</sup>). Despite the relatively high initial  
198 ammonium concentrations (380–480 mg L<sup>-1</sup>) in all cultures, no clear lag phase was observed in  
199 microalgal growth. The biomass concentration started to stabilize on day 15-18. In the beginning,  
200 *S. acuminatus* in the digestate Tp grew slower than in the digestates T and Mp likely due to the  
201 higher initial ammonium concentration and poorer light penetration (due to darker color of the  
202 digestate). Before day 9, *S. acuminatus* biomass concentration in the digestate T ( $6.0$  g L<sup>-1</sup> VSS at  
203 day 9) was the highest followed by *S. acuminatus* in the digestate Mp ( $4.9$  g L<sup>-1</sup> VSS at day 9) and  
204 Tp ( $4.4$  g L<sup>-1</sup> VSS at day 9). Later, the culture concentration in the digestate Tp exceeded those in  
205 the digestates Mp and T after day 9 and day 15, respectively.

### 206 3.2.2 Nutrient removal from liquid digestates

207 *S. acuminatus* removed nutrients efficiently from the digestates (Fig. 2). The ammonium  
208 concentration decreased from initial 380–480 mg L<sup>-1</sup> to less than 0.2–10 mg L<sup>-1</sup>. The ammonium  
209 removal efficiency in the thermophilic digestates was over 99.9%, which was a little higher than  
210 the ammonium removal efficiency obtained in the mesophilic digestate (97.4%). The phosphate  
211 and sulfate were completely removed from all the liquid digestates in 7 days and 7–9 days,  
212 respectively. There was no clear difference in the phosphate and sulfate removal efficiency from  
213 the three different digestates (T, Tp and Mp).

### 214 3.2.3 CODs, DOC and color changes

215 CODs removal efficiency was higher from the thermophilic digestates (38% and 39%) than from  
216 the mesophilic digestate (29%) (Fig. 3a). The DOC concentration in the thermophilic digestates  
217 decreased while DOC increased in the digestate Mp during the cultivation (Fig. 3b). The OD of  
218 the digestates was measured after removing the microalgae to show the digestate color change  
219 during the cultivation (Fig. 3c). The OD values in all digestates decreased until day 9 and remained  
220 quite stable after that. In the end of the batch cultivations, the color removal efficiencies in T, Tp  
221 and Mp were 80%, 74% and 79%, respectively.

## 222 4 Discussion

223 This study shows that it is possible to produce a high concentration of microalgal biomass and  
224 remove nutrients (ammonium, phosphate and sulfate) efficiently from various liquid digestates of  
225 pulp and paper mill biosludge digestion without dilution. Thus, the results confirm the potential of  
226 Integrated AD&MC system where the liquid digestates originate from pulp and paper wastewater  
227 treatment plant biosludge digestion as shown in our previous study (Tao et al., 2017). It further  
228 shows that the temperature of AD and thermal pretreatment prior to AD have some but not critical  
229 impact on microalgal biomass production and nutrient, CODs and DOC removal. Thus, this study  
230 provides information for decision making on the AD system to be invested simultaneously  
231 considering the potential implementation of a microalgal system in a biorefinery concept in pulp  
232 and paper industry. An overview (treatment methods of biosludge, microalgal cultivation  
233 conditions and bioenergy production) of the studied Integrated AD&MC systems is shown in Table  
234 2.

235 During the 21-day cultivation, approximately 35% more microalgal biomass (as VSS) was  
236 obtained in the thermophilic digestates than in the mesophilic digestate. This is a promising  
237 discovery, as methane production was also higher both without and with pretreatment in the  
238 thermophilic digestion compared to the mesophilic process (Table 2) (Asunis, 2015) indicating  
239 that the highest biogas production and microalgal biomass yield can be obtained in the same  
240 integrated AD&MC system. However, it is clear that the influence from pulp and paper mill  
241 digestate on microalgal growth is species specific as Kinnunen and Rintala (2016) previously  
242 reported that biomass concentration less than  $0.2 \text{ g L}^{-1}$  (VSS) was obtained with a *Scenedesmus*  
243 sp. originating from Lake Pyhäjärvi (Tampere, Finland) in an optimum mixture of 75% distilled  
244 water and 25% liquid digestate from pulp and paper industry biosludge AD. Although the  
245 biosludges used in Kinnunen and Rintala (2016) and this study were from the same pulp and paper  
246 mill, the different characteristics of the digestates (likely due to the changes of e.g. wood source  
247 used, pulp mill operation parameters and season) and microalgal strains clearly affect the  
248 obtainable biomass quantity.

249 The effect of sludge pretreatment before digestion on microalgal cultivation is not, however, fully  
250 clear based on this study. Asunis (2015) reported that thermal pretreatment increased the methane  
251 yield by 100% in thermophilic AD process while the increase was 460% in mesophilic AD, while  
252 the methane yield with pretreatment at thermophilic condition was still  $25 \text{ L CH}_4 \text{ kg}^{-1} \text{ VS}$  higher  
253 than that obtained with pretreatment at mesophilic condition (Table 2). The difference caused by  
254 the pretreatment prior to thermophilic digestion on the microalgal biomass production in the  
255 digestate was not significant. Although highest methane and microalgal biomass production was  
256 obtained at the same process (thermophilic AD with pretreatment), other factors should be  
257 considered, including e.g. costs and energy burden of the thermal pretreatment and possible

258 removal of residual CODs from the digestate after microalgal cultivation. However, it is  
259 impossible to strictly compare the microalgal biomass yields in the mesophilic digestates with and  
260 without thermal pretreatment in this study due to the differences in dilution used in this study and  
261 our previous study (Tao et al, 2017).

262 The present study also shows that it is possible to obtain a high microalgal biomass yield in the  
263 liquid digestates from pulp and paper wastewater treatment plant biosludge without dilution. This  
264 indicates e.g. that the digestate color levels in this study did not affect the microalgal growth greatly.  
265 Substances in the liquid digestates causing the color may include clay, silt, finely divided inorganic  
266 and organic matter, soluble colored organic compounds, and plankton and other microscopic  
267 organisms (Wang et al., 2010). The turbidity of liquid digestates may vary ranging e.g. from 2960  
268 to 51400 NTU as reported in the liquid fraction of mainly manure digestates from 11 full-scale co-  
269 digestion plants (Akhiar et al., 2017). The dark color of the medium is one of the issues, which  
270 could reduce the microalgal growth due to poor light penetration (Wang et al., 2010; Marcilhac et  
271 al., 2014; Xia and Murphy, 2016). For example, in a study by Wang et al. (2010), where *Chlorella*  
272 sp. was cultivated in liquid fraction of anaerobically digested dairy manure (turbidity:1800–1900  
273 NTU) with different dilutions (10, 15, 20 and 25-times) for 21 days the inverse correlation between  
274 turbidity and specific algal growth rates ( $R^2 = 0.982$ ) indicated that high turbidity can limit algal  
275 growth. However, dilution for the microalgal growth increases total wastewater treatment volume  
276 and might reduce microalgal growth owing to a reduction in nutrients and trace element  
277 concentrations. In the present study, the different AD process conditions led to color differences  
278 of the three liquid digestates (turbidity: 280–320 NTU), which however did not affect the color  
279 removal efficiency. It is not easy to compare results (e.g. microalgal biomass production and  
280 nutrients removal efficiencies) with other studies, which have similar medium turbidities as in the

281 present study since only few papers have mentioned the turbidity of medium during the microalgal  
282 cultivation.

283 In this study, microalgal cultivation removed CODs to certain levels (29-39% removal) while DOC  
284 acted somewhat contradictory to CODs as DOC level increased in the mesophilic digestate. COD  
285 represents the demand of chemical oxidizer needed to oxidize all the oxidizable organic or  
286 inorganic materials in wastewater and DOC is used to reflect dissolved organic carbon content of  
287 a sample. In most microalgal studies, either DOC or COD has been measured during microalgal  
288 cultivation (Eloka-Eboka et al., 2017; Guldhe et al., 2017; Wang et al., 2010) and the correlation  
289 between COD and DOC in microalgal cultures is not clear based on the previous studies. For  
290 example, Marjakangas et al (2015) reported increase in both soluble COD and DOC concentrations  
291 likely due to the low pH stress after *C. vulgaris* CY5 was mixotrophically cultivated in  
292 anaerobically treated piggery wastewater. Thus, it seems that the changes in COD and DOC  
293 depend on the growth conditions. In our study, organic carbon release from photosynthetic  
294 microalgal cells might explain the observed increase in DOC during the cultivations in mesophilic  
295 digestate. The decrease in CODs suggests that organic materials from the digestates were  
296 consumed during the cultivation and the amount of consumed materials was higher than the  
297 organic carbon released by the microalgae during normal photosynthetic growth. Some studies  
298 have reported relatively high COD removal efficiencies (75–80%) from liquid digestates  
299 integrated with microalgal cultivation (Yan and Zheng, 2014; Yang et al., 2015). The CODs in  
300 digestes in this study was probably mainly caused by lignocellulosic materials (Kinnunen et al.,  
301 2015), which are not easily biodegradable and are therefore difficult to remove with biological  
302 methods. Thus, further removal would be possible with other than biological treatments e.g.  
303 chemical oxidation, if that would be deemed necessary.

304 The results in this study demonstrate that the microalgal cultivation efficiently removed  
305 ammonium, phosphorus and sulfate from all digestates from pulp and paper industry biosludge  
306 AD. Phosphorus was likely removed from the digestates through adsorption on the microalgal  
307 surface, intracellular uptake and precipitation (Cai et al., 2013). In the present study, it is speculated  
308 that enough phosphorus ensured microalgal growth since the microalgal biomass yield did not stop  
309 or slow down when phosphate was no more detected from the liquid digestates after day 7. For  
310 ammonium removal, several ammonium transformations (e.g. algal uptake, ammonia evaporation,  
311 bacterial growth and nitrification) can occur in algae-bacteria consortium systems (González-  
312 Fernández et al., 2011). According to the average temperature (22 °C) and the observed pH range  
313 (7.8–8.4), the theoretical fraction of unionized ammonia in all cultivations was 2.8%–10.3%. In  
314 addition, low levels of nitrate were found in all cultivations. This data suggests that ammonium  
315 stripping and nitrification may have occurred, but that the main portion of the removed ammonium  
316 from the digestates was used for microbial growth.

317 Initial sulfate concentration in liquid digestates could affect the ammonium removal efficiency and  
318 microalgal biomass production. This hypothesis is supported by the fact that the cultivations in the  
319 digestates T and Tp having similar initial sulfate concentration (15-17 mg L<sup>-1</sup>) enabled over 99.9%  
320 ammonium removal and similar microalgal biomass production while the different initial sulfate  
321 concentrations in the digestates T and Mp (17 vs. 3 mg L<sup>-1</sup>), which had similar initial ammonium  
322 concentration resulted in different ammonium removal efficiencies and algal biomass yield.  
323 Biological nitrogen fixation is catalyzed during photosynthesis by nitrogenase, which contains  
324 iron-sulfur clusters (Zheng and Dean, 1994) and the shortage of sulfur can therefore decrease the  
325 assimilation of nitrogen (Kumaresan et al., 2017). Sulfate as primary sulfur source for microalgae  
326 in aquatic environments has been proved to affect microalgal growth also in other studies (Lv et

327 al., 2017; Mera et al., 2016). Mera et al. (2016) reported that microalga *Chlamydomonas moewusii*  
328 growth was quite similar at sodium sulfate concentrations 0.1–3 mM ( $\text{SO}_4^{2-}\text{-S}$ : 3.2–96 mg L<sup>-1</sup>) but  
329 microalgal biomass yields were lower at higher and lower sodium sulfate concentrations. In study  
330 by Lv et al. (2017), similar *Chlorococcum* sp. growth at sulfate levels from 18–271 mg L<sup>-1</sup> was  
331 obtained, but growth was much lower at 0 mg L<sup>-1</sup> sulfate.

## 332 **5 Conclusions**

333 Cultivatation of *Scenedesmus acuminatus* was succesful in different undiluted digestates from pulp  
334 and paper industry biosludges treated at different AD conditions i.e. mesophilic vs. thermophilic,  
335 with and without thermal (121 °C) pretreatment. *S. acuminatus* grew well (7.8–10.8 g L<sup>-1</sup>) and  
336 removed nutrients efficiently (over 97%) from all the digestates. Color (74–80%) and CODs (29–  
337 39%) were partially removed. The digestate from thermophilic process with pretreatment enabled  
338 highest microalgal biomass concentration, forming a promising discovery for pulp and paper  
339 industry algae-based biorefinery applications as highest biomethane production was obtained at  
340 the same conditions.

341

342 **Acknowledgments:** This work was supported by the Marie Skłodowska-Curie European Joint  
343 Doctorate (EJD) in Advanced Biological Waste-To-Energy Technologies (ABWET) funded from  
344 Horizon 2020 [grant number 643071]. We would like to thank Viljami Kinnunen and Ramasamy  
345 Praveenkumar for the suggestions on the experimental set-up. We would also like to thank Tarja  
346 Ylijoki-Kaiste for her help in the laboratory.



347 **References**

- 348 1. Akhlar, A., Battimelli, A., Torrijos, M., Carrere, H., 2017. Comprehensive characterization of  
349 the liquid fraction of digestates from full-scale anaerobic co-digestion. *Waste Manage.* 59, 118-  
350 128.
- 351 2. Ansa, E.D.O., Lubberding, H.J., Gijzen, H.J., 2012. The effect of algal biomass on the removal  
352 of faecal coliform from domestic wastewater. *Appl. Water Sci.* 2, 87-94.
- 353 3. Arenas, E.G., Palacio, R., Juantorena, A.U., Fernando, S.E.L., Sebastian, P.J., 2017. Microalgae  
354 as a potential source for biodiesel production: techniques, methods, and other challenges. *Int. J.*  
355 *Energy Res.* 41, 761-789.
- 356 4. Asunis, F., 2015. Thermal pretreatment to enhance anaerobic digestion of pulp and paper mill  
357 biosludge (Unpublished master's thesis). Universita degli Studi di Cagliari Facolta di Ingegneria  
358 e Architettura, Italy and Tampere University of Technology, Finland.
- 359 5. Cai, T., Park, S.Y., Li, Y., 2013. Nutrient recovery from wastewater streams by microalgae:  
360 status and prospects. *Renew. Sustainable Energy Rev.* 19, 360-369.
- 361 6. de Alda, J.A.O., 2008. Feasibility of recycling pulp and paper mill sludge in the paper and board  
362 industries. *Resour. Conserv. Recycl.* 52, 965-972.
- 363 7. Eloka-Eboka, A.C., Inambao, F.L., 2017. Effects of CO<sub>2</sub> sequestration on lipid and biomass  
364 productivity in microalgal biomass production. *Appl. Energy* 195, 1100-1111.
- 365 8. European Council. Conclusions (23 and 24 October 2014). 2030 Climate and Energy Policy  
366 Framework. EUCO 169/14; 2014. Retrieved from  
367 [http://www.consilium.europa.eu/uedocs/cms\\_data/docs/pressdata/en/ec/145397.pdf](http://www.consilium.europa.eu/uedocs/cms_data/docs/pressdata/en/ec/145397.pdf).

- 368 9. González-Fernández, C., Molinuevo-Salces, B., García-González, M.C., 2011. Nitrogen  
369 transformations under different conditions in open ponds by means of microalgae–bacteria  
370 consortium treating pig slurry. *Bioresour. Technol.* 102, 960-966.
- 371 10. Guldhe, A., Ansari, F.A., Singh, P., Bux, F., 2017. Heterotrophic cultivation of microalgae  
372 using aquaculture wastewater: A biorefinery concept for biomass production and nutrient  
373 remediation. *Ecol. Eng.* 99, 47-53.
- 374 11. McKendry, P., 2002. Energy production from biomass (part 1): overview of biomass.  
375 *Bioresour. Technol.* 83, 37-46.
- 376 12. Kamali, M., Gameiro, T., Costa, M.E.V., Capela, I., 2016. Anaerobic digestion of pulp and  
377 paper mill wastes—An overview of the developments and improvement opportunities. *Chem. Eng.*  
378 *J.* 298, 162-182.
- 379 13. Kinnunen, V., Rintala, J., 2016. The effect of low-temperature pretreatment on the  
380 solubilization and biomethane potential of microalgae biomass grown in synthetic and wastewater  
381 media. *Bioresour. Technol.* 221, 78-84.
- 382 14. Kinnunen, V., Ylä-Outinen, A., Rintala, J., 2015. Mesophilic anaerobic digestion of pulp and  
383 paper industry biosludge—long-term reactor performance and effects of thermal pretreatment.  
384 *Water Res.* 87, 105-111.
- 385 15. Kumaresan, V., Nizam, F., Ravichandran, G., Viswanathan, K., Palanisamy, R., Bhatt, P.,  
386 Arasu, M.V., Al-Dhabi, N.A., Mala, K., Arockiaraj, J., 2017. Transcriptome changes of blue-green  
387 algae, *Arthrospira* sp. in response to sulfate stress. *Algal Res.* 23, 96-103.

- 388 16. Lee, C.T., Hashim, H., Ho, C.S., Van Fan, Y., Klemeš, J.J., 2017. Sustaining the low-carbon  
389 emission development in Asia and beyond: Sustainable energy, water, transportation and low-  
390 carbon emission technology. *J. Clean. Prod.* 146, 1-13.
- 391 17. Liikanen, J. (2016, December 7). Biofuel from Äänekoski. *Paper and Timber Journal*.  
392 Retrieved from <http://www.paperijapuu.fi/biofuel-from-aanekoski/>
- 393 18. Lv, J., Guo, J., Feng, J., Liu, Q., Xie, S., 2017. Effect of sulfate ions on growth and pollutants  
394 removal of self-flocculating microalga *Chlorococcum* sp. GD in synthetic municipal wastewater.  
395 *Bioresour. Technol.* 234, 289-296.
- 396 19. Marcilhac, C., Sialve, B., Pourcher, A.M., Ziebal, C., Bernet, N., Béline, F., 2014. Digestate  
397 color and light intensity affect nutrient removal and competition phenomena in a microalgal-  
398 bacterial ecosystem. *Water Res.* 64, 278-287.
- 399 20. Marjakangas, J.M., Chen, C.Y., Lakaniemi, A.M., Puhakka, J.A., Whang, L.M., Chang, J.S.,  
400 2015. Simultaneous nutrient removal and lipid production with *Chlorella vulgaris* on sterilized  
401 and non-sterilized anaerobically pretreated piggery wastewater. *Biochem. Eng. J.* 103, 177-184.
- 402 21. Mera, R., Torres, E., Abalde, J., 2016. Effects of sodium sulfate on the freshwater microalga  
403 *Chlamydomonas moewusii*: implications for the optimization of algal culture media. *J. Phycol.* 52,  
404 75-88.
- 405 22. Polishchuk, A., Valev, D., Tarvainen, M., Mishra, S., Kinnunen, V., Antal, T., Yang, B.,  
406 Rintala, J., Tyystjärvi, E., 2015. Cultivation of *Nannochloropsis* for eicosapentaenoic acid  
407 production in wastewaters of pulp and paper industry. *Bioresour. Technol.* 193, 469-476.
- 408 23. Romera, E., González, F., Ballester, A., Blázquez, M.L., Muñoz, J.A., 2007. Comparative

409 study of biosorption of heavy metals using different types of algae. *Bioresour. Technol.* 98, 3344-  
410 3353.

411 24. Tan, S., Yang, J., Yan, J., Lee, C., Hashim, H., Chen, B., 2017. A holistic low carbon city  
412 indicator framework for sustainable development. *Appl. Energy* 185, 1919-1930.

413 25. Tao, R., Kinnunen, V., Praveenkumar R., Lakaniemi, A.M., Rintala, A.J., 2017. Comparison  
414 of *Scenedesmus acuminatus* and *Chlorella vulgaris* cultivation in liquid digestates from anaerobic  
415 digestion of pulp and paper industry and municipal wastewater treatment sludge. *J. Appl. Phycol.*  
416 doi: 10.1007/s10811-017-1175-6

417 26. Veluchamy, C., Kalamdhad, A.S., 2017. Biochemical methane potential test for pulp and paper  
418 mill sludge with different food/microorganisms ratios and its kinetics. *Int. Biodeterior.*  
419 *Biodegradation*, 117, 197-204.

420 27. Wang, B., Li, Y., Wu, N., Lan, C.Q., 2008. CO<sub>2</sub> bio-mitigation using microalgae. *Appl.*  
421 *Microbiol. Biotechnol.* 79, 707-718.

422 28. Wang, L., Li, Y., Chen, P., Min, M., Chen, Y., Zhu, J., Ruan, R.R., 2010. Anaerobic digested  
423 dairy manure as a nutrient supplement for cultivation of oil-rich green microalgae *Chlorella* sp.  
424 *Bioresour. Technol.* 101, 2623-2628.

425 29. Xia, A., Murphy, J.D., 2016. Microalgal cultivation in treating liquid digestate from biogas  
426 systems. *Trends Biotechnol.* 34, 264-275.

427 30. Yan, C., Zheng, Z., 2014. Performance of mixed LED light wavelengths on biogas upgrade  
428 and biogas fluid removal by microalga *Chlorella* sp. *Appl. Energy* 113, 1008-1014.

- 429 31. Yang, L., Tan, X., Li, D., Chu, H., Zhou, X., Zhang, Y., Yu, H., 2015. Nutrients removal and  
430 lipids production by *Chlorella pyrenoidosa* cultivation using anaerobic digested starch wastewater  
431 and alcohol wastewater. *Bioresour. Technol.* 181, 54-61.
- 432 32. Zheng, L., Dean, D.R., 1994. Catalytic formation of a nitrogenase iron-sulfur cluster. *J. Biol.*  
433 *Chem.* 269, 18723-18726.

434 **Figure Captions**

435 **Fig. 1** Biomass concentration as volatile suspended solids (VSS) during the cultivation of  
436 *Scenedesmus acuminatus* in the liquid digestates from the pulp and paper wastewater treatment  
437 plant biosludge anaerobically treated at thermophilic process (55 °C) without pretreatment (T),  
438 with pretreatment at 121 °C for 10 min (Tp) and at mesophilic process (35 °C) with pretreatment  
439 at 121 °C for 10 min (Mp).

440 **Fig. 2** The soluble ammonium-N (a), phosphate-P (b) and sulfate-S concentrations (c) during the  
441 cultivation of *Scenedesmus acuminatus* in the digestates from the pulp and paper wastewater  
442 treatment plant biosludges anaerobically treated at thermophilic condition (55 °C) without  
443 pretreatment (T), with pretreatment at 121 °C for 10 min (Tp) and at mesophilic condition (35 °C)  
444 with pretreatment at 121 °C for 10 min (Mp).

445 **Fig. 3** CODs concentration and removal efficiency (a), DOC concentration (b) and OD of the  
446 cultivation medium (c), during the cultivation of *Scenedesmus acuminatus* in the digestates from  
447 the pulp and paper wastewater treatment plant biosludge anaerobically treated at thermophilic  
448 process (55 °C) without pretreatment (T), with pretreatment at 121 °C for 10 min (Tp) and at  
449 mesophilic process (35 °C) with pretreatment at 121 °C for 10 min (Mp).

450

451 **Tables**

452 **Table 1** Compositions of the liquid digestates from the anaerobic digestion of the pulp and paper industry  
 453 biosludge produced at thermophilic process without pretreatment (T) and with pretreatment at 121 °C for  
 454 10 min (Tp) and at mesophilic process without pretreatment (M) and with pretreatment at 121 °C for 10  
 455 min (Mp).

	T	Tp	M <sup>a)</sup>	Mp
pH	8.2	8.3	8.5	8.3
Alkalinity <sup>a)</sup> (mg L <sup>-1</sup> CaCO <sub>3</sub> )	2700	3100	n.a.	2600
OD	0.59 ± 0.06	0.63 ± 0.08	0.34 ± 0.01	0.35 ± 0.01
Turbidity (NTU)	280	320	n.a.	290
NH <sub>4</sub> <sup>+</sup> -N (mg L <sup>-1</sup> )	380 ± 20	480 ± 20	350 ± 50	380 ± 0
NO <sub>3</sub> <sup>-</sup> (mg L <sup>-1</sup> )	<1.0	<1.0	<1.0	<1.0
NO <sub>2</sub> <sup>-</sup> (mg L <sup>-1</sup> )	<1.0	<1.0	<1.0	<1.0
TP (mg L <sup>-1</sup> )	33 ± 3	27 ± 1	28 ± 1	33 ± 2
PO <sub>4</sub> <sup>3-</sup> -P (mg L <sup>-1</sup> )	16 ± 3	15 ± 3	18 ± 1	15 ± 1
SO <sub>4</sub> <sup>2-</sup> -S <sup>a)</sup> (mg L <sup>-1</sup> )	17 ± 1.0	15 ± 0.1	17 ± 0.9	3 ± 0.1
CODs (mg L <sup>-1</sup> )	1200 ± 130	2000 ± 130	910 ± 30	1170 ± 10
BOD <sub>7s</sub> <sup>a)</sup> (mg L <sup>-1</sup> )	110 ± 5	60 ± 100	n.a.	60 ± 5
DOC (mg L <sup>-1</sup> )	300±4	540±110	370±40	150±0

456 a) The values with ± sign include standard errors

457 b) n.a.=data not available

458 **Table 2** Integrated processes of anaerobic digestion of pulp and paper industry biosludge and *Scenedesmus*  
 459 *acuminatus* cultivation in the undiluted liquid digestates from the anaerobic digestion of the biosludge

	Pretreatment	AD temperature (°C)	Microalgal cultivation duration (d)	Methane yield (L CH <sub>4</sub> kg <sup>-1</sup> VS)	Average microalgal biomass production (g L <sup>-1</sup> VSS)
M	No	35	14	18 <sup>a</sup>	8.8 <sup>b)</sup>
Mp	Yes	35	21	101 <sup>a</sup>	7.8
T	No	55	21	63 <sup>a</sup>	10.2
Tp	Yes	55	21	126 <sup>a</sup>	10.8

460 a) data originated from Asunis (2015)


461 b) microalgae were cultivated in 1.5-times diluted digestate (Tao et al., 2017)

462



463 **Figures**

464 **Fig. 1**

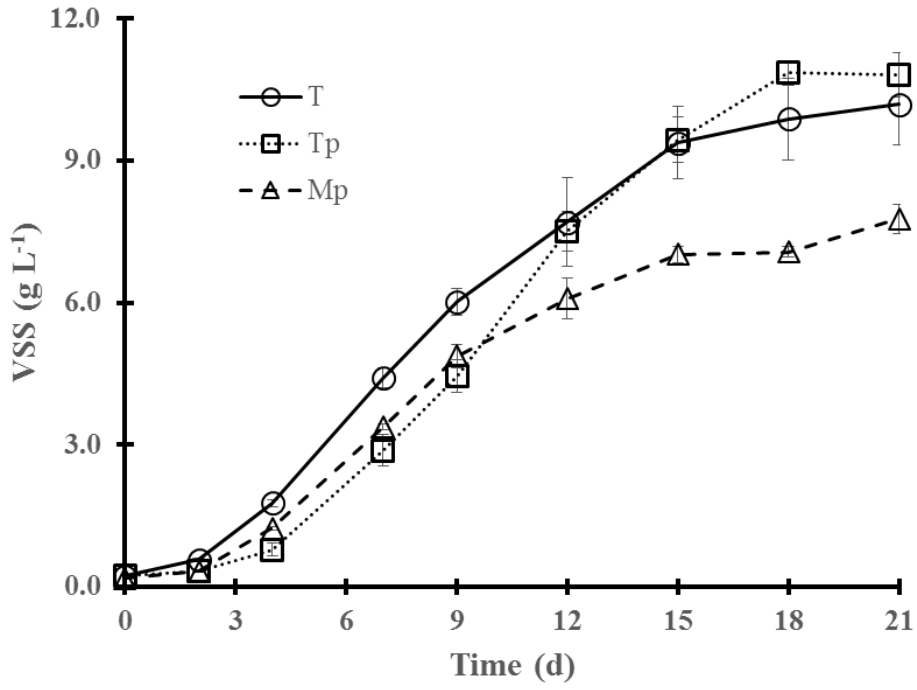

465

466

