



Title	Onsite survey on the mechanism of passive aeration and air flow path in a semi-aerobic landfill
Author(s)	Matsuto, Toshihiko; Zhang, Xin; Matsuo, Takayuki; Yamada, Shuhei
Citation	Waste Management, 36, 204-212 https://doi.org/10.1016/j.wasman.2014.11.007
Issue Date	2015-02
Doc URL	http://hdl.handle.net/2115/58483
Type	article (author version)
File Information	Waste Manage_36_2015.pdf



[Instructions for use](#)

1 **Onsite survey on the mechanism of passive aeration and air flow path**
2 **in a semi-aerobic landfill**

3
4 Toshihiko Matsuto*, Xin Zhang, Takayuki Matsuo, Shuhei Yamada

5
6 Laboratory of Solid Waste Disposal Engineering

7 Faculty of Engineering, Hokkaido University

8 Kita 13, Nishi 8, Kita-ku, Sapporo, Hokkaido 060-8628, Japan

9
10 *Corresponding author: Toshihiko Matsuto

11 Tel & Fax: +81-11-706-6825, E-mail: matsuto@eng.hokudai.ac.jp

12
13 **Abstract**

14 The semi-aerobic landfill is a widely accepted landfill concept in Japan because it
15 promotes stabilization of leachates and waste via passive aeration without using any
16 type of mechanical equipment. Ambient air is thought to be supplied to the landfill
17 through a perforated pipe network made of leachate collection pipe laid along the
18 bottom and a vertically erected gas vent. However, its underlying air flow path and
19 driving forces are unclear because empirical data from real-world landfills is
20 inadequate. The objective of this study is to establish scientific evidence about the
21 aeration mechanisms and air flow path by an on-site survey of a full-scale,
22 semi-aerobic landfill.

23 First, all passive vents located in the landfill were monitored with respect to
24 temperature level and gas velocity in different seasons. We found a linear correlation
25 between the outflow rate and gas temperature, suggesting that air flow is driven by a
26 buoyancy force caused by the temperature difference between waste in the landfill and
27 the ambient temperature. Some vents located near the landfill bottom acted as air
28 inflow vents. Second, we conducted a tracer test to determine the air flow path between
29 two vents, by injecting tracer gas from an air sucking vent. The resulting slowly
30 increasing gas concentration at the neighboring vent suggested that fresh air flow
31 passes through the waste layer toward the gas vents from leachate collection pipes, as
32 well as directly flowing through the pipe network. Third, we monitored the
33 temperature of gas flowing out of a vent at night. Since the temperature drop of the gas
34 was much smaller than that of the environment, the air collected at the gas vents was
35 estimated to flow mostly through the waste layer, i.e., the semi-aerobic landfill has
36 considerable aeration ability under the appropriate conditions.

37

38

39 **1. Background**

40 In recent years, landfill aeration has been considered to be one of the most
41 important options for the concept of sustainable landfill. While bioreactor landfills and
42 thermal/biological pretreatment are other options for landfill operation, landfill
43 aeration is mainly used in old landfills to “convert conventional anaerobic landfills
44 into a biological stabilized state” (Ritzkowski and Stegmann, 2012). Studies on landfill
45 aeration appeared in the late 1990s. Leikam et al. (1997) and Heyer et al. (1999)
46 reported on leachate quality, gas generation, and temperature build-up for the in situ
47 aeration of an old landfill in Germany. Raga and Cossu (2014) also carried out in situ
48 aeration to reduce biogas and leachate generation in Italy. In 2004, the Landfill
49 Aeration Task Group was established by the International Waste Working Group
50 (IWWG), and subsequently published a monograph “Landfill Aeration in 2007”
51 (Stegmann and Ritzkowski, 2007).

52 The semi-aerobic landfill, proposed by Hanashima in the 1970s, was categorized as
53 an “aerobic landfill” by Ritzkowski and Stegmann (2012), but it uses no mechanical
54 equipment for aeration. The key concept of a semi-aerobic landfill is the connection of
55 a leachate collection pipe with gas vents that directly connect to the atmosphere
56 (Figure 1). According to Matsufuji (1998), this idea was first developed in the early
57 1970s when the biochemical oxygen demand (BOD) in leachate from an anaerobic
58 landfill, which was used as a reference for evaluating the effect of forced aeration, was
59 found to be as low as that in aerobic landfills. Hanashima suggested that the BOD in
60 the leachate was lowered by the air supplied from the leachate collection pipe, which
61 was directly connected to the atmosphere. At this point, only the leachate collection
62 pipe was considered as an air supply source. However, as the depth of the waste layer
63 increased as landfill works proceeded, air supply capacity was limited by the low
64 permeability of the dumped waste load and by the increased distance from the leachate
65 collection pipe. Therefore, due to the increase in the depth of the waste layer, the air
66 supply pipe was extended by the construction of vertical gas vents that were connected
67 to the leachate collection pipe.

68 Unlike aerobic landfills with forced injection or extraction, in which the flow paths
69 of air and gas can be estimated as a physical process, the air and gas flows in a
70 semi-aerobic landfill have simply been assumed. Figure 1 shows an assumed air flow
71 in semi-aerobic landfills, i.e., air flows into the waste layer both from the leachate
72 collection pipe and from the gas vents, as indicated by the arrows in the figure. This

73 assumption is naturally derived from the idea to extend the leachate collection pipe in
74 the vertical direction as mentioned above. The driving force of air flow in semi-aerobic
75 landfills is considered to be the buoyancy force caused by temperature differences
76 between the waste in the landfill and the atmosphere. Matsufuji and Tachifuji (2007)
77 explained that air and gas, warmed by the heat generated during the aerobic
78 biodegradation of waste, tend to rise and get vented through the gas vents. Therefore,
79 the negative pressure produces a siphoning effect that draws ambient air into the
80 leachate collection pipe. The direction of air flow around the gas vents shown in Figure
81 1 is somewhat contradictory to this statement by Matsufuji.

82 There have been numerous studies on semi-aerobic landfills in Japan in the past
83 half century (Park et al.(1997), Hirata et al.(2012), for example). These studies were
84 mostly conducted using a cylindrical lysimeter packed with various types of waste, in
85 which semi-aerobic conditions were realized by opening the bottom and the top of the
86 lysimeter to expose the waste to the atmosphere. An anaerobic lysimeter that was
87 closed at both ends was usually used as a control. In most studies, the leachate was the
88 main concern with respect to environmental pollution, and gas was monitored only for
89 the sake of determining the mass balance of carbon.

90 On the other hand, few studies have been conducted on a full-scale, semi-aerobic
91 landfill, especially with regard to aeration. Yanase et al. (2010) measured the air flow
92 rate into the leachate collection pipe during different seasons of the year. They showed
93 that the air flow rate negatively correlated with the ambient temperature: a large flow
94 rate occurred in winter and there was no air flow in summer. This fact supports
95 Matsufuji and Tachifuji's (2007) assumption that the driving force of air flow is the
96 temperature difference. By measuring increases in the air and gas flows in the gas
97 vents, Kim et al. (2010) showed that air and gas did in fact flow into the gas vents from
98 waste layer. Although the study was conducted in a landfill where gas vents were
99 constructed after the closure of the landfill, and they were not connected to the
100 leachate collection pipe, an air flow through the waste toward the gas vents had been
101 expected in this semi-aerobic landfill. Yanase (unpublished data, 2004) recorded the
102 temperature of waste and gas emitted from a gas vent continuously for a year at the
103 same landfill, as in Yanase et al. (2010). Two temperature sensors were located 3 m
104 away from each other at a depth of 3 m, and these two temperatures were exactly the
105 same except for short term fluctuations in the gas temperature. Combining the results
106 of these latter two studies, we can assume that air flows through the waste layer, and
107 warm air collects at gas vents.

108 These few studies of full-scale landfills give only fragmented information about
109 aeration in semi-aerobic landfills. For example, Yanase et al.(2010) did not measure
110 the gas flow rate at gas vents, and Kim et al. (2010) surveyed only a few gas vents.
111 There is inadequate data on the overall aeration process in landfills. Therefore, based
112 on the assumption made by Matsufuji and Tachifuji (2007), this study aims to establish
113 scientific evidence for the aeration mechanisms and air flow path by the on-site survey
114 of a full-scale, semi-aerobic landfill.

115

116 **2. Surveyed landfill and methodology**

117

118 **2.1 Description of the landfill**

119 This study was conducted at an industrial solid-waste landfill in Sendai, Japan,
120 which started operations in November 2003. There are two zones, with a total area of
121 78,241 m² and a volume of 2.1 × 10⁶ m³. The second zone, in which our on-site study
122 was conducted, started receiving waste in November 2009. A typical waste layer is 2.5
123 m thick and covered daily by a 10- to 20-cm-thick soil layer. In June 2013, there were
124 eight waste layers, and the total thickness of the landfill was about 25 m, including
125 30–50 cm of intermediate cover. The waste composition on a weight basis is as
126 follows: waste plastics (28%), demolition waste (20%), waste metals (8%),
127 incineration residues (7%), and sludge (12%) which is the main source of organic
128 materials. The other 25% consists of mostly incombustible waste, such as pretreated
129 waste and ash.

130 Figure 2 shows the layout of the leachate collection pipes and the passive gas
131 vents, indicated by the solid line and symbols. The main leachate collection pipe ends
132 in an open leachate collection pit. All gas vents are connected to the leachate collection
133 pipes, a common practice in semi-aerobic landfills. Typically, vertical gas vents are
134 constructed on top of the main leachate collection pipe, and secondary leachate
135 collection pipes are used as inclined gas vents that branch out toward the peripheral
136 area of the landfill. In this landfill, as shown in the cross-section view No. 7–N8–PN14
137 in Figure 2, vertical gas vents are also located at the bent parts of the leachate
138 collection pipes, for example N1–N9. As a result, there are three types of gas vents,
139 which are indicated by different symbols and identified using the following numbers:

- 140 No. 1–9: gas vents on the main leachate collection pipe
141 N1–N9, S1–S7: gas vents on the bends of the branching leachate
142 collection pipes
143 PN1–PN16, PS1–PS17: gas vents on the open end of the branching leachate

144 collection pipes.

145 The diameter of the gas vents is 30 cm (inner diameter is 28 cm), except for vent No. 1,
146 which is 60 cm in diameter. The diameter of the main leachate collection pipe is 60 cm;
147 the length from vent No. 1 to No. 9 is approximately 280 m (Nos. 1–3: 70 m, Nos. 3–6:
148 110 m, Nos. 6–9: 100 m). The intervals between the gas vents are in the range of 15 to
149 35 meters. Both the leachate collection pipes and the gas vents are perforated.

150

151 **2.2 Survey method**

152

153 (1) Survey schedule

154 We visited the site on three occasions—on June 18 and 19, October 24 and 25, and
155 November 15 and 16, 2013. In June, all gas vents were identified and numbered, as
156 shown in Figure 2, and we determined the gas velocity and temperature at the exits of
157 all gas vents. The composition of gas exiting the vents was measured at those vents
158 from which the gas flow rate was relatively high. In October, we determined the
159 altitudes of the gas vents, and the gas flow velocity and temperature at all gas vents
160 was measured again. We also conducted a preliminary trial of a tracer gas test to
161 estimate the response time for gas monitoring. The injection point of the tracer gas was
162 determined based on the June survey. In November, we conducted the tracer gas test
163 twice. Temporal variations in gas flow measurements were identified, and the change
164 in gas temperature at night was also measured.

165

166 (2) Gas velocity and temperature

167 The gas velocity and temperature at the exit of the gas vents were measured using
168 an anemometer (Kanomax 6531; detection range of 0.01–30 m/s and an accuracy of
169 $\pm 2\%$) and a digital thermometer (Thermo PORT TP-100mR; detection range of -56 to
170 306°C and an accuracy of $\pm 0.1^\circ\text{C}$). We recorded a 10-s average gas flow velocity
171 because of the high fluctuations in the flow velocity. Before measuring the velocity
172 and the temperature, we identified the direction of the gas flow at the exit of the gas
173 vents using a smoke tube (GASTEC No. 501). This was very useful due to the
174 difficulty in determining the gas flow direction when the flow velocity was small.

175 The anemometer and thermometer sensors were inserted into the gas vents as
176 close as possible to ground level (see Figure 4(a)). The altitude of the gas vents was
177 measured by GPS, and photos were taken to record the conditions around these vents,
178 such as the slope of the surrounding area.

179

180 (3) Gas composition

181 Gas composition was measured using a portable gas analyzer (GA2000 Plus,
182 Geotechnical Instruments). The analyzer was equipped with a pump working at a
183 sampling rate of 300 ml/min. A sampling tube was lowered into a gas vent to a depth
184 of 50 cm below ground level, and measurements were recorded after 60 s of sampling.
185 The presence of five different gases (CH₄, CO₂, O₂, CO, H₂S) were simultaneously
186 detected at ranges of 0%–70%, 0%–40%, 0%–25%, 0–2000 ppm, and 0–500 ppm,
187 respectively. The accuracy of the measurements for CH₄, CO₂, and O₂ were ±0.5%,
188 ±3%, and ±0.1%, respectively. The amount of N₂ was determined by the balance of
189 CH₄, CO₂, and O₂.

190

191 (4) Tracer gas test

192 Carbon monoxide (CO), which is a minor component in landfill gas, was used as a
193 tracer gas because of the ease with which it can be continuously monitored with a
194 conventional gas meter. CO was detected neither in June (gas composition shown in
195 Figure 7) nor in November. Pure CO gas (100%) was continuously injected for about
196 two hours, and the output concentration was recorded during the tracer gas injection
197 using a carbon monoxide meter (GCO-2008; SATOSHOUJI INC.), or occasionally by
198 a portable gas analyzer (GA2000 plus, Geotechnical Instruments). The location where
199 CO injection took place and the location of the effluent is described in section 4.1.

200

201 **3. Mechanism of aeration**

202

203 **3.1 Gas flow rate at passive vents**

204 The gas flow rates at the gas vents, calculated from the data obtained in June, are
205 plotted in Figure 3. The area of the circle is proportional to the gas flow rate. Flow rate
206 was not determined at several vents, either because they were covered or because of
207 some other reason. Unexpectedly, air flowed in at several gas vents, as shown by the
208 smoke travel path in Figure 4(b). In this context, the gas vents are either called inflow
209 or outflow vents, according to the gas flow direction.

210 As shown by the contour line in Figure 3, most of the inflow vents were located at
211 low altitudes. According to the theoretical functioning of semi-aerobic landfills, air is
212 drawn in through the leachate collection pipe (see Figure 1). In this landfill, however,
213 gas vents also took in air if they were located near the landfill bottom, even though
214 waste was deposited 15m below the exits of inflow vents. In June, we found the top of
215 the leachate pit, into which leachate was discharged from the collection pipe, covered

216 with a nonwoven fabric, while it had not been covered in October. Regardless of these
217 different conditions of the leachate collection pit, vents No. 1 and PN1–PN5
218 functioned as inflow vents during both months.

219 The air flow rate from the end of the leachate collection pipe (calculated using the
220 average gas velocity and the area of the collection pit) was almost equivalent to that of
221 vent No. 1 in June. The sum of the flow rate was 22.6 (inflow) and 42.6 (outflow) in
222 June, and 53.4 (inflow) and 43.2 (outflow) in October (in m^3/min). One third of the
223 inflow rate in October was derived from the gas inflow of the leachate pit. While the
224 smoke exhibited a straight streamline in the outflow vents, there was turbulence in the
225 inflow vents. Inflowing air through gravel deposited around the vent was observed at
226 some of the inflow vents. Therefore, the estimation of the inflow rate is less accurate.

227 By using an inflow rate of $50\text{m}^3/\text{min}$ for 7.8 ha, the average air flow rate per
228 hectare is estimated to be $385\text{ m}^3/\text{h}$ in this landfill. As for an aerobic landfill, the
229 average aeration rate in the eight-year in situ aeration project in Germany was
230 calculated to be $325\text{ m}^3/\text{hr}$, using an average aeration flow rate of $1040\text{ m}^3/\text{hr}$
231 (Ritskowski and Stegmann, 2007) and a total area of 3.2 ha (Heyer et al., 2001).
232 Although the inflow rate is not entirely accurate, and this volume is not used solely for
233 the aeration of waste in this study (this ratio is discussed later in section 4.3), this
234 comparison is helpful in understanding the aeration capacity of a semi-aerobic landfill.

235

236 **3.2 Relationship between gas flow rate and gas temperature**

237 The relationship between the gas flow rate and gas temperature for the outflow vents
238 is shown in Figure 5. The number of gas vents plotted in the figure is 35 and 29 in June
239 and October, respectively, and the ambient temperature is also shown. In both months,
240 a linear correlation was found between these parameters, i.e., as the gas temperature
241 increased, the gas velocity also increased. As indicated by their intersection on the
242 x-axis, this figure supports the assumption that the temperature difference between the
243 waste and the environment is the driving force behind the gas flow.

244 Therefore, the gas temperature is the most easily measured indicator of the gas flow
245 rate. A higher temperature signals a higher rate of gas flow. If the temperature is equal
246 to that of the environment, either air is drawn into the gas vents or no gas flow exists.

247

248 **3.3 Buoyancy effect**

249 The positive correlation between gas temperature and gas flow rate suggests that
250 air movement is driven by a buoyancy force. Considering a homogeneous block of
251 waste, with the depth and area being designated as H and A, respectively (Figure 6),

252 the buoyancy force working on the air inside the block can be expressed as follows:

$$253 \quad F = \varepsilon(\rho(T_e) - \rho(T_w)) \cdot A \cdot H \cdot g, \quad (1)$$

254 where ε is the porosity of the waste and ρ is the density of the air [kg/m^3]. T_e and T_w
255 are the absolute temperatures of air in the environment and at the waste layer,
256 respectively. Applying Darcy's law and the equation $dP = F/A$, Darcy's velocity (flow
257 rate per unit area [m/s]) is expressed as follows:

$$258 \quad v = k_a \cdot dP/dz = -k_a \cdot F/(A \cdot H), \quad (2)$$

259 where k_a is the permeability coefficient [$\text{m}^2/(\text{s} \cdot \text{Pa})$], and dP is the pressure difference
260 between the top and the bottom of the block. Using Eq. 1 and the ideal gas law

$$261 \quad \rho = M_w \cdot P_0/(R \cdot T), \quad (3)$$

262 where M_w is the molar mass of air [kg/mol], P_0 is the standard atmosphere pressure at
263 0°C , R is the gas constant [$\text{J}/(\text{mol} \cdot \text{K})$], and T is the absolute temperature of air [K], we
264 can calculate the gas velocity as follows:

$$265 \quad v = \varepsilon k_a \cdot M_w \cdot P_0 \cdot g/R(1/T_e - 1/T_w) = \varepsilon \cdot k_a \cdot M_w \cdot P_0 \cdot g/R(T_w - T_e)/T_e \cdot T_w. \quad (4)$$

266 Although this model seems too simple to simulate the gas flow velocity in a landfill,
267 the positive linear correlation shown in Figure 5 supports this hypothesis. Low
268 permeability of waste might be a reason for the low gas flow rate at some vents.

269 Figure 7 shows the gas composition and velocity at the exit of the outflow gas
270 vents. The residual fraction is the estimated nitrogen. Air is the main component of the
271 gas, and the concentrations of CH_4 and CO_2 are very low. These low ratios of landfill
272 gas components are reasonable when considering the effluent air supply from the
273 environment stated in section 3.1. Even when landfill gas is generated, its amount is
274 small compared with that of air.

275

276 **4. Air flow path in the landfill**

277

278 **4.1 Scheme of the tracer test**

279 To obtain quantitative data on the air flow dynamics in this semi-aerobic landfill,
280 a tracer gas test was conducted on November 15, 2013. The idea was that if air flowed
281 through the waste layer from the leachate collection pipe, it would need a longer travel
282 time to leave the gas vents as compared with just flowing through the pipes and vents.

283 CO gas was injected into an inflow vent, and the gas concentration was
284 continuously measured at the nearest and other outflow vents. The CO concentration
285 instantly increased from zero to a specific value at the inflow vent; therefore, this was
286 called the "step response test." The tracer gas was injected into either vent No. 1 or
287 PN1. Vent No. 1 was selected because it was the first gas vent on the main leachate

288 collection pipe, and it had the largest air inflow rate. The reason for selecting PN1 was
289 its straightforward connection with other vents (see Figure 2). No. 1 was connected to
290 N1, N2, No 2, PS1, and other vents, and air from the end of the leachate collection pipe
291 was mixed with air from those vents. PN1 was directly connected to N1.

292 Injection of the CO gas into PN1 started at 11:36, and the CO concentration was
293 continuously recorded at N1 using the carbon monoxide meter (GCO-2008). The CO
294 concentration at neighboring gas vents (Nos. 2 and 3, N1–N3, and PN2) was also
295 measured using a portable gas analyzer. Based on a preliminary test conducted in
296 October, the CO gas flow rate was set at 1 L/min to keep the gas concentration lower
297 than 1000 ppm, which is the highest detectable concentration for the GCO-2008 meter.
298 Gas injection continued until 13:59 with a total running time of 140 min.

299 In the same way, CO was injected at 14:29 into vent No. 1, with a gas flow rate
300 of 10 L/min. The CO concentration was monitored using the GCO-2008 meter at vents
301 Nos. 2 and 3, and the CO concentrations at other gas vents (No. 4 and 5, N1–N3, S6,
302 PS10, and PS11) were also measured two to three times using the GA2000 plus the gas
303 analyzer. CO injection continued for 110 min until 16:30. As shown in Figure 8(b), CO
304 injection into PN1 did not have any influence on the CO concentration at vents Nos.2
305 and 3.

306 The input CO concentration was estimated to be 600 ppm at PN1 and 780 ppm at
307 vent No. 1. These figures were calculated from the air velocity and the CO gas flow
308 rate. At PN1, CO concentration was also measured using the GCO-2008 meter, which
309 was lowered into the gas vents to a depth of approximately one meter below ground
310 level to prevent turbulence.

311

312 **4.2 Air flow path through the waste layer**

313 Figure 8(a) shows the CO response at vents Nos. 2 and 3 when CO was injected
314 into vent No. 1. If the air flowing in at vent No. 1 had passed only through the leachate
315 collection pipe and the gas vents, the CO response would have suddenly increased at
316 the travel time of the air flowing through the pipe, and it would have a constant value
317 thereafter. In Figure 8(a), however, after the sudden increase at around 4 minutes of
318 travel time, the CO concentration slowly increased at both vents Nos. 2 and 3. The
319 gradually increasing response curve suggests that there was an air flow passing
320 through the waste layer with a highly variable residence time, ranging from several
321 minutes to hours, which reflect the distribution of the air's travel distance in the waste
322 layer. The CO tracer gas was also detected at vents Nos. 4 and 5, and they showed an
323 increasing trend similar to that observed in Nos. 2 and 3. The detection of CO at vents

324 PS10 and PS11 tells us that the leachate collection pipe supplied air through the
325 majority of the interconnected leachate collection pipework.

326 By integrating all the information obtained in Figure 8(a), we estimated the air
327 flow paths, as shown in Figure 9(a). The air-containing tracer gas injected at vent No. 1
328 flows in multiple directions through the leachate collection pipe and the gas vents: far
329 downwards and to the sides. If we focus on the CO gas reaching vent No. 2, there are
330 two paths of the tracer gas: the flow passes through the pipe and through the waste,
331 which are denoted in the figure by P_{pipe} and P_{waste} , respectively. P_{pipe} has a travel time
332 of around 4 min between vents Nos. 1 and 2. In contrast, P_{waste} consists of diverse
333 paths in three-dimensional directions, since the flow might occur between any of the
334 segments of the leachate collection pipe where CO gas exists and vent No. 2. The
335 reason why the response curve in Figure 8(a) appears to be increasing after 110
336 minutes (not having attained a steady state) might be due to the existence of the longer
337 distance flow to vent No. 2.

338 Figure 8(b) shows the CO response when the tracer gas was injected into PN1.
339 Unlike the response at Nos. 2 and 3, there was no evident P_{pipe} path between PN1 and
340 N1. We consider this to be due to the clogging of the PN1 vent. The estimated aeration
341 path for the CO injection from PN1 is shown in Figure 9(b).

342 CO gas was selected for the tracer test for the ease with which it can be
343 continuously monitored. Since CO is not inert and could have been oxidized as it
344 passed through the waste layer during the tracer test, the CO concentration in Figure 8
345 might have been lower than the actual value.

346 In Figures 8(a) and 8(b), the lower CO concentration at vent No. 2 as compared
347 with the concentration at vent No. 1, and the lower CO concentration at N1 compared
348 with that at PN1, were obviously influenced by air coming in through the leachate
349 collection pipe, and through from the inlet of vent No. 1, respectively.

350

351 **4.3 Aeration of waste**

352 The tracer test studied the air flow path from one inflow vent to the other
353 outflow vent. In terms of aeration in a semi-aerobic landfill, the ratio of air passing
354 through a waste or pipe network before reaching the gas vents is extremely important.
355 The air flowing out of a vent is a collection of air originating from multiple parts of the
356 leachate collection pipes and inflow vents. If most of the air entering into a landfill
357 travels only through the leachate collection pipe and gas vents, the air will have little
358 effect on the aeration of the waste. In Figure 10, we show a schematic of two paths to a
359 gas vent, in which f is a ratio of air flowing in a pipe, and $(1-f)$ is the ratio of air

360 passing through the waste layer. Using the symbols in the figure, the energy balance
361 produces the following equation.

$$362 \quad T \cong f T_e + (1 - f) T_w. \quad (2)$$

363 Waste mass has a large heat capacity, so the temperature of the air passing through the
364 waste layer does not change during the day, i.e., T_w can be assumed to be constant. The
365 differential form of Eq. (1) is

$$366 \quad dT/dt = f dT_e/dt \quad (2)$$

367 Therefore, when comparing temperature changes between the outflow gas and the
368 ambient air, the ratio of the two paths can be estimated. For this purpose, a
369 thermometer (CENTER314), connected to a K-type thermocouple (detection range of
370 -200 to 1000°C), was placed at vents No. 2 and No. 3, and N1 at around noon on
371 October 24, and remained there until 11:00 the next day.

372 Figure 11 shows the monitoring results of the temperature of air and gas at vents
373 No. 3 and N1. Data for the first four hours are missing due to problems with placement
374 of the thermometers, and solar radiation caused a sharp increase in the temperature 20
375 h after monitoring started. Because the temperature change of the gas is smaller than
376 that of the ambient temperature, different scales were used in Figure 11. As shown by
377 the regression lines, the range of the change in gas temperature was about 20% (i.e., $f =$
378 0.2) when compared to the change in the environmental temperature at vent No. 1. This
379 means that a large portion of the air collected at the gas vents passed through the waste
380 layer, and this ratio was almost the same for vent No. 2. As for N1, the temperature
381 change is very small, which means that the air collected at N1 is mostly passing
382 through the waste layer.

383

384 **4.4 Fluctuation of air flow**

385 The gas flow measured in the waste mass was not stable. There is a negative
386 correlation in the CO concentration between vents Nos. 2 and 3, especially at 60, 72,
387 and 90 minutes, as shown in Figure 8(a). This suggests that the air flow path through
388 the waste randomly changed between neighboring vents, i.e., the gas was occasionally
389 pulled more strongly into one vent, and this situation reversed later. Such gradual
390 changes of the gas flow was observed at other vents as well. For instance, Figure 11
391 shows consecutive measurements of 10 s on average. Because the velocity was
392 measured at one vent at a time, each measurement series is independent of the others.

393 A sudden change in flow direction was observed on October 24th. Gas flowed out at
394 N6 (1.10 m/s), but on the next day, N6 became the inflow vent (0.33 m/s). Rain during
395 the night might have caused this change of direction.

396

397 **5. Conclusion**

398

399 Our objectives were to clarify the aeration mechanisms and air flow paths occurring
400 in a semi-aerobic landfill. The main findings described in this paper are as follows:

401 1) Part of the fresh air introduced from the environment into the leachate collection
402 pipe (and from the inflow vents in this landfill) flows through the waste layer toward
403 the gas vents, in addition to passing through the pipes, as suggested by the tracer
404 response curve in section 4.2.

405 2) Air flow is driven by a buoyancy force caused by the temperature difference
406 between the waste in the landfill and the ambient temperature, as suggested by the
407 positive correlation between gas velocity and gas temperature in section 3.2.

408 3) The air collected at gas vents was estimated to flow mostly through the waste
409 layer, as suggested by the smaller decrease of temperature in the gas released from the
410 vent than from the environment, as discussed in section 4.3.

411 Therefore, the aforementioned assumption made by Matsufuji and Tachifuji (2007)
412 can be revised as follows:

413 In a semi-aerobic landfill, which has a structure that is open to the environment, the
414 temperature of waste is increased by heat released from aerobic biodegradation. Due to
415 a buoyancy force caused by the temperature difference between the waste and the
416 environment, warmed air and gas in waste layer tend to rise and be vented through the
417 gas vents, and fresh air is drawn from the leachate collection pipe laid at the bottom of
418 landfill.

419 When considering a semi-aerobic landfill as an aerobic-landfill technology, the
420 most important finding in this study is its aeration ability: there exists a
421 three-dimensional aeration path between the leachate collection pipes in the bottom
422 and the vertically installed vents. Compared with the assumed air flow in Figure 1, in
423 which air is supplied in the vicinity of the leachate collection pipe and gas vents, the
424 waste volume to be aerated is considerably extended. The layout of the pipe network
425 should be designed with respect to the possible air flow paths. Both the leachate
426 collection pipe and the passive gas vents are key elements in a semi-aerobic landfill
427 because the former functions as a conduit supplying air to the landfill, and the latter
428 functions as an exit for the heated air. It is not necessary to connect the gas vents to the
429 leachate collection pipe because the connection only increases the air flow through the
430 pipe, and this has little effect on aeration.

431 The aeration ability of a semi-aerobic landfill is influenced by various factors such

432 as waste composition, compaction of the waste, permeability, type and thickness of the
433 cover material, and temperature. This study was carried out in a landfill that has a
434 moderate amount of organic matter and a number of vents located at intervals of 15 to
435 35 meters, and it was situated in a cool region. The performance of semi-aerobic
436 landfills in other places, such as South Asia for example, is unknown. A high food
437 waste ratio might lead to lower permeability. High ambient temperatures will reduce
438 the temperature difference, and consequently the buoyancy force may become smaller.
439 Even in Japan, waste composition, the layout of pipe networks, and the diameter of
440 pipes are not the same. An on-site study of a full-scale landfill is definitely needed for
441 the assessment of the semi-aerobic landfill's aeration capabilities and its applicability
442 in specific conditions, and to develop better designs of the semi-aerobic landfill.

443

444 **Acknowledgements**

445 The authors would like to express their deepest appreciation to the members of
446 Sendai-Kankyo-Kaihatsu Co. Ltd. for their valuable help during our on-site survey.

447

448 **References**

- 449 Heyer, K. -U., Hupe, K., Heerenklage, J., Ritzkowski, M., Dalheimer, F., and
450 Stegmann, R., 1999. Aeration of old landfills as an innovative method of process
451 enhancement and remediation, Sardinia 1999, IV, pp.563-571
- 452 Heyer, K. -U., Hupe, K., Ritzkowski, M., and Stegmann, R., 2001. Technical
453 implementation and operation of the low pressure aeration of landfills, Sardinia
454 2001.
- 455 Hirata, O, Matsufuji, Y. Tachifuji, A Yanase, R., 2012. Waste stabilization mechanism
456 by a recirculatory semi-aerobic landfill with the aeration system, J. Material Cycles
457 and Waste Management, 14(1), 47-51.
- 458 Kim, H. J., Yoshida, H., and Matsuo, T., 2010. Air and landfill gas movement through
459 passive gas vents installed in closed landfills. Waste Management 30 (3),
460 pp.465-472.
- 461 Leikam, K., Heyer, K. -U., and Stegmann, R., 1997. In situ stabilization of completed
462 landfills and old sites, Sardinia 1997, IV. pp.451-462
- 463 Matsufuji, Y. and Tachifuji, A., 2007. The history and status of semi-aerobic landfills
464 in Japan and Malaysia. In: Landfill aeration, CISA publisher, pp.109-116.
- 465 Matsufuji, Y., History of Semi-aerobic landfill (in Japanese), Mizu (water), 1998,
466 pp.21-26, 65-75.

- 467 Park, S., Kusuda, T., Shimaoka, T., Hanashima, M., 1997. Simulation on behavior of
468 pollutants in semi-aerobic landfill layers (in Japanese), J. of the Japan Society of
469 Waste Management Experts, 8(4), 147-156.
- 470 Raga, R., Cossu, R., 2014. Landfill aeration in the framework of a reclamation project
471 in Northern Italy. Waste Management 34, 683-691
- 472 Ritzkowski, M. and Stegmann, R., 2007. Biostabilizing a MSW landfill by means of in
473 situ aeration – results of an eight-year project (Stegmann, R. and M.Ritzkowski
474 (ed.) Landfill aeration, CISA, 2007)
- 475 Ritzkowski, M. and Stegmann, R., 2012. Landfill aeration worldwide: Concepts,
476 indications and findings, Waste Management, 32, pp.1411-1419
- 477 Stegmann, R. and Ritzkowski, M (ed.) Landfill aeration, CISA, 2007
- 478 Yanase, R., Matsufuji, Y., Tashiro, T., and Nakatomi, S., 2010. Study on the gas flow of
479 semi-aerobic landfill. Proceedings of the 21th Annual Conference of the Japan
480 Society of Material Cycles and Waste Management Experts, pp.539-540.

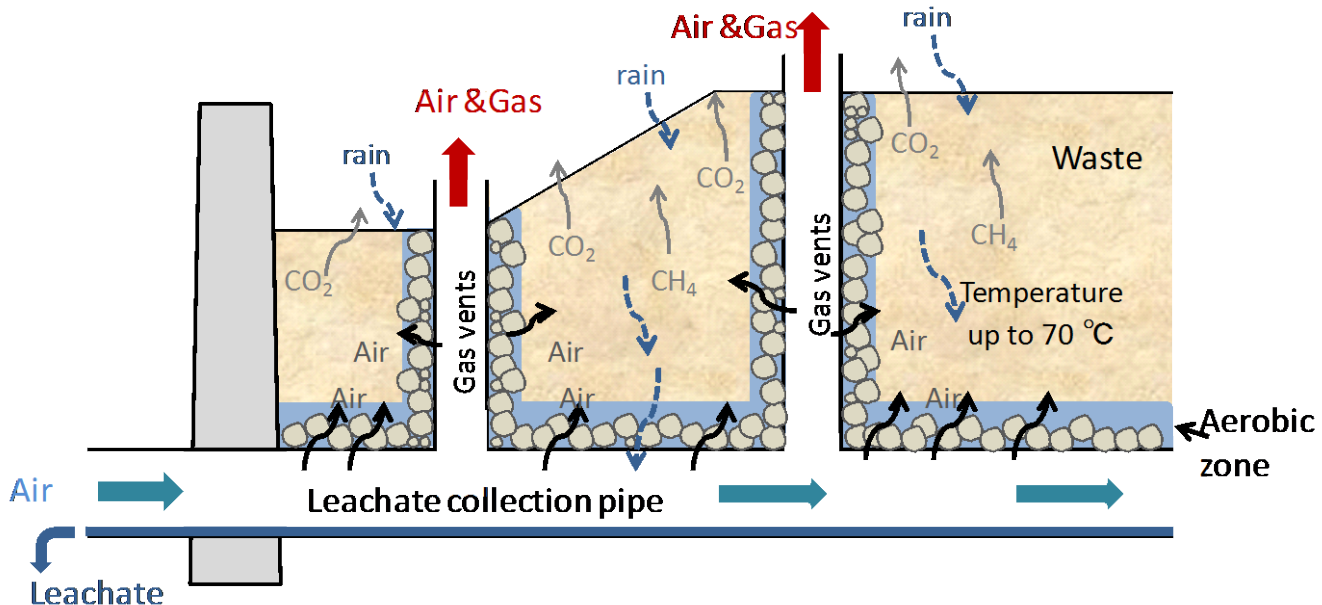


Figure 1 Generally assumed air and gas flow in semi-aerobic landfills


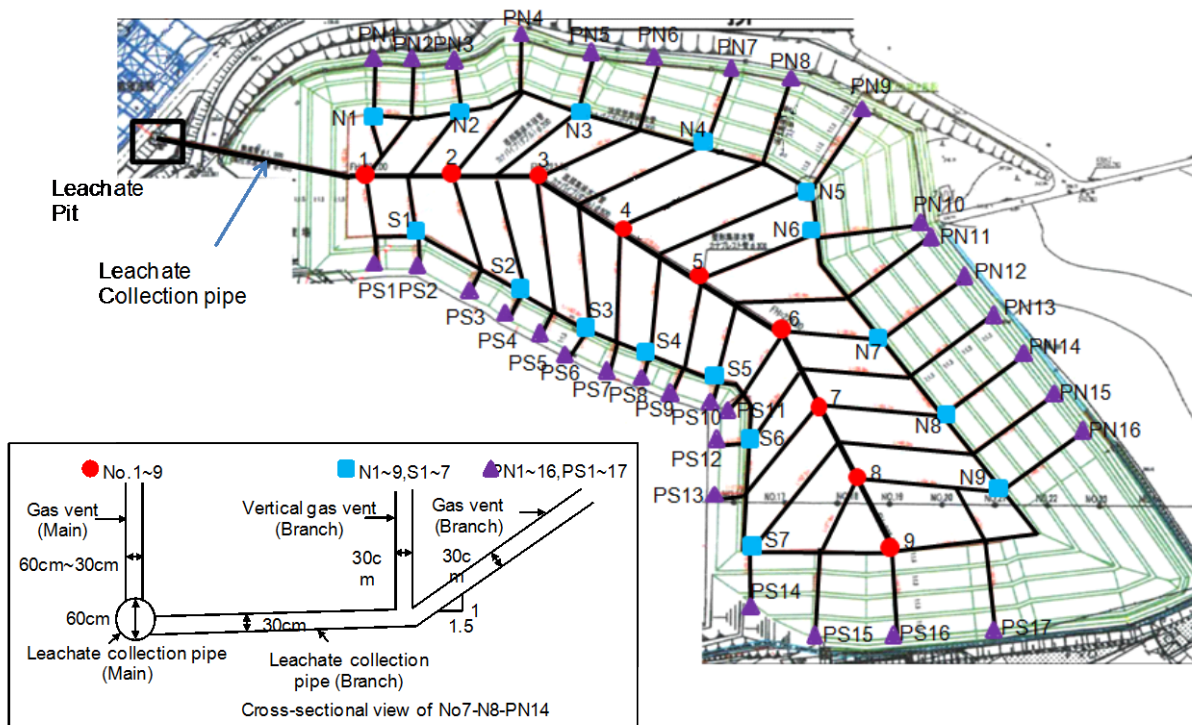


Figure 2 Layout of leachate collection pipes and gas vents in a surveyed semi-aerobic landfill



2013.6.19

Figure 3 Gas flow rate at gas vents in June

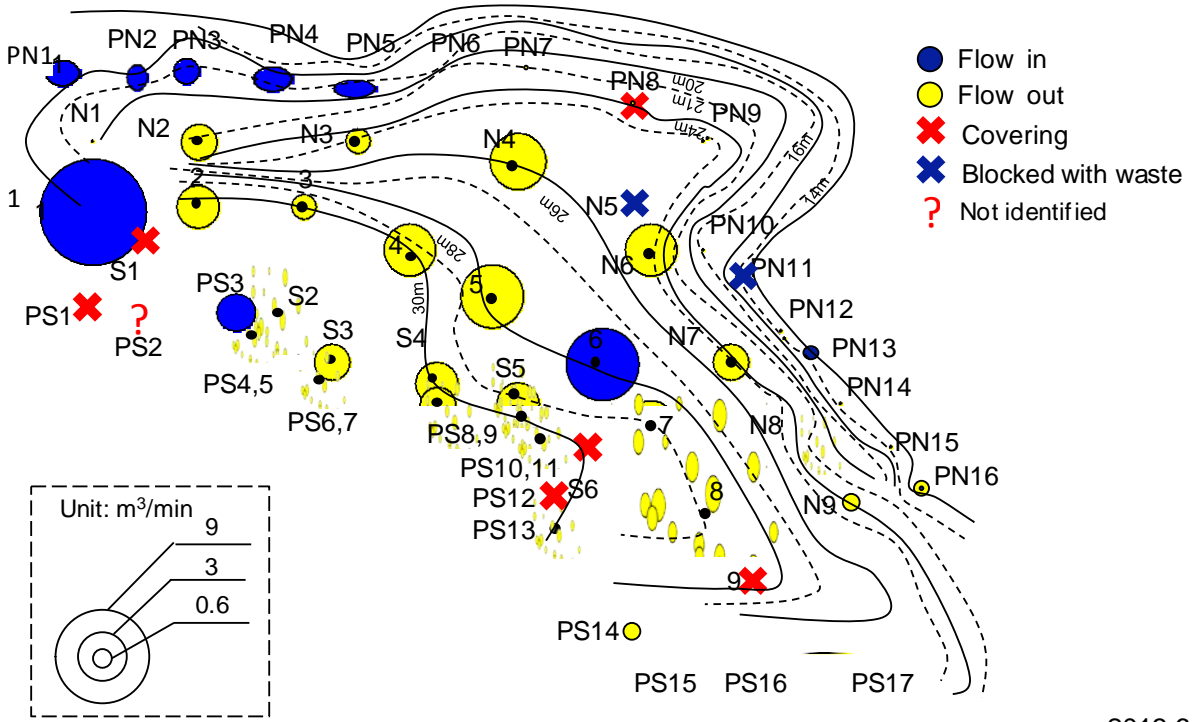

(a) Outflow vent (No.3)



(b) Inflow vent (PN5)

Figure 4 Identified gas flow by smoke tube

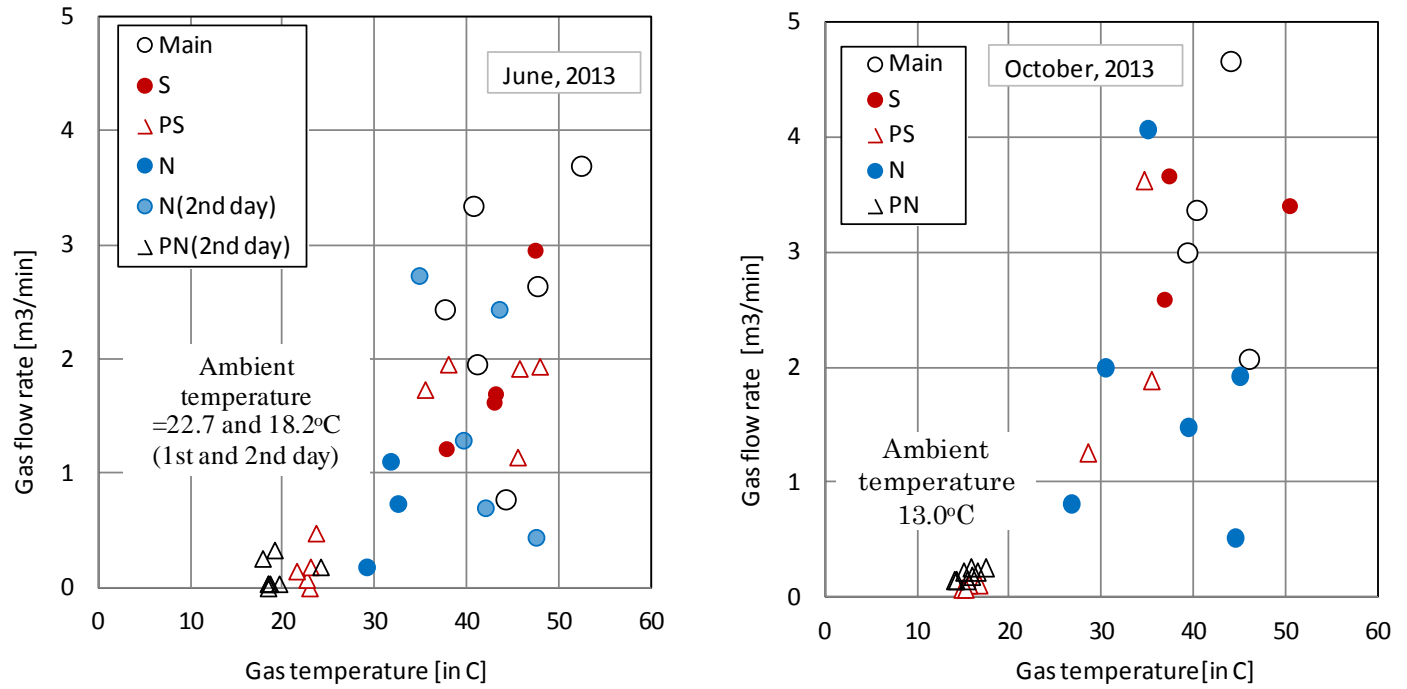


Figure 5 Correlation between gas temperature and flow rate at outflow vents

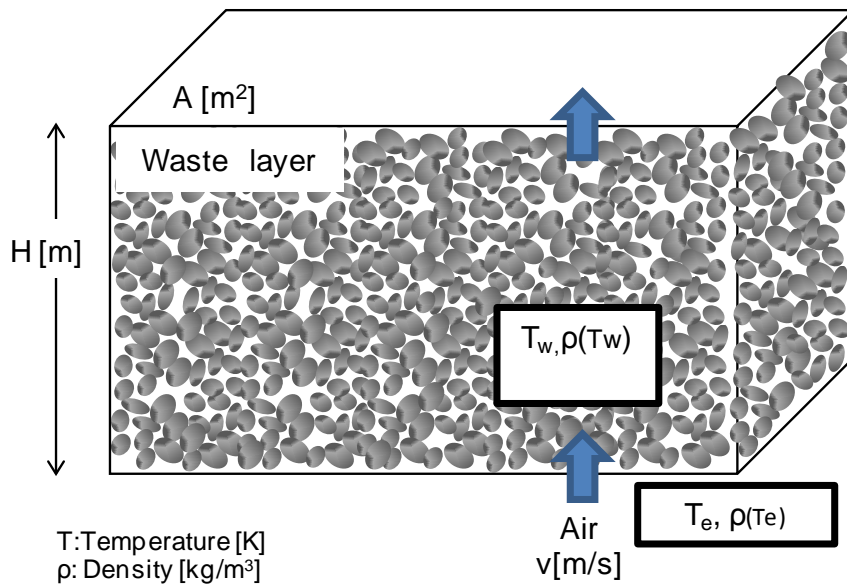


Figure 6 Simplistic model of buoyancy effect in porous waste layer



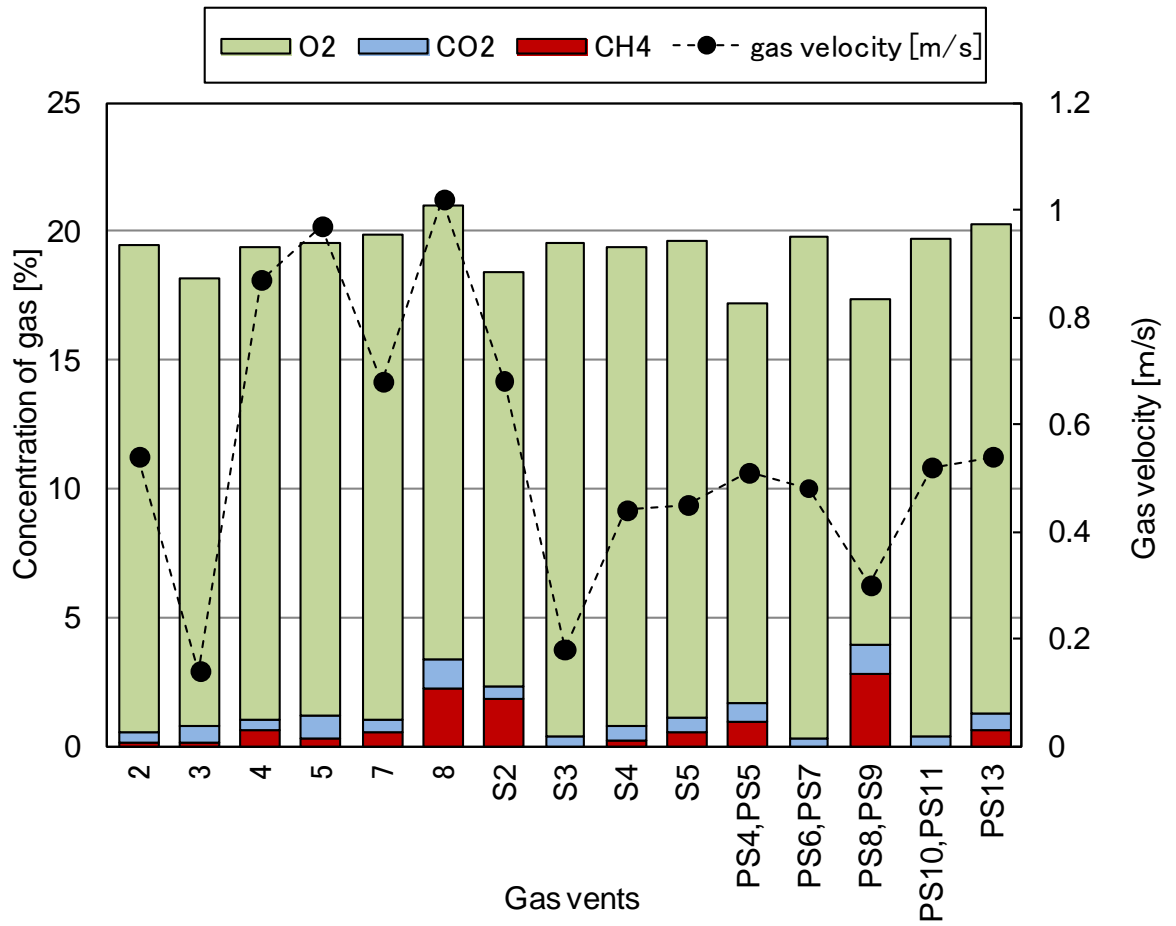


Figure 7 Gas composition at outflow vent

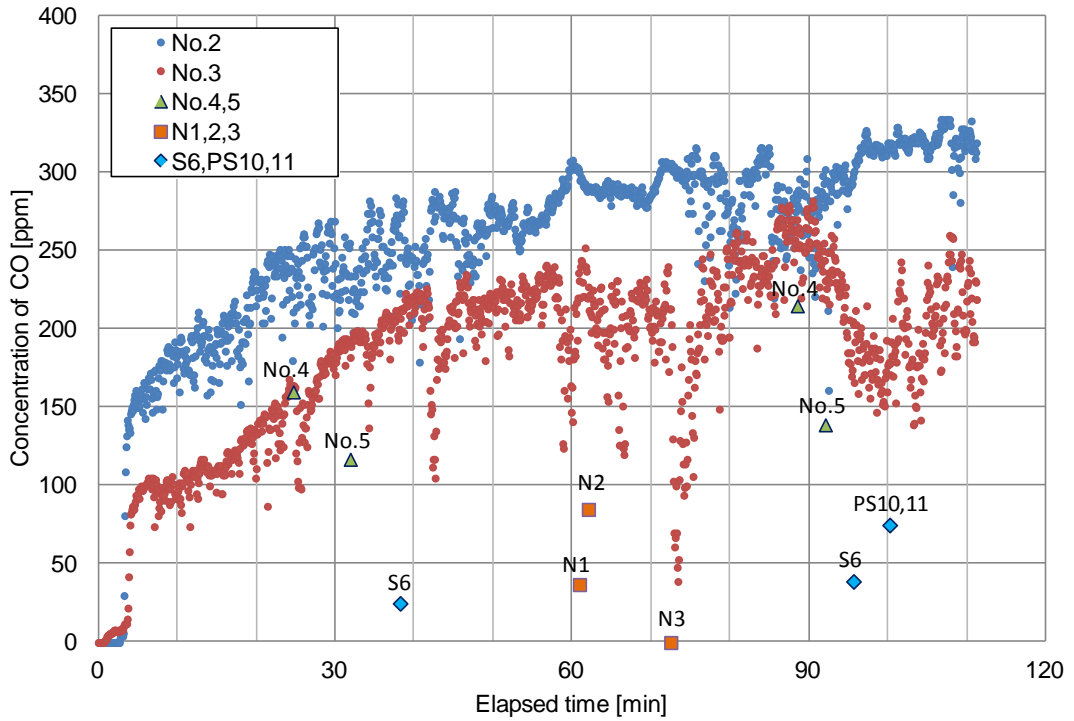

Date: 2013.11.15

(a) CO injection from No.1 vent (input concentration 780ppm)

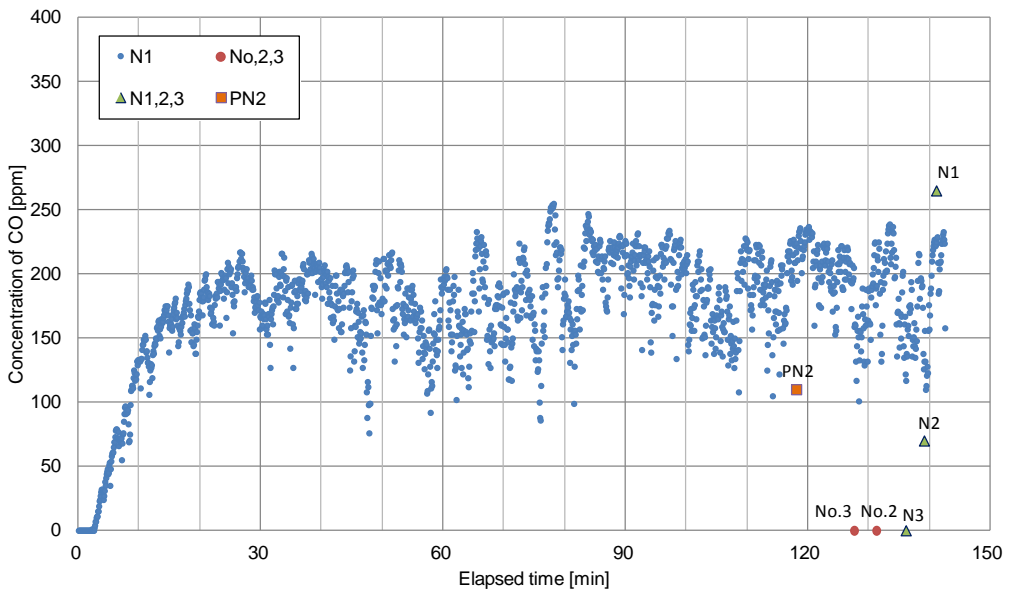

(b) CO injection from PN1 vent (input concentration : 600ppm)

Figure 8 CO(Carbon monoxide) gas response at outflow vents

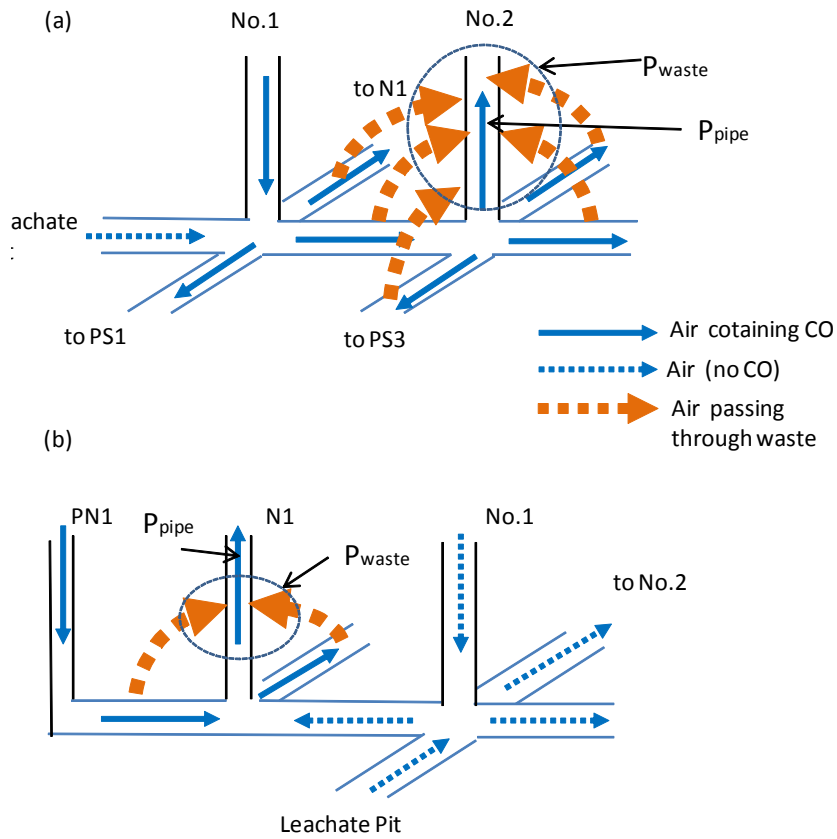


Figure 9 Estimated air flow passing through pipes and through waste layer

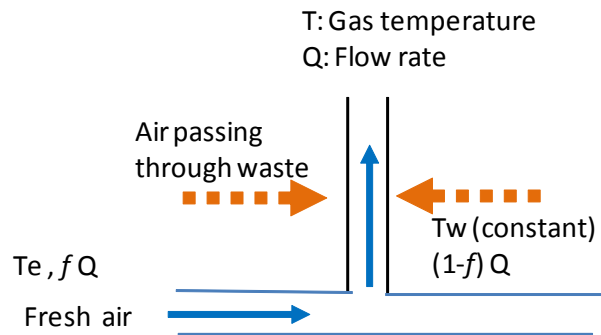


Figure 10 Two paths of air flowing out at outflow vent

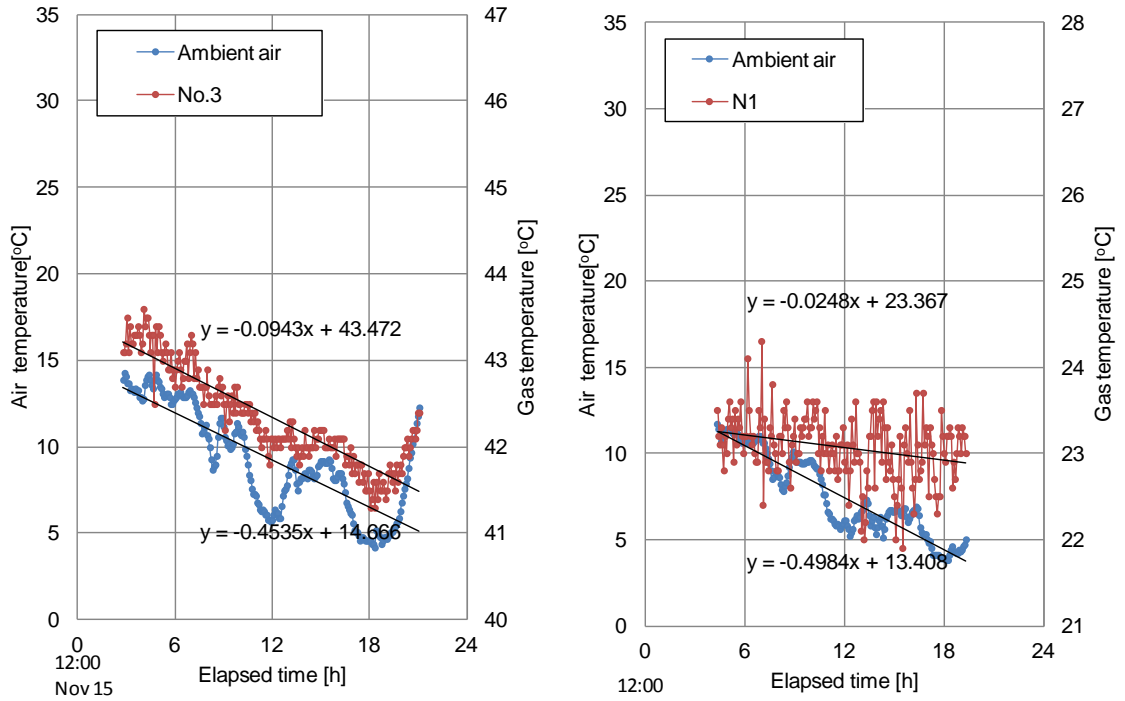


Figure 11 Temperature change of gas and ambient air

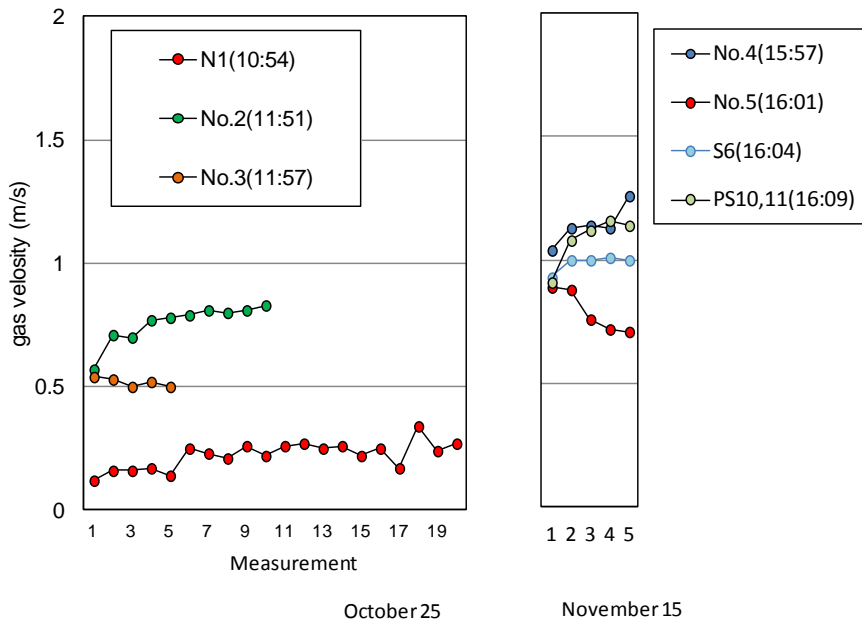


Figure 12 Consecutive measurement of gas velocity at outflow vents