

Comparative analysis of environmental performance of an office building using BREEAM and GBL

Wei Cheng¹, Behzad Sodagar², Feifei Sun³

¹*School of Urban and Architecture, Wuhan University of Science and Technology, China.*

²*School of Architecture and Design, University of Lincoln, UK.*

³*Department of Energy and Environmental Design, NPS Group, UK*

Abstract

With rapid economic growth and urban expansion in China, the Chinese building sector is now facing the huge challenge of balancing its energy demand and pollution. In order to minimize the environmental impact, the Ministry of Housing Urban-Rural Development (MOHURD) has set an ambitious energy reduction target requiring that 30% of all new constructions to be green by 2020.

This paper presents comparative analysis of two environmental rating systems: the latest version of Chinese Green Building Label (GBL 2014) released by the MOHURD in order to promote the market transformation of green buildings and Building Research Establishment Environmental Assessment Method (BREEAM 2014), the widely recognised environmental assessment methodology in the global construction industry. To compare the two environment assessment standards, a public office building currently under construction in Fujian (China) has been used as a case-study to rate its environmental credentials using both BREEAM and GBL.

Results have shown that although both standards use a similar methodology, they require different levels of input data and may result in different ratings for the same building.

Keywords: environmental assessment methods, LCA, energy consumption, carbon emissions, green buildings, environmental impacts, GBL, BREEAM

1 Introduction

The construction industry is a major contributor to climate change [1] as it is responsible for almost half of the global greenhouse gases and consumes 40% of the materials entering the global economy [2,3]. The effect of carbon emissions on Climate Change can arguably be seen as the greatest impact and therefore of the most urgent priority [4]. As a result the construction industry has become increasingly concerned with understanding the whole life impact of buildings as it is increasingly required to declare the greenhouse gas (GHG), carbon footprint or business CO₂ emissions [5]. In addition to investigating and monitoring the effects of buildings on climate change, it is also important for the research community to investigate the effects of climate change on future energy consumptions of buildings as consumptions will change under future climate scenarios [6]. As worldwide population grows and hence more buildings will be needed, one may assume that the construction industry will continue to increase its carbon dioxide emissions unless it changes its practice [4]. This has resulted in energy efficiency in buildings to become a main criterion for energy policy in many countries.

In this context, the concept of green building plays a significant role in focusing on increasing energy efficiency, sustainable use of resources and moreover enhancing health and wellbeing of building users. In order to assess the environmental performance of the design and build, a number of codes, standards and assessment rating systems have been developed. The codes, standards and procedures have created lively debates and increase awareness within the building industry globally about the actions required to tackle climate change [4]. For example, the EU proposed the Energy Performance Buildings Directive (EPBD) in 2002 to monitor and to reduce energy use. Brunsgaard et al. [7] analysed how the main EPBD was implemented by EU participating countries. Sharifi et al. [8] proposed a review of 7 well-known building environmental assessment tools worldwide with a view to introduce a framework for evaluating the effectiveness of existing tools. Haapio et al. [9] analysed and categorized 16 existing building environmental assessment tools focusing on the tools developed in Europe and North America. According to Ali and Al Nsairat [10], there are two types of building environmental assessment tools: (i) method based on criteria-based tools (CBT) and (ii) method based on the Life Cycle Assessment (LCA). Table 1 lists a few widely used assessment tools using CBT or LCA approaches.

Table 1: Classification of building environmental assessment methods

Assessment tool	Tool type	Country	Developer	Year
BEES	LCA	USA	U.S. National Institute of Standards and Technology	2002
ATHEN TM	LCA	Canada	ATHENA Sustainable Material Institute	1997
BEAT	LCA	Denmark	Danish Building Research Institute	1999
Eco-Quantum	LCA	Netherlands	IVAM, University of Amsterdam	1999
BREEAM	CBT	UK	Building Research Establishment (BRE)	1990
LEED	CBT	USA	U.S. Green Building Council	1998
Green Star	CBT	Australia	Green Building Council Australia	2003
CASBEE	CBT	Japan	Japan Sustainable Building Consortium	2004

Table 2: Sections and levels of BREEAM and GBL

	BREEAM		GBL	
Categories and Weighting	Management	12%	Landscape	16%
	Health and Wellbeing	15%	Energy efficiency	28%
	Energy	15%	Water efficiency	18%
	Transport	9%	Material and resource	19%
	Water	7%	Indoor environment	19%
	Materials	13.50%	Innovation(additional)	10%
	Waste	8.50%		
	Land use and ecology	10%		
	Pollution	10%		
	Innovation(additional)	10%		
Levels of certification and score	Pass	30-44	one-star ★	50-59
	Good	45-54	two-star ★★	60-79
	Very Good	55-69	three-star ★★★	80+
	Excellent	70-84		
	Outstanding	85+		

The aim of LCA method is to evaluate the environmental impact of products and processes during their whole life span from cradle to grave [11], as used for example in assessment tools such as BEES(Building for Environment and Economic Sustainability, USA), ATHENA™ (Canada), BEAT (Building Environmental Assessment Tool, Denmark) and Eco-Quantum (Netherlands). LCA methods can be used as a decision making support to analyse complex and different sets of alternatives during the design phase with the purpose of optimising materials, energy use, waste management and transportation options. Because of very specific and technical language of most assessment tools specialists professions are usually their main user groups [10,12] limiting the wide spread use of tools as most stake holders and decision-makers in the building industry are not specialists enough to initiate the assessment process in all projects. It is therefore crucial to facilitate the use of assessment tools and also promote use of intelligible assessment tools capable of creating easy and simple interaction with potential clients on the market [13].To achieve truly sustainable buildings there must be a co-coordinated approach involving all stake holders including the client, the industry and local authorities and government [4]. It is also important to realise that in order to minimise carbon emissions, assessments should be

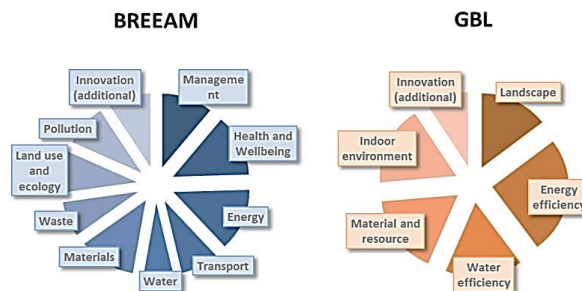


Figure 1: Sections of certification for BREEAM and GBL

carried out at the outset of the design when refinement of design strategies and options have the maximum potential of reducing whole life emissions [5]. Ford et al. [14] argue that without the involvement of the building users (clients) in the design to identify their needs and goals it will be difficult to judge which of energy saving concepts and measures perform well and which do not work at all.

As a 'checklist Approach', criteria-based tools (CBT) are more widely accepted and globally used throughout the life-cycle of buildings[15]. To this end, this study analyses the potential of criteria-based tools in the environmental assessment of buildings.

CBT methods are based on a system of allocating points to determine credits and classes by evaluating environmental loads [10]. Among the first criteria-based environmental assessment tools is BREEAM (Building Research Establishment Environmental Assessment Method) which was established by the Building Research Establishment (BRE) in the UK in 1990. BREEAM has been used to assess the environmental credentials of buildings over 70 countries worldwide[16]. LEED (Leadership in Energy and Environmental Design) is another widely used assessment tool developed by the U.S. Green Building Council (USGBC) in 1998 with registered projects in covers 30 different countries[17]. Another criteria-based tool is the Green Star, a national voluntary environmental rating tool which was launched in 2003 by the Green Building Council of Australia (GBCA)[18]. In Japan, CASBEE (Comprehensive Assessment System for Building Environmental Efficiency) was set up by the Japan Sustainable Building Consortium (JSBC) in 2004 aiming to promote eco-efficient buildings by evaluating the environmental loads and the environmental quality and performance during the life cycle[19].

One of the reasons for comparing GBL and BREEAM in this paper is that an increasing number of buildings are certificated under BREEAM in China as well as due to the fact that GBL2014 is developed based on principles and methodology used in BREEAM.

2 Aims and objectives

The aim and scope of this paper is to review the role of assessment methods in the design and procurement of sustainable buildings and to compare the predicted performance of an office building under construction in China using two widely used assessments methods in China, i.e. BREEAM and GBL.

3 Scope and methodology

The research uses quantitative analyses and investigations. BREEAM and GBL rating methods have been examined and used for assessing the sustainability credentials of a case study office building in China. BREEAM has provided a benchmark for a range of building types in the UK. New rating of Outstanding was introduced in 2008 [16] to further reward the best examples. The use of whole life assessment tools are becoming more popular as new buildings constructed to more stringent energy efficiency targets will have a higher ratio of embodied

Table 3: Redistribution of credits to the new sections for BREEAM

Land Use and Ecology		10.00%
●	LE01 Site selection	2.00%
●	LE 02 Ecological value of site and protection of ecological features	2.00%
●	LE 03 Minimising impact on existing site ecology	2.00%
●	LE 04 Enhancing site ecology	2.00%
●	LE 05 Long term impact on biodiversity	2.00%
Transport		9.00%
●	Tra01 Public transport accessibility	3.75%
●	Tra02 Proximity to amenities	1.50%
●	Tra03 Cyclist facilities	1.50%
●	Tra04 Maximum car parking capacity	1.50%
●	Tra05 Travel plan	0.75%
Energy		15.00%
●	Ene01 Reduction of energy use and carbon emissions	5.81%
●	Ene02 Energy monitoring	0.97%
●	Ene03 External lighting	0.48%
●	Ene04 Low carbon design	1.45%
●	Ene05 Energy efficient cold storage	0.97%
●	Ene06 Energy efficient transportation systems	1.45%
●	Ene07 Energy efficient laboratory systems	2.42%
●	Ene08 Energy efficient equipment	0.97%
●	Ene09 Drying space	0.48%
Water		7.00%
●	Wat01 Water consumption	3.89%
●	Wat02 Water monitoring	0.78%
●	Wat03 Water leak detection	1.55%
●	Wat04 Water efficient equipment	0.78%
Materials		13.50%
●	Mat01 Life cycle impacts	5.80%
●	Mat02 Hard landscaping and boundary protection	0.96%
●	Mat03 Responsible sourcing of materials	3.86%
●	Mat04 Insulation	0.96%
●	Mat05 Designing for durability and resilience	0.96%
●	Mat06 Material efficiency	0.96%
Health and Wellbeing		15.00%
●	Hea01 Visual comfort	4.09%
●	Hea02 Indoor air quality	3.41%
●	Hea03 Safe containment in laboratories	1.36%
●	Hea04 Thermal comfort	2.05%
●	Hea05 Acoustic performance	2.73%
●	Hea06 Safety and security	1.36%
Pollution		10.00%
●	Pol01 Impact of refrigerants	2.31%
●	Pol02 NOx emissions	2.31%
●	Pol03 Surface water run-off	3.84%
●	Pol04 Reduction of night time light pollution	0.77%
●	Pol05 Reduction of noise pollution	0.77%
Waste		8.50%
●	Wst01 Construction waste management	3.80%
●	Wst02 Recycled aggregates	0.94%
●	Wst03 Operational waste	0.94%
●	Wst04 Speculative floor and ceiling finishes	0.94%
●	Wst05 Adaptation to climate change	0.94%
●	Wst06 Functional adaptability	0.94%
Management		12.00%
	Man01 Project brief and design	2.29%
	Man02 Life cycle cost and service life planning	2.29%
	Man03 Responsible construction practices	3.42%
	Man04 Commissioning and handover	2.29%
	Man05 Aftercare	1.71%

Table 4: Redistribution of credits to the new sections for GBL

Landscape	16.00%
● Lan01 Land utilization	5.44%
● Lan02 Outdoor environment	2.88%
● Lan03 Transportation and public services	3.84%
● Lan04 Site design and site ecology	3.84%
Energy efficiency	28.00%
● Ene01 Building and envelope	6.16%
● Ene02 HAVC	10.36%
● Ene03 Lighting and electrical system	5.88%
● Ene04 Energy utilization	5.60%
Water efficiency	18.00%
● Wat01 Water-saving system	6.30%
● Wat02 Water-saving utensils and facilities	6.30%
● Wat03 Utilization of non-traditional water resources	5.40%
Material and resources	19.00%
● Mat01 Material-saving design	7.60%
● Mat02 Material selection	11.40%
Indoor environment	19.00%
● Ind01 Indoor acoustic environment	4.18%
● Ind02 Indoor lighting environment	4.75%
● Ind03 Indoor thermal environment	3.80%
● Ind04 Indoor air quality	6.27%

emissions to operational, and this situation will only become more acute as both domestic and non-domestic buildings are designed to meet zero carbon targets [20]. Even in buildings designed to be zero carbon in use and attempt to have low embodied emissions by substituting alternative materials such as replacing cement with lime, embodied emissions remain significant [21].

BREEAM assesses the environmental performance of design and build by allocating scores to nine technical sections. The sections are management, health and wellbeing, energy, transport, water, materials, waste, land use and ecology, pollution. Scores gained from each section are weighted by the ‘environmental weightings’, which reflects the relative importance of each section. The weighted scores are then added up to obtain the overall score, which has a base of 100 points. The category ‘Innovation’ can be achieved with 10 additional points [16]. The number of points obtained determines the final level of the certification. There are five progressive levels of certification: Pass, Good, Very Good, Excellent and Outstanding (Table 2).

In 2006 the Chinese Government released the first national green building assessment standard—GBL. As a criteria-based tool (CBT), it was developed by Society for Urban Studies and administrated by the Ministry of Housing Urban-Rural Development (MOHURD). The new version 2014 of this standard came into force on 1st January 2015 in order to help achieve the national target in China requiring 30% of all new constructions to be green by 2020 [22]. GBL is classified into five sections being: Landscape, Energy efficiency, Water efficiency, Material and resource, Indoor environment. Similar to BREEAM, GBL certification is a point-based score rating with a percentage weighting system. Likewise BREEAM, ‘Innovation’ can also be gained in GBL with 10 additional points. There are 3 ‘classes’ of certifications in GBL being: one-star, two-star or three-star, with three-star being the highest achievement (Table 2).

Table 5: New sections and score (% weighting) for BREEAM and GBL

	Landscape ●	Energy and atmosphere ●	Water ●	Material ●	Indoor environment ●
BREEAM	24.4(27.7%)	19.6(22.3%)	7(8.0%)	22(25.0%)	15(17.0%)
GBL	16(16.0%)	28(28.0%)	18(18.0%)	19(19.0%)	19(19.0%)

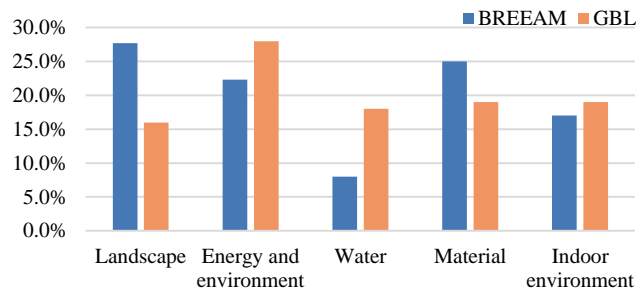


Figure 2: Comparison new sections between BREEAM and GBL

Figure 1 illustrates the sections in BREEAM and GBL from which scores may be obtained. Due to different number of sections in each method and in order to make the comparison between the two methods more meaningful, five shared sections based on universal environmental impacts were identified for both methods. There are landscape, energy and atmosphere, water, materials, indoor environment. The new weightings (% scores) were counted by adding up the individual scores of each section for BREEAM (Table 3) and GBL (Table 4) and in accordance with the aspects embedded in the new five sections identified for both methods. The colour coding used in Tables 3 and 4 relates to the five new sections as shown in Table 5. The new five sections were standardised on the basis of 100 once the new weightings (%scores) were set up (Table 5).

The performance reactivity for BREEAM and GBL is shown on the histogram in Figure 2. BREEAM allocates more points to the landscape section as compared with the other 4 sections. Table 3 demonstrates there are 13 issues included in the landscape (red colour) allowing for factors related to the sustainability of the landscape choice such as ecology and amenity issues. In GBL more attention has been paid to land utilization (Lan01) accounting for 34% of the total scores allocated to the landscape section (Table 4). The main reason for emphasising this aspect in GBL is due to the shortage of available land in China.

The energy and atmosphere performance in BREEAM emphasises on reduction of greenhouse gas emissions, such as CO₂ and NO_x [16]. This section in GBL attracts the highest portion of scores, 28% of total scores (Table 5). There is a considerable difference in the level of scores allocated to water in the two methods. BREEAM focuses on reducing the demand for potable water, while GBL focuses

on optimizing water-supply. GBL has higher water weighting compared with BREEAM.

Material is the second most prioritised section after landscape in BREEAM in order to minimize the environmental impacts, reducing waste and promoting sustainable sourcing of materials. Indoor environment section relating to lighting, acoustics, thermal and air quality, is a common area in both methods and the weightings are relatively similar.

In our study we have not included management and innovation in the composition of the new five sections. This is due to the fact that management, a category existed in BREEAM for managing the service quality, is not linked to any environmental credit. As for innovation, it is an additional category existed in both BREEAM and GBL. So by excluding the management and innovation in our analysis, the quantifiable results are not affected in terms of environmental sustainability. This has resulted for the total maximum possible scores achievable in the five new sections in BREEAM equate to 88 while the corresponding figure is 100 in CBL (Figures 4 and 5).

4 Pilot study

The building selected for the study is 105m tall, 30 story public office building (named building C82), located in Fujian, China, which is currently under construction (2016) and due to be completed by the end of 2017 (Fig. 3). Table 6 lists some characteristics of the building. The area of the site is 13,300 square meters. The building has a total floor area of 109,860 square meters, of which 25,678 square meters is underground. Four public transport stations are near the entrance of the site, with walking distances less than 500 meters to the building. The building is made of reinforced concrete with fully glass curtain walling facade. The building is equipped with varied refrigerant volume (VRV) air conditioning system with condensation heat recovery fresh air unit. Rainwater is collected and stored in an underground tank for reuse as gray water after being flocculated, filtered and disinfected, for purpose such as irrigating the landscape, road cleaning and garage washing. Gray water is not used for flushing toilets. BREEAM and GBL require energy performance of the design against a ‘Notional building’ by using the approved simulation tools according to each standard

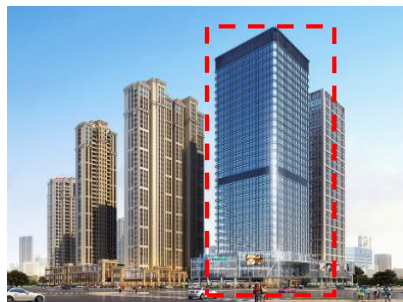


Figure 3: The case building-‘C82’

Location	Fujian,China
Gross floor area	109,860 m ²
Site area	13,300 m ²
External wall U-value	1.02 W/m ² K
Window U-value (include glass curtain wall)	2.25 W/m ² K
Roof U-value	0.573 W/m ² K
Heat/cooling generator	Heat pump
Thermostat settings(designed)	Summer25°C Winter18°C

Table 6: Summary information for ‘C82’

[23,24]. For BREEAM, the ‘Notional building’ has been defined in the NCM2013 [25] and the simulation software ‘Energyplus’ was used to examine energy performance of the building. For GBL, the ‘Notional building’ has been defined in the national standard GB50189-2015[24] and ‘PKPM’, the most widespread software for analysing dynamic energy consumption in China, was applied to evaluate the energy performance of the case study building.

5 Results and conclusions

This section discusses the main differences in the composition of total score calculated by BREEAM and GBL methods for the building case study. Table 7 present the results obtained from our analyses. The building is classified as ‘Good’ with 50.93 points for BREEAM and two-star with 63.66 points for GBL. The correlations between the results for the corresponding categories can be seen in Figures 4, 5 and 6. The landscape category encourages sustainable land use as well as better access to sustainable means of transport for building users. The two methods appear to show relatively close scores for the landscape category. The case study building has archived a score of 14.63 in BREEAM out of the maximum available 24.4 (Fig.4) representing 60% achievement (Fig.6). GBL has estimated a score of 11.04 out of a possible maximum 16(Fig.5) representing a 70% achievement (Fig.6).

According to the results for energy and atmosphere section, similar performance is ascribed to the building C82 by the dynamic simulations, but we can see BREEAM gives fewer points than GBL for this category as seen in Figures 4 and 5. Because the two schemes are based on different energy assessment methods,46% of the total scores(9.07 out of 16.9 as in Fig. 4) are awarded by using BREEAM in comparison with 54% of the total scores(15.12 out of 28 as in Fig. 5) awarded by GBL (Fig. 6).

The biggest difference between the two methods is the results for the section ‘water’ for the case study building. The reuse of water is highly prioritised by BREEAM, while the percentage of water saved is of concern in GBL. According to GBL requirements, saving water is a practice that has excellent potential for

Table 7: Results of BREEAM and GBL for the building ‘C82’

	BREEAM		GBL	
Section Score	Management	6.00	Landscape	11.04
	Health and Wellbeing	11.04	Energy efficiency	15.12
	Land Use and Ecology	5.00	Water efficiency	15.84
	Transport	5.25	Material and resources	10.26
	Energy	6.77	Indoor environment	11.40
	Water	3.88	Innovation(additional)	0
	Material	7.71		
	Waste	1.88		
	Pollution	7.69		
	Innovation(additional)	0		
Final score	50.93		63.66	
Rating	Good		★★	

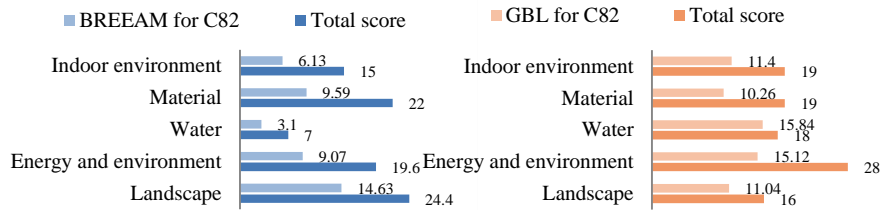


Figure 4: Score achieved in C82 related to maximum score of the new BREEAM's sections

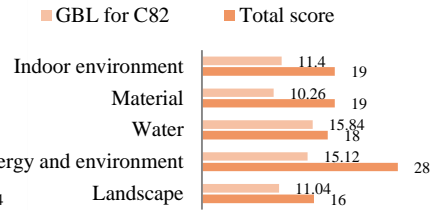


Figure 5: Score achieved in C82 related to maximum score of the new GBL's sections

reducing consumption, so the case study building gets a high score for water (15.84 out of 18), while the corresponding score for BREEAM is only 3.1 out of 7 as shown in Figures 5 and 4 respectively.

Regarding the section of material, both methods consider the percentage of recyclable materials used and the reduction of waste. BREEAM pays more value to low embodied impact materials over their life. Examining the item of materials 43% of the score is related to the total in BREEAM while the corresponding figure is 54% in GBL.

For indoor environment, limited evaluations of acoustic, lighting, thermal and air quality are assessed by both methods. BREEAM covers more details than GBL in the Indoor environment section in general and specifically in the containment and secure use. The case study building in BREEAM achieves only 6.13 points out of a maximum possible 15 representing 41% while in GBL scores 11.4 out of a maximum possible 19 representing 60%. The building has achieved a total score of 42.52 out of a possible available 88 points (Fig. 4) representing an overall achievement of 48% in BREEAM while the corresponding figures in GBL is around 64% (Fig. 5).

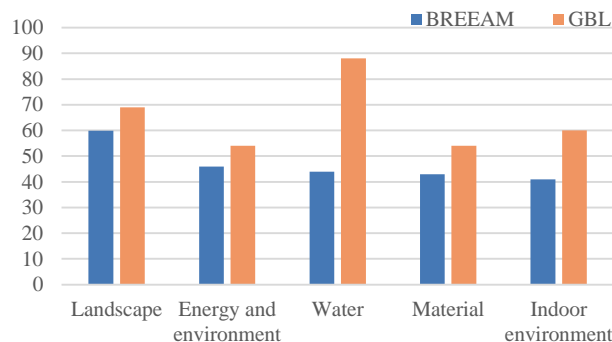


Figure 6: Comparison between BREEAM and GBL results (new sections) for the building of C82

This paper analysed the environmental performance assessment of a case study office building by using two widely used assessment methods, i.e. BREEAM and GBL in China. Among the aims of the study was to compare GBL procedure and its results with those of BREEAM through using both methods in evaluating environmental performance of a case study office building under construction in China. In order to make comparisons between the two methods more compatible and meaningful, it was necessary to devise a new structure within which the credits can be redistributed to five main common sections applicable to both methods. These five new sections are landscape, energy and atmosphere, water, materials, indoor environment, respectively.

The comparison showed that the main objectives of BREEAM and GBL methods are very similar and that generally speaking their assessment and certification are relatively close. The two methods however allocate different levels of emphasis to different assessment criteria. The results obtained are based on analyses carried out for one case study office building in China and hence cautious should be exercised when applying the results universally.

Reference

- [1] Urge-Vorsatz, D., Harvey, L.D.D., Mirasgedis, S. & Levine, M.D., Mitigating CO₂ emissions from energy use in the world's buildings. *Building Research & Information*, **35**(4), pp.379–398, 2007.
- [2] Asif, M., Muneer, T. & Kelly, R., Life cycle assessment: A case study of a dwelling home in Scotland. *Building and Environment*, **42**(3), pp.1391-1394, 2007.
- [3] United Nations Environment Programme (UNEP), *Buildings: Investing in Energy and Resource Efficiency*. UNEP, 2011 Online. www.unep.org/greeneconomy/Portals/88/documents/ger/9.0_Buildings.pdf
- [4] Sodagar, B. & Fieldson, R., Towards a low carbon construction practice. *Construction Information Quarterly (CIQ) Journal, Chartered Institute of Building (CIOB)*, **10**(3), pp.101-108, 2008.
- [5] Fieldson, R., Rai, D. & Sodagar, B., Towards a framework for early estimation of lifecycle carbon footprinting of buildings in the UK. *Construction Information Quarterly (CIQ) Journal, Chartered Institute of Building (CIOB)*, **11**(2), pp. 66-75, 2009.
- [6] Sun, F., Sodagar, B. & Bell, J., Building heating consumptions under present and future climate scenarios. PLEA2013 of the 29th Conf. on Sustainable Architecture for a Renewable Future, Germany, 2013.
- [7] Brunsgaard, C., Dvořáková, P., Wyckmans, A., Stutterecker, W., Laskari, M., Almeida, M., Kabele K., Magyar Z., Bartkiewicz P. & Op't Veld P., Integrated energy design - Education and training in cross-disciplinary teams implementing energy performance of buildings directive (EPBD). *Building and Environment*, **72**, pp.1-14, 2014.
- [8] Sharifi, A. & Murayama, A., A critical review of seven selected neighborhood sustainability assessment tools. *Environ Impact Assess Rev*, **38**, pp.73-87, 2013.

-
- [9] Haapio, A. & Viitaniemi, P., A critical review of building environmental assessment tools. *Environ Impact Assess Rev*, **28(7)**, pp.469-482, 2008.
- [10] Ali, H.H. & Al Nsairat, S.F., Developing a green building assessment tool for developing countries- case of Jordan, *Build Environ*, **44(5)**, pp.1053-64, 2009.
- [11] Ortiz, O., Castells, F. & Sonnemann, G., Sustainability in the construction industry: a review of recent developments based on LCA. *Construction Building Materials*, **23(1)**, pp. 28–39, 2009.
- [12] Suzer, O., A comparative review of environmental concern prioritization: LEED vs other major certification systems, *Environmental Management*, **154**, pp. 266-283, 2015.
- [13] Krause, A.L. & Bitter, C., Spatial econometrics, land values and sustainability: trends in real estate valuation research, *Cities*, **29(2)**, pp.19-25, 2012.
- [14] Ford, B., Schiano-Phan, R. & Zhongcheng, D., The passivhaus standard in European warm climates, *Passive-on Project*, www.eerg.it/passiveon.org/CD/1.%20Technical%20Guidelines/Part%203/Part%203.pdf
- [15] Zabalza Bribian, I., Aranda Uson, A. & Scarpellini, S., Life cycle assessment in buildings: State-of-the-art and simplified LCA methodology as a complement for building certification. *Build. Environ*, **44(12)**, pp.2510-2520, 2009.
- [16] BREEAM, www.breeam.com/why-breeam
- [17] LEED, www.usgbc.org/leed
- [18] Green star, www.gbca.org.au/faq/green-star
- [19] CASBEE, www.ibec.or.jp/CASBEE
- [20] Fieldson, R. & Smith, B., Gathering diverse and complex energy use data for monitoring and analysis. *London Business Conferences*, 2007, www.researchgate.net/publication/237665752
- [21] Sodagar, B., Fieldson, R. & Gilroy Scott, B., Design for sustainable architecture and environments. *The International Journal of Environmental, Cultural, Economic & Social Sustainability*, **4(4)**, pp.73-84, 2007.
- [22] MOHURD, www.mohurd.gov.cn/
- [23] Schwartz, Yair & Raslan, Rokia, Variations in results of building energy simulation tools, and their impact on BREEAM and LEED ratings: A case study. *Energy & Buildings*, **62(7)**, pp. 350–359, 2013.
- [24] Ministry of Housing Urban-Rural Development (MOHURD), GB50189-2015: Design standard for energy efficiency of public buildings. MOHURD, China, pp.11-15, 2014.
- [25] NCM, National Calculation Methodology (NCM) Modeling Guide. Building Research Establishment Ltd, 2013.