



Strathprints Institutional Repository

Chen, Yanping and Zhang, Zhelin and Zhang, Zhen and Yuan, Xiaohui and Liu, Feng and Chen, Min and Xu, Jianqiu and Yu, Jin and Sheng, Zheng-Ming and Zhang, Jie (2015) Spectral interference of terahertz pulses from two laser filaments in air. Applied Physics Letters, 106 (22). ISSN 0003-6951 , <http://dx.doi.org/10.1063/1.4922143>

This version is available at <http://strathprints.strath.ac.uk/53829/>

Strathprints is designed to allow users to access the research output of the University of Strathclyde. Unless otherwise explicitly stated on the manuscript, Copyright © and Moral Rights for the papers on this site are retained by the individual authors and/or other copyright owners. Please check the manuscript for details of any other licences that may have been applied. You may not engage in further distribution of the material for any profitmaking activities or any commercial gain. You may freely distribute both the url (<http://strathprints.strath.ac.uk/>) and the content of this paper for research or private study, educational, or not-for-profit purposes without prior permission or charge.

Any correspondence concerning this service should be sent to Strathprints administrator: strathprints@strath.ac.uk

Spectral interference of terahertz pulses from two laser filaments in air

Yanping Chen^{1,2,a)}, Zhelin Zhang^{1,2}, Zhen Zhang^{1,2}, Xiaohui Yuan^{1,2}, Feng Liu^{1,2}, Min Chen^{1,2},
Jianqiu Xu^{1,2}, Jin Yu^{1,4}, Zhengming Sheng^{1,2,3,b)}, and Jie Zhang^{1,2}

¹*Key Laboratory for Laser Plasmas (Ministry of Education), Department of Physics and Astronomy, Shanghai Jiao Tong University, Shanghai 200240, China*

²*IFSA Collaborative Innovation Center, Shanghai Jiao Tong University, Shanghai 200240, China*

³*Department of Physics, SUPA, University of Strathclyde, Glasgow G4 0NG, UK*

⁴*Institut Lumière Matière, UMR 5306 Université Lyon 1-CNRS, Université de Lyon, 69622 Villeurbanne CEDEX, France*

Abstract

Spectral interference is experimentally demonstrated by two terahertz pulses emitting from filaments induced by two successive femtosecond laser pulses in air. Here a leading pulse is set to be weaker than a trailing pulse and their temporal separation is larger than the pulse duration of the terahertz pulses. When the leading pulse is stronger than the trailing pulse, the frequency modulation within the whole terahertz envelope is greatly deteriorated due to nonlinear effects applying on the trailing pulse through the plasmas generated by the leading pulses. Such unique terahertz spectrum may find applications in terahertz spectroscopy.

^{a)}Electronic mail: yanping.chen@sjtu.edu.cn

^{b)}Electronic mail: zsheng@sjtu.edu.cn

The technique of terahertz time-domain spectroscopy (THz-TDS) emerges to become valuable for potential applications in many areas such as security, communication, and medicine etc. For example, in the security area, not only can THz waves propagate through cloths and packaging materials but also they can be used to identify immediately most of the hidden explosives, which feature unique "fingerprints" within terahertz region [1-4]. Laser-induced plasmas, photoconductive terahertz antennas, and nonlinear crystals are effective terahertz emitters to generate broadband terahertz pulses which can be used for terahertz time-domain spectroscopy [5-8]. In some occasions, however, these terahertz sources are not powerful enough to provide reliable spectra, especially in the case that the THz-TDS system is working in a reflective mode. The normal way to obtain a more reliable terahertz spectrum is to increase the data-acquisition time.

In this Letter, we demonstrate spectral interference of two terahertz pulses emitting from femtosecond laser filaments with temporal separation larger than the pulse duration of the terahertz pulses. The terahertz spectral signals are enhanced by the interference of two broadband terahertz pulses, which could benefit the resolution of the spectrum for a THz-TDS system.

In our experiments, a 1 kHz, 800 nm, 40 fs Ti-sapphire laser beam was split into two (a reference beam and a control beam). The energy of the reference and control beams were 1.3 mJ and 2.4 mJ, respectively. The temporal delay between the reference and control beams is adjustable by a translation stage. The two beams were recombined together by a beam splitter. After this beam splitter, both beams were focused by a plano-convex lens with a focal length of 50 cm, generating filaments in air. The terahertz radiations generated by these two beams were collected by a pair of parabolic mirrors and detected by an electro-optic sampling (EOS) device with a $\langle 110 \rangle$ oriented ZnTe crystal of 1.5 mm thickness [9]. A 500- μ m-thick silicon wafer was

applied between the two parabolic mirrors to block the residual fundamental pulses and white light from the filaments.

We measured terahertz radiations from filaments generated by the reference and control beams at each specific delay. The terahertz waveforms and their Fourier transform spectra for each temporal delay between the reference and control beams are specified in Figs. 1 and 2, respectively. Figure 1(a) presents the typical terahertz waveform obtained from filaments created by the reference beam only and Fig. 1(b) for the control beam only. Their corresponding spectra are shown in dashed line for the reference beam and dotted line for the control beam in Fig. 2(a). Their spectral profiles over the whole terahertz frequency domain are similar. The spectral amplitude for the reference beam, however, is lower because this beam is weaker compared to the control beam. When both the reference and control beams initiate filaments, the waveforms and spectra of terahertz radiations from the filaments make interesting changes. In the case of no temporal delay between the reference and control beams [Fig. 1(c)], the spectral profiles of terahertz radiation from these two beams are the same as terahertz emission either from the reference beam or from the control beam. And its spectral amplitude is close to the sum of terahertz emission produced by the reference and control beams [solid line in Fig. 2(a)]. When the strong pulse (control beam) is 4-ps delayed from the weak pulse (reference beam), the time difference of the two terahertz pulses generated by these two beams is larger than the terahertz pulses' temporal width [Fig. 1(d)]. Compared with the terahertz waveform obtained with only the control beam in Fig. 1(b), the phase of the terahertz waveform radiated from the delayed control beam slightly changes while the modification in its amplitude is negligible [Fig. 1(d)]. Meanwhile, frequency modulation is observed within the whole terahertz spectral envelope, as shown by solid line in Fig. 2(b). When the reference beam is 8-ps ahead of the control beam, the whole spectrum shows increased frequency modulation accompanied with more periodic peaks

and narrower bandwidth, as shown by solid line in Fig. 2(c). The waveform of the terahertz pulse emitting from the 8-ps delayed control beam is quite similar to that obtained with the 4-ps delayed control beam [Figs. 1(d) and 1(e)].

When the strong pulse (control beam) propagates ahead of the weak pulse (reference beam), the amplitudes of the terahertz waveforms radiated from the delayed reference beams are reduced to a quarter of the terahertz signal emitting from the original reference beam, as shown in Figs. 1(f) and 1(g). Their corresponding spectral amplitudes are shown in dotted lines in Figs. 2(b) and 2(c). It is obvious that the frequency modulation phenomenon becomes weaker and noisy than the terahertz spectra obtained when the control pulse propagates behind the reference pulse. This dramatic drop in the terahertz amplitude created by the reference pulse is due to the nonlinear interaction between the two filaments generated by the reference and control pulses. When the reference pulse propagates after the control pulse, it will feel the strong plasma defocusing effect induced by filamentation process of the control pulse. Consequently, most of its pulse energy is diffracted out to the energy reservoir [10], which results in the generation of a weaker terahertz pulse. However, the energy of the control pulse is high enough to overcome the plasma defocusing effect induced by filamentation process of the reference pulse when the control pulse travels behind the reference pulse. In this situation, therefore, no obvious decrease in the amplitude of the terahertz pulse generated by the control beam is observed, except for minor changes in the phase of this pulse.

The evolution of the spectral full width at half maximum of these periodic peaks as a function of the temporal difference between the reference and control pulses is illustrated in Fig. 3. Each point corresponds to an average spectral width of the periodic peaks measured at a specified temporal delay between two pulses in the experiment. All these data are collected while the control beam travels in front of the reference beam. When the temporal separation of the two

pulses increases from 1.33 ps to 10.66 ps, the terahertz spectral width drops from 0.7 THz to 0.1 THz, accordingly. This measurement indicates that the periodic peaks become narrower with the increase of time delay between the two laser pulses. This spectral width curve can be well fitted (solid line, Fig. 3) by using the following equation:

$$\Delta f \cdot \Delta t = 1, \quad (1)$$

where Δf is the terahertz spectral width at half maximum, and Δt is the time difference between the reference and control terahertz pulses. This observation suggests that the terahertz spectral width (Δf) only depends on the time difference between two terahertz pulses (Δt).

The occurrence of these periodic spectral peaks within the whole terahertz spectral envelope can be explained by interference effects of two delayed terahertz pulses emitting from filaments formed by two discrete, successive femtosecond laser pulses (a reference pulse and a delayed control pulse). Each spectral peak in the modulated terahertz spectrum represents a constructive interference of this spectral component. The intensity at each frequency is a coherent superposition of the spectral components from the reference and control terahertz pulses at this measured wavelength (λ) [11], i.e.,

$$I(\lambda) \sim \left[E(\lambda)_0^{ref} + E(\lambda)_0^{control} \right]^2 \cos^2\left(\frac{\pi d}{\lambda}\right) + C(\lambda), \quad (2)$$

where d is the distance between the reference and control pulses, $E(\lambda)_0^{ref}$ and $E(\lambda)_0^{control}$ are spectral amplitudes of terahertz components from the reference and control terahertz pulses at wavelength λ , respectively. Here $C(\lambda)$ depends on the difference of $E(\lambda)_0^{ref}$ and $E(\lambda)_0^{control}$, which equals to zero when the reference and control beams have the same energy. Figure 4 illustrates the experimental and calculated spectral intensity of two successive terahertz pulses

emitting from filaments formed by the reference beam and 4-ps delayed control beam. The experimental curve is obtained by squaring the amplitude of the terahertz spectrum acquired when the control beam propagates 4 ps before the reference beam [solid curve in Fig. 2(b)]. The calculation is based on the Eq. (2) and it fits the experimental curve very well. Some minor difference comes from nonlinear interaction of two successive filaments [12-14]. The plasma induced by the leading reference beam affects the formation of the filaments generated by the trailing control beam, which results in some nonlinear effects superposed on the spectrum of terahertz spectral interference. Equation (2) also indicates that the frequency of spectral modulation is related to the temporal separation between the two successive terahertz pulses. The further the two terahertz pulses depart from each other, the higher the frequency modulation is. Therefore, the modulation frequency in the terahertz spectral envelope can be easily manipulated by modification of the temporal separation of the reference and control pulses. Also, the spectral peaks can be smoothly tuned in the same way.

In conclusion, we have produced spectral interference in the terahertz region by two terahertz pulses emitting from filaments induced by two successive femtosecond pulses. The amplitude of the whole terahertz spectral envelope is enhanced by interference of two terahertz pulses. The central frequency and the spectral bandwidth of the terahertz periodic peaks are tunable by manipulating the temporal separation between the leading and trailing terahertz pulses. Not only can this terahertz spectrum could improve the signal to noise ratio in the terahertz time-domain spectroscopy by tuning the spectral peaks to the absorption lines of the interested samples, but also provide a unique way to study the nonlinear interaction of time-delayed filaments by monitoring the interaction-induced change of the terahertz spectral interference.

This work was supported by the National Basic Research Program of China (No. 2014CB339801) and the National Natural Science Foundation of China (Nos. 11474202 and

11104259, 11421064).

References

1. M. Tonouchi, "Cutting-edge terahertz technology", *Nat. Photonics* **1**, 97 (2007).
2. L. Ho, M. Pepper, and P. Taday, "Terahertz spectroscopy: Signatures and fingerprints", *Nat. Photonics* **2**, 541 (2008).
3. B. Fischer, M. Hoffmann, H. Helm, G. Modjesch, and P. Jepsen, "Chemical recognition in terahertz time-domain spectroscopy and imaging", *Semicond. Sci. Technol.* **20**, 246 (2005).
4. P. Y. Han, and X.-C. Zhang, "Free-space coherent broadband terahertz time-domain spectroscopy", *Meas. Sci. Technol.* **12**, 1747 (2001).
5. M. Li, H. Pan, Y. Tong, C. Chen, Y. Shi, J. Wu, H. Zeng, "All-optical ultrafast polarization switching of terahertz radiation by impulsive molecular alignment", *Opt. Lett.* **36**, 3633 (2011).
6. Y. Chen, T. Wang, C. Marceau, F. Théberge, M. Châteauneuf, J. Dubois, O. Kosareva, and S. L. Chin, "Characterization of THz emission from a DC-biased filament in air," *Appl. Phys. Lett.* **95**, 101101 (2009).
7. D. S. Kim, and D. S. Citrin, "Coulomb and radiation screening in photoconductive terahertz sources," *Appl. Phys. Lett.* **88**, 161117 (2006).
8. C. Kübler, R. Huber, and A. Leitenstorfer, "Ultra broadband terahertz pulses: Generation and field-resolved detection", *Semicond. Sci. Technol.* **20**, S128 (2005).
9. Y. Chen, C. Marceau, W. Liu, Z.-D. Sun, Y. Zhang, F. Théberge, M. Châteauneuf, J. Dubois and S. L. Chin, *Appl. Phys. Lett.* **93**, 231116 (2008).
10. S. L. Chin, S. A. Hosseini, W. Liu, Q. Luo, F. Théberge, N. Aközbek, A. Becker, V. P. Kandidov, O. G. Kosareva, and H. Schroeder, "The propagation of powerful femtosecond

- laser pulses in optical media: physics, applications, and new challenges", *Can. J. Phys.* **83**, 863 (2005).
11. S. L. Chin, V. François, J. M. Watson, and C. Delisle, "Spectral modulation of two coherently separated femtosecond laser pulses", *Appl. Opt.* **31**, 3383 (1992).
 12. H. Cai, J. Wu, P. Lu, X. Bai, L. Ding, and H. Zeng, "Attraction and repulsion of parallel femtosecond filaments in air", *Phys. Rev. A* **80**, 051802 (2009).
 13. X. Yang, J. Wu, Y. Tong, L. Ding, Z. Xu, and H. Zeng, "Femtosecond laser pulse energy transfer induced by plasma grating due to filament interaction in air", *Appl. Phys. Lett.* **97**, 071108 (2010).
 14. P. Lu, J. Wu, and H. Zeng, "Manipulation of plasma grating by impulsive molecular alignment", *Appl. Phys. Lett.* **103**, 221113 (2013).

Figure Captions:

Fig. 1. (Color online) Waveforms of terahertz radiation from filaments induced by (a) the reference beam, (b) the control beam, (c) the reference beam and control beam simultaneously (same delay), (d) the reference beam and 4-ps delayed control beam, (e) the reference beam and 8-ps delayed control beam, (f) the 4-ps delayed reference beam and control beam, and (g) the 8-ps delayed reference beam and control beam.

Fig. 2. (Color online) Spectral amplitudes for terahertz radiation from filaments induced by (a) the reference beam (dashed line), the control beam (dotted line), both the reference beam and control beam (solid line), (b) the reference beam and 4-ps delayed control beam (solid line), the reference beam and 4-ps ahead control beam (dotted line), (c) the reference beam and 8-ps delayed control beam (solid line), the reference beam and 8-ps ahead control beam (dotted line).

Fig. 3. (Color online) Spectral width of periodic peaks as a function of the temporal difference between the reference and control pulses.

Fig. 4. (Color online) (a) Experimental and (b) calculated spectral intensity of two successive terahertz pulses emitting from filaments formed by the reference beam and 4-ps delayed control beam.

Figure 1:

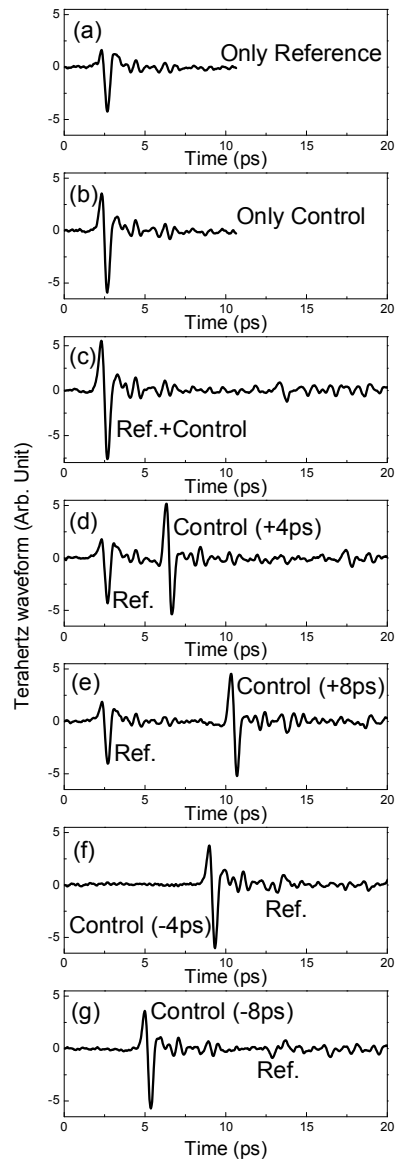


Figure 2:

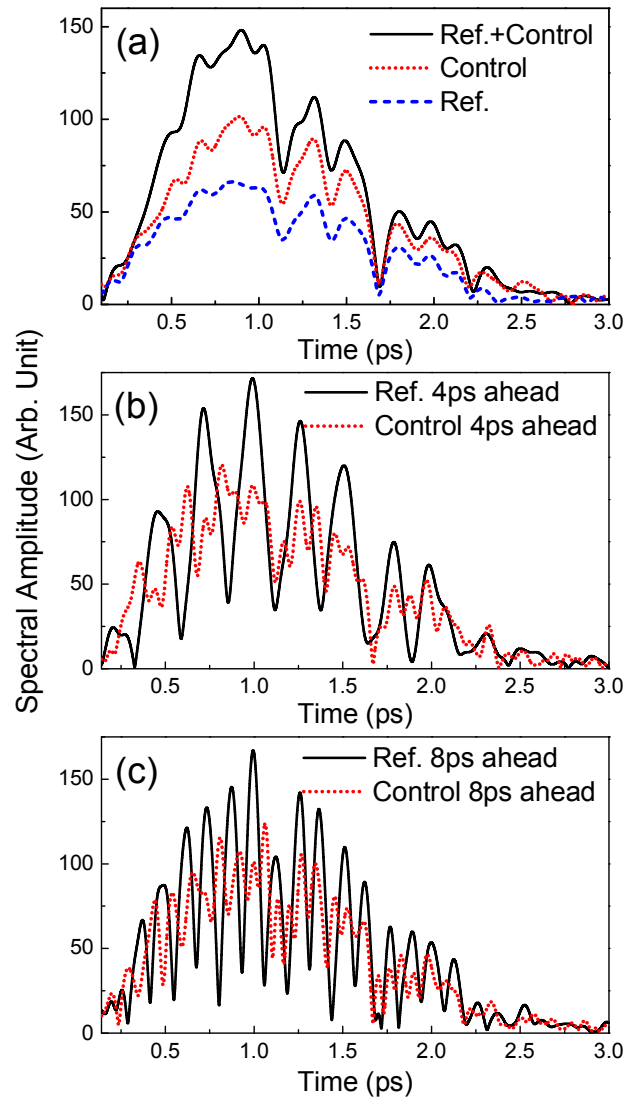


Figure 3:

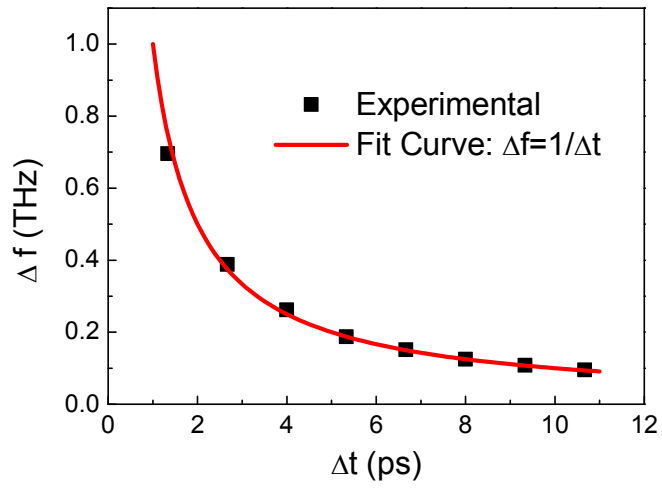


Figure 4:

