



Kurt, Rafet Emek and Khalid, Hassan and Turan, Osman and Houben, Mark and Bos, Jelte and Helvacioğlu, Ismail Hakki (2016) Towards human-oriented norms : considering the effects of noise exposure on board ships. Ocean Engineering. ISSN 0029-8018 , <http://dx.doi.org/10.1016/j.oceaneng.2016.03.049>

This version is available at <http://strathprints.strath.ac.uk/56137/>

Strathprints is designed to allow users to access the research output of the University of Strathclyde. Unless otherwise explicitly stated on the manuscript, Copyright © and Moral Rights for the papers on this site are retained by the individual authors and/or other copyright owners. Please check the manuscript for details of any other licences that may have been applied. You may not engage in further distribution of the material for any profitmaking activities or any commercial gain. You may freely distribute both the url (<http://strathprints.strath.ac.uk/>) and the content of this paper for research or private study, educational, or not-for-profit purposes without prior permission or charge.

Any correspondence concerning this service should be sent to the Strathprints administrator: strathprints@strath.ac.uk

Towards Human-Oriented Norms: Considering the Effects of Noise Exposure On Board Ships

Rafet Emek Kurt¹, Hassan Khalid¹, Osman Turan¹, Mark Houben², Jelte Bos^{2,3}, Ismail Hakki Helvacioğlu⁴

¹Department of Naval Architecture, Ocean and Marine Engineering, University of Strathclyde, Glasgow, UK

²TNO, Soesterberg, The Netherlands

³Faculty of Behavioural and Movement Sciences, Vrije Universiteit, Amsterdam, The Netherlands

⁴Faculty of Naval Architecture and Ocean Engineering, Istanbul Technical University, Istanbul, Turkey

Abstract

With modern trends of decrease in crew numbers on board ships together with increased operational demands and paperwork, crew fatigue and comfort have become more critical and are being given more importance. It is well known that environmental factors affect crew comfort and performance. The two outstanding factors which exist in the shipboard environment are vessel motions and noise. As such, the findings and lessons learnt from other industrial sectors are considered to be less relevant for ships. Therefore, it is necessary to conduct focused research to understand the effects of these factors, so that the lessons learnt can be integrated into the ship design process so as to mitigate their adverse effects during vessel operations. Due to obvious performance issues, ship motions and motion sickness research has attracted far more interest than human response to noise. This paper reports the findings of a recent research study undertaken as part of an EU FP7 research project, namely SILENV, which investigated the current levels of crew noise exposure through field studies. Furthermore, developed models on human response to noise on board ships and SILENV green label noise standards are also introduced in comparison with the current normative framework.

Keywords: Noise, Comfort, Ship, Noise Exposure, Crew, SILENV Project

1 Introduction

Today, as a result of technological developments, ships are equipped with sophisticated systems and automation. This has triggered a trend to decrease the number of crew members on board ships. Nevertheless, these automated systems still require human intervention for interpreting the information or when tasks require decision-making. Therefore, as compared to the past, even though the physical workload of the crew members on today's vessels decreased, the cognitive load is much higher than it used to be. As a result, maintaining the performance of the crew has become more important than before to achieve safe shipping operations. Investigations of the shipping accidents from US, UK, Canada, and Australia showed that human error is the major contributor of shipping accidents where 80 to 85% of all accidents were primarily caused by or associated with human error (Baker and Seah, 2004). As a result of this increased understanding on the importance of the human element, more research was focused on human factors on board ships.

12

Corresponding Author: Rafet Emek Kurt

Tel: +44 (0)141 548 4697, +44 (0)141 548 4094 13

Fax: +44 (0)141 552 2879

E-mail Address: rafet.kurt@strath.ac.uk

Postal Address: Department of Naval Architecture, Ocean and Marine Engineering, University of Strathclyde, 100 Montrose Street, Glasgow G4 0LZ, United Kingdom

1

1 In terms of human factors on-board ships, a naval architect's primary role is to design ships while considering
2 the needs of crew in terms of health, wellbeing and performance. It is important to mention that the
3 environment on ships in which crew members spend their day-to-day life is unique (motions, noise,
4 vibrations, heat, cold, smell etc.) and can be considered as extreme when compared with many other
5 industries. For example, one of the most challenging ship operations where human performance becomes
6 critical is in arctic conditions, which is even compared by scientists to space operations (Sillitoe et al., 2010;
7 Wickman). Moreover, as crew members not only work on board but are also required to live and rest in this
8 same environment for months, crew performance and wellbeing become more complex. Therefore,
9 environmental conditions on ships should be designed in a way to ensure not only the health but also the
10 performance and wellbeing of crew members on board.

11 One of the most important environmental factors on ships is passive motions. Due to having obvious
12 consequences and performance outcomes on crew, motion sickness has been studied in-depth, resulting in
13 numerous human response models, which can be utilised to estimate the levels of comfort even at the design
14 stage .However, shipping industry has failed to develop a similar knowledge base and even awareness on
15 human response to noise, which are also very important environmental factors on board ships. Shipping
16 industry focussed on complying with the limits set by IMO (International Maritime Organization), which were
17 under scrutiny and forced to change recently.

18 This paper reports research conducted under the EU FP7 SILENV Project (Ships Oriented Innovative
19 Solutions to Reduce Noise and Vibrations) which gave specific importance to human response to noise on
20 board ships and produced a 'Green Label Standard' for noise levels on board ships.

2 Literature Review

21 The most obvious effect of noise on humans is called Temporary Threshold Shift (TTS) which is an auditory
22 fatigue resulting from being exposed to hazardous levels of noise. Repeated exposure, not giving the affected
23 person enough time to fully recover the TTS, or exposure to very hazardous levels of noise, progresses into a
24 Permanent Threshold Shift (PTS) (Alberti, 2001). The current regulatory framework is only designed to
25 protect workers from these hazardous noise exposures. However, effects of noise on crew is much wider than

1 the health as it affects the crew wellbeing, comfort and performance considering that crew most of the time
2 live and work in the same environment.

3
4
5 At this point it is important to mention two relevant noise standards which are applicable to ships. The IMO
6
7 has recently updated the old Code on Noise Levels on Board Ships (IMO, 1981) with a new one (IMO, 2012)
8
9 which is enforced under the provisions of regulation II-1/3-12 of the SOLAS Convention. The code defines
10
11 the minimum acceptable noise levels for ship compartments and considers that, when complied with, the
12
13 equivalent continuous noise exposure of crew members will not exceed 80 dB(A). On the other hand, the EU
14
15 Physical Agents Directive for Noise (EC, 2003) aims to protect the workers' health from hazardous noise
16
17 exposures by defining the daily noise exposure action and limit values. In EU's approach, human is at focus
18
19 and the aim is to monitor and regulate the total amount of noise received the crew. Therefore, exposure
20
21 duration becomes more important since it directly affects the noise exposure levels. It may be inferred that the
22
23 approach of EU Physical Agent Directive is more human oriented as compared to the aforementioned IMO
24
25 Noise Code. However, both regulations are not strict enough when the effect of noise on crew performance
26
27 and wellbeing is considered. Furthermore, the effect of noise on performance and wellbeing lacks research in
28
29 the maritime domain. The aforementioned research gap and the need for diverting more research to this
30
31 important area was also recognised by Martin and Kuo (1995).
32
33
34
35

36
37 Numerous research studies from other industrial sectors are focused on understanding the effect of noise
38
39 exposure on worker performance and wellbeing. A review of the literature shows that exposure to noise has
40
41 negative effects on human performance and wellbeing (Broadbent, 1954; Button et al., 2004; Kurt et al., 2010;
42
43 Melamed et al., 2004; Melamed and Froom, 2002; Weston and Adams, 1932). However, it is also possible to
44
45 find examples of studies in the literature where researchers found a positive relation or no relation between
46
47 noise exposure and human performance (Harcum and Monti, 1973; Harrison and Kelly, 1989; Jerison, 1957;
48
49 White et al., 2012).
50
51
52

53 The literature review thus demonstrates conflicting findings, which shows that the relationship between the
54
55 noise exposure and human performance/wellbeing may change depending on the duration of noise exposure,
56
57 type of noise, demography of the subjects, type and complexity of the task. Unfortunately, this situation
58
59 makes the lessons-learnt from other industrial sectors to be less relevant and therefore less transferrable to the
60
61
62
63
64
65

maritime domain. Therefore, effects of on-board noise levels on the human performance and wellbeing needs to be investigated and findings should be taken into account when defining new noise limits for ships.

3 Noise Criteria

3.1 IMO Noise Code

The IMO Code on Noise Levels on Board Ships (resolution A.468 (XII)) has been in use for many years by regulatory bodies, ship owners and designers as permissible noise limits. Compliance with the limits defined by IMO noise code was voluntary, and therefore not every ship met the requirements of the code. Recently, some modifications were made to improve on the noise control/allowable exposure levels in the code (IMO, 2012), which came into force in January 2013, and is now mandatory to comply with. A comparison of the noise limits of the old and new code is given in Table 1 below.

Table 1: Noise level limits according to IMO Resolution A468 (XII) 1981 and IMO Resolution MSC.337 (91) 2012

Locations		IMO 1981 dB(A)	IMO 2012* dB(A)
Work spaces	Machinery spaces (continuously manned)	90	removed
	Machinery spaces (not continuously manned)	110	110
	Machinery control rooms	75	75
	Workshops	85	85
	Non-specified work spaces	90	85
Navigation spaces	Navigation bridge and chartroom	65	65
	Listening post, including navigation bridge wings and windows	70	70
	Radio room (with radio equipment operating but not producing audio signals)	60	60
	Radar rooms	65	65
Accommodation spaces	Cabins and hospitals	60	60/55
	Mess rooms	65	65/60
	Recreation rooms	65	65/60
	Open recreation areas	75	75
	Offices	65	65/60
Service spaces	Galleys, without food processing equipment operating	75	75
	Stores and pantries	75	75
Normally unoccupied spaces	Spaces not specified	90	90

*The limits for ship size greater than 10000 GRT are shown after /.

It can be seen from the above table that for some of the compartments the noise limits were reduced while other compartments noise limits remained same. Several classification societies and maritime authorities have already imposed more strict standards to control the ship noise (ABS, 2001; DMA, 2002; GL, 2003; LR,

2004; MCA, 2007; SMA, 1973). It is stated in the code that, when ships comply with the noise limits defined in Table 1, the equivalent continuous noise exposure of crew members will not exceed 80 dB(A).

3.2 EU Physical Agents Directive

The European Parliament has followed a similar approach by issuing a physical agent directive to protect workers from risks arising from exposure to noise (EC, 2003). The directive covers all workers who are exposed or likely to be exposed to risk from noise. The main difference between the IMO resolution and the EU directive is that; the EU directive pays more attention to the workers' exposure to the noise and tries to limit hazardous exposures, while IMO aims to control noise at the design stage and enforce compartment-based noise limits for ships to ensure the protection of human health on board. In a sense, it is a better approach to regulate the noise limits in a human-centred way but since ships are remote and monitoring compliance is harder, defining compartment based limits at the design stage is also effective. The exposure action and limit values defined by the EU physical agents directive is shown in Table 2.

Table 2: Exposure limit and action values defined by EU physical agents directive

	Daily exposure Levels, dB(A)	Peak levels, dB(C)
Exposure limit values ($L_{EX,8h}$)	87	140
Upper exposure action values ($L_{EX,8h}$)	85	137
Lower exposure action values ($L_{EX,8h}$)	80	135

For both EU Physical Agents Directive and IMO Noise Code, the exposure levels can be calculated using the following:

$$L_{EX,T} = 10 \times \log \frac{1}{T} \sum_i^n t_i \times 10^{L_i/10} \quad (1)$$

In the above equation t_i is the duration in a noisy environment while T is 8 when calculating 8 hour equivalent exposure level and 24 when calculating 24 hour equivalent levels.

3.3 Comparative Study

In order to understand the current regulatory compliance, the authors conducted a comparative study on noise exposure on board ships (Turan et al., 2010) which included the following activities:

- Noise levels at various compartments were measured in six different oil/chemical tankers during their sea trials.
- A questionnaire was designed and applied to capture the work patterns of the tanker crew.
- Based on the identified work patterns, noise exposure levels of all crew ranks were estimated.
- Results were comparatively analysed using the criteria defined by IMO and EU.

The main particulars of the six Oil/Chemical tanker ships are given in Table 3. It can be seen that all tankers are of similar size, apart from the “Oil/Chemical Tanker No: 4” which is a larger vessel.

Table 3: Main particulars of ships used in full scale measurements

Type of Ship	DWT	L _{Overall} (metres)	Speed (knots)	Engine Power (kW)
1.Oil/Chemical Tanker	7915	121	14	3840
2.Oil/Chemical Tanker	6000	107	13	2620
3.Oil/Chemical Tanker	8000	121	14	3840
4.Oil/Chemical Tanker	18000	148	14	5920
5.Oil/Chemical Tanker	4500	106	15.5	3250
6.Oil/Chemical Tanker	6100	123	13	2610

It is stated in the IMO noise code that if ships comply with the defined noise limits seafarers will not be exposed to an LEX(24) exceeding 80 dB(A). In order to investigate this, exposure levels for each rank were calculated through an exposure assessment tool reported in Turan et al. (2010). Results of this study showed that although ships are fulfilling the requirements set by the IMO on compartment bases, they are failing to comply with the defined noise exposure criteria. In the aforementioned study calculations were carried out for 4 different hearing protection levels; (1) no hearing protection used, (2) the IMO’s estimated noise reduction levels are used, (3) a correction for using ‘A’ weighted TWA (time weighted average) is applied to the noise reduction rates of hearing protectors, and (4) OSHA’s correction factor from lab-obtained NRR (Noise Reduction Rating) to a real work environment is applied. It was concluded in this study that when all corrections applied on hearing devices to estimate their effective protection, seafarers, especially those who working in or near machinery spaces, are at risk. As a result it can be said that even in terms of protecting human health on board, there are issues that need to be improved. Therefore, it is necessary to introduce new norms, which will ensure designing the noise levels on board ships by considering the recent improvements, practical implementation, health, comfort and performance of crew members.

4 EU FP7 SILENV Project's Green Label Proposal

EU FP7 SILENV Project (SILENV, 2009) was funded in response to an emerging need for reducing ship-generated noise and vibration pollution. The SILENV Project dealt with a wide range of issues related to noise and vibration on and from ships which can be summarised in following three groups; (1) noise & vibration onboard, (2) Underwater noise radiation, and (3) airborne noise emissions from ships. The project conducted a thorough review of the available published literature, carried out field studies and measurements, developed human response models, and issued guidelines aiming to improve the current situation (André et al., 2014; Badino et al., 2012a; Badino et al., 2012b, 2013; Borelli et al., 2015). One of the main deliverables of SILENV Project is the 'Green Label Proposal' (SILENV, 2012) which defines new improved noise limits for ships. The following sections will explain the development procedure as well as the final proposed green limits.

4.1 Methodology

In order to define the SILENV Green Label, the following methodology was adopted as demonstrated in Figure 1 below.

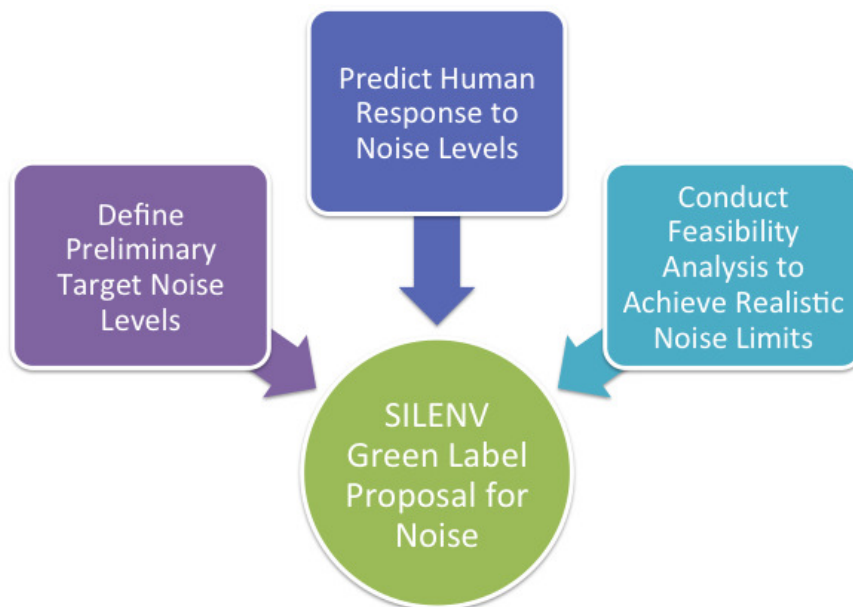


Figure 1: SILENV Approach for defining noise limits

1 First, the SILENV Consortium aimed to define preliminary target levels for noise on board ships. In order to
2 achieve this, a comprehensive research was conducted to review all applicable noise standards and
3 regulations.
4

5
6 In the next step, the SILENV Project investigated the resulting human response from preliminary noise levels
7 as defined in the previous step. Specific human response models (comfort, wellbeing and performance) were
8 developed to predict the human response. These models were then utilised to take human response into
9 consideration.
10

11 It was also important to define noise limits which are achievable and which will be accepted by the industry.
12

13 Therefore, in the SILENV project a database of noise measurement levels from European ships was built, so
14 that proposed levels could be assessed to see whether it is feasible for current fleet to comply with or not.
15

16 Finally, the SILENV Consortium finalised the Green Label Proposal through an expert workshop.
17

18 **4.2 Preliminary targets and critical analysis**

19 The IMO “Code on noise levels on board ships” is fully accepted by the maritime community as a reference
20 document when dealing with noise on board ships. Therefore, it was considered that the development of
21 preliminary noise limits for the SILENV ‘Green Label Proposal’ should use the IMO noise code as a base.
22

23 Then, through conducting an extensive review on available noise norms, target noise levels were developed. It
24 was thought that SILENV should consider all the limit levels defined by the various existing norms and define
25 the preliminary target noise levels which -if not more stringent- are just as stringent as the existing norms to
26 ensure compliance with the most demanding noise mitigation standards for comfort and work environment.
27

28 The proposed preliminary noise levels are shown in Table 4 and Table 5 for crew and passengers respectively,
29 in comparison with the existing norms.
30

1 Table 4: Proposed preliminary noise limits for crew spaces in comparison with existing norms (in dB(A))

2 (SILENV, 2012)

Locations	RINA	BV	GL	ABS	DNV	LR	IMO Code	IMO New	PROPOSED	
ACCOMODATION	Crew Cabins	55	52	52	50	50	52	60	55	50
	Day Cabins	-	-	-	-	-	55	-	-	55
	Officers Cabins	52	-	50	-	-	-	-	-	50
	Hospital	50	55	54	50	55	-	60	60	50
	Offices	58	57	57	55	60	55	65	65	55
	Open deck recreation	70	70	68	65	70	-	75	70	65
	Closed Public Spaces	60	57	90	-	55	-	-	-	55
	Mess room	60	57	57	-	-	57	65	60	57
	Recreation	-	-	57	60	-	-	65	65	57
	Corridors	-	70	58	60	-	-	-	-	58
	Dining Spaces	-	-	-	55	-	-	-	-	55
		58	55	55	55	55	60	60	65	55
	NAVIG.	Radio room								
Navigation Spaces		58	-	55	-	-	-	65	-	55
Chart Rooms		-	-	-	55	-	-	-	-	55
Radar Room		-	-	-	55	-	-	65	-	55
	70	70	67	65	70	75	75	70	65	
WORK	Engine control room									
	Workshops	-	85	80	80	-	85	80	80	80
	Open deck working areas	70		75	-	-	63	-	-	63
	Laundries	-	-	-	75	-	-	-	-	75
	Continuously Manned Machinery Spaces	-	-	-	85	-	90	90	-	85
	Not Continuously Manned Machinery Spaces	-	-	110	108	-	110	110	105	105
	Cargo Handling Spaces/Areas Near Cargo Handling Equipment	-	-	-	80	-	-	-	-	80
	Fan Rooms	-	-	-	85	-	-	-	-	85
	Alleyways, changing rooms	-	-	-	-	-	70	-	-	70
	Listing posts, Bridge wings	-	-	65	-	-	-	70	70	65
	Galleys	-	70	68	70	-	75	-	70	68
	Pantries	-	-	66	70	-	-	-	-	66
	Stores	-	-	80	70	-	-	-	-	70
Wheelhouse	-	-	-	55	60	85	-	65	55	

4 Table 5: Proposed preliminary noise limits for passenger compartments

Locations	Noise Level, dB(A)						PROPOSED
	ABS	BV	DNV	GL	LR	RINA	
Passenger top level cabins	45	45	44	44	45	45	44
Passenger standard cabins	45	49	49	46	49	50	45
Outside installation	65	65	65	64	67	65	64
Discotheque, ballroom	60	65	55	52	55	55	52
Restaurant, lounge	55	55	55	52	55	55	52
Libraries, theatre	55	53	55	52	50	52	50
Shops	55	60	55	52	60	55	52
Gymnasium	65	60	55	52	55	55	52
Corridors, staircase	60	60	55	54	55	60	54
Hospital	45	55	55	54	52	50	45

4.3 Human Response

As already highlighted in Section 3.3, the study on the compliance of existing vessels with IMO regulation and EU directive, revealed that in some cases the ships fulfilling limiting noise level criteria of IMO regulation were still failing to meet the noise exposure limits (see Turan et al., 2010). It was, therefore, considered important to assess the preliminary noise target levels against human subjective responses from on board comfort and work environment point of view. Hence, improved human response models were developed in the SILENV Project (see Houben et al., 2012 for further details). For the model development, noise measurements were conducted in various compartments on board 15 different ships. Together with the noise measurements, questionnaires were deployed to capture the human response. The human response models describe the relationship between the levels of noise and subjective ratings of crew on performance and of passengers on comfort. The number of various ordinal subjective ratings obtained were reduced through correlation, factor analyses and common sense. The relationship between dependent and independent variables appeared to be non-linear, hence logistic regressions were used and final models with good fitness were obtained.

In order to represent multidimensional nature of human responses, 2 comfort and 3 performance models were developed, resulting in a total of 5 human response models focusing on different performance and comfort criteria. These models are summarized in Table 6.

Table 6: Dependent variable in models. Numbers only refer to specific items used in the questionnaires deployed in the SILENV Project, and are of no particular value here.

	Models & Dependent variables
Comfort	N2c - Annoyance O1c - Overall feeling of discomfort
Performance	N2p - Annoyance N7p - Quality impairment O1p - Overall feeling of wellbeing

As a result of detailed discussions amongst SILENV partners, for comfort ‘N2c - Noise Annoyance model’ and for performance ‘N7p - Quality impairment model’ were selected out of a larger range of questionnaire items deployed by the SILENV Project to assess the preliminary target levels. These selected models were then used to calculate the percentage of human discomfort and performance impairment. Table 7 shows the

limits corresponding to a specific percentage of people annoyed or impaired in their work by the noise. In the SILENV Green Label proposal it was aimed to ensure at least 90% of passengers' and crews' satisfaction.

Table 7: Noise limits per human response

Extra probability relative to base line	Noise Annoyance, dB(A)	Noise Induced Work Quality Impairment, dB(A)
5%	48	55
10%	55	64
15%	60	71
20%	65	77
25%	70	82
30%	75	86

4.4 Feasibility of the Preliminary Target Levels

It is important to define realistic noise limits which are achievable for new ships. Therefore, the aim of this analysis was to find an answer to the following question: “what noise criteria should be defined in order to make only 5%, 10%, 20%, 30%, 40%, and 50% of modern ships to comply?”. In order to achieve that, only the most recent ships from the SILENV Noise Database were selected considering that the technology in older ships will not be comparable to the new buildings. A total of 64 different vessels were taken into consideration and Table 8 shows the percentages of vessels from the SILENV database that comply with the noise levels. Noise limits which will correspond to 20% of the vessels to comply, was considered reasonable and achievable by the SILENV Consortium. More details about the SILENV database can be found in a publication by Beltrán Palomo (2013)

4.5 Finalisation of Green Label Proposal

The noise requirements defined in previous sections were combined to obtain the SILENV Green Label Proposal. First, the preliminary noise limits (IMO limits as well as other standards) were taken as a starting point and compared to the human response criteria defined in the previous sections. As a result of this comparison and discussions, new noise limits were defined (see Houben et al., 2012 for details). Then, these noise limits were compared with the noise criteria based on 20% of current vessels compliance. Again, after these comparison and discussions within the SILENV Consortium, new noise limits have been defined. After consolidating all the criteria, through a workshop SILENV partners further discussed and finalised the green label proposal. The final SILENV Green Label Proposal is shown in Table 9 below. As it can be seen from the table, SILENV introduced its own space groups, similar but not completely identical to the compartments specified by IMO (Table 1).

Table 8: Percentages of vessels which comply with given noise levels (SILENV, 2012) for the different locations and corresponding location types as defined in Table 10.

Locations	Corresponding location type	x=50%		x=40%		x=30%		x=20%		x=10%		x=5%	
		Noise limit dB(A)	Exact percent t. %	Noise limit dB(A)	Exact percent t. %	Noise limit dB(A)	Exact percent t. %	Noise limit dB(A)	Exact percent t. %	Noise limit dB(A)	Exact percent t. %	Noise limit dB(A)	Exact percent t. %
Passenger Cabin	1	54	46	54	39	51	31	50	27	46	12	44	4
Crew Cabin	1	60	52	59	41	57	33	54	19	51	11	49	7
Offices	2	59	49	58	42	55	32	52	25	51	14	49	7
Public Spaces	3	60	52	59	44	57	32	56	24	55	12	52	4
Crew Public Spaces	4	66	49	65	42	63	34	60	20	53	10	50	4
Outdoor Areas	6	76	47	76	40	74	27	69	20	59	13	59	13
Wheelhouse	7	62	54	61	42	58	31	57	23	55	12	54	5
Work Spaces	9	83	53	82	40	79	31	76	18	73	10	69	6
Control Room	8	70	51	69	40	66	30	62	23	60	11	58	4
Auxiliary Engine Room	11	105	46	104	39	102	23	97	15	89	8	79	0
Engine Room	11	108	50	107	40	106	27	105	21	102	10	101	8

Table 9: Locations used for the SILENV Green Noise Label

Location Type	Group Name	Location Example	Noise Limits, dB(A)
1	Cabins	Passenger Cabins	50
		Crew Cabins	50
		Hospital	50
2	Offices	Offices	53
3	Public Spaces A	Libraries	55
		Calm Public Spaces	55
4	Public Spaces B	Restaurant	60
		Lounge	60
		Mess room	60
		Shops	60
5	Public Spaces C	Discotheque, dance floor	65
		Ball room	65
		Corridor	65
		Staircase	65
6	Outdoor Areas	Open recreational areas	70
		Bridge wings / Open deck working areas	70
7	Wheelhouse	Wheelhouse	60
		Radio Room	60
8	Work space A	Engine Control Room	65
		Galleys	65
9	Work space B	Pantries	75
		Stores	75
		Laundries	75
		Workshops	75
		Garage	75
10	Work space C	Continuously manned machinery space	90
11	Work space D	Not Continuously manned machinery space	105

5 Conclusions

In the SILENV Project improved human response models have been developed (Kurt, 2014). Furthermore, these models were utilised for developing the SILENV green label proposal. The noise criteria proposed by SILENV is the first example of a human oriented noise norm developed for the shipping industry. The developed green label proposal not only aims to protect the health of the crew but also aims to maintain a good level of comfort as well as performance on board ships, also for passengers. Analysis of current fleet shows that, the new limits are realistic and achievable by the new ships. More information can be seen in the SILENV Green label proposal (SILENV, 2012).

The SILENV Green Label stands out by the following issues:

- The difference made by classification societies between crew cabins and passenger cabins is removed. The main reason for this is related to the minimum standards of wellbeing of human regardless of their role onboard ships. 50 dB(A) is an achievable noise level for both passenger and crew and provides a basic standard. Crew being able to sleep and rest is very critical since sleep deprivation is identified as one of the contributors to crew fatigue, which is leading to human errors and ship accidents/incidents. For passenger ships, different classification societies offer various comfort class notations that differentiate in the level of quietness of the room. However, crew who live and work onboard ships do not have such choices and it is very important that they at least receive the cabin equivalent to the minimum standard of a passenger cabin for a given ship. Therefore, 50 dB(A) is a desirable and technologically achievable minimum standard for crew cabins considering both crew wellbeing and safer ship operations.
- Another point is that even in the new IMO noise code, the noise limit defined for the hospital location is 60 dB(A), which is 10 dB(A) higher when compared to the SILENV proposed limit of 50 dB(A). The main reason for a more stringent SILENV limit is that any patient admitted to the hospital section of the ship, should have the ideal conditions for fast recovery and at least they should have the minimum cabin standards.
- Noise levels in cabins were specified to ensure that less than 10% of people will get annoyed. Tolerating a small percentage of people being annoyed is based on the fact that, even in the absence of

1 any physical environmental habitat deficiencies, average complaints are around 10%, which is
2 attributed mainly to the passenger expectations and personal or other factors such as price vs service
3
4 (Turan, 2006). Therefore achieving 90% satisfaction level was considered feasible and more realistic.
5

- 6 • Noise levels in wheelhouses have been specified to ensure that less than 10% of people will judge
7 their performance degraded based on subjectively reported self ratings. Again, considering safe
8 operations, a lower noise limit in the wheel house (bridge) is necessary. Study carried out by Kurt et
9 al. (2010) shows that increasing noise levels on the bridge influence the concentration of the officer
10 and affect the passage performance significantly. Therefore, the limit set by IMO of 65 dB(A) should
11 be further investigated.
12
- 13 • In high noise areas (Work space C and D) hearing protection has to be worn. Previous studies showed
14 that noise exposure of crew mainly working in engine and related rooms exceeds the exposure limits
15 defined by the EU physical agents directive (Turan et al., 2010). It is clear that reducing the noise
16 levels in engine rooms or similar compartments to an inhabitable level is not always possible.
17 Therefore, Personal Protective Equipment (PPE) is essential to be worn by the crew who work in
18 these spaces. There are various types of PPEs available providing different levels of protection against
19 noise. Therefore, it is important to choose the correct type of hearing protection to reduce the
20 hazardous noise exposure.
21
- 22 • When considering the public spaces, the proposed SILENV standards took into account the activities
23 taking place in those spaces as well as human expectations. This resulted in the proposal of different
24 limits. The noise level in public spaces such as libraries is expected to be low and therefore a lower
25 noise limit, corresponding with a lower annoyance level (10%) is chosen. On the other hand, in public
26 spaces like dining spaces or shops, noise levels are naturally higher due to the leisure activities and
27 therefore noise limits are chosen to be less stringent, corresponding with 15% annoyance level.
28

29 Overall, the proposed SILENV Green Label Noise standards advocate to consider not only health but also
30 wellbeing and performance of humans on board. It was also shown that these proposed standards can be
31 achieved by the industry with currently available technologies and know-how.
32

1 **6 Acknowledgement**

2 Authors gratefully acknowledge that the research presented in this paper is generated as part of European
3
4³ Commission funded project SILENV (Ships Oriented Innovative Solutions to Reduce Noise and Vibrations),
5
6⁴ Seventh Framework Programme, Project number 234182, FP7-SST-2008-RTD-1.
7
8
9⁵

7 References

- 1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
- ABS, 2001. Guide for Crew Habitability on Ships. American Bureau of Shipping.
- Alberti, P.W., 2001. The Pathophysiology of the Ear, in: Goelzer B, H.C., Sehrndt GA (Ed.), Occupational Exposure To Noise Evaluation, Prevention And Control. World Health Organisation (WHO).
- André, M., Baudin, E., Palomo, P.B., Dambra, R., Delente, M., Gaggero, T., Haimov, E., Hallander, J., Houben, M., Ianniello, S., 2014. Holistic noise and vibration abatement within the EU 7FP. The SILENV project: Ship Innovative soLutions to rEduce Noise and Vibrations. Transport Research Arena.
- Badino, A., Borelli, D., Gaggero, T., Rizzuto, E., Schenone, C., 2012a. Control of airborne noise emissions from ships, Proc. of the Intern. Conf. on Advances and Challenges in Marine Noise and Vibration MARNAV2012, Glasgow, UK.
- Badino, A., Borelli, D., Gaggero, T., Rizzuto, E., Schenone, C., 2012b. Noise emitted from ships: impact inside and outside the vessels. *Procedia-Social and Behavioral Sciences* 48, 868-879.
- Badino, A., Borelli, D., Gaggero, T., Rizzuto, E., Schenone, C., 2013. The EU research effort towards the control of noise emissions from ships: the SILENV Project (7FP), AIA-DAGA 2013 Conference on Acoustics, Merano, Italy.
- Baker, C.C., Seah, A.K., 2004. Maritime accidents and human performance: the statistical trail, MarTech Conference, Singapore.
- Beltrán Palomo, P., 2013. The Most Recent Noise & Vibration Assessment of the European Fleet, within the Framework of the “SILENV Project”. *Ship Science & Technology* 7 (14), 43-66.
- Borelli, D., Gaggero, T., Rizzuto, E., Schenone, C., 2015. Measurements of airborne noise emitted by a ship at quay, The 22nd International Congress on Sound and Vibration Florence, Italy.
- Bos, J.E., MacKinnon, S.N., Patterson, A., 2005. Motion sickness symptoms in a ship motion simulator: effects of inside, outside, and no view. *Aviation, space, and environmental medicine* 76 (12), 1111-1118.
- Broadbent, D.E., 1954. Some effects of noise on visual performance. *Quarterly Journal of Experimental Psychology* 6 (1), 1-5.
- Button, D.C., Behm, D.G., Holmes, M., Mackinnon, S.N., 2004. Noise and muscle contraction affecting vigilance task performance. *Occupational Ergonomics* 4 (3), 157-171.
- DMA, 2002. Technical regulation on noise in ships, Technical regulation 4. Danish Maritime Authority.
- EC, 2003. on the minimum health and safety requirements regarding the exposure of workers to the risks arising from physical agents (noise). Official Journal of the European Union.
- GL, 2003. Rules for Classification and Construction, Chapter 16 Harmony Class- Rules on Rating. Germanischer Lloyd
- Harcum, E.R., Monti, P.M., 1973. Cognitions and Placebos in Behavioural Research on Ambient Noise. *Perceptual and Motor Skills* 37 (1), 75-99.
- Harrison, D.W., Kelly, P.L., 1989. Age differences in cardiovascular and cognitive performance under noise conditions. *Perceptual and Motor Skills* 69 (2), 547-554.

1 Houben, M., Kurt, R.E., Khalid, H., Zoet, P., Bos, J., Turan, O., 2012. Human Response to Noise and
2 Vibration Aboard Ships, International Conference on Advances and Challenges in Marine Noise and
3 Vibration. University of Strathclyde, 5-7 September, Glasgow UK.
4
4 4 IMO, 1981. Code on Noise Levels on Board Ships.
5
6 5 IMO, 2012. Adoption of the Code on Noise Levels on Board Ships. International Maritime Organisation.
7
8 6 Jerison, H.J., 1957. Performance on a simple vigilance task in noise and quiet. The Journal of the Acoustical
9 Society of America 29 (11), 1163-1165.
10
11 8 Khalid, H., Turan, O., Bos, J.E., 2011. Theory of a subjective vertical–horizontal conflict physiological
12 motion sickness model for contemporary ships. Journal of marine science and technology 16 (2), 214-225.
13
14 10 Kurt, R.E., 2014. Development of human response models and human oriented criteria for noise on board
15 ships, Department of Naval Architecture, Ocean and Marine Engineering. University of Strathclyde, Glasgow,
16 United Kingdom.
17
18 13 Kurt, R.E., Turan, O., Arslan, O., H., K., Clelland, D., Gut, N., 2010. An Experimental Study to Investigate
19 Effects of Noise on Human Performance Onboard Ships, Human Performance at Sea Conference, Glasgow,
20 UK.
21
22 16 LR, 2004. Provisional Rules for Passenger and Crew Accommodation Comfort. Lloyd’s Register.
23
24 17 Martin, A., Kuo, C., 1995. The effects of noise and vibration on crew performance, International Conference
25 on Noise and Vibration in the Maritime Environment. The Royal Institution of Naval Architects Trinity
26 House, London, UK.
27
28 20 MCA, 2007. Codes of Practice For Controlling Risks due to Noise and Vibration on Ships. Maritime and
29 Coastguard Agency
30
31 22 McCauley, M.E., Royal, J.W., Wylie, C.D., O’Hanlon, J.F., Mackie, R.R., 1976. Motion sickness incidence:
32 Exploratory studies of habituation, pitch and roll, and the refinement of a mathematical model. DTIC
33 Document.
34
35 25 Melamed, S., Fried, Y., From, P., 2004. The joint effect of noise exposure and job complexity on distress and
36 injury risk among men and women: the cardiovascular occupational risk factors determination in Israel study.
37 Journal of occupational and environmental medicine 46 (10), 1023-1032.
38
39 28 Melamed, S., From, P., 2002. The joint effect of industrial noise exposure and job complexity on all-cause
40 mortality-The CORDIS study. Noise and Health 4 (16), 23.
41
42 30 SILENV, 2009. Ships oriented innovative solutions to reduce noise and vibrations. European Union,
43 Framework Programme 7 Collaborative Project no 234182.
44
45 32 SILENV, 2012. WP 5: Green Label Proposal - Subtask 5.2: Noise and Vibration label proposal.
46
47 33 Sillitoe, A., Upcraft, D., Rich, K., LaRoche, M., Røed, B., Huse, J., 2010. Supporting Human Performance in
48 Ice and Cold Conditions. Lloyd's Register, London.
49
50 35 SMA, 1973. Sjöfartsverkets meddelanden Serie A. Swedish Maritime Authority.
51
52 36 Turan, O., 2006. COMPASS Final Publishable Report A rational approach for reduction of motion sickness &
53 improvement of passenger comfort & safety in sea transportation.
54
55
56
57
58
59
60
61
62
63
64
65

1 Turan, O., Helvacioğlu, I.H., Insel, M., Khalid, H., Kurt, R.E., 2010. Crew noise exposure on board ships and
2 comparative study of applicable standards. *Ships and Offshore Structures* 6 (4), 323-338.

3 Weston, H.C., Adams, S., 1932. The effects of noise on the performance of weavers. Medical Research
4 Council Industrial Health Research Board, pp. 38-62.

5
6 White, K., Meeter, M., Bronkhorst, A., 2012. Effects of transportation noise and attitudes on noise annoyance
7 and task performance, INTER-NOISE and NOISE-CON Congress and Conference Proceedings. Institute of
8 Noise Control Engineering, pp. 780-788.

9
10 Wickman, L.A., Comparing Crew Operations in Extreme Environments: Arctic Shipping vs. Outer Space.
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65

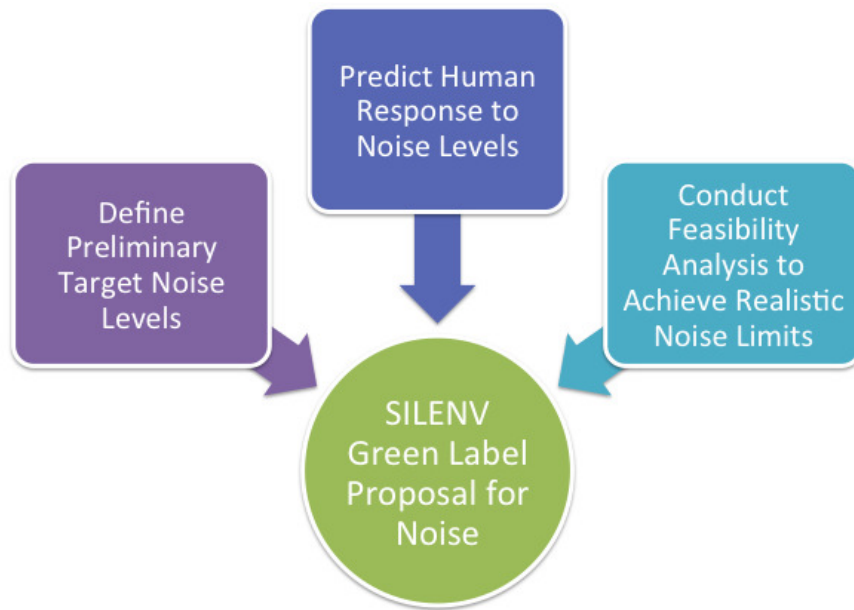


Figure 1: SILENV Approach for defining noise limits

1 Table 1: Noise level limits according to IMO Resolution A468 (XII) 1981 and IMO Resolution MSC.337 (91)
 2 2012

Locations		IMO 1981 dB(A)	IMO 2012* dB(A)
Work spaces	Machinery spaces (continuously manned)	90	removed
	Machinery spaces (not continuously manned)	110	110
	Machinery control rooms	75	75
	Workshops	85	85
	Non-specified work spaces	90	85
Navigation spaces	Navigation bridge and chartroom	65	65
	Listening post, including navigation bridge wings and windows	70	70
	Radio room (with radio equipment operating but not producing audio signals)	60	60
	Radar rooms	65	65
Accommodation spaces	Cabins and hospitals	60	60/55
	Mess rooms	65	65/60
	Recreation rooms	65	65/60
	Open recreation areas	75	75
	Offices	65	65/60
Service spaces	Galleys, without food processing equipment operating	75	75
	Stores and pantries	75	75
Normally unoccupied spaces	Spaces not specified	90	90

3 *The limits for ship size greater than 10000 GRT are shown after /.

5 Table 2: Exposure limit and action values defined by EU physical agents directive

	Daily exposure Levels, dB(A)	Peak levels, dB(C)
Exposure limit values ($L_{EX,8h}$)	87	140
Upper exposure action values ($L_{EX,8h}$)	85	137
Lower exposure action values ($L_{EX,8h}$)	80	135

7 Table 3: Main particulars of ships used in full scale measurements

Type of Ship	DWT	$L_{Overall}$ (metres)	Speed (knots)	Engine Power (kW)
1.Oil/Chemical Tanker	7915	121	14	3840
2.Oil/Chemical Tanker	6000	107	13	2620
3.Oil/Chemical Tanker	8000	121	14	3840
4.Oil/Chemical Tanker	18000	148	14	5920
5.Oil/Chemical Tanker	4500	106	15.5	3250
6.Oil/Chemical Tanker	6100	123	13	2610

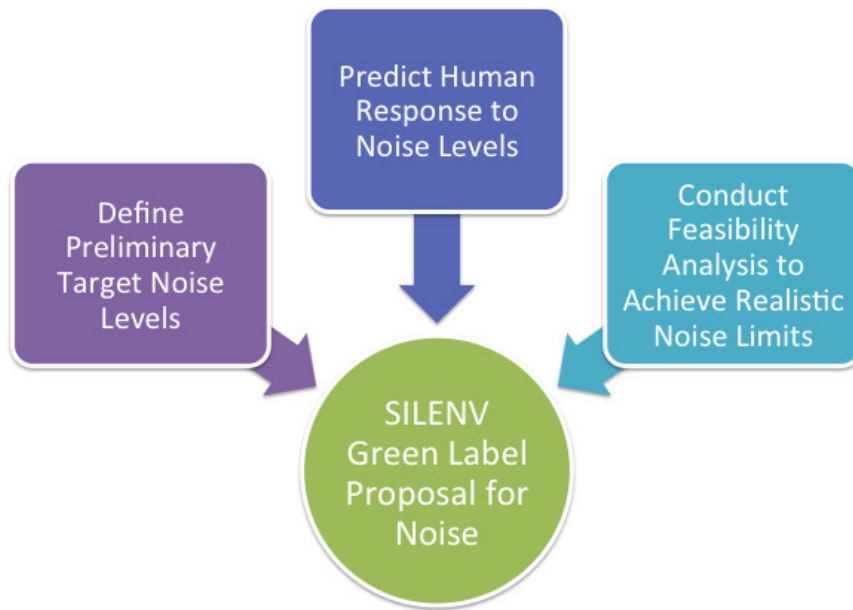


Figure 1: SILENV Approach for defining noise limits

Table 4: Proposed preliminary noise limits for crew spaces in comparison with existing norms (in dB(A))

(SILENV, 2012)

	Locations	RINA	BV	GL	ABS	DNV	LR	IMO Code	IMO New	PROPOSED
ACCOMODATION	Crew Cabins	55	52	52	50	50	52	60	55	50
	Day Cabins	-	-	-	-	-	55	-	-	55
	Officers Cabins	52	-	50	-	-	-	-	-	50
	Hospital	50	55	54	50	55	-	60	60	50
	Offices	58	57	57	55	60	55	65	65	55
	Open deck recreation	70	70	68	65	70	-	75	70	65
	Closed Public Spaces	60	57	90	-	55	-	-	-	55
	Mess room	60	57	57	-	-	57	65	60	57
	Recreation	-	-	57	60	-	-	65	65	57
	Corridors	-	70	58	60	-	-	-	-	58
	Dining Spaces	-	-	-	55	-	-	-	-	55
NAVIG.	Radio room	58	55	55	55	55	60	60	65	55
	Navigation Spaces	58	-	55	-	-	-	65	-	55
	Chart Rooms	-	-	-	55	-	-	-	-	55
	Radar Room	-	-	-	55	-	-	65	-	55
WORK	Engine control room	70	70	67	65	70	75	75	70	65
	Workshops	-	85	80	80	-	85	80	80	80
	Open deck working areas	70	-	75	-	-	63	-	-	63
	Laundries	-	-	-	75	-	-	-	-	75
	Continuously Manned Machinery Spaces	-	-	-	85	-	90	90	-	85
	Not Continuously Manned Machinery Spaces	-	-	110	108	-	110	110	105	105
	Cargo Handling Spaces/Areas Near Cargo Handling Equipment	-	-	-	80	-	-	-	-	80

Fan Rooms	-	-	-	85	-	-	-	-	85
Alleyways, changing rooms	-	-	-	-	-	70	-	-	70
Listing posts, Bridge wings	-	-	65	-	-	-	70	70	65
Galleys	-	70	68	70	-	75	-	70	68
Pantries	-	-	66	70	-	-	-	-	66
Stores	-	-	80	70	-	-	-	-	70
Wheelhouse	-	-	-	55	60	85	-	65	55

Table 5: Proposed preliminary noise limits for passenger compartments

Locations	Noise Level, dB(A)						
	ABS	BV	DNV	GL	LR	RINA	PROPOSED
Passenger top level cabins	45	45	44	44	45	45	44
Passenger standard cabins	45	49	49	46	49	50	45
Outside installation	65	65	65	64	67	65	64
Discotheque, ballroom	60	65	55	52	55	55	52
Restaurant, lounge	55	55	55	52	55	55	52
Libraries, theatre	55	53	55	52	50	52	50
Shops	55	60	55	52	60	55	52
Gymnasium	65	60	55	52	55	55	52
Corridors, staircase	60	60	55	54	55	60	54
Hospital	45	55	55	54	52	50	45

Table 6: Dependent variable in models. Numbers only refer to specific items used in the questionnaires deployed in the SILENV Project, and are of no particular value here.

Models & Dependent variables	
Comfort	N2c - Annoyance O1c - Overall feeling of discomfort
Performance	N2p - Annoyance N7p - Quality impairment O1p - Overall feeling of wellbeing

Table 7: Noise limits per human response

Extra probability relative to base line	Noise Annoyance, dB(A)	Noise Induced Work Quality Impairment, dB(A)
5%	48	55
10%	55	64
15%	60	71
20%	65	77
25%	70	82
30%	75	86

Table 8: Percentages of vessels which comply with given noise levels (SILENV, 2012) for the different locations and corresponding location types as defined in Table 10.

Locations	Corresponding location type	x=50%		x=40%		x=30%		x=20%		x=10%		x=5%	
		Noise limit dB(A)	Exact percen t. %	Noise limit dB(A)	Exact percen t. %	Noise limit dB(A)	Exact percen t. %	Noise limit dB(A)	Exact percen t. %	Noise limit dB(A)	Exact percen t. %	Noise limit dB(A)	Exact percen t. %
Passenger	1	54	46	54	39	51	31	50	27	46	12	44	4

Cabin													
Crew Cabin	1	60	52	59	41	57	33	54	19	51	11	49	7
Offices	2	59	49	58	42	55	32	52	25	51	14	49	7
Public Spaces	3	60	52	59	44	57	32	56	24	55	12	52	4
Crew Public Spaces	4	66	49	65	42	63	34	60	20	53	10	50	4
Outdoor Areas	6	76	47	76	40	74	27	69	20	59	13	59	13
Wheelhouse	7	62	54	61	42	58	31	57	23	55	12	54	5
Work Spaces	9	83	53	82	40	79	31	76	18	73	10	69	6
Control Room	8	70	51	69	40	66	30	62	23	60	11	58	4
Auxiliary Engine Room	11	105	46	104	39	102	23	97	15	89	8	79	0
Engine Room	11	108	50	107	40	106	27	105	21	102	10	101	8

1

2

Table 9: Locations used for the SILENV Green Noise Label

Location Type	Group Name	Location Example	Noise Limits, dB(A)
1	Cabins	Passenger Cabins	50
		Crew Cabins	50
		Hospital	50
2	Offices	Offices	53
3	Public Spaces A	Libraries	55
		Calm Public Spaces	55
4	Public Spaces B	Restaurant	60
		Lounge	60
		Mess room	60
		Shops	60
5	Public Spaces C	Discotheque, dance floor	65
		Ball room	65
		Corridor	65
		Staircase	65
6	Outdoor Areas	Open recreational areas	70
		Bridge wings / Open deck working areas	70
7	Wheelhouse	Wheelhouse	60
		Radio Room	60
8	Work space A	Engine Control Room	65
		Galleys	65
9	Work space B	Pantries	75
		Stores	75
		Laundries	75
		Workshops	75
		Garage	75
10	Work space C	Continuously manned machinery space	90
11	Work space D	Not Continuously manned machinery space	105

3

4