UNIVERSITY of York

This is a repository copy of *The Sensor Organism*.

White Rose Research Online URL for this paper: http://eprints.whiterose.ac.uk/91559/

Version: Submitted Version

#### **Conference or Workshop Item:**

Mogers, Naums, Lagos, Dimitris orcid.org/0000-0003-0637-281X and Trefzer, Martin Albrecht orcid.org/0000-0002-6196-6832 (2015) The Sensor Organism. In: York Doctoral Symposium, 28 Oct 2015.

#### Reuse

Items deposited in White Rose Research Online are protected by copyright, with all rights reserved unless indicated otherwise. They may be downloaded and/or printed for private study, or other acts as permitted by national copyright laws. The publisher or other rights holders may allow further reproduction and re-use of the full text version. This is indicated by the licence information on the White Rose Research Online record for the item.

#### Takedown

If you consider content in White Rose Research Online to be in breach of UK law, please notify us by emailing eprints@whiterose.ac.uk including the URL of the record and the reason for the withdrawal request.



eprints@whiterose.ac.uk https://eprints.whiterose.ac.uk/

# The Sensor Organism

# What?

Biologically-inspired heterogeneous multicellular model of Wireless Sensor Network (WSN) based on Genetic Regulatory Network (GRN). With little prior knowledge of problem domain the model learns to recognize patterns in sensor readings. The model solves the problems of anomaly detection and fault detection.

The model is optimized for constrained embedded platform such as Arduino microcontroller.

Why? Biological cell systems that this system is modelled after self-organize and adapt to the environment – a property necessary for a generic WSN. They are faulttolerant, flexible and scalable; inherently parallelizable, they are good fit for distributed systems such as WSN.


# Project outputs UML-model defined on four levels: organism, cell colony, single cell and GRN.

C++ OOP library implementing ZigBee Radio Communication functionality and several components of the model.

## Sensor driver

## Stem cell

## **DNA** server

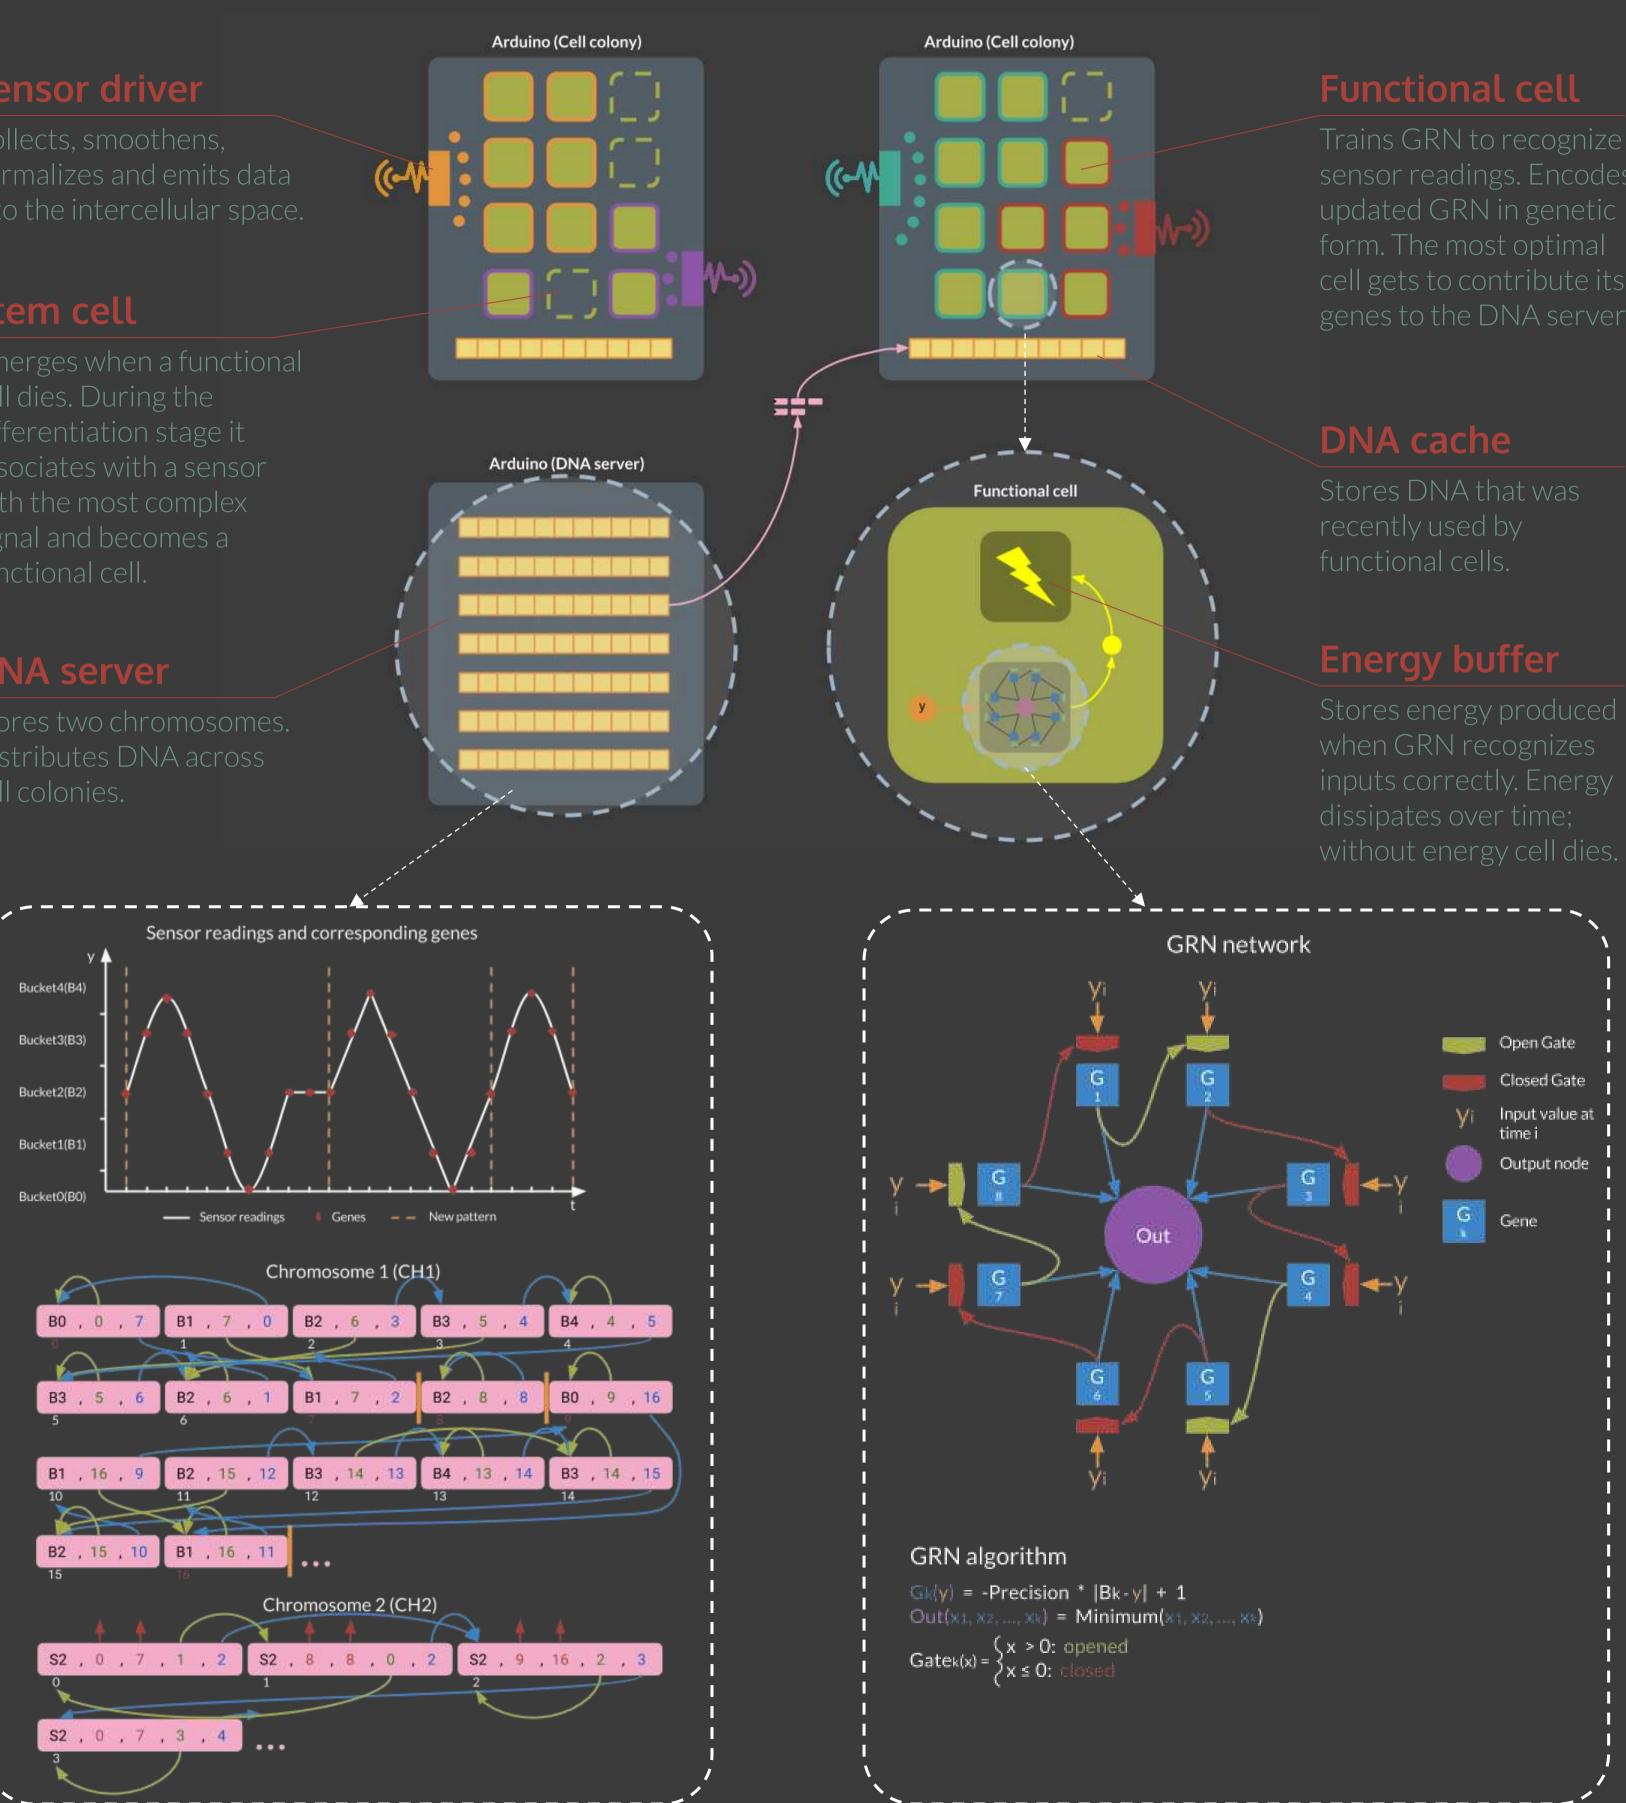



York Centre for Complex System Analysis

### Naums Mogers Dr Martin A Trefzer Dr Dimitris Lagos

How? Model defines two Arduino specializations: cell colony and DNA server. Cell colony consists of sensors, sensor drivers and cells. Initially colony is filled with stem cells; as time goes, stem cells train on sensor readings, specialize in particular patterns and transform into functional cells. By recognizing patterns correctly, cells obtain energy; if energy runs out, cells die.

DNA Server is an Arduino dedicated to store genetically encoded data, that is shared between cell colonies. Only the most optimal cells get to contribute to the DNA server.

The anomaly is reported when cell death rate rises, i.e. when majority of cells do not recognize the pattern and die.

The model requires supervision during the learning stage, when anomalies are reported frequently as all patterns are observed for the first time.

Applications This generic WSN model is potentially applicable to any problem that is solvable using a WSN. However, it is expected to be the most optimal solution when input data changes quickly and in different ways. Examples include Machine health monitoring, Structural health monitoring, Terrain mapping using moving agents and Biometric observation.

